

# V-Series Switch

## Product Highlights:

- ♦ Maximum sealing protection with dual seals around lamps and rocker stem certified to IP66 & IP68. Optional panel seals for additional protection.
- ♦ Silver plated butt contact mechanism provides 50 to 100 thousand electrical cycles and a variety of different electrical ratings.
- ♦ Roller pin mechanism does not require lubricants and allows the switch to withstand extreme temperatures.
- ♦ The switch base accommodates up to 10 terminals and a large variety of switch and lighting circuits.
- ♦ The multi-step mounting wings provide a secure fit for panel thicknesses of 0.032" thru 0.250" in an industry standard 0.830" x 1.450" mounting hole.
- ♦ The switch connector allows the user to preload FQC terminals for easy assembly to switch base.
- ♦ Numerous choices of removable rockers allow for style change without having to retest or re-qualify the switch base.
- ♦ Illumination options are endless with bar, oval, and square lenses available in choices of incandescent, neon and a wide variety of LEDs including superbrite, megabrite, flashing and bicolor lighting.
- ♦ Available with a variety of complimentary mounting panels, hole plugs, illuminated indicators and boots to accommodate most any design need.



CONTURA III



CONTURA II



CONTURA V



CONTURA VII

Carling Technologies' fully sealed V-Series Contura switches are well known for their cutting edge design, high quality, maximum performance and unmatched reliability. These switches are a staple in the marine and transportation industries and have passed a range of environmental, corrosion, temperature, vibration, shock and sealing tests including MIL Std 202F, MIL Std 810C, UL 1500, ISO 8846, IEC 60529 and BS 5490 among others, making them one of the most rugged and reliable switches ever manufactured.



**Carling Technologies®**

Innovative Designs. Powerful Solutions.

Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.  
60 Johnson Avenue • Plainville, CT 06062-1177  
Phone: (860) 793-9281 • Fax: (860) 793-9231  
Email: [sales@carlingtech.com](mailto:sales@carlingtech.com) • [www.carlingtech.com](http://www.carlingtech.com)

# V-Series Switch

## DESIGN FEATURES

### MAXIMUM DESIGN OPTIONS WITH MINIMUM INVENTORIES

Panel redesign is a snap, requiring no tooling change, with our removable interchangeable actuators. A unique balance between aesthetics and functionality.

### SEALS OUT WATER, DUST AND DEBRIS

Dual seal protection locks out elements. Certified to IP66/IP68 for front panel components.

### CLEAN CONNECTIONS

Offered in both eight and ten terminal base options. AMP & Packard compatible connectors available.

### SILVER PLATED BUTT

Contact mechanism provides 50 to 100 thousand electrical cycles and a variety of different electrical ratings.

### WITHSTANDS EXTREME TEMPERATURES


Roller pin mechanism eliminates the need for lubricants. Enables switch to withstand -40°C to +85°C temperatures.

### MULTIPLE LIGHTING OPTIONS

Incandescent lamps & LED lighting. Our LED illumination is offered in a wide array of light intensities, colors, as well as dual level, tri-color, and flashing options.

### OPTIONAL PANEL SEAL

Prevents water/dust egress behind panel.

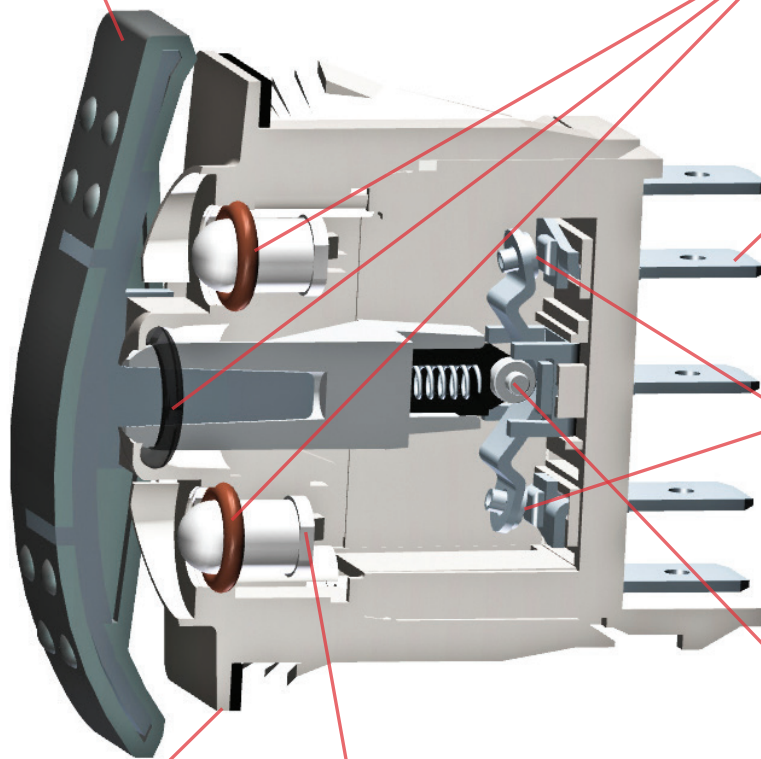



### Contura II & III

The Contura II & III actuators are constructed of thermoplastic polycarbonate and are offered with a hard nylon overlay or a "soft-touch" elastomer overlay. These models incorporate aesthetic designs on the top and bottom of the rocker featuring two rows of raised "bumps" on the Contura II and three "indented" lines on the Contura III.



### Contura X

The raised bracket/bezel on the Contura X helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This curved rocker style is available with a variety of lenses and legends.



### Contura IV

The Contura IV's "Shape to create a Shape" actuator works with the curves, contours & advanced styling of the latest panel designs, flowing with these advanced curves & radii. This actuator style fits on the Contura flush bracket/bezel.



### Contura XI

The raised bracket/bezel on the Contura XI helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This convex style rocker is available with a wide variety of lenses and legends.



### Contura V

The symmetrically curved Contura V actuator provides the perfect complement to the Contura IV's "Shape to create a Shape" design concept. With its flush style mounting bracket, Contura V can be mounted in between two Contura IV's, by itself, or in groups.



### Contura XII

The Contura XII version features a paddle style actuator with the raised bracket/bezel of Contura X and XI. The contoured handle design provides intuitive recognition and ease of operation and is available with all Contura X and XI lens and legend offerings.



### Contura VI (WAVE)

The Contura VI WAVE sealed rocker switches, when used in a row, create an uniquely appealing "wave" design on your panel. A variety of colors and finishes are available for both rocker and wave insert. Contura VI features bar and oval lenses.



### Contura VII

Contura VII featuring gently curved corners and edges assuring compatibility with most any panel design. Intuitive feel is maximized by the use of 2 embossed circular pads located at opposite ends of the rocker. Any combination of Bar or Oval style lenses can be located in the pads providing a truly unique look, exclusive to Contura VII.




### Illuminated Indicator

The Illuminated Indicator is offered with removable/ replaceable lamps and Contura II, III, V, or X styling. Illumination alerts the operator of essential system functions or malfunctions like: oil pressure, high temperature, fluid levels, parking brake, or general system malfunction.

### V-Series Accessories/Options

Carling Technologies also offers many V-Series accessories including connectors, mounting panels, hole plugs, panel seals, and actuator removal tools.





## Electrical

|                            |                                                                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact Rating             | 4VA @ 28VDC (MAX) resistive<br>15 amps, 125VAC<br>10 amps, 250VAC<br>1/2 HP 125-250VAC<br>20 amps, 4-14VDC<br>15 amps, 15-28VDC<br>10A, 14VT<br>6A, 125VAC L |
| Dielectric Strength        | 1500 Volts RMS                                                                                                                                               |
| Insulation Resistance      | 50 Megohms                                                                                                                                                   |
| Initial Contact Resistance | 10 milliohms max. @ 4VDC                                                                                                                                     |
| Life                       | 50,000- 100,000 cycles circuit dependent                                                                                                                     |
| Contacts                   | Silver alloy, silver tin-oxide, fine silver                                                                                                                  |
| Terminals                  | Brass or copper/silver plate 1/4" (6.3mm) Quick Connect terminations standard. Solder lug, Wire Lead                                                         |

## Mechanical

|           |                                          |
|-----------|------------------------------------------|
| Endurance | 150,000 cycles minimum circuit dependent |
|-----------|------------------------------------------|

## Physical


|                                            |                                                                                                                                                                                                                                             |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lighted                                    | Incandescent - rated 10,000 hours<br>Neon - rated 25,000 hours<br>LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)                                                                                    |
| Seals                                      | Internal                                                                                                                                                                                                                                    |
| Base                                       | Optional external gasket panel seal<br>Polyester blend rated to 125°C with a UL flammability rating of 94V0.                                                                                                                                |
| Contura II, III, IV, V, VI<br>Actuator     | Hard Surface: Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay.<br>Soft Surface: Basic actuator structure molded of thermoplastic polycarbonate with an elastomer overlay. |
| Contura X, XI, XII<br>Actuator, VP<br>Lens | Nylon 66 Reinforced rated to 105°C<br>Polycarbonate rated at 100°C                                                                                                                                                                          |

## Actuator Travel (Angular Displacement)

|             |                |
|-------------|----------------|
| 2 position  | 18°            |
| 3 positions | 9° from center |

## Mounting Specifications

|                                                                                     |                                                                 |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| Panel Thickness Range                                                               |                                                                 |
| # of gaskets                                                                        | Acceptable Panel Thickness                                      |
| 0                                                                                   | .030 to .250 (.76mm to 6.35mm)                                  |
| 1                                                                                   | .030 to .109 & .147 to .157<br>(.76 to 2.77mm & 3.73 to 3.98mm) |
| Recommended: No gasket with panel thickness of .032, .062, .093, .125, .187 or .250 |                                                                 |



## Agency Certifications



## Environmental



### Environmental

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sealed version: IP68, in accordance with IEC 60529, BS 5490, DIN 40050 & NFC 20 010. This rating applies to front panel components of the actual switch only, and signifies protection against dust and the prolonged effects of immersion under pressure. The standard test for immersion under pressure requires submersion under one meter of water for 30 minutes. The V-Series switch has exceeded these parameters, having been actuated and illuminated during submersion. |                                                                                                                                                                                                                                                             |
| Corrosion                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Flowing Mixed Gas (FMG)<br>Class III 3 year accelerated exposure per ASTM B-827, B-845 Silver and gold contacts                                                                                                                                             |
| Operating Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -40°C to + 85°C                                                                                                                                                                                                                                             |
| Vibration 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Per Mil-Std 202F, Method 204D<br>Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test and pre and post test contact resistance.                                                           |
| Vibration 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Resonance search<br>24-50 Hz 0.40 DA<br>50-2000 ±10 G's peak<br>Results Horizontal Axis 3-5 G's max. Random<br>24 Hz 0.06 PSD-Gsq/Hz<br>60 Hz 0.50<br>100 Hz 0.50<br>200 Hz 0.025<br>2000 Hz 0.025<br>No loss of circuit during test; <10µ seconds chatter. |
| Shock                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.                                                                                   |
| Salt Spray                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Per Mil-Std 202F, Method 101D, Test Condition A, 48 Hrs. Sealed version only.                                                                                                                                                                               |
| Dust                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Per Mil-Std 810C, Method 510.2 Air Velocity 300 ±200 Feet/Min, Test Duration 16 Hrs.                                                                                                                                                                        |
| Thermal Shock                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Per Mil-Std 202F, Method 107F, Test Cond. A, -55°C to 85°C. Test criteria - pre and post test contact resistance                                                                                                                                            |
| Moisture Resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance                                                                                                                                                                         |
| Ignition Protection                                                                                                                                                                                                                                                                                                                                                                                                                                                               | All Contura switches with sealed construction meet the requirements of UL1500/ISO8846 for ignition protection, in addition to conformance with EC directive 94/25/EC for marine products.                                                                   |

## Dimensional Specifications: in. [mm]



### CONTURA II STYLE

SHOWN WITH  
SQUARE LENS

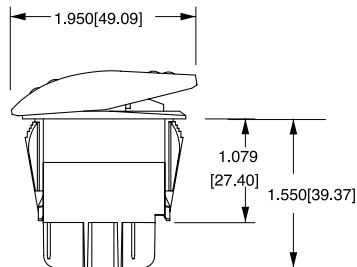

**8 TERMINAL BASE  
W/BARRIERS**



### CONTURA III STYLE




**8 TERMINAL BASE  
W/O BARRIERS**

### CONTURA IV STYLE


SHOWN WITH  
BAR LENS




**10 TERMINAL BASE  
W/BARRIERS**




**8 TERMINAL BASE  
W/BARRIERS**




**10 TERMINAL BASE  
W/BARRIERS**




**10 TERMINAL BASE  
W/O BARRIERS**




**SWITCH SHOWN WITH  
VCH CONNECTOR 8  
TERMINAL**



**BOTTOM VIEW  
TERMINAL  
ARRANGEMENT  
8 TERMINAL BASE**



**BOTTOM VIEW  
TERMINAL  
ARRANGEMENT  
10 TERMINAL BASE**





**SWITCH SHOWN WITH  
VC1 CONNECTOR 10  
TERMINAL**


## Dimensional Specifications: in. [mm]

### CONTURA V


SHOWN WITH  
BAR LENS



8 TERMINAL BASE  
W/BARRIERS





8 TERMINAL BASE  
W/BARRIERS




SWITCH SHOWN WITH  
VCH CONNECTOR 8  
TERMINAL

### CONTURA V


SHOWN WITH  
LOW PROFILE LOCK




8 TERMINAL BASE  
W/O BARRIERS

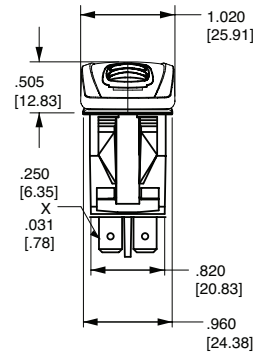

8 TERMINAL BASE  
W/O BARRIERS





BOTTOM VIEW  
TERMINAL  
ARRANGEMENT  
8 TERMINAL BASE




BOTTOM VIEW  
TERMINAL  
ARRANGEMENT  
10 TERMINAL BASE

### CONTURA VI


SHOWN WITH OVAL  
LENS



10 TERMINAL BASE  
W/BARRIER AND  
LAMP TERMINAL





10 TERMINAL BASE  
W/O BARRIERS




SWITCH SHOWN WITH  
VC1 CONNECTOR 10  
TERMINAL

### CONTURA VII


SHOWN WITH LARGE LENS  
AND BAR LENS



10 TERMINAL BASE  
W/O BARRIERS




10 TERMINAL BASE  
W/O BARRIERS



SWITCH SHOWN  
WITH VC1  
CONNECTOR 10  
TERMINAL


## Dimensional Specifications: in. [mm]

**CONTURA X STOLE**  
 8 TERMINAL BASE WITH BARRIERS

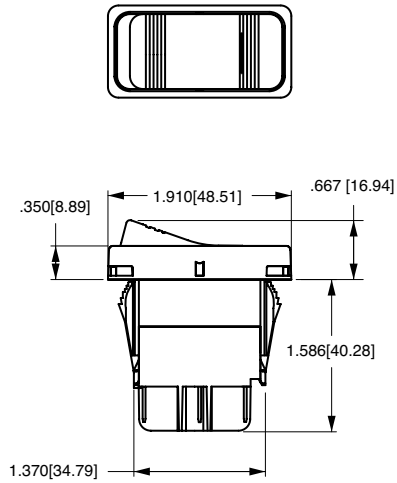


**8 TERMINAL BASE  
W/BARRIERS**

**CONTURA XI STOLE**  
 10 TERMINAL BASE WITH BARRIERS

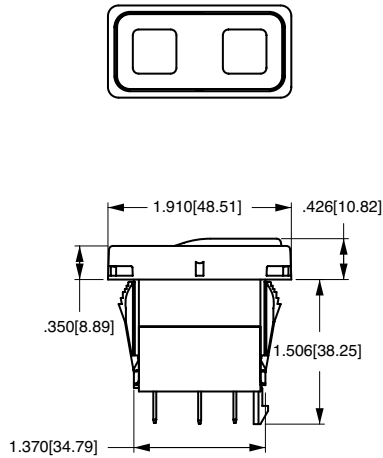


**10 TERMINAL BASE  
W/O BARRIERS**


**CONTURA XII STOLE**  
 8 TERMINAL BASE WITH BARRIERS

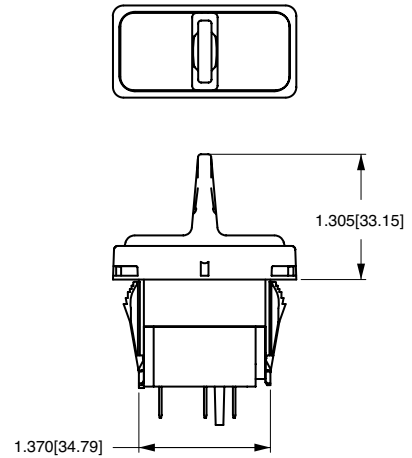


**8 TERMINAL BASE  
W/O BARRIERS**

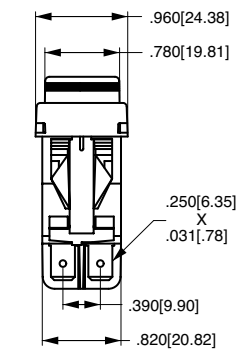



**8 TERMINAL BASE  
W/BARRIERS**

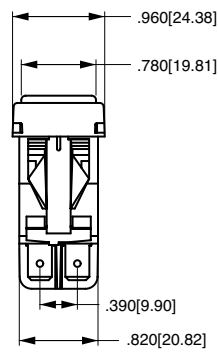


**10 TERMINAL BASE  
W/BARRIERS**

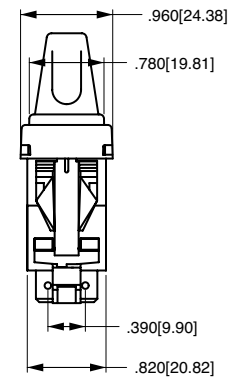


**10 TERMINAL  
BASE  
W/O BARRIERS**



**BOTTOM VIEW  
TERMINAL  
ARRANGEMENT  
8 TERMINAL BASE**



**BOTTOM VIEW  
TERMINAL  
ARRANGEMENT  
10 TERMINAL BASE**

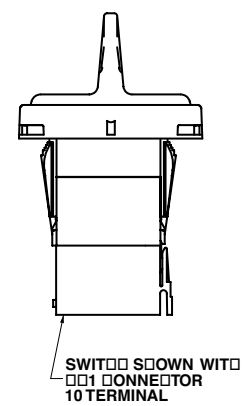

| CIRCUIT | CIRCUIT DIAGRAM |
|---------|-----------------|
| 1       |                 |
| 2       |                 |
| 3       |                 |
| 4       |                 |
| 5       |                 |
| 6       |                 |
| 7       |                 |
| 8       |                 |

| CIRCUIT | CIRCUIT DIAGRAM |
|---------|-----------------|
| A       |                 |
| B       |                 |
| C       |                 |
| D       |                 |
| E       |                 |
| F       |                 |
| G       |                 |
| H       |                 |

| CIRCUIT | CIRCUIT DIAGRAM |
|---------|-----------------|
| J       |                 |
| K       |                 |
| L       |                 |
| M       |                 |
| R       |                 |
| S       |                 |

| SYMBOL LEGEND |                                                 |
|---------------|-------------------------------------------------|
| SYM.          | DEFINITION                                      |
|               | DESIGNATES TERMINALS AND CONTACTS               |
|               | DESIGNATES LAMP LOCATION                        |
|               | DESIGNATES MAINTAINED CIRCUITS                  |
|               | DESIGNATES OTHER POSITION                       |
|               | DESIGNATES MOMENTARY CIRCUITS                   |
|               | DESIGNATES TWO POSITION CONNECTION              |
|               | DESIGNATES EXTERNAL JUMPER PROVIDED BY CUSTOMER |



| LAMP CIRCUIT | CIRCUIT DIAGRAM | LAMP CIRCUIT | CIRCUIT DIAGRAM | LAMP CIRCUIT | CIRCUIT DIAGRAM | LAMP CIRCUIT | CIRCUIT DIAGRAM |
|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|
| A/1          |                 | F/6          |                 | L/9          |                 | SPECIAL #1   |                 |
| B/2          |                 | G/7          |                 | M/R          |                 | SPECIAL #3   |                 |
| C/3          |                 | H/Z          |                 | N/T          |                 | SPECIAL #4   |                 |
| D/4          |                 | J/8          |                 | P/V          |                 |              |                 |
| E/5          |                 | K/W          |                 | U/Y          |                 |              |                 |

| CIRCUIT | CIRCUIT DIAGRAM | CIRCUIT | CIRCUIT DIAGRAM | CIRCUIT | CIRCUIT DIAGRAM |
|---------|-----------------|---------|-----------------|---------|-----------------|
| J1      |                 | J5      |                 | JA      |                 |
| J2      |                 | JJ      |                 | JK      |                 |
| J3      |                 |         |                 |         |                 |
| J4      |                 |         |                 |         |                 |

NOTE:  
J circuits are available for  
all non-locking V-Series  
styles. Consult factory for  
p/n details.

| SYMBOL LEGEND |                                   |
|---------------|-----------------------------------|
| SYM.          | DEFINITION                        |
| ○             | DESIGNATES TERMINALS AND CONTACTS |
| ○             | DESIGNATES LAMP LOCATION          |
| ○             | DESIGNATES TWO POSITION CIRCUIT   |

| CIRCUIT        | CONNECTOR PART # |
|----------------|------------------|
| JA, JJ, JK     | JC1-01           |
| J1, J3, J4, J5 | JC2-01           |
| J2             | JC3-01           |

|             |              |             |                  |                   |           |           |              |   |               |            |             |              |   |                             |                               |
|-------------|--------------|-------------|------------------|-------------------|-----------|-----------|--------------|---|---------------|------------|-------------|--------------|---|-----------------------------|-------------------------------|
| V           | 1            | D           | A                | B                 | T         | 0         | B            | — | A             | R          | B           | 00           | — | 0                           | 00                            |
| 1<br>Series | 2<br>Circuit | 3<br>Rating | 4<br>Termination | 5<br>Illumination | 6<br>Lamp | 7<br>Lamp | 8<br>Bracket |   | 9<br>Actuator | 10<br>Lens | 11<br>Color | 12<br>Legend |   | 13<br>Legend<br>Orientation | 14<br>Actuator<br>Lens Legend |

### 1 SERIES V

### 2 CIRCUIT

Terminal Connections as viewed from bottom of switch:  
 8 terminal 10 terminal  
 8 - -7 8 - -7  
 1 - -4 1 - -4  
 2 - -5 2 - -5  
 3 - -6 3 - -6  
 10 - -9

( ) - momentary  
 SP - single pole - uses terminals 1, 2 & 3.  
 DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
 Terminals 7, 8, 9 & 10 for lamp circuit only.

### Position:

|    | 1            | 2                   | 3            |
|----|--------------|---------------------|--------------|
| SP | 2 & 3, 5 & 6 | Connected Terminals | 1 & 2, 4 & 5 |
| 1  | ON           | NONE                | OFF          |
| 2  | (ON)         | NONE                | OFF          |
| 3  | ON           | NONE                | (OFF)        |
| 4  | ON           | NONE                | ON           |
| 5  | ON           | NONE                | (ON)         |
| 6  | ON           | OFF                 | ON           |
| 7  | ON           | OFF                 | (ON)         |
| 8  | (ON)         | OFF                 | (ON)         |

### SPECIAL CIRCUITS

|    | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
|----|----------------|--------------|-------|
| H* | 2 & 3          | 2 & 3        | OFF   |
| G* | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| S* | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| M* | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| E* | (2 & 3, 5 & 6) | 5 & 6        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
 External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

### 3 RATING<sup>3</sup>

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J & K for circuits H, G & M.

### 5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed | Unsealed | Lamps | Actuator Lens position when Illuminated | Lamp wired to Terminals |
|--------|----------|-------|-----------------------------------------|-------------------------|
| S      | 0        | NONE  |                                         |                         |
| A      | 1        | #1    | Independent                             | 8+ 7-                   |
| B      | 2        | #1    | Down                                    | 3+ 7-                   |
| C      | 3        | #2    | Up                                      | 3+ 7-                   |
| D      | 4        | #1    | Down                                    | 3+ 7-                   |
| E      | 5        | #1    | Down                                    | 1+ 7-                   |
| F      | 6        | #1    | Up                                      | 1+ 7-                   |
| G      | 7        | #1    | Independent                             | 8+ 7-                   |
| H      | Z        | #2    | Up                                      | 3+ 7-                   |
| U      | Y        | #1    | Independent                             | 8+ 7-                   |
|        |          | #2    | Independent                             | 10+ 9-                  |

Selections for Single Pole Switches Only:

|   |   |    |             |       |
|---|---|----|-------------|-------|
| J | 8 | #1 | Down        | 3+ 8- |
| K | W | #1 | Independent | 6+ 7- |
|   |   | #2 | Independent | 6+ 7- |

Selections for Double Pole Switches Only:

|   |   |    |      |       |
|---|---|----|------|-------|
| L | 9 | #1 | Down | 3+ 6- |
| M | R | #2 | Up   | 3+ 6- |
| N | T | #1 | Down | 3+ 6- |
| P | V | #1 | Up   | 1+ 4- |
|   |   | #2 | Up   | 3+ 6- |

### 6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

|              |          |          |                   |                   |       |
|--------------|----------|----------|-------------------|-------------------|-------|
| No lamp      | 0        | 2 250VAC | 6 12V superbright | 7 18V superbright | 8 24V |
| Neon         | 1 125VAC | 5 6V     | Green             | Red               |       |
| Incandescent | 4 3V     |          |                   |                   |       |
| LED*         |          | Red      | Amber             |                   |       |
|              |          | A        | L                 | F                 | R     |
|              |          | B        | M                 | G                 | S     |
|              |          | C        | N                 | H                 | T     |
|              |          | D        | P                 | J                 | V     |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

### 8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL

|          |       |       |      |
|----------|-------|-------|------|
| No Seal  | Black | White | Gray |
| One Seal | B     | W     | H    |

### 9 ACTUATOR

|             |   |
|-------------|---|
| No Actuator | 0 |
| Contura II  | A |
| Contura III | B |
|             | C |
|             | D |

Actuator orientation above terminals: 3,6 1,4

### 10 LENS

|                 |             |       |     |      |
|-----------------|-------------|-------|-----|------|
| 0 - No Actuator | Z - No Lens | Green | Red | Blue |
| Clear           | White       | Amber |     |      |
| 1               | 6           | B     | G   | M    |
| 2               | 7           | C     | H   | N    |
| 3               | 8           | D     | J   | P    |
|                 |             |       | K   | R    |
|                 |             |       | L   | S    |
|                 |             |       |     | W    |
|                 |             |       |     | Y    |

Square lens options available only for Contura II:

Lens color for LEDs must be clear, white, or match color of LED.  
 Green or blue lenses are not recommended with Neon lamps.

### 11 ACTUATOR COLOR<sup>1</sup> AND TEXTURE

|                 |       |      |     |       |
|-----------------|-------|------|-----|-------|
| 0 - No Actuator | Black | Gray | Red | White |
| Soft Surface    | B     | G    | R   | W     |
| Hard Surface    | C     | H    | S   | Y     |

### 12 ACTUATOR LENS OR BODY LEGENDS<sup>2</sup>

|        |        |        |        |
|--------|--------|--------|--------|
| 11 ON  | 12 OFF | 13 I   | 14 O   |
| OFF    | ON     | O      | I      |
| 15 O O | 16 O O | 17 O I | 18 I O |
| F N    | F N    |        |        |
| F      | F      |        |        |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION

|   |                                                   |
|---|---------------------------------------------------|
| 0 | No legend (used with codes 11-18 in selection 12) |
| 1 | Orientation 1                                     |
| 2 | Orientation 2                                     |
| 3 | Orientation 3                                     |
| 4 | Orientation 4                                     |

### 14 ACTUATOR LENS LEGEND

00 No legend this location / no actuator  
 (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.  
 For legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- Body legends not available on Soft surface actuators; White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Additional ratings available. See page 20.
- Contura II available with two square lenses. Consult factory for details.

|             |              |             |                  |                   |           |           |              |   |               |            |                |              |   |                             |
|-------------|--------------|-------------|------------------|-------------------|-----------|-----------|--------------|---|---------------|------------|----------------|--------------|---|-----------------------------|
| V           | 1            | D           | A                | S                 | W         | O         | B            | — | A             | Z          | E              | 00           | — | 0                           |
| 1<br>Series | 2<br>Circuit | 3<br>Rating | 4<br>Termination | 5<br>Illumination | 6<br>Lock | 7<br>Lamp | 8<br>Bracket |   | 9<br>Actuator | 10<br>Lens | 11<br>Function | 12<br>Legend |   | 13<br>Legend<br>Orientation |

### 1 SERIES V

### 2 CIRCUIT

Terminal Connections as viewed from bottom of switch:

|            |             |
|------------|-------------|
| 8 terminal | 10 terminal |
| 8 - -7     | 8 - -7      |
| 1 - -4     | 1 - -4      |
| 2 - -5     | 2 - -5      |
| 3 - -6     | 3 - -6      |
|            | 10 - -9     |

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
Terminals 7, 8, 9 & 10 for lamp circuit only.

### Position:

|    | 1            | 2                   | 3            |
|----|--------------|---------------------|--------------|
| SP | 2 & 3, 5 & 6 | Connected Terminals | 1 & 2, 4 & 5 |
| 1  | ON           | NONE                | OFF          |
| 2  | (ON)         | NONE                | OFF          |
| 3  | ON           | NONE                | (OFF)        |
| 4  | ON           | NONE                | ON           |
| 5  | ON           | NONE                | (ON)         |
| 6  | ON           | OFF                 | ON           |
| 7  | ON           | OFF                 | (ON)         |
| 8  | (ON)         | OFF                 | (ON)         |

### SPECIAL CIRCUITS

|    | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
|----|----------------|--------------|-------|
| H* | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| G* | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| S* | (2 & 3, 5 & 6) | 2 & 3        | OFF   |
| M* | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| E* | 5 & 6          | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

### 3 RATING<sup>4</sup>

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J & K for circuits H, G & M.

### 5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed                                    | Unsealed | Lamps | Actuator Lens position when Illuminated | Lamp wired to Terminals |
|-------------------------------------------|----------|-------|-----------------------------------------|-------------------------|
| S                                         | 0        | NONE  |                                         |                         |
| C                                         | 3        | # 2   | Up                                      | 3+ 7-                   |
| H                                         | Z        | # 2   | Independent                             | 8+ 7-                   |
| Selections for Double Pole Switches Only: |          |       |                                         |                         |
| M                                         | R        | # 2   | Up                                      | 3+ 6-                   |

### 6 LOCK

Lock above terminals 1 & 4 end of switch.  
W lock

### Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
- Additional ratings available. See page 20.

### 7 LAMP

Lamp above terminals 3 & 6 end of switch

|              |          |          |                         |                       |       |
|--------------|----------|----------|-------------------------|-----------------------|-------|
| No lamp      | 0        | 2 250VAC | 6 12V superbright Green | 7 18V superbright Red | 8 24V |
| Neon         | 1 125VAC | 5 6V     |                         |                       |       |
| Incandescent | 4 3V     |          |                         |                       |       |
| LED*         |          | Amber    |                         |                       |       |
|              | Red      | L        |                         |                       |       |
|              | Amber    | M        |                         |                       |       |
|              | Green    | N        |                         |                       |       |
|              | 2VDC     | P        |                         |                       |       |
|              | 6VDC     |          |                         |                       |       |
|              | 12VDC    |          |                         |                       |       |
|              | 24VDC    |          |                         |                       |       |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.


### 8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL

|          |       |       |      |
|----------|-------|-------|------|
| No Seal  | Black | White | Gray |
| One Seal | B     | W     | H    |
|          | C     | Y     |      |

### 9 HARD SURFACE ACTUATOR<sup>1</sup>

|             |       |      |     |       |
|-------------|-------|------|-----|-------|
| Contura II  | Black | Grey | Red | White |
|             | A     | B    | G   | H     |
| Contura III | C     | D    | E   | F     |

Actuator orientation above terminals:



### 10 LENS

Z - No Lens

|       |       |       |       |     |      |
|-------|-------|-------|-------|-----|------|
| Clear | White | Amber | Green | Red | Blue |
| 3     | 8     | D     | J     | P   | V    |

Lens color for LEDs must be clear, white, or match color of LED.

Green or blue lenses are not recommended with Neon lamps.



### 11 ACTUATOR LOCK FUNCTION AND COLOR<sup>1</sup>

| Lock Color     | Up | Down | Up & Down | Center <sup>3</sup> |
|----------------|----|------|-----------|---------------------|
| Match Actuator | A  | H    | R         | 1                   |
| Black          | B  | J    | S         | 2                   |
| White          | C  | K    | T         | 3                   |
| Red            | D  | L    | V         | 4                   |
| Safety Orange  | E  | M    | W         | 5                   |

### 12 ACTUATOR LENS OR BODY LEGEND<sup>2</sup>

00 - No Legend

|        |       |      |      |
|--------|-------|------|------|
| 21 OFF | 22 ON | 23 O | 24 I |
| 25 O   | 26 O  | 27 O | 28 I |
| F      | N     |      |      |



For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION

|   |                                                   |
|---|---------------------------------------------------|
| 0 | No legend (used with codes 21-28 in selection 12) |
| 1 | Orientation 1                                     |
| 2 | Orientation 2                                     |
| 3 | Orientation 3                                     |
| 4 | Orientation 4                                     |



ORIENTATION OF ACTUATOR/LENS IN PANEL

ORIENTATION 1

ORIENTATION 2

ORIENTATION 3

ORIENTATION 4

|             |              |             |                  |                   |           |           |              |   |               |            |             |              |   |                             |                               |
|-------------|--------------|-------------|------------------|-------------------|-----------|-----------|--------------|---|---------------|------------|-------------|--------------|---|-----------------------------|-------------------------------|
| V           | 1            | D           | A                | B                 | T         | O         | B            | — | E             | P          | C           | 00           | — | 0                           | 00                            |
| 1<br>Series | 2<br>Circuit | 3<br>Rating | 4<br>Termination | 5<br>Illumination | 6<br>Lamp | 7<br>Lamp | 8<br>Bracket |   | 9<br>Actuator | 10<br>Lens | 11<br>Color | 12<br>Legend |   | 13<br>Legend<br>Orientation | 14<br>Actuator<br>Lens Legend |

### 1 SERIES V

### 2 CIRCUIT

Terminal Connections as viewed from bottom of switch:

| 8 terminal | 10 terminal |
|------------|-------------|
| 8 - 7      | 8 - 7       |
| 1 - 4      | 1 - 4       |
| 2 - 5      | 2 - 5       |
| 3 - 6      | 3 - 6       |
|            | 10 - 9      |

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
Terminals 7, 8, 9 & 10 for lamp circuit only.

### Position:

| SP | DP | 1    | 2    | 3     |
|----|----|------|------|-------|
| 1  | A  | ON   | NONE | OFF   |
| 2  | B  | (ON) | NONE | OFF   |
| 3  | C  | ON   | NONE | (OFF) |
| 4  | D  | ON   | NONE | ON    |
| 5  | F  | ON   | NONE | (ON)  |
| 6  | J  | ON   | OFF  | ON    |
| 7  | K  | ON   | OFF  | (ON)  |
| 8  | L  | (ON) | OFF  | (ON)  |

### SPECIAL CIRCUITS

|    | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
|----|----------------|--------------|-------|
| H* | 2 & 3          | 2 & 3        | OFF   |
| G* | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| S  | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| M* | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| R  | (2 & 3, 5 & 6) | 2 & 3        | 5 & 1 |
| E* | 5 & 6          | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

### 3 RATING<sup>4</sup>

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J & K for circuits H, G & M.

### 5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed | Unsealed | Lamps | Actuator Lens position when Illuminated | Lamp wired to Terminals |
|--------|----------|-------|-----------------------------------------|-------------------------|
| S      | 0        | NONE  |                                         |                         |
| A      | 1        | #1    | Independent                             | 8+ 7-                   |
| B      | 2        | #1    | Down                                    | 3+ 7-                   |
| C      | 3        | #2    | Up                                      | 3+ 7-                   |
| D      | 4        | #1    | Down                                    | 3+ 7-                   |
| E      | 5        | #1    | Down                                    | 1+ 7-                   |
|        |          | #2    | Up                                      | 1+ 7-                   |
| F      | 6        | #1    | Independent                             | 3+ 7-                   |
|        |          | #2    | Up                                      | 3+ 6-                   |
| G      | 7        | #1    | Independent                             | 8+ 7-                   |
|        |          | #2    | Up                                      | 3+ 7-                   |
| H      | Z        | #2    | Independent                             | 8+ 7-                   |
| U      | Y        | #1    | Independent                             | 8+ 7-                   |
|        |          | #2    | Independent                             | 10+ 9-                  |

Selections for Single Pole Switches Only:

|   |   |    |             |       |
|---|---|----|-------------|-------|
| J | 8 | #1 | Down        | 3+ 8- |
|   |   | #2 | Independent | 6+ 7- |
| K | W | #1 | Independent | 8+ 7- |
|   |   | #2 | Independent | 6+ 7- |

Selections for Double Pole Switches Only:

|   |   |    |      |       |
|---|---|----|------|-------|
| L | 9 | #1 | Down | 3+ 6- |
| M | R | #2 | Up   | 3+ 6- |
| N | T | #1 | Down | 3+ 6- |
|   |   | #2 | Down | 1+ 4- |
| P | V | #1 | Up   | 1+ 4- |
|   |   | #2 | Up   | 3+ 6- |

### 6,7 LAMP (same coding for both selections)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

|                   |   |          |          |                         |                       |                       |
|-------------------|---|----------|----------|-------------------------|-----------------------|-----------------------|
| No lamp           | 0 | 1 125VAC | 2 250VAC | 6 12V superbright Green | 7 18V superbright Red | 8 24V superbright Red |
| Neon              | 1 | 4 3V     | 5 6V     |                         |                       |                       |
| Incandescent LED* |   | Red A    | Amber L  |                         |                       |                       |
|                   |   | B        | M        |                         |                       |                       |
| 2VDC              |   | C        | N        |                         |                       |                       |
| 6VDC              |   | D        | P        |                         |                       |                       |
| 12VDC             |   |          |          |                         |                       |                       |
| 24VDC             |   |          |          |                         |                       |                       |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

### 8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL

|          |       |       |      |
|----------|-------|-------|------|
|          | Black | White | Gray |
| No Seal  | B     | W     | G    |
| One Seal | C     | Y     | H    |

### 9 ACTUATOR

|                                             |   |
|---------------------------------------------|---|
| No Actuator                                 | 0 |
| Contura IV, left orientation                | E |
| Contura IV, left orientation, laser etched  | T |
| Contura IV, right orientation               | F |
| Contura IV, right orientation, laser etched | R |

Actuator orientation above terminals:



### 10 LENS

| 0 - No Actuator | Z - No Lens |       |       |     |      |
|-----------------|-------------|-------|-------|-----|------|
| Clear           | White       | Amber | Green | Red | Blue |
| 1               | 6           | B     | G     | M   | T    |
| 2               | 7           | C     | H     | N   | U    |
| 3               | 8           | D     | J     | P   | V    |
| 4               | 9           | E     | K     | R   | W    |
| 5               | A           | F     | L     | S   | Y    |

Lens color for LEDs must be clear, white, or match color of LED.  
Green or blue lenses are not recommended with Neon lamps.

### 11 ACTUATOR COLOR<sup>1,5,6</sup>

|             |   |       |   |      |   |     |   |       |   |        |   |        |   |
|-------------|---|-------|---|------|---|-----|---|-------|---|--------|---|--------|---|
| No Actuator | 0 | Black | C | Gray | H | Red | S | White | Y | Nickel | D | Pewter | E |
|-------------|---|-------|---|------|---|-----|---|-------|---|--------|---|--------|---|



### 12 ACTUATOR LENS OR BODY LEGENDS<sup>2</sup>

|        |        |        |        |
|--------|--------|--------|--------|
| 11 ON  | 12 OFF | 13 I   | 14 O   |
| OFF    | ON     | O      | I      |
| 15 O O | 16 O O | 17 O I | 18 I O |
| F N    | F N    |        |        |
| F      | F      |        |        |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION

|   |                                                   |
|---|---------------------------------------------------|
| 0 | No legend (used with codes 11-18 in selection 12) |
| 1 | Orientation 1                                     |
| 2 | Orientation 2                                     |
| 3 | Orientation 3                                     |
| 4 | Orientation 4                                     |



### 14 ACTUATOR LENS LEGEND

00 No legend this location / no actuator  
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.  
For legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### Notes:

- Consult factory to verify horsepower rating for your particular circuit choice.
- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Gloss brow is on left side of E actuator and right side of F actuator.
- Additional ratings available. See page 20.
- Laser etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
- Pewter and nickel colors only available with laser etched actuator.

|             |              |             |                  |                   |           |           |              |   |               |            |             |              |   |                             |                               |
|-------------|--------------|-------------|------------------|-------------------|-----------|-----------|--------------|---|---------------|------------|-------------|--------------|---|-----------------------------|-------------------------------|
| V           | 1            | D           | A                | B                 | T         | O         | B            | — | G             | P          | C           | 00           | — | 0                           | 00                            |
| 1<br>Series | 2<br>Circuit | 3<br>Rating | 4<br>Termination | 5<br>Illumination | 6<br>Lamp | 7<br>Lamp | 8<br>Bracket |   | 9<br>Actuator | 10<br>Lens | 11<br>Color | 12<br>Legend |   | 13<br>Legend<br>Orientation | 14<br>Actuator<br>Lens Legend |

**1 SERIES**

V

**2 CIRCUIT**

Terminal Connections as viewed from bottom of switch:

|            |             |
|------------|-------------|
| 8 terminal | 10 terminal |
| 8 - - 7    | 8 - - 7     |
| 1 - - 4    | 1 - - 4     |
| 2 - - 5    | 2 - - 5     |
| 3 - - 6    | 3 - - 6     |
|            | 10 - - 9    |

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
 DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
 Terminals 7, 8, 9 & 10 for lamp circuit only.

**Position:**

| SP | DP | 2 & 3, 5 & 6 | Connected Terminals | 1 & 2, 4 & 5 |
|----|----|--------------|---------------------|--------------|
| 1  | A  | ON           | NONE                | OFF          |
| 2  | B  | (ON)         | NONE                | OFF          |
| 3  | C  | ON           | NONE                | (OFF)        |
| 4  | D  | ON           | NONE                | ON           |
| 5  | F  | ON           | NONE                | (ON)         |
| 6  | J  | ON           | OFF                 | ON           |
| 7  | K  | ON           | OFF                 | (ON)         |
| 8  | L  | (ON)         | OFF                 | (ON)         |

**SPECIAL CIRCUITS**

|    | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
|----|----------------|--------------|-------|
| H* | 2 & 3          | 2 & 3        | OFF   |
| G* | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| S  | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| M* | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| R  | (2 & 3, 5 & 6) | 2 & 3        | 5 & 1 |
| E* | 5 & 6          | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
 External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

**3 RATING<sup>4</sup>**

|   |                                              |
|---|----------------------------------------------|
| B | .4VA @ 28VDC Resistive                       |
| 1 | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

**4 TERMINATION/BASE STYLE**

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J &amp; K for circuits H, G &amp; M.

**5 ILLUMINATION & SWITCH SEALING**

Lamp #1: above terminals 1 &amp; 4 end of switch.; Lamp #2 above terminals 3 &amp; 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed | Unsealed | Lamps | Actuator Lens position when Illuminated | Lamp wired to Terminals |
|--------|----------|-------|-----------------------------------------|-------------------------|
| S      | 0        | NONE  |                                         |                         |
| A      | 1        | #1    | Independent                             | 8+ 7-                   |
| B      | 2        | #1    | Down                                    | 3+ 7-                   |
| C      | 3        | #2    | Up                                      | 3+ 7-                   |
| D      | 4        | #1    | Down                                    | 3+ 7-                   |
| E      | 5        | &#2   | Down                                    | 1+ 7-                   |
|        |          | #1    | Up                                      | 1+ 7-                   |
| F      | 6        | &#2   | Up                                      | 3+ 7-                   |
|        |          | #1    | Independent                             | 8+ 7-                   |
| G      | 7        | &#2   | Up                                      | 3+ 7-                   |
|        |          | #1    | Independent                             | 8+ 7-                   |
| H      | Z        | #2    | Up                                      | 8+ 7-                   |
| U      | Y        | #1    | Independent                             | 8+ 7-                   |
|        |          | &#2   | Independent                             | 10+ 9-                  |

Selections for Single Pole Switches Only:

|   |   |     |             |       |
|---|---|-----|-------------|-------|
| J | 8 | #1  | Down        | 3+ 8- |
|   |   | &#2 | Independent | 6+ 7- |
| K | W | #1  | Independent | 8+ 7- |
|   |   | &#2 | Independent | 6+ 7- |

Selections for Double Pole Switches Only:

|   |   |     |      |       |
|---|---|-----|------|-------|
| L | 9 | #1  | Down | 3+ 6- |
| M | R | #2  | Up   | 3+ 6- |
| N | T | #1  | Down | 3+ 6- |
|   |   | &#2 | Down | 1+ 4- |
| P | V | #1  | Up   | 1+ 4- |
|   |   | &#2 | Up   | 3+ 6- |

**6,7 LAMP (same coding for both selections)**

Selection 6: above terminals 1 &amp; 4; Selection 7: above terminals 3 &amp; 6

|              |   |          |          |                   |                   |       |
|--------------|---|----------|----------|-------------------|-------------------|-------|
| No lamp      | 0 | 1 125VAC | 2 250VAC | 6 12V superbright | 7 18V superbright | 8 24V |
| Neon         | 1 | 4 3V     | 5 6V     | Green             | Red               |       |
| Incandescent | 4 |          |          |                   |                   |       |
| LED*         |   | Red      | Amber    |                   |                   |       |
| 2VDC         | A | L        | F        |                   |                   |       |
| 6VDC         | B | M        | G        |                   |                   |       |
| 12VDC        | C | N        | H        |                   |                   |       |
| 24VDC        | D | P        | J        |                   |                   |       |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

**8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL**

|          |       |       |      |
|----------|-------|-------|------|
|          | Black | White | Gray |
| No Seal  | B     | W     | G    |
| One Seal | C     | Y     | H    |

**9 ACTUATOR**

|                         |   |
|-------------------------|---|
| No Actuator             | 0 |
| Contura V               | G |
| Contura V, laser etched | P |

**10 LENS**

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

| 0 - No Actuator | Z - No Lens |       |       |     |      |
|-----------------|-------------|-------|-------|-----|------|
| Clear           | White       | Amber | Green | Red | Blue |
| 1               | 6           | B     | G     | M   | T    |
| 2               | 7           | C     | H     | N   | U    |
| 3               | 8           | D     | J     | P   | V    |
| 4               | 9           | E     | K     | R   | W    |
| 5               | A           | F     | L     | S   | Y    |

Lens style & location:  
#1/ #2


|     |         |      |          |           |
|-----|---------|------|----------|-----------|
| bar | bar/bar | oval | oval/bar | oval/oval |
|-----|---------|------|----------|-----------|

**11 ACTUATOR COLOR<sup>1,3,3</sup>**



No Actuator 0 Black C Gray H Red S White Y Nickel D Pewter E

**12 ACTUATOR LENS OR BODY LEGENDS<sup>2,6</sup>**

|        |        |        |        |
|--------|--------|--------|--------|
| 11 ON  | 12 OFF | 13 I   | 14 O   |
| OFF    | ON     | O      | I      |
| 15 O O | 16 O O | 17 O I | 18 I O |
| F N    | F N    |        |        |
| F      | F      |        |        |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).**13 LEGEND ORIENTATION**

|   |                                                   |
|---|---------------------------------------------------|
| 0 | No legend (used with codes 11-18 in selection 12) |
| 1 | Orientation 1                                     |
| 2 | Orientation 2                                     |
| 3 | Orientation 3                                     |
| 4 | Orientation 4                                     |

**14 ACTUATOR LENS LEGEND**

00 No legend this location / no actuator  
 (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.  
 For legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

**Notes:**

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Laser Etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
- Additional ratings available. See page 20.
- Nickel and Pewter colors only available with laser etched actuator.
- Consult factory for laser etched lens callout.



|             |              |             |                  |                   |           |           |              |   |               |            |                |              |   |                             |
|-------------|--------------|-------------|------------------|-------------------|-----------|-----------|--------------|---|---------------|------------|----------------|--------------|---|-----------------------------|
| V           | 1            | D           | A                | S                 | W         | O         | B            | — | J             | Z          | E              | 00           | — | 0                           |
| 1<br>Series | 2<br>Circuit | 3<br>Rating | 4<br>Termination | 5<br>Illumination | 6<br>Lock | 7<br>Lamp | 8<br>Bracket |   | 9<br>Actuator | 10<br>Lens | 11<br>Function | 12<br>Legend |   | 13<br>Legend<br>Orientation |

### 1 SERIES

V

### 2 CIRCUIT<sup>3</sup>

Terminal Connections as viewed from bottom of switch:

|            |             |
|------------|-------------|
| 8 terminal | 10 terminal |
| 8 - 7      | 8 - 7       |
| 1 - 4      | 1 - 4       |
| 2 - 5      | 2 - 5       |
| 3 - 6      | 3 - 6       |
|            | 10 - 9      |

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
Terminals 7 & 8 for lamp circuit only.  
Terminals 9 & 10 are not used with locking style switches.

### Position:

| SP | DP | 2 & 3, 5 & 6 | Connected Terminals | 1 & 2, 4 & 5 |
|----|----|--------------|---------------------|--------------|
| 1  | A  | ON           | NONE                | OFF          |
| 4  | D  | ON           | NONE                | ON           |
| 6  | J  | ON           | OFF                 | ON           |
| 7  | K  | ON           | OFF                 | (ON)         |
| 8  | L  | (ON)         | OFF                 | (ON)         |
| 9  | N  | OFF          | NONE                | ON           |

### 3 RATING<sup>4</sup>

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J & K for circuits H, G & M.

### 5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed | Unsealed | Lamps | Actuator Lens position when Illuminated | Lamp wired to Terminals |
|--------|----------|-------|-----------------------------------------|-------------------------|
| S      | 0        | NONE  |                                         |                         |
| C      | 3        | # 2   | Up                                      | 3+ 7-                   |
| H      | Z        | # 2   | Independent                             | 8+ 7-                   |
| M      | R        | # 2   | Up                                      | 3+ 6-                   |

### 6 LOCK

Lock above terminals 1 & 4 end of switch.

W low profile lock Y<sup>6</sup> high profile lock

### 7 LAMP

Lamp above terminals 3 & 6 end of switch

|              |   |          |          |                         |                       |       |
|--------------|---|----------|----------|-------------------------|-----------------------|-------|
| No lamp      | 0 | 1 125VAC | 2 250VAC | 6 12V superbright Green | 7 18V superbright Red | 8 24V |
| Neon         | 1 | 4 3V     | 5 6V     |                         |                       |       |
| Incandescent |   |          |          |                         |                       |       |
| LED*         |   | Red      | Amber    |                         |                       |       |
|              |   | A        | L        | F                       | R                     |       |
| 2VDC         |   | B        | M        | G                       | S                     |       |
| 6VDC         |   | C        | N        | H                       | T                     |       |
| 12VDC        |   | D        | P        | J                       | V                     |       |
| 24VDC        |   |          |          |                         |                       |       |

### 8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL

|          |       |       |      |
|----------|-------|-------|------|
| No Seal  | Black | White | Gray |
| One Seal | B     | W     | H    |
|          | C     | Y     |      |

### 9 HARD SURFACE ACTUATOR

CONTURA IV:

|             |       |      |     |       |
|-------------|-------|------|-----|-------|
| Orientation | Black | Grey | Red | White |
| Left        | J     | K    | L   | M     |
| Right       | N     | P    | R   | S     |

|            |       |      |     |       |
|------------|-------|------|-----|-------|
| CONTURA V: | Black | Grey | Red | White |
|            | U     | V    | W   | Y     |

Actuator orientation above terminals: 3,6 1,4

### 10 LENS<sup>5</sup>

Z - No Lens

|       |       |       |       |     |      |
|-------|-------|-------|-------|-----|------|
| Clear | White | Amber | Green | Red | Blue |
| A     | B     | C     | D     | E   | F    |
| G     | H     | J     | K     | L   | M    |

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

### 11 ACTUATOR LOCK FUNCTION AND COLOR<sup>1</sup>

| Lock Color     | Up | Down | Up & Down | Center <sup>3</sup> |
|----------------|----|------|-----------|---------------------|
| Match Actuator | A  | H    | R         | 1                   |
| Black          | B  | J    | S         | 2                   |
| White          | C  | K    | T         | 3                   |
| Red            | D  | L    | V         | 4                   |
| Safety Orange  | E  | M    | W         | 5                   |
| Gray           | F  | G    | N         | 6                   |

### 12 ACTUATOR LENS OR BODY LEGEND<sup>2</sup>

00 - No Legend

|     |    |      |      |
|-----|----|------|------|
| 21  | 22 | 23   | 24   |
| OFF | ON | O    | I    |
| 25  | O  | 26 O | 27 O |
| F   | N  |      |      |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION

|   |               |
|---|---------------|
| 0 | No legend     |
| 1 | Orientation 1 |
| 2 | Orientation 2 |
| 3 | Orientation 3 |
| 4 | Orientation 4 |



### Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
- Additional ratings available. See page 20.
- Located at T3-6 end of switch.
- Contura V style only.

|          |           |          |               |                |        |        |           |   |            |         |         |          |                 |                  |   |                       |                         |
|----------|-----------|----------|---------------|----------------|--------|--------|-----------|---|------------|---------|---------|----------|-----------------|------------------|---|-----------------------|-------------------------|
| V        | 1         | D        | B             | G              | N      | T      | B         | - | H          | A       | 7       | C        | B               | AC               | - | 1                     | 00                      |
| 1 Series | 2 Circuit | 3 Rating | 4 Termination | 5 Illumination | 6 Lamp | 7 Lamp | 8 Bracket |   | 9 Actuator | 10 Lens | 11 Lens | 12 Color | 13 Insert Color | 14 Actuator Lens |   | 15 Legend Orientation | 16 Actuator Lens Legend |

**1 SERIES**

V

**2 CIRCUIT**

Terminal Connections as viewed from bottom of switch:

8 terminal 10 terminal

8 - - 7 8 - - 7

1 - - 4 1 - - 4

2 - - 5 2 - - 5

3 - - 6 3 - - 6

10 - - 9

( ) - momentary

SP - single pole - uses terminals 1, 2 &amp; 3.

DP - double pole uses terminals 1, 2, 3, 4, 5 &amp; 6.

Terminals 7, 8, 9 &amp; 10 for lamp circuit only.

**Position:**

| SP | DP | 1            | 2                   | 3            |
|----|----|--------------|---------------------|--------------|
| 1  | A  | 2 & 3, 5 & 6 | Connected Terminals | 1 & 2, 4 & 5 |
| 2  | B  | (ON)         | NONE                | OFF          |
| 3  | C  | (ON)         | NONE                | OFF          |
| 4  | D  | (ON)         | NONE                | (OFF)        |
| 5  | F  | (ON)         | NONE                | (ON)         |
| 6  | J  | (ON)         | OFF                 | (ON)         |
| 7  | K  | (ON)         | OFF                 | (ON)         |
| 8  | L  | (ON)         | OFF                 | (ON)         |

**SPECIAL CIRCUITS**

|    | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
|----|----------------|--------------|-------|
| H* | 2 & 3          | 2 & 3        | OFF   |
| G* | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| S* | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| M* | (2 & 3, 5 & 6) | 2 & 3        | OFF   |
| R  | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| E* | 5 & 6          | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

**3 RATING<sup>3</sup>**

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

**4 TERMINATION/BASE STYLE**

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

**5 ILLUMINATION & SWITCH SEALING**

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed                                    | Unsealed | Lamps | Actuator Lens position when Illuminated | Lamp wired to Terminals |
|-------------------------------------------|----------|-------|-----------------------------------------|-------------------------|
| S                                         | 0        | NONE  |                                         |                         |
| A                                         | 1        | #1    | Independent                             | 8+ 7-                   |
| B                                         | 2        | #1    | Down                                    | 3+ 7-                   |
| C                                         | 3        | #2    | Up                                      | 3+ 7-                   |
| D                                         | 4        | #1    | Down                                    | 3+ 7-                   |
| E                                         | 5        | &#2   | Down                                    | 1+ 7-                   |
| F                                         | 6        | #1    | Up                                      | 1+ 7-                   |
| G                                         | 7        | &#2   | Up                                      | 3+ 7-                   |
| H                                         | Z        | #1    | Independent                             | 8+ 7-                   |
| U                                         | Y        | #2    | Up                                      | 3+ 6-                   |
|                                           |          | &#2   | Independent                             | 8+ 7-                   |
|                                           |          | &#2   | Independent                             | 10+ 9-                  |
| Selections for Single Pole Switches Only: |          |       |                                         |                         |
| J                                         | 8        | #1    | Down                                    | 3+ 8-                   |
|                                           |          | &#2   | Independent                             | 6+ 7-                   |
| K                                         | W        | #1    | Independent                             | 8+ 7-                   |
|                                           |          | &#2   | Independent                             | 6+ 7-                   |
| Selections for Double Pole Switches Only: |          |       |                                         |                         |
| L                                         | 9        | #1    | Down                                    | 3+ 6-                   |
| M                                         | R        | #2    | Up                                      | 3+ 6-                   |
| N                                         | T        | #1    | Down                                    | 3+ 6-                   |
|                                           |          | &#2   | Down                                    | 1+ 4-                   |
| P                                         | V        | #1    | Up                                      | 1+ 4-                   |
|                                           |          | &#2   | Up                                      | 3+ 6-                   |

**6,7 LAMP (same coding for both selections)**

Selection 6: above terminals 1 &amp; 4; Selection 7: above terminals 3 &amp; 6

|              |     |        |       |        |                   |
|--------------|-----|--------|-------|--------|-------------------|
| No lamp      | 0   |        |       |        |                   |
| Neon         | 1   | 125VAC | 2     | 250VAC |                   |
| Incandescent | 4   | 3V     | 5     | 6V     |                   |
| LED*         |     |        |       |        |                   |
|              | Red |        | Amber |        | 6 12V superbright |
| A            |     |        | L     |        | Green             |
| B            |     |        | M     |        | 7 18V superbright |
| C            |     |        | N     |        | Red               |
|              |     |        | P     |        |                   |
|              |     |        |       |        | F                 |
|              |     |        |       |        | G                 |
|              |     |        |       |        | H                 |
|              |     |        |       |        | J                 |
|              |     |        |       |        | K                 |
|              |     |        |       |        | L                 |
|              |     |        |       |        | M                 |
|              |     |        |       |        | N                 |
|              |     |        |       |        | O                 |
|              |     |        |       |        | P                 |
|              |     |        |       |        | Q                 |
|              |     |        |       |        | R                 |
|              |     |        |       |        | S                 |
|              |     |        |       |        | T                 |
|              |     |        |       |        | U                 |
|              |     |        |       |        | V                 |
|              |     |        |       |        | W                 |
|              |     |        |       |        | X                 |
|              |     |        |       |        | Y                 |
|              |     |        |       |        | Z                 |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

**8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL**

|          |       |       |      |
|----------|-------|-------|------|
|          | Black | White | Gray |
| No Seal  | B     | W     | G    |
| One Seal | C     | Y     | H    |

**9 ACTUATOR**

0 No Actuator

H High Insert

L Low Insert

**10,11 LENS<sup>4</sup>**

Lens color for LEDs must be clear, white, or match color of LED.  
Green or blue lenses are not recommended with Neon lamps.

0 - No Actuator Z - No Lens

| Clear | White | Amber | Green | Red | Blue |                       |
|-------|-------|-------|-------|-----|------|-----------------------|
| -     | 7     | C     | H     | N   | U    | Bar Lens Translucent  |
| 3     | -     | D     | J     | P   | V    | Bar Lens Transparent  |
| 4     | -     | E     | K     | R   | W    | Oval Lens Transparent |
| -     | A     | F     | L     | S   | Y    | Oval Lens Translucent |

**12 ACTUATOR COLOR**

C Black H Gray S Red Y White

**13 INSERT COLOR**

|   |                      |   |                      |
|---|----------------------|---|----------------------|
| B | Black                | N | Bright Nickel Plated |
| C | Bright Chrome Plated | S | Satin Chrome Plated  |
| D | Satin Chrome Painted | T | Satin Nickel Plated  |
|   |                      | W | White                |

**14 ACTUATOR LENS OR BODY LEGENDS<sup>2</sup>**

00 - No Legend this location/No actuator

11 ON 12 OFF 13 I 14 O

OFF ON O I

15 O O 16 O O 17 O I 18 I O

F N F N F

F F F



For additional legend options &amp; codes, see pages 54-65 of the Carling Transportation catalog

**15 LEGEND ORIENTATION**



0 No legend (used with codes 11-18 in selection 12)

1 Orientation 1

2 Orientation 2

3 Orientation 3

4 Orientation 4

**16 ACTUATOR LENS LEGEND**

00 No legend this location / no actuator

(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.  
For legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

**Notes:**

Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.

2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.

3 Additional ratings available. See page 20.

|             |              |             |                  |                   |           |           |              |               |            |             |              |                             |                               |   |    |
|-------------|--------------|-------------|------------------|-------------------|-----------|-----------|--------------|---------------|------------|-------------|--------------|-----------------------------|-------------------------------|---|----|
| V           | 1            | D           | A                | B                 | T         | 0         | B            | —             | Z          | R           | C            | 00                          | —                             | 0 | 00 |
| 1<br>Series | 2<br>Circuit | 3<br>Rating | 4<br>Termination | 5<br>Illumination | 6<br>Lamp | 7<br>Lamp | 8<br>Bracket | 9<br>Actuator | 10<br>Lens | 11<br>Color | 12<br>Legend | 13<br>Legend<br>Orientation | 14<br>Actuator<br>Lens Legend |   |    |

### 1 SERIES

V

### 2 CIRCUIT

Terminal Connections as viewed from bottom of switch:

| 8 terminal | 10 terminal |
|------------|-------------|
| 8 - 7      | 8 - 7       |
| 1 - 4      | 1 - 4       |
| 2 - 5      | 2 - 5       |
| 3 - 6      | 3 - 6       |
|            | 10 - 9      |

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
 DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
 Terminals 7, 8, 9 & 10 for lamp circuit only.

#### Position:

| Position | DP | 1    | 2    | 3     |
|----------|----|------|------|-------|
| 1        | A  | ON   | NONE | OFF   |
| 2        | B  | (ON) | NONE | OFF   |
| 3        | C  | ON   | NONE | (OFF) |
| 4        | D  | ON   | NONE | ON    |
| 5        | F  | ON   | NONE | (ON)  |
| 6        | J  | ON   | OFF  | ON    |
| 7        | K  | ON   | OFF  | (ON)  |
| 8        | L  | (ON) | OFF  | (ON)  |

#### SPECIAL CIRCUITS

|    | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
|----|----------------|--------------|-------|
| H* | 2 & 3          | 2 & 3        | OFF   |
| G* | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| S  | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| M* | (2 & 3, 5 & 6) | 2 & 3        | OFF   |
| R  | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| E* | 5 & 6          | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
 External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

### 3 RATING<sup>4</sup>

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J &amp; K for circuits H, G &amp; M.

### 5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 &amp; 4 end of switch.; Lamp #2 above terminals 3 &amp; 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

| Sealed | Unsealed | Lamps | Actuator Lens position when illuminated | Lamp wired to Terminals |
|--------|----------|-------|-----------------------------------------|-------------------------|
| S      | 0        | NONE  |                                         |                         |
| A      | 1        | #1    | Independent                             | 8+ 7-                   |
| B      | 2        | #1    | Down                                    | 3+ 7-                   |
| C      | 3        | #2    | Up                                      | 3+ 7-                   |
| D      | 4        | #1    | Down                                    | 3+ 7-                   |
| E      | 5        | &#2   | Down                                    | 1+ 7-                   |
|        |          | #1    | Up                                      | 1+ 7-                   |
| F      | 6        | &#2   | Up                                      | 3+ 7-                   |
|        |          | #1    | Independent                             | 8+ 7-                   |
| G      | 7        | &#2   | Up                                      | 3+ 6-                   |
|        |          | #1    | Independent                             | 8+ 7-                   |
| H      | Z        | &#2   | Up                                      | 3+ 7-                   |
| U      | Y        | #1    | Independent                             | 8+ 7-                   |
|        |          | &#2   | Independent                             | 10+ 9-                  |

Selections for Single Pole Switches Only:

|   |   |     |             |       |
|---|---|-----|-------------|-------|
| J | 8 | #1  | Down        | 3+ 8- |
|   |   | &#2 | Independent | 6+ 7- |
| K | W | #1  | Independent | 8+ 7- |
|   |   | &#2 | Independent | 6+ 7- |

Selections for Double Pole Switches Only:

|   |   |     |      |       |
|---|---|-----|------|-------|
| L | 9 | #1  | Down | 3+ 6- |
| M | R | #2  | Up   | 3+ 6- |
| N | T | #1  | Down | 3+ 6- |
|   |   | &#2 | Down | 1+ 4- |
| P | V | #1  | Up   | 1+ 4- |
|   |   | &#2 | Up   | 3+ 6- |

### 6,7 LAMP (same coding for both selections)

Selection 6: above terminals 1 &amp; 4; Selection 7: above terminals 3 &amp; 6


|              |                   |
|--------------|-------------------|
| No lamp      | 0                 |
| Neon         | 1 125VAC 2 250VAC |
| Incandescent | 4 3V 5 6V         |
| LED*         | 6 12V 7 18V 8 24V |
|              | superbright Red   |
| 2VDC         | A L F             |
| 6VDC         | B M G             |
| 12VDC        | C N H             |
| 24VDC        | D P J             |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

### 8 FLUSH BRACKET COLOR<sup>1</sup>, PANEL SEAL

|            |       |      |
|------------|-------|------|
| Black      | White | Gray |
| No Seal B  | W     | G    |
| One Seal C | Y     | H    |

### 9 ACTUATOR

No Actuator  
Contura VII0  
Z

### 10 LENS

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

0 - No Actuator Z - No Lens


| White | Amber | Green | Red | Blue | Lens style & location |
|-------|-------|-------|-----|------|-----------------------|
| 6     | B     | G     | M   | T    |                       |
| 7     | C     | H     | N   | U    |                       |
| 8     | D     | J     | P   | V    |                       |
| 9     | E     | K     | R   | W    |                       |
| A     | F     | L     | S   | Y    |                       |
| 1     | 2     | 3     | 4   | 5    |                       |

### 11 ACTUATOR COLOR/THUMB PRINT COLOR<sup>1</sup>

|   |                   |   |             |
|---|-------------------|---|-------------|
| O | N/A - No Actuator | C | Black/Black |
| H | Grey/Black        | S | Red/Black   |
| Y | White/Black       |   |             |


### 12 ACTUATOR LENS LEGENDS<sup>2,4</sup>

|        |        |        |        |
|--------|--------|--------|--------|
| 11 ON  | 12 OFF | 13 I   | 14 O   |
| OFF    | ON     | O      | I      |
| 15 O O | 16 O O | 17 O I | 18 I O |
| F N    | F N    |        |        |
| F      | F      |        |        |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION

|   |                                                   |
|---|---------------------------------------------------|
| 0 | No legend (used with codes 11-18 in selection 12) |
| 1 | Orientation 1                                     |
| 2 | Orientation 2                                     |
| 3 | Orientation 3                                     |
| 4 | Orientation 4                                     |

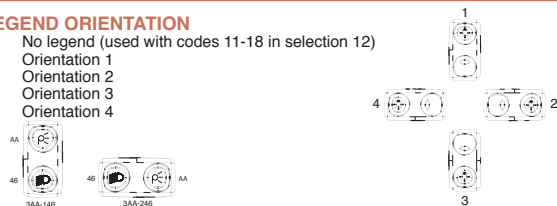

### 14 ACTUATOR LENS LEGEND

00 No legend this location / no actuator  
 (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.  
 For legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.

2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.

3 Additional ratings available. See page 20.

4 Legends available for lighted oval lens version only

| 1      | 2       | 3      | 4           | 5            | 6    | 7    | 8       | 9        | 10   | 11   | 12     | 13          | 14          |
|--------|---------|--------|-------------|--------------|------|------|---------|----------|------|------|--------|-------------|-------------|
| Series | Circuit | Rating | Termination | Illumination | Lamp | Lamp | Bracket | Actuator | Lens | Lens | Legend | Legend      | Actuator    |
|        |         |        |             |              |      |      |         |          |      |      |        | Orientation | Lens Legend |

## 1 SERIES

## 2 CIRCUIT

Terminal Connections as viewed  
from bottom of switch:

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
Terminals 7, 8, 9 & 10 for lamp circuit only.

**Position:**

| SP | DP | 2 & 3, 5 & 6 | Connected Terminals | 1 & 2, 4 & 5 |
|----|----|--------------|---------------------|--------------|
| 1  | A  | ON           | NONE                | OFF          |
| 2  | B  | (ON)         | NONE                | OFF          |
| 3  | C  | ON           | NONE                | (OFF)        |
| 4  | D  | ON           | NONE                | ON           |
| 5  | F  | ON           | NONE                | (ON)         |
| 6  | J  | ON           | OFF                 | ON           |
| 7  | K  | ON           | OFF                 | (ON)         |
| 8  | L  | (ON)         | OFF                 | (ON)         |

## 8 SPECIAL CIRCUITS

| SPECIAL CIRCUITS |                |              |       |
|------------------|----------------|--------------|-------|
| H*               | 2 & 3          | 2 & 3, 5 & 4 | 5 & 4 |
| G*               | 2 & 3, 5 & 6   | 2 & 3        | OFF   |
| S                | 2 & 3, 5 & 6   | 2 & 3        | 1 & 2 |
| M*               | (2 & 3, 5 & 6) | 2 & 3        | OFF   |
| R                | (2 & 3, 5 & 6) | 2 & 3        | 1 & 2 |
| E                | 5 & 6          | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, S, M are specified in section 4.  
 External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

### 3 RATING<sup>4</sup>

**3 RATING**  
**1** .4VA @ 28VDC Resistive  
**B** 15A 24V  
**C** 20A 18V  
**D** 20A 12V  
**E** 20A 14V, 10A 14VT (circuit 1, 4, A & D only)  
**F** 10A 14V, 6A 14VT (circuit G only)  
**M** .4VA/20A 12V  
**N** .4VA/15A 24V

#### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| A      | 2       | .250 TAB (QC) no barriers   | No          |
| J      | B       | .250 TAB (QC) with barriers | No          |
| A      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| C      | 4       | Solder Lug no barriers      | No          |
| 3      | D       | Solder Lug                  | No          |
| 5      | 6       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J & K for circuits H, G & M.

## 5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Actuator Lens position  
when Illuminated

## Terminals

| Sealed | Unsealed | Lamps | when Illuminated | Terminals |
|--------|----------|-------|------------------|-----------|
| S      | 0        | NONE  |                  |           |
| A      | 1        | # 1   | Independent      | 8+ 7-     |
| B      | 2        | # 1   | Down             | 3+ 7-     |
| C      | 3        | # 2   | Up               | 3+ 7-     |
| D      | 4        | # 1   | Down             | 3+ 7-     |
| E      |          | &# 2  | Down             | 1+ 7-     |
|        | 5        | # 1   | Up               | 1+ 7-     |
|        |          | &# 2  | Up               | 3+ 7-     |
| F      | 6        | # 1   | Independent      | 8+ 7-     |
|        |          | &# 2  | Up               | 3+ 6-     |
| G      | 7        | # 1   | Independent      | 8+ 7-     |
|        |          | &# 2  | Up               | 3+ 7-     |
| H      | Z        | # 2   | Independent      | 8+ 7-     |
| U      | Y        | # 1   | Independent      | 8+ 7-     |
|        |          | &# 2  | Independent      | 10+ 9-    |
| J      | 8        | # 1   | Down             | 3+ 8-     |
|        |          | &# 2  | Independent      | 6+ 7-     |
| K      | W        | # 1   | Independent      | 8+ 7-     |
|        |          | &# 2  | Independent      | 6+ 7-     |
| L      | 9        | # 1   | Down             | 3+ 6-     |
| M      | R        | # 2   | Up               | 3+ 6-     |
| N      | T        | # 1   | Down             | 3+ 6-     |
|        |          | &# 2  | Down             | 1+ 4-     |
| P      | V        | # 1   | Up               | 1+ 4-     |
|        |          | &# 2  | Up               | 3+ 6-     |

### 6.7 LAMP (same coding for both selections)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

|              |     |        |                      |                    |       |
|--------------|-----|--------|----------------------|--------------------|-------|
| No lamp      | 0   |        |                      |                    |       |
| Neon*        | 1   | 125VAC | 2 250VAC             |                    |       |
| Incandescent | 4   | 3V     | 5 6V                 | 6 12V              | 7 18V |
| LED*         |     |        |                      |                    | 8 24V |
|              | Red | Amber  | superbright<br>Green | superbright<br>Red |       |
| 2VDC         | A   | L      | F                    | R                  |       |
| 6VDC         | B   | M      | G                    | S                  |       |
| 12VDC        | C   | N      | H                    | T                  |       |
| 24VDC        | D   | P      | J                    | V                  |       |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

**8 BRACKET COLOR<sup>1</sup>. PANEL SEAL (EXTERNAL FOAM GASKET)**

|              | X & XI w/Flush Bracket |          |          | X, XI, XII w/Raised Bracket |          |
|--------------|------------------------|----------|----------|-----------------------------|----------|
| # of gaskets | 0                      | 1        | 2        | 0                           | 1        |
| Black        | <b>B</b>               | <b>C</b> | <b>D</b> | <b>1</b>                    | <b>4</b> |
| White        | <b>W</b>               | <b>Y</b> | <b>Z</b> | <b>2</b>                    | <b>5</b> |
| Gray         | <b>G</b>               | <b>H</b> | <b>J</b> | <b>3</b>                    | <b>6</b> |

## 9 ACTUATOR

| No Actuator | 0     |      |       |     |  |                                                                                     |
|-------------|-------|------|-------|-----|--|-------------------------------------------------------------------------------------|
|             | Black | Gray | White | Red |  |  |
| Contura X   | 1     | 2    | 3     | 4   |  |  |
| Contura XI  | 6     | 7    | 8     | 9   |  |  |
| Contura XII | J     | K    | N     | M   |  |                                                                                     |

Actuator orientation shows terminals:

|                                                                                     | 3.6 | 1.4 |
|-------------------------------------------------------------------------------------|-----|-----|
|  |     |     |
|  |     |     |
|  |     |     |

Actuator orientation above terminals:

### 10 LENS - ABOVE LAMP #1 TERMINALS<sup>1,4</sup>

11 LENS - ABOVE LAMP #2 TERMINALS<sup>3,6</sup>

| D - No Actuator |       |       | Z - No Lens |     |   | Blue                           | Lens Style |
|-----------------|-------|-------|-------------|-----|---|--------------------------------|------------|
| Clear           | White | Amber | Green       | Red |   |                                |            |
| 3               | 8     | D     | J           | P   | V | Bar                            |            |
| 4               | 9     | E     | K           | R   | W | One piece Square               |            |
| 5               | A     | F     | L           | S   | Y | Two piece Square*              |            |
|                 |       |       |             |     |   | (w/ clear top protective lens) |            |
| 2               | 7     | C     | H           | N   | U | Two piece Square*              |            |
|                 |       |       |             |     |   | (w/ smoke top protective lens) |            |
| 1               | 6     | B     | G           | M   | T | Two piece Square*              |            |
|                 |       |       |             |     |   | (w/ white top protective lens) |            |

\* All bottom lenses are molded of opaque material. Consult factory for other lens colors.  
Lens color for LEDs must be clear, white, or match color of LED.  
Green or blue lenses are not recommended with Neon lamps.

## 12 ACTUATOR LENS OR BODY LEGEND<sup>2</sup>

00 - No Legend this location/No actuator

|    |                 |    |                 |    |        |    |        |
|----|-----------------|----|-----------------|----|--------|----|--------|
| 11 | ON<br>OFF       | 12 | OFF<br>ON       | 13 | I<br>O | 14 | O<br>I |
| 15 | O O<br>F N<br>F | 16 | O O<br>N F<br>F | 17 | O I    | 18 | I O    |
| 21 | OFF             | 22 | ON              | 23 | O      | 24 | I      |
| 25 | O<br>F<br>F     | 26 | O<br>N          | 27 | O      | 28 | I      |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION<sup>3</sup>

**0** No legend (used with codes 11-18 in selection 12)

Orientation 1  
Orientation 2  
Orientation 3  
Orientation 4

3D  
A7  
G3  
MA  
MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC

Orientation 1  
Orientation 2  
Orientation 3  
Orientation 4

3D  
A7  
G3  
MA  
MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC

Orientation 1  
Orientation 2  
Orientation 3  
Orientation 4

3D  
A7  
G3  
MA  
MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC

Orientation 1  
Orientation 2  
Orientation 3  
Orientation 4

3D  
A7  
G3  
MA  
MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC  
EPMMA-5MC

## 14 ACTUATOR LENS LEGEND

**00** No legend this location / no actuator  
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.  
For legend options & codes, visit us at [www.carlintechnic.com](http://www.carlintechnic.com).

Notes: Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.  
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators; Custom colors are available, consult factory.  
3 With 2 square lenses, use sel. 12 for lens above lamp 1, & selection 14 for lens above lamp 2.  
4 Additional ratings available. See page 20.  
5 Not available with Contura XI rockers.

|          |           |          |               |                |        |        |           |   |            |         |             |           |   |                       |
|----------|-----------|----------|---------------|----------------|--------|--------|-----------|---|------------|---------|-------------|-----------|---|-----------------------|
| V        | 1         | D        | A             | S              | W      | 0      | 1         | — | 1          | P       | B           | 00        | — | 0                     |
| 1 Series | 2 Circuit | 3 Rating | 4 Termination | 5 Illumination | 6 Lock | 7 Lamp | 8 Bracket |   | 9 Actuator | 10 Lens | 11 Function | 12 Legend |   | 13 Legend Orientation |

### 1 SERIES V

### 2 CIRCUIT

Terminal Connections as viewed from bottom of switch:

|            |             |
|------------|-------------|
| 8 terminal | 10 terminal |
| 8 - 7      | 8 - 7       |
| 1 - 4      | 1 - 4       |
| 2 - 5      | 2 - 5       |
| 3 - 6      | 3 - 6       |
|            | 10 - 9      |

( ) - momentary

SP - single pole - uses terminals 1, 2 & 3.  
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.  
Terminals 7, 8, 9 & 10 for lamp circuit only.

### Position:

|    | DP | 1            | 2         | 3                      |
|----|----|--------------|-----------|------------------------|
| SP | DP | 2 & 3, 5 & 6 | Connected | Terminals 1 & 2, 4 & 5 |
| 1  | A  | ON           | NONE      | OFF                    |
| 4  | D  | ON           | NONE      | ON                     |
| 6  | J  | ON           | OFF       | ON                     |
| 9  | N  | OFF          | NONE      | ON                     |

### SPECIAL CIRCUITS

|    |              |              |       |
|----|--------------|--------------|-------|
| H* | 2 & 3        | 2 & 3, 5 & 4 | 5 & 4 |
| G* | 2 & 3, 5 & 6 | 2 & 3        | OFF   |
| S  | 2 & 3, 5 & 6 | 2 & 3        | 1 & 2 |
| E* | 5 & 6        | 5 & 3        | 5 & 1 |

\*Jumper between terminals 2 & 5 for circuits H, G, & M are specified in selection 4.  
External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

### 3 RATING<sup>4</sup>

|   |                                              |
|---|----------------------------------------------|
| 1 | .4VA @ 28VDC Resistive                       |
| B | 15A 24V                                      |
| C | 20A 18V                                      |
| D | 20A 12V                                      |
| E | 20A 14V, 10A 14VT (circuit 1, 4, A & D only) |
| F | 10A 14V, 6A 14VT (circuit G only)            |
| M | .4VA/20A 12V                                 |
| N | .4VA/15A 24V                                 |

### 4 TERMINATION/BASE STYLE

| 8 term | 10 term | Termination                 | Jumper      |
|--------|---------|-----------------------------|-------------|
| 1      | 2       | .250 TAB (QC) no barriers   | No          |
| A      | B       | .250 TAB (QC) with barriers | No          |
| J      | K       | .250 TAB (QC) no barriers   | Yes T2 to 5 |
| 3      | 4       | Solder Lug no barriers      | No          |
| C      | D       | Solder Lug                  | No          |
| 5      | F       | Wire Leads no barriers      | No          |
| E      | F       | Wire Leads                  | No          |

Note: Codes J & K for circuits H, G & M.

### 5 ILLUMINATION & SWITCH SEALING

Lamp above terminals 3 & 6 end of switch.

Positive (+) and negative (-) symbols apply to LED lamps only  
Actuator Lens position when illuminated

| Sealed | Unsealed | Lamps | Actuator Lens position when illuminated | Lamp wired to Terminals |
|--------|----------|-------|-----------------------------------------|-------------------------|
| S      | 0        | NONE  |                                         |                         |
| C      | 3        | # 2   | Up                                      | 3+ 7-                   |
| H      | Z        | # 2   | Independent                             | 8+ 7-                   |
| M      | R        | # 2   | Up                                      | 3+ 6-                   |

Selections for Double Pole Switches Only:

### 6 LOCK

Lock above terminals 1 & 4 end of switch.  
W lock

### 7 LAMP

Lamp above terminals 3 & 6 end of switch

|                   |   |          |          |                         |                       |       |
|-------------------|---|----------|----------|-------------------------|-----------------------|-------|
| No lamp           | 0 | 1 125VAC | 2 250VAC | 6 12V superbright Green | 7 18V superbright Red | 8 24V |
| Neon              | 1 | 4 3V     | 5 6V     |                         |                       |       |
| Incandescent LED* |   | Red      | Amber    |                         |                       |       |
| 2VDC              | A |          | L        | F                       | R                     |       |
| 6VDC              | B |          | M        | G                       | S                     |       |
| 12VDC             | C |          | N        | H                       | T                     |       |
| 24VDC             | D |          | P        | J                       | V                     |       |

\* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

### 8 RAISED BRACKET COLOR<sup>1</sup>, PANEL SEAL (EXTERNAL FOAM GASKET)

|            | Black | White | Gray |
|------------|-------|-------|------|
| No Gasket  | 1     | 2     | 3    |
| One Gasket | 4     | 5     | 6    |

### 9 HARD SURFACE ACTUATOR

| Contura X | Black | Grey | Red | White |
|-----------|-------|------|-----|-------|
|           | 1     | 2    | 3   | 4     |



Actuator orientation above terminals: 3,6 1,4

### 10 LENS - ABOVE LAMP #2 TERMINALS<sup>3,6</sup>

Z - No Lens

| Clear | White | Amber | Green | Red | Blue | Lens Style                     |
|-------|-------|-------|-------|-----|------|--------------------------------|
| 3     | 8     | D     | J     | P   | V    | Bar                            |
| 4     | 9     | E     | K     | R   | W    | One piece Square               |
| 5     | A     | F     | L     | S   | Y    | Two piece Square*              |
|       |       |       |       |     |      | (w/ clear top protective lens) |
| 2     | 7     | C     | H     | N   | U    | Two piece Square*              |
|       |       |       |       |     |      | (w/ smoke top protective lens) |
| 1     | 6     | B     | G     | M   | T    | Two piece Square*              |
|       |       |       |       |     |      | (w/ white top protective lens) |

\* All bottom lenses are molded of opaque material. Consult factory for other lens colors.  
Lens color for LEDs must be clear, white, or match color of LED.  
Green or blue lenses are not recommended with Neon lamps.

### 11 ACTUATOR LOCK FUNCTION AND COLOR<sup>3</sup>

| Lock Color     | Up | Down | Up & Down |
|----------------|----|------|-----------|
| Match Actuator | A  | H    | R         |
| Black          | B  | J    | S         |
| White          | C  | K    | T         |
| Red            | D  | L    | V         |
| Gray           | E  | M    | W         |
| Safety Orange  | F  | N    | Y         |

### 12 ACTUATOR LENS OR BODY LEGEND<sup>2</sup>

00 - No Legend



|        |       |      |      |
|--------|-------|------|------|
| 21 OFF | 22 ON | 23 O | 24 I |
| 25 O   | 26 O  | 27 O | 28 I |
| F      | N     |      |      |
| F      |       |      |      |



For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

### 13 LEGEND ORIENTATION<sup>3</sup>

|   |                                                   |
|---|---------------------------------------------------|
| 0 | No legend (used with codes 11-18 in selection 12) |
| 1 | Orientation 1                                     |
| 2 | Orientation 2                                     |
| 3 | Orientation 3                                     |
| 4 | Orientation 4                                     |



### Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Located over T1-4 end of switch.
- Additional ratings available. See page 20.



**Reduce inventory levels and cost by stocking actuators and base switches separately.**

**Contura II, III, IV, V, X, XI, XII Base switches separately:** specify **V** with code selections 2-8 in the ordering schemes.

**Contura II, III, IV, V Actuator only:** **VV** with code **A** or **C** for selection 9, & with selections 10-14 in the ordering schemes.

**Panel Seal:** VPS

**Contura II, III, IV, V Actuator only:** **VV** with code **A, C, E, G** or **P** for selection 9 & with selections 10-14 in the ordering schemes.

**Contura X, XI, XII actuators with lenses separately:** **VV** with code selections 9-14 in the ordering schemes.

**Contura X & XI actuators without lenses separately:**

**VVR** **6** **1** **00** **1**

1 Actuator Separately 2 Actuator Style/Color 3 Lens Opening 4 Actuator Legend 5 Legend Orientation

**1 CONTURA X & XI ACTUATOR SEPARATELY**  
**VVP****2 ACTUATOR STYLE & COLOR**

|            | Black | Gray | White | Red |
|------------|-------|------|-------|-----|
| Contura X  | 1     | 2    | 3     | 4   |
| Contura XI | 6     | 7    | 8     | 9   |

**3 LENS OPENING FOR<sup>1</sup>**

|   |                 |   |                                                               |
|---|-----------------|---|---------------------------------------------------------------|
| 1 | One bar lens    | 5 | square lens on top/<br>bar lens on bottom<br>(Contura X only) |
| 2 | One bar lenses  |   |                                                               |
| 3 | One square lens |   |                                                               |
| 4 | two square lens |   |                                                               |

**4 ACTUATOR LENS OR BODY LEGEND**


**00** - No Legend this location

|        |        |        |        |
|--------|--------|--------|--------|
| 11 ON  | 12 OFF | 13 I   | 14 O   |
| OFF    | ON     | O      | I      |
| 15 O O | 16 O O | 17 O I | 18 I O |
| F N    | N F    |        |        |
| F      | F      |        |        |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

**5 LEGEND ORIENTATION<sup>1</sup>**

**0** No legend  
**1** Orientation 1  
**2** Orientation 2  
**3** Orientation 3  
**4** Orientation 4

**Contura X, XI & XII top piece of 2-piece lens separately:**

**VVT** **1**

1 Lens Separately 2 Color

**1 TOP OF LENS SEPARATELY**  
**VVT**

**2 COLOR**  
1 Clear 2 Smoke 3 White

**Contura X, XI & XII actuator lens assembly:**

1 piece lens/bar lens are positioned the same as bottom lens for assembly, minus the top lens. Lenses snap in from bottom.

**Notes:**

- 1 If actuator marking for 2 bar or 2 square lenses, legend orientation 0, 1, or 2 must be chosen.
- 2 Center of actuator marking not available for Contura XII.
- 3 Legend is not available for bar style lens.
- 4 Not recommended with neon lamps.
- 5 Must also order top piece of 2 piece square lens separately.

**Contura XII actuators without lenses separately:**

**VVP** **J** **1** **Z** **21** **1** **00**

1 Actuator 2 Style & Color 3 Lens Opening 4 Lens Opening 5 Legend 6 Legend Orientation 7 Legend Orientation

**1 CONTURA XII ACTUATOR SEPARATELY**  
**VVP****2 ACTUATOR STYLE & COLOR**

**J** Black **K** Gray **N** White **M** Red

**3,4 LENS OPENING FOR**

**Z** No lens **1** Bar lens **2** Square lens

**5, 7 LENS OR BODY LEGEND<sup>2</sup>**


**00** - No Legend

|        |       |      |      |
|--------|-------|------|------|
| 21 OFF | 22 ON | 23 O | 24 I |
| 25 O   | 26 O  | 27 O | 28 I |
| F      | N     |      |      |
| F      |       |      |      |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

**6 LEGEND ORIENTATION<sup>3</sup>**

**0** No legend  
**1** Orientation 1  
**2** Orientation 2

**Contura X, XI & XII actuator lens assembly separately:**

**VVL** **2** **1** **00** **0**

1 Lens Separately 2 Lens Style 3 Lens Color 4 Legend 5 Legend Orientation

**1 CONTURA X, XI & XII LENS SEPARATELY**  
**VVL****2 LENS STYLE<sup>3</sup>**

1 Bar lens 2 One Piece Square lens 3 Bottom of Two-Piece Square lens<sup>5</sup>

**3 TRANSLUCENT LENS COLOR**

1 Clear 2 White 3 Amber 4 Green<sup>4</sup> 5 Red 6 Blue<sup>4</sup>

**4 LENS OR BODY LEGEND<sup>2</sup>**


**00** - No Legend

|        |       |      |      |
|--------|-------|------|------|
| 21 OFF | 22 ON | 23 O | 24 I |
| 25 O   | 26 O  | 27 O | 28 I |
| F      | N     |      |      |
| F      |       |      |      |

For additional legend options & codes, visit us at [www.carlingtech.com](http://www.carlingtech.com).

**5 LEGEND ORIENTATION<sup>3</sup>**

**0** No legend  
**1** Orientation 1  
**2** Orientation 2  
**3** Orientation 3  
**4** Orientation 4






## Easily integrate Contura products into your system, with Contura Accessories


### Contura Connectors

| Q.C. SELECTION GUIDE          |             |                  |            |                       |
|-------------------------------|-------------|------------------|------------|-----------------------|
| COMPANY SERIES                | PART NO     |                  | WIRE RANGE |                       |
|                               | PLAIN BRASS | TIN PLATED BRASS | AWG        | MM <sup>2</sup> (REF) |
| PACKARD 58 SERIES             | 02965580    |                  | 12         | 3.0                   |
|                               | 02965471    | 12010601         | (2)16-14   | (2)1.0-2.0            |
|                               | 02965470    |                  | 16-14      | 1.0-2.0               |
|                               | 02965469    | 06288318         | 20-18      | .5-.8                 |
| PACKARD METRI-PACK 630 SERIES |             | 12084590         | 10         | 5.0                   |
|                               |             | 12052224         | 12         | 3.0                   |
|                               |             | 12015870         | 16-14      | 1.0-2.0               |
|                               |             | 12020035         | (2)22-18   | (2).5-.8              |
|                               | 12015832    | 12015869         | 20-18      | .5-.8                 |
|                               |             | 12052222         | 20-22      | .35-.5                |
| AMP 250 SERIES FASTIN-FASTON  | 60253-1     | 60253-2          | 16-12      | 1.3-3                 |
|                               | 42100-1     | 42100-2          | (2) 16     | (2) 1.3               |
|                               | 60295-1     | 60295-2          | 18-14      | .8-2                  |
|                               |             |                  | 22-18      | .3-.9                 |


**NOTE:** Consult Delphi Packard and/or Amp on actual part numbers and availability.  
AMP is a registered trademark of AMP Inc. Harrisburg, PA  
Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warren, Ohio

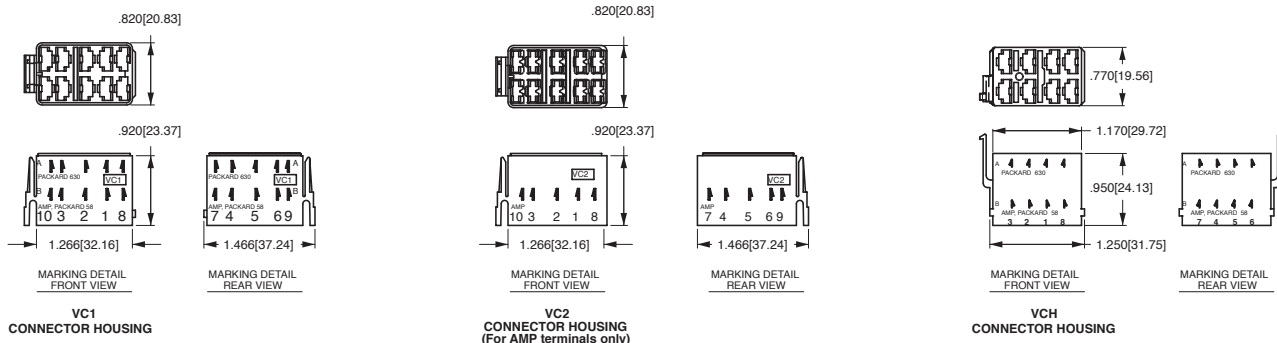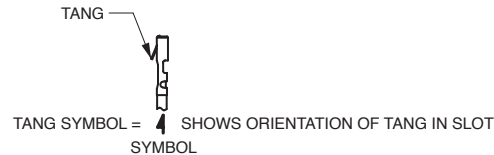

### Contura X Boot (P/N VB1-01)

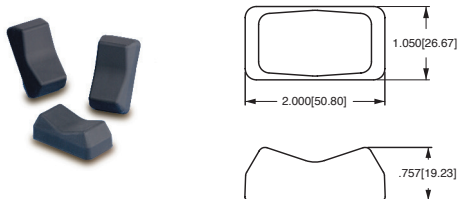

### Contura II, III, IV & V Actuator Removal Tool (P/N VRT)

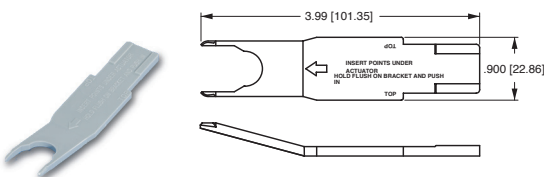

### Additional V-Series Ratings

- 1 .4VA @ 28VDC Resistive
- 4 10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings
- 5 10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified
- 6\* 15A 125VAC 1/2 HP, 12(2)A 125 VAC  $\mu$  T85
- 7\* 15A 125VAC 1/2 HP, 12(6)A 125 VAC T85
- 8\* 10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(2)A 250 VAC  $\mu$  T85
- 9\* 10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(6)A 250 VAC T85
- B 15A 24V
- C 20A 18V
- D 20A 12V
- E 20A 14V, 10A 14VT (circuits 1, 4, A, & D only)
- F 10A 14V, 6A, 14VT (circuit G only)
- G 20A 6V
- H 20A 3V
- L 15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L
- M .4VA/20A 12V (combi-contact)
- (combination gold/silver contacts for borderline dry circuit applications)
- N .4VA/15A 24V (combi-contact)
- (combination gold/silver contacts for borderline dry circuit applications)

#### NOTES

Consult factory to determine availability for individual circuits and their HP rating.


\* Ratings 6 - 9 are UL, CSA & VDE certified, require terminations A or B for double pole circuits, & are not available with illumination circuits 4, 8, D, J, N, & T or with wire lead or solder lug terminations. Circuits 1, 4, A, D, H, M & E are not available with rating 6 & 8. Rating 7 & 9 only available with circuits 1, 4, A & D. Circuits 2, 3, 5, 7, 8, K, L are 1/2 HP 250VAC only with rating 8. Ratings 6 & 7 must specify lamp code 1 (125VAC neon). Ratings 8 & 9 must specify lamp code 2 (250VAC neon). Rating L available with circuits 1, 4, A & D only.

## Contura Mounting Panels


### Dimensional Specifications: in. [mm]

**MOUNTING PANEL**  
For additional units, add 1.03[26.2] per unit.  
For more than 2 V-Series Switches, add middle section. Available in Panel Thicknesses listed below. Consult factory.


**MOUNTING PANEL THICKNESS**  
.062[1.57]      .187[4.75]  
.083[2.36]      .250[6.35]  
.125[3.17]      .375[9.52]




**VMS MOUNTING PANEL HOLE**




**MOUNTING PANEL OPENING (2) UNITS**




**VME MOUNTING PANEL END**




**VMM MOUNTING PANEL MIDDLE**




**VMS MOUNTING PANEL**



**VM3 MOUNTING PANEL**

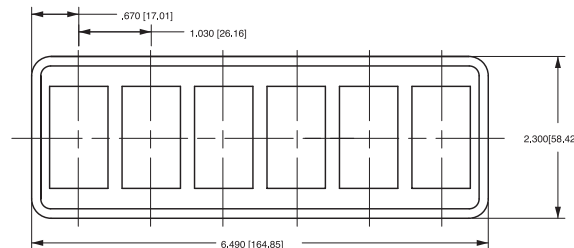


**VM6 MOUNTING PANEL**




## Contura Hole Plug


### Dimensional Specifications: in. [mm]




**VHP CONTURA II, III HOLE PLUG**




**VHP CONTURA II, III HOLE PLUG**




**VH1 STANDARD HOLE PLUG (No wing serrations) (With VC1 connector attached)**




**VH2 STANDARD HOLE PLUG (With wing serrations)**




(TYP. FOR VH3 & VH4)




(TYP. FOR VH5 & VH6)




**VH3 CONTURA IV HOLE PLUG (No wing serrations)**



**VH4 CONTURA IV HOLE PLUG (With wing serrations)**



**VH5 CONTURA V HOLE PLUG (No wing serrations)**



**VH6 CONTURA V HOLE PLUG (With wing serrations)**



**DETAIL VIEW VH1, VH3 & VH5 HOLE PLUGS (No wing serrations for ease of removal)**



**DETAIL VIEW VH2, VH4 & VH6 HOLE PLUGS (With wing serrations)**



\* Intentionally left blank

\* Intentionally left blank



### **Worldwide Headquarters**

Carling Technologies, Inc.  
60 Johnson Avenue • Plainville, CT 06062-1177  
Phone: (860) 793-9281 • Fax: (860) 793-9231  
Email: sales@carlingtech.com • www.carlingtech.com

East Region Sales Office, CT • ersm@carlingtech.com  
Midwest Region Sales Office, IL • mrsm@carlingtech.com  
West Region Sales Office, CA • wrsm@carlingtech.com

### **Asia-Pacific Headquarters**

Carling Technologies, Asia-Pacific Ltd.,  
Kowloon, Hong Kong  
Int + 852-2737-2277 • Fax: Int + 852-2736-9332  
Email: sales@carlingtech.com.hk

Shenzhen, China • shenzhen@carlingtech.com  
Shanghai, China • shanghai@carlingtech.com  
Pune, India • india@carlingtech.com  
Kaohsiung, Taiwan • taiwan@carlingtech.com  
Yokohama, Japan • japan@carlingtech.com

### **Europe / Middle East / Africa Headquarters**

Carling Technologies, Ltd.,  
Devon, England  
Int + 44 1392-364422 • Fax: Int + 44 1392-364477  
Email: ltd.sales@carlingtech.com

GmbH, Germany • gmbh@carlingtech.com  
SAS, France • sas@carlingtech.com

REV\_SW\_V\_1112



**Carling Technologies®**

Innovative Designs. Powerful Solutions.

Innovative Designs. Powerful Solutions.