




35W Single Output Switching Power Supply

NES-35 series

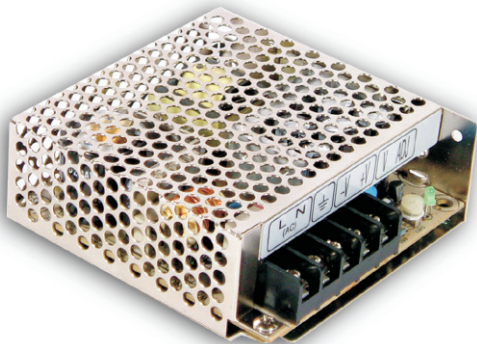

■ Features :

- Universal AC input/Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty




SPECIFICATION

MODEL		NES-35-5	NES-35-12	NES-35-15	NES-35-24	NES-35-48
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	48V
	RATED CURRENT	7A	3A	2.4A	1.5A	0.8A
	CURRENT RANGE	0 ~ 7A	0 ~ 3A	0 ~ 2.4A	0 ~ 1.5A	0 ~ 0.8A
	RATED POWER	35W	36W	36W	36W	38.4W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	150mVp-p	200mVp-p	240mVp-p
	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V	43.2 ~ 52.8V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION Note.4	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION Note.5	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	500ms, 30ms/230VAC 1200ms, 30ms/115VAC at full load				
HOLD UP TIME (Typ.)	50ms/230VAC 10ms/115VAC at full load					
INPUT	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY (Typ.)	78%	81%	83%	85%	86%
	AC CURRENT (Typ.)	0.75A/115VAC 0.5 A/230VAC				
	INRUSH CURRENT (Typ.)	COLD START 45A				
	LEAKAGE CURRENT	<2mA / 240VAC				
PROTECTION	OVERLOAD	110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V	55.2 ~ 64.8V
		Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	WORKING TEMP.	-20 ~ +60℃ (Refer to output load derating curve)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 45℃)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
SAFETY & EMC (Note 6)	SAFETY STANDARDS	UL60950-1, CB(IEC60950-1) Approved				
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC				
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B				
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3				
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8,11, ENV50204, EN55024, EN61000-6-1 Light industry level, criteria A				
OTHERS	MTBF	394Khrs min. MIL-HDBK-217F (25℃)				
	DIMENSION	99*97*36mm (L*W*H)				
	PACKING	0.36Kg; 45pcs/17.2Kg/0.93CUFT				
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Line regulation is measured from low line to high line at rated load. 5. Load regulation is measured from 0% to 100% rated load. 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.					

Mechanical Specification

Case No. 905 Unit:mm

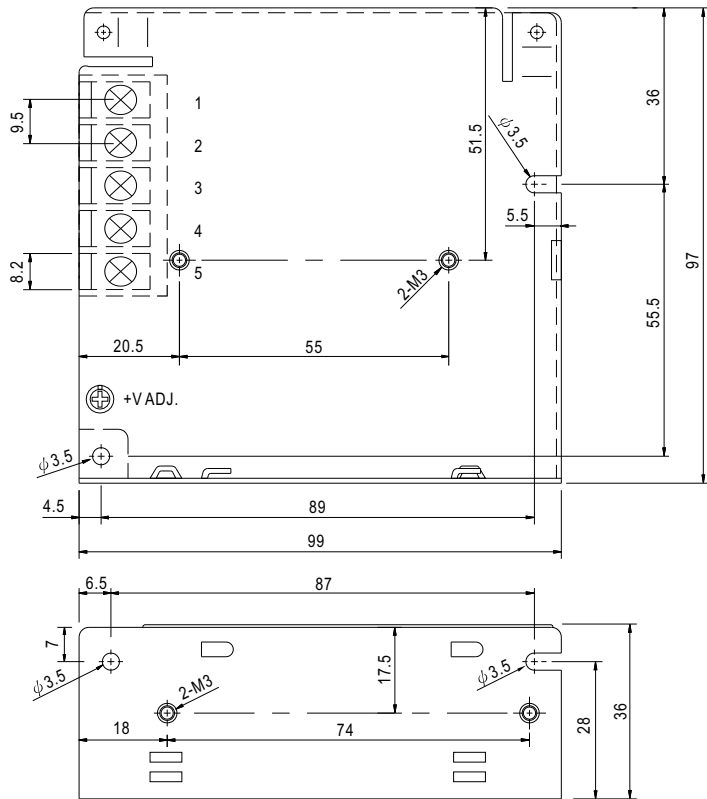


Terminal Pin. No Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT -V
2	AC/N	5	DC OUTPUT +V
3	FG $\perp$		



Block Diagram

fosc : 60KHz

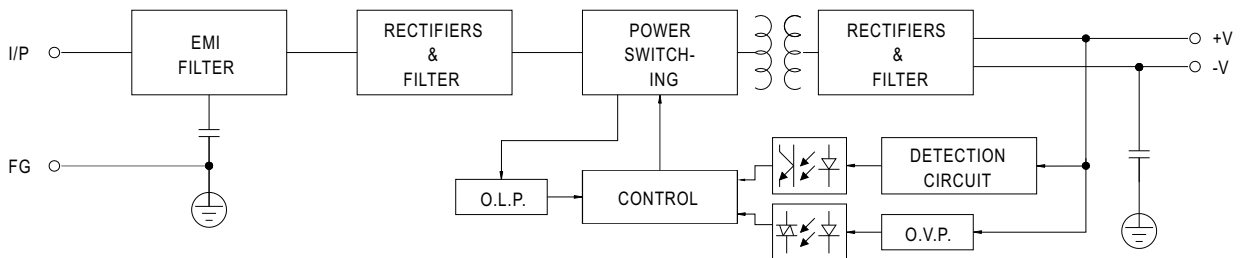

Derating Curve

Output Derating VS Input Voltage

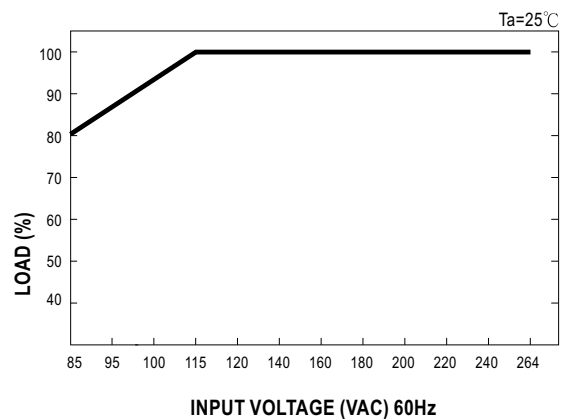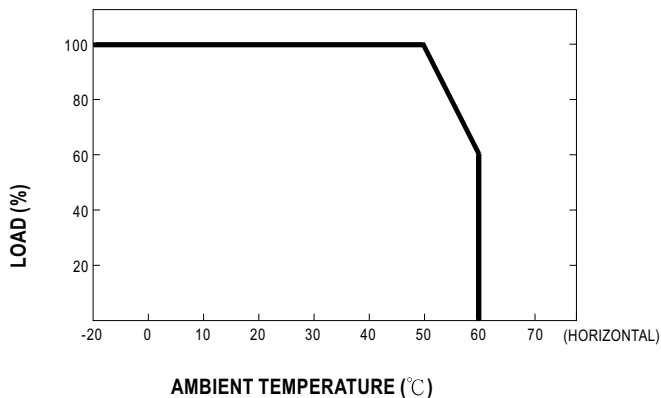

MODEL : NES-35-15

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1:150 mVp-p (Max)	I/P: 230VAC O/P:FULL LOAD Ta:25℃	V1: 10 mVp-p (Max)	P
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 13.5V~ 16.5 V	I/P: 230 VAC I/P: 115 VAC O/P:MIN LOAD Ta:25℃	12.43 V~ 17.46 V/ 230 VAC 12.43 V~ 17.46 V/ 115 VAC	P
3	OUTPUT VOLTAGE TOLERANCE	V1: 1 %~ -1 % (Max)	I/P: 115 VAC / 264 VAC O/P:FULL/ MIN LOAD Ta:25℃	V1: 0.05 %~ -0.05 %	P
4	LINE REGULATION	V1: 0.5 %~ -0.5 % (Max)	I/P: 115 VAC ~ 264 VAC O/P:FULL LOAD Ta:25℃	V1: 0 %~ 0 %	P
5	LOAD REGULATION	V1: 0.5 %~ -0.5 % (Max)	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: 0.05 %~ -0.05 %	P
6	SET UP TIME	230VAC: 500 ms (Max) 115 VAC: 1200 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 188 ms 115VAC/ 550 ms	P
7	RISE TIME	230VAC: 30 ms (Max) 115VAC: 30 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 6 ms 115VAC/ 6 ms	P
8	HOLD UP TIME	230VAC: 50 ms (TYP) 115VAC: 10 ms (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 98 ms 115VAC/ 21 ms	P
9	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25℃	TEST: <5 %	P
10	DYNAMIC LOAD	V1: 1500 mVp-p	I/P: 230 VAC O/P:FULL /Min LOAD 90%DUTY/1KHZ Ta:25℃	108 mVp-p	P

INPUT FUNCTION TEST

N O	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	85VAC~264 VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	54 V~264V	P
			I/P: LOW-LINE-3V= 82V HIGH-LINE+15%=300 V O/P: FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE OSC	I/P: 85VAC ~ 264 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK	P
3	EFFICIENCY	83 % (TYP)	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	85.4 %	P
4	INPUT CURRENT	230V/ 0.5 A (TYP) 115V/ 0.75 A (TYP)	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I = 0.36 A/ 230 VAC I = 0.62 A/ 115 VAC	P
5	INRUSH CURRENT	230V/ 45 A (TYP) COLD START	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I = 43 A/ 230 VAC	P
6	LEAKAGE CURRENT	< 2 mA / 240 VAC	I/P: 254 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.35 mA N-FG: 0.35 mA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	110 %~ 150 %	I/P: 230 VAC I/P: 115 VAC O/P: TESTING Ta: 25°C	133 %/ 230 VAC 127 %/ 115 VAC Hiccup Mode	P
2	OVER VOLTAGE PROTECTION	CH1: 17.25 V~ 20.25 V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	18.7 V/ 230 VAC 18.7 V/ 115 VAC Shunt down Re- power ON	P
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264 VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT																																																																																
1	TEMPERATURE RISE TEST	MODEL : NES-35-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 28.9 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 50 °C <table><thead><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta= 28.9 °C</th><th>HIGH AMBIENT Ta= 50 °C</th></tr></thead><tbody><tr><td>1</td><td>BD1</td><td>KBJ208G 2A/800V LT</td><td>52.5°C</td><td>69.4°C</td></tr><tr><td>2</td><td>LF1</td><td>LF-158</td><td>42.8°C</td><td>60.5°C</td></tr><tr><td>3</td><td>D1</td><td>HER306 3A/600V REC</td><td>56.2°C</td><td>74.1°C</td></tr><tr><td>4</td><td>C5</td><td>82U/400V CAPX 85°C NEG</td><td>43.7°C</td><td>61.5°C</td></tr><tr><td>5</td><td>R5</td><td>P6KE150A</td><td>54.5°C</td><td>72.4°C</td></tr><tr><td>6</td><td>Q1</td><td>K2628 6A/600V SAN</td><td>62.0°C</td><td>79.9°C</td></tr><tr><td>7</td><td>T1 COIL</td><td>TF-1241</td><td>58.5°C</td><td>76.1°C</td></tr><tr><td>8</td><td>C36</td><td>100U/35V RUB 105°C YXF</td><td>38.8°C</td><td>57.2°C</td></tr><tr><td>9</td><td>D100</td><td>FMX-12S 10A/200V</td><td>55.9°C</td><td>74.3°C</td></tr><tr><td>10</td><td>C105</td><td>470U/35V CAPX 105°C GL</td><td>45.6°C</td><td>64.7°C</td></tr><tr><td>11</td><td>R105</td><td>51Ω/2W R/MO</td><td>59.9°C</td><td>79.0°C</td></tr><tr><td>12</td><td>U1</td><td>1203P</td><td>46.2°C</td><td>64.3°C</td></tr><tr><td>13</td><td></td><td></td><td>°C</td><td>°C</td></tr><tr><td>14</td><td></td><td></td><td>°C</td><td>°C</td></tr><tr><td>15</td><td></td><td></td><td>°C</td><td>°C</td></tr></tbody></table>			NO	Position	P/N	ROOM AMBIENT Ta= 28.9 °C	HIGH AMBIENT Ta= 50 °C	1	BD1	KBJ208G 2A/800V LT	52.5°C	69.4°C	2	LF1	LF-158	42.8°C	60.5°C	3	D1	HER306 3A/600V REC	56.2°C	74.1°C	4	C5	82U/400V CAPX 85°C NEG	43.7°C	61.5°C	5	R5	P6KE150A	54.5°C	72.4°C	6	Q1	K2628 6A/600V SAN	62.0°C	79.9°C	7	T1 COIL	TF-1241	58.5°C	76.1°C	8	C36	100U/35V RUB 105°C YXF	38.8°C	57.2°C	9	D100	FMX-12S 10A/200V	55.9°C	74.3°C	10	C105	470U/35V CAPX 105°C GL	45.6°C	64.7°C	11	R105	51Ω/2W R/MO	59.9°C	79.0°C	12	U1	1203P	46.2°C	64.3°C	13			°C	°C	14			°C	°C	15			°C	°C	P
NO	Position	P/N	ROOM AMBIENT Ta= 28.9 °C	HIGH AMBIENT Ta= 50 °C																																																																																	
1	BD1	KBJ208G 2A/800V LT	52.5°C	69.4°C																																																																																	
2	LF1	LF-158	42.8°C	60.5°C																																																																																	
3	D1	HER306 3A/600V REC	56.2°C	74.1°C																																																																																	
4	C5	82U/400V CAPX 85°C NEG	43.7°C	61.5°C																																																																																	
5	R5	P6KE150A	54.5°C	72.4°C																																																																																	
6	Q1	K2628 6A/600V SAN	62.0°C	79.9°C																																																																																	
7	T1 COIL	TF-1241	58.5°C	76.1°C																																																																																	
8	C36	100U/35V RUB 105°C YXF	38.8°C	57.2°C																																																																																	
9	D100	FMX-12S 10A/200V	55.9°C	74.3°C																																																																																	
10	C105	470U/35V CAPX 105°C GL	45.6°C	64.7°C																																																																																	
11	R105	51Ω/2W R/MO	59.9°C	79.0°C																																																																																	
12	U1	1203P	46.2°C	64.3°C																																																																																	
13			°C	°C																																																																																	
14			°C	°C																																																																																	
15			°C	°C																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 139 % LOAD Ta:25°C	TEST : OK	P																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 230 VAC O/P: 100% LOAD Ta= -20°C	TEST : OK	P																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 272 VAC O/P:FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK	P																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %(0-45°C)	I/P: 230 VAC O/P:FULL LOAD	± 0.01 %(0-45°C)	P																																																																																
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency:10-500Hz (3) Sweep Time:10min/sweep cycle (4) Acceleration:2G (5) Test Time:1 hour in each axis (X.Y.Z) (6) Ta:25°C		TEST : OK	P																																																																																

SAFETY TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 3 KVAC/min I/P-FG: 1.5 KVAC/min O/P-FG: 0.5 KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 1.8 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25°C	I/P-O/P: 3.82 mA I/P-FG: 2.97 mA O/P-FG: 2.36 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 500 MΩ I/P-FG: 2 GΩ O/P-FG: 3 GΩ NO DAMAGE	P
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25°C	4 Mω	P
4	APPROVAL	TUV: Certificate NO : UL: File NO : E183223			P

E.M.C TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS	P
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab	P
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab	P
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :1KV L,N-PE:2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
7	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT I/P: 230VAC O/P:FULL LOAD Ta= 25 °C LIFE TIME= 392998 HRS I/P: 230VAC O/P:FULL LOAD Ta= 50 °C LIFE TIME= 79820 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 394 HRS			P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated K2545 : 600V 6 A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25℃	(1) 472 V (2) 474 V (3) 580 V	P
2	Diode Peak Voltage	D100 Rated BYQ28X-200 :200V 10A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25℃	(1) 105 V (2) 121 V (3) 106 V	P
3	Clamp Diode Peak Voltage	D1 Rated HER306 : 600 V 3A	I/P:High-Line +3V = 267 V O/P: (1)Full Load (2) Dynamic Load 90%Duty/1KHz Ta:25℃	(1) 464 V (2) 464 V	P
4	Input Capacitor Voltage	C5 Rated : 82u /400V/ 85℃	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change (4)Burn in 1hour Ta:25℃	(1) 378 V (2) 378 V (3) 374 V (4) 372 V	P
5	Control IC Voltage Test	U1 Rated 1203 : 18V	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta:25℃	(1) 13.1 V (2) 12.8 V (3) 11.8 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2005/3/28	RD SAMPLE	PASS	VINCENT TSENG	MAX LIN
2005/7/8	PRODUCT SAMPLE	PASS	VINCENT TSENG	MAX LIN

2003/12/12 A50-F023