

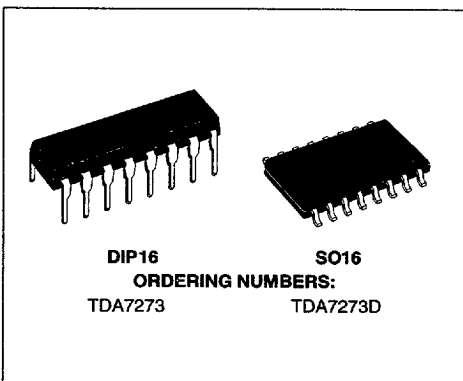
SINGLE CHIP STEREO CASSETTE PLAYBACK SYSTEM

ADVANCE DATA


- WIDE OPERATING SUPPLY VOLTAGE (1.8V to 7V)
- INPUT COUPLING WITHOUT CAPACITORS
- BUILT-IN DC STEREO VOLUME CONTROL
- BUILT-IN RIPPLE FILTERS
- LOW QUIESCENT CURRENT
- NO EXTERNAL BOUCHEROT CELL
- MAX OUTPUT CURRENT 70mA PEAK

DESCRIPTION

The TDA7273 is a monolithic integrated circuit designed for portable cassette players market. It comprises preamplifiers, DC volume control, and headphone drivers.



BLOCK DIAGRAM

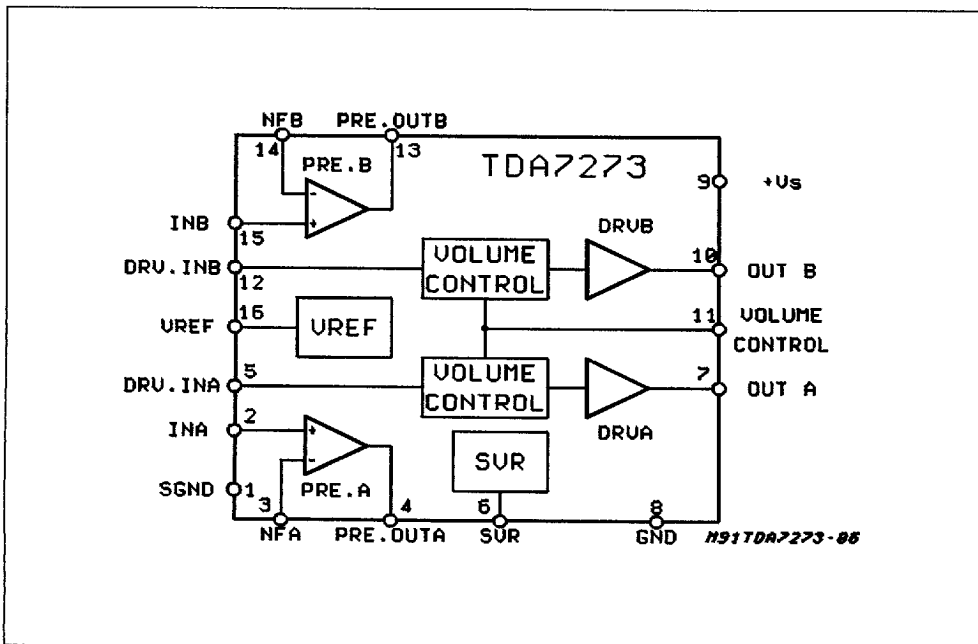

May 1991 ■ 7929237 0064596 86T ■

1/6

This is advanced information on a new product now in development or undergoing evaluation. Details are subject to change without notice.

373

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Test Conditions	Unit
V_S	Supply Voltage	9	V
I_o	Output Current (max)	70	mA
T_{op}	Operating Temperature Range	-20 to 70	°C
T_{stg}, T_j	Storage & Junction Temperature Range	-40 to +150	°C


THERMAL DATA

Symbol	Description	DIP-16	SO-16	Unit
$R_{thj-amb}$	Thermal Resistance Junction-ambient	Max 100	200	°C/W


DC CHARACTERISTICS: $T_{amb} = 25^{\circ}\text{C}$; $V_S = 3\text{V}$; $R_L = 10\text{K}\Omega$ (Preamplifier), $R_L = 32\Omega$ (Headphone);
 $V_{IN} = 0$; V_{OL} control = V_{ref}

Terminal No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Terminal Voltage (V)	0	1.5	1.5	1.5	1.5	2.7	1.5	0	3	1.5	1.5	1.5	1.5	1.5	1.5	1.5

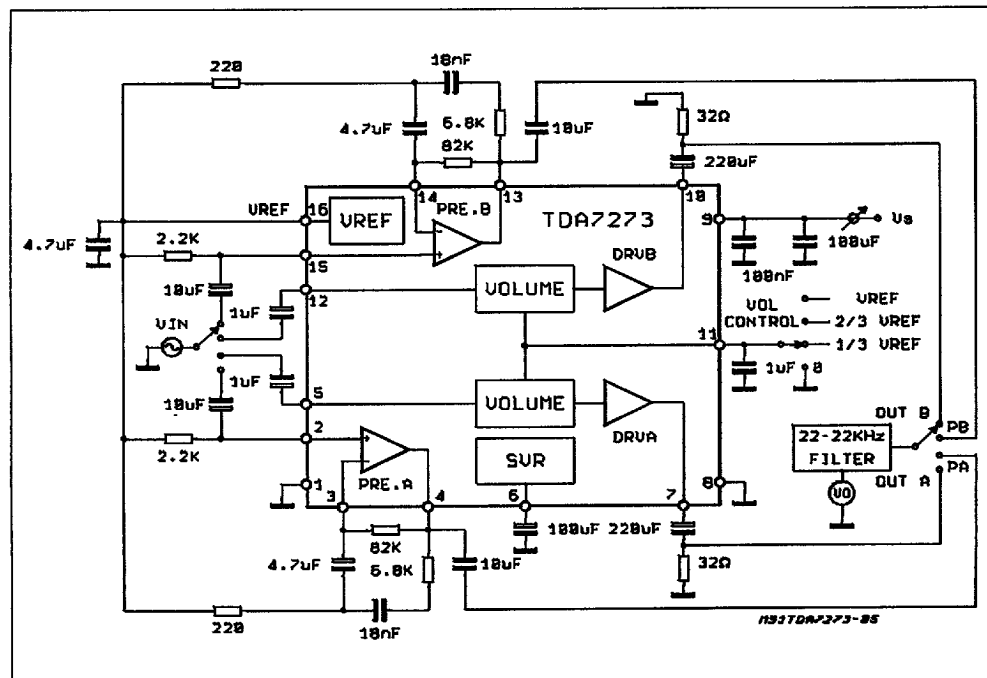TEST CIRCUIT



PIN CONNECTION (Top view)

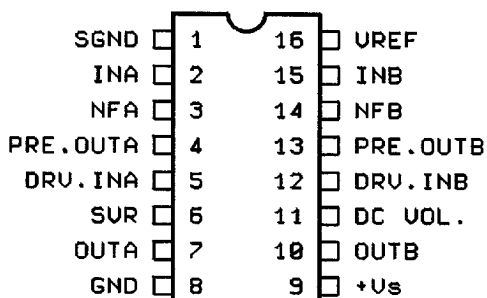

H91TDA7273-20

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}\text{C}$, $V_S = 3\text{V}$, $f = 1\text{KHz}$, $R_L = 32\Omega$ Vol. control = $2/3V_{ref}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_S	Supply Voltage		1.8		7	V
I_d	Quiescent Current			14	20	mA
V_{ref}	Reference Voltage		1.3	1.49	1.7	V

PREAMPLIFIER SECTION

G_{VO}	Open Loop Gain			70		dB
G_V	Close Loop Gain		30	33	35	dB
V_o	Output Voltage	THD = 1%	600	850		mV
I_b	Bias Current			3		μA
THD	Total Harmonic Distortion	$V_o = 330\text{mVrms}$		0.05	0.25	%
C_t	Cross Talk	$R_g = 2.2\text{K}\Omega$; $V_o = 330\text{mVrms}$		74		dB
E_N	Output Noise	$R_g = 2.2\text{K}\Omega$; BW = 22Hz to 22KHz		100		μV
SVR	Ripple Rejection	$R_g = 2.2\text{K}\Omega$ $V_R = 100\text{mVrms}$ $f = 100\text{Hz}$; $C_{SVR} = 100\mu\text{F}$	40	50		dB

HEADPHONE DRIVER

$V_o(\text{DC})$	DC Output Voltage			1.50		V
P_o	Output Power	THD = 10%;	15	30		mW
P_o	Transient Output Power	THD = 10% $R_L = 16\Omega$		50		mW
G_V	Close Loop Gain	$P_o = 5\text{mW}$	28	31	34	dB
THD	Total Harmonic Distortion	$P_o = 5\text{mW}$		0.2	1	%
C_t	Cross Talk	$R_g = 10\text{K}\Omega$; $P_o = 5\text{mW}$	40	50		dB
SVR	Ripple Rejection	$V_r = 100\text{mVrms}$, $f = 100\text{Hz}$ Vol. control = $1/3V_{ref}$ $C_{SVR} = 100\mu\text{F}$; $R_g = 600\Omega$		47		dB
	Volume Control Range		66	75		dB

Figure 1: Application Circuit

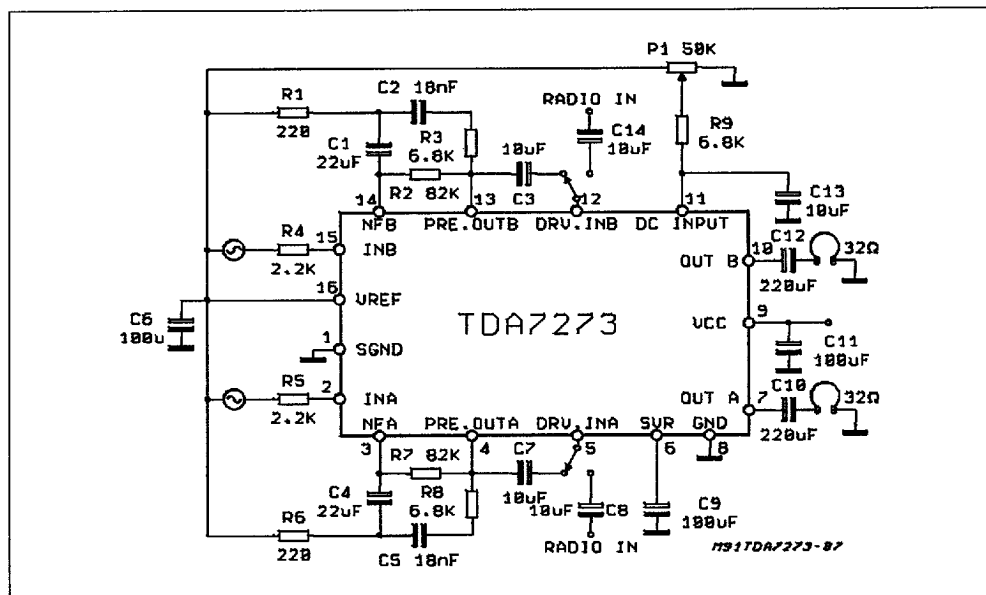


Figure 2: P.C. Board and Component Layout of the Circuit of Figure 1 (1:1 scale)

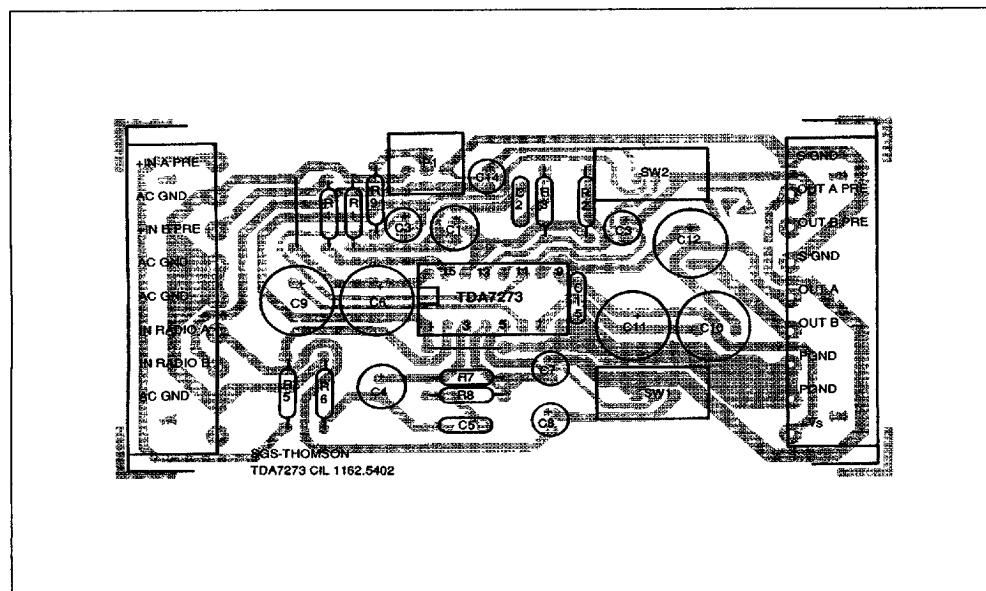


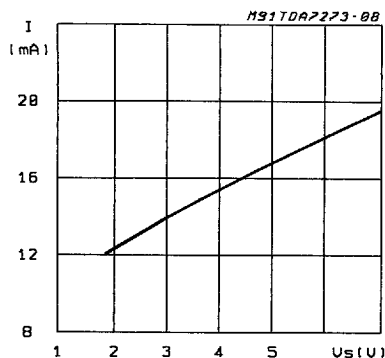
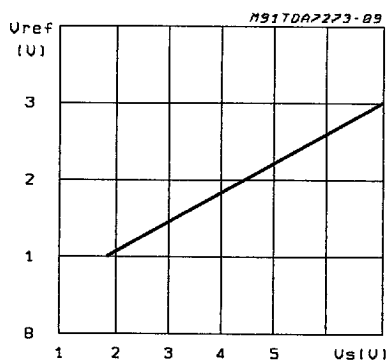
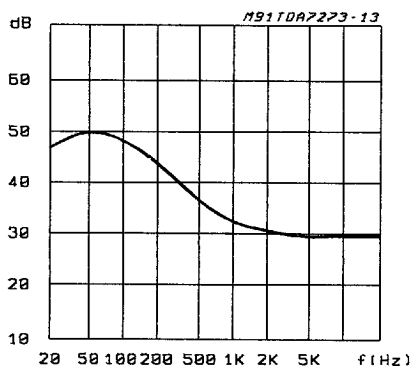
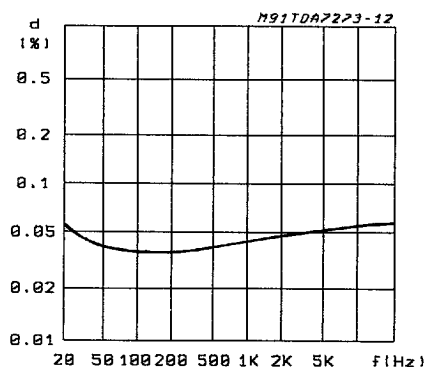
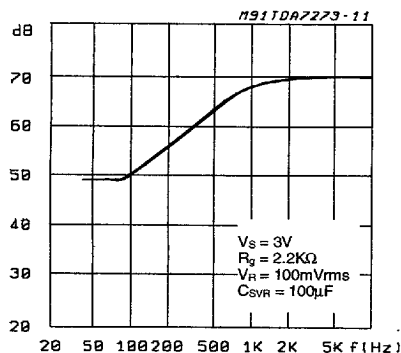
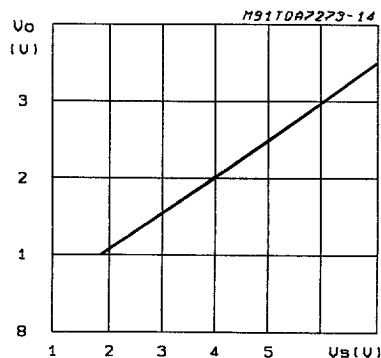
Figure 3: Supply Current vs. Supply Voltage
(Preamplifier + Driver)**Figure 4: V_{ref} vs. Supply Voltage (pin 16)****Figure 5: Closed Loop Gain vs. Frequency**
($V_S = 3V$) (PREAMPLIFIER)**Figure 6: THD vs. Frequency** ($V_S = 3V$,
 $V_o = 330mV_{rms}$, $R_L = 10K\Omega$)
(PREAMPLIFIER)**Figure 7: SVR vs. Frequency (PREAMPLIFIER)****Figure 8: Quiescent Output Voltage vs. Supply Voltage (DRIVER)**

Figure 9: Closed Loop Gain vs Frequency
 $(V_S = 3V, R_L = 32\Omega)$ (DRIVER)

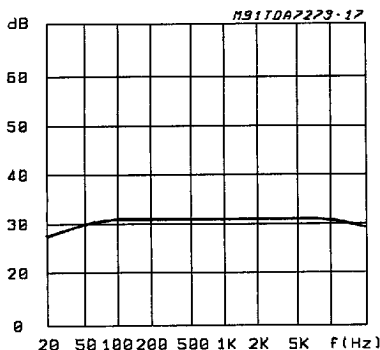


Figure 10: Output Power vs. Supply Voltage
 $(V_{ol} = 2/3 V_{ref}, R_L = 32\Omega, THD = 10\%, f = 1KHz)$ (DRIVER)

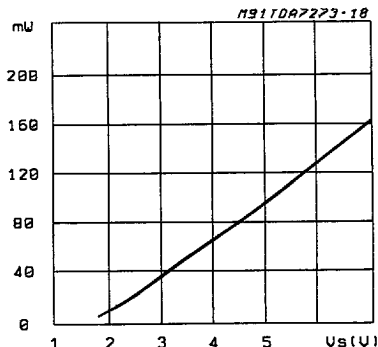


Figure 11: THD vs. Output Power $(V_o = 2/3 V_{ref}, V_S = 3V, R_L = 32\Omega, f = 1KHz)$ (DRIVER)

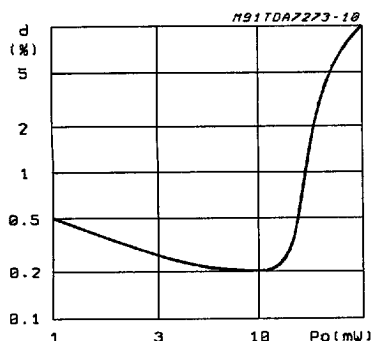


Figure 12: THD vs. Frequency $(P_o = 5mW, V_S = 3V, R_L = 32\Omega)$ (DRIVER)

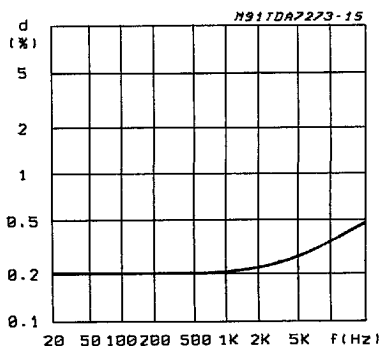


Figure 13: SVR vs. Frequency $V_S = 3V (R_L = 32\Omega, V_r = 100V_{rms}, R_g = 600\Omega, C_{SVR} = 100mV)$ (DRIVER)

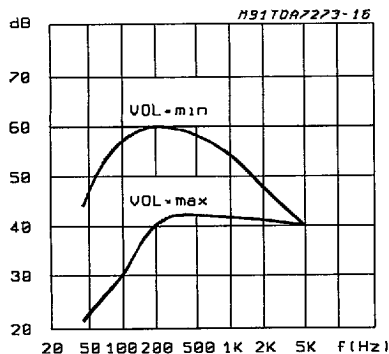


Figure 14: Volume Control (0dB = 10mW, $V_S = 3V, R_{vol} = 50K\Omega, R_L = 32\Omega, f = 1KHz$) vs. Volume Setting (DRIVER)

