
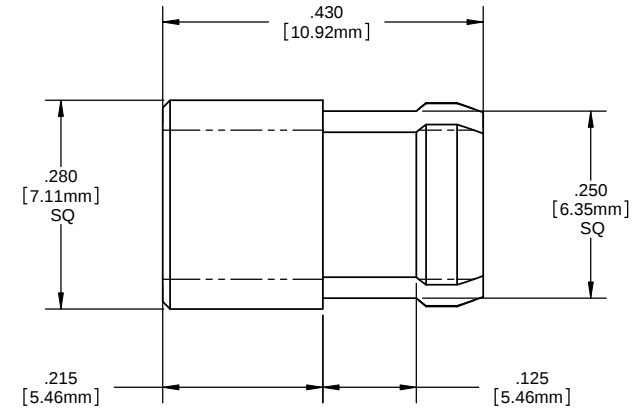



NOTES:

1. MOUNTING: Mounts in a $\phi .250 \pm .002$ [$\phi 6.35\text{mm} \pm .05$] square punched hole on .375 [9.5mm] centers. Panel thickness .063 [1.6mm] to .125 [3.17mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.


REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR111009AZ01	4-23-10	SMU



ORDERING CODE : **SQL 360 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		MATERIAL POLYCARBONATE, UL 94-V2		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com		
ANGLES ±1°	DECIMALS .X ±.020 .XX ±.010 XXX ±.005	FINISH SEE NOTES		TITLE: 5MM SQUARE STANDARD HEIGHT FRESNEL LENS		
BREAK ALL CORNERS AND SHARP RADIIES 30° MAX		APPROVAL		DATE		SIZE
		DRAWN: SMU		4-23-10		
THIRD ANGLE PROJECTION		CHECKED: DZ		4-23-10		DWG. NO. B SQL 360 XXX
DO NOT SCALE DRAWING		REV		001		
PROPRIETARY AND CONFIDENTIAL DRAWING OF THE SOLID PROTOTYPING DEPARTMENT OF VISUAL COMMUNICATIONS COMPANY, INC. THIS DRAWING IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. ANY VIOLATION OF THIS NOTICE IS A VIOLATION OF FEDERAL AND STATE LAWS AND WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.		SCALE: 1:1		SHEET 1 OF 1		