



October 2015

Chip Protectors

For ESD protection

SGNE series

SGNE04 0402 [01005 inch]*

SGNE06 0603 [0201 inch]

* Dimensions Code JIS[EIA]

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

REMINDERS

- Please note the following precautions in order to avoid problems with chip protectors such as characteristic degradation and element destruction.

Please store these products in an environment with a temperature of 5 to 40°C and humidity level of 20 to 70%RH, and use them within six months.

Poor storage conditions may lead to the deterioration of the solderability of the terminal electrodes, so please be careful to avoid contact with humidity, dew condensation, dust, toxic gas (hydrogen, hydrogen sulfide, sulfuric acid, chlorine, ammonia, etc.), direct sunlight, and so on.

Please do not use products that have been dropped or detached when mounting.

Please solder with the reflow soldering method, and not the flow (dip) soldering method.

- Please note the following precautions to avoid problems with chip protectors such as characteristic degradation and element destruction, which ultimately lead to the generation of heat and smoke with the elements.

Do not use in locations where the temperatures exceed the operating temperature range such as under direct sunlight or near sources of heat.

Do not use in locations where there are high levels of humidity such as under direct exposure to weather and areas where steam is released.

Do not use in locations such as dusty areas, high-saline environments, places where the atmosphere is contaminated with corrosive gas, etc.

Avoid powerful vibrations, impact (such as by dropping), pressure, etc. that may lead to splitting in the products.

Do not use with a voltage that exceeds the maximum allowable circuit voltage.

When resin coating (including modular) a varistor, do not use a resin that will cause deterioration of the varistor. Be sure never to use resin that generates hydrogen as palladium is used for the inner electrode.

Avoid attachment near combustible materials.

- Please contact our sales offices when considering the use of the products listed on this catalog for applications, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property ('specific uses' such as automobiles, airplanes, medical instruments, nuclear devices, etc.) as well as when considering the use for applications that exceed the range and conditions of this catalog.

Please also contact us when using these products for automotive applications.

- Please note that we are not responsible for any damages or losses incurred resulting from the use of these products that exceeds the range and conditions of this catalog or specific uses.

- Please take appropriate measures such as acquiring protective circuits and devices that meet the uses, applications, and conditions of the instruments and keeping backup circuits.

Chip Protectors

ESD Protection

Product compatible with RoHS directive
Compatible with lead-free solders

Overview of the SGNE Series

■ FEATURES

- Multilayer chip protector is the ESD protection solution which is using a semiconductor ceramic.
- It is the possible replacement of TVS Diode for ESD protection.
- Chip size is available with EIA01005(0402mm), EIA0201(0603mm).
- Rather than the present products of TDK, it has the outstanding ESD absorption feature.
- Excellent ESD protection characteristic. (Based on IEC61000-4-2, Contact-8kV)

■ APPLICATION

- ESD protection such as signal line, audio line
- Filter for EMI protection
- Smart phone, tablet PC, portable music player, note PC, etc

■ PART NUMBER CONSTRUCTION

SGNE	04	C	080	M	T	150	N	25
Series name	LxW Dimensions (mm)	Structure	Breakdown voltage (V)	Varistor voltage tolerance (%)	Packaging style	Capacitance (pF)	Capacitance tolerance* (%)	ESD Clamp voltage Average voltage (IEC61000-4-2, 8kV)
	04 0.4x0.2		080 8	M ±20	T Taping	150 15	N ±30	
	06 0.6x0.3		270 27			6R8 6.8	G ±2pF	


○ RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. <http://product.tdk.com/en/environment/rohs/>

• All specifications are subject to change without notice.

Overview of the SGNE Series


■ TDK ESD Protection Device Map

Multilayer chip protector is a ESD protection component which has excellent ESD absorption characteristic and the low capacitance. This SGNE series is suitable for the applications which require the low clamping voltage and the low capacitance.

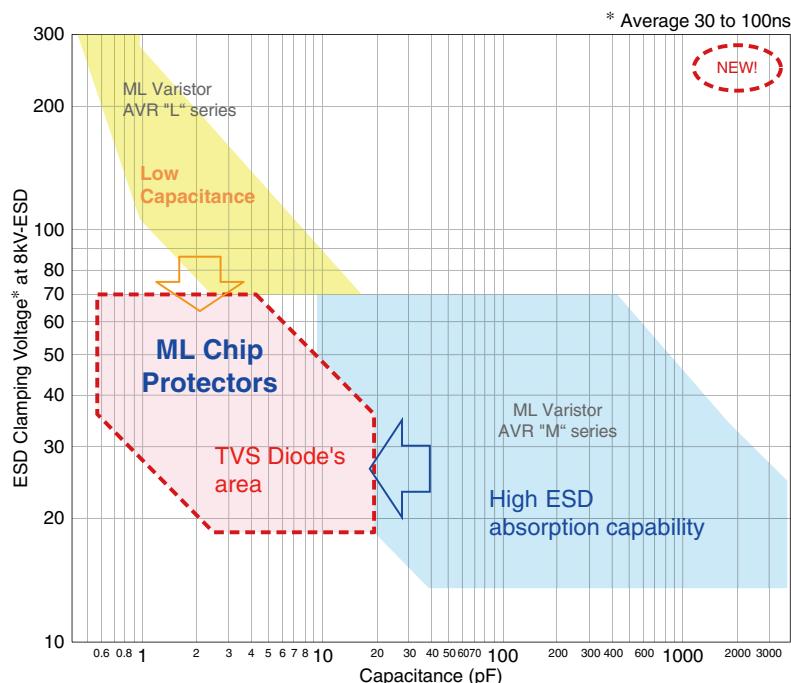

Overview of the SGNE Series

■ RECOMMENDED REFLOW PROFILE


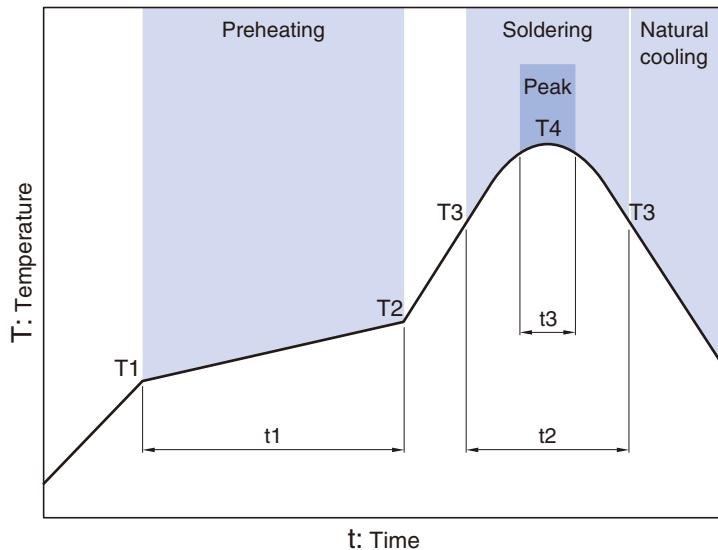


Preheating			Soldering		Peak	
Temp.	Time		Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	120s max.	230°C	40s max.	260°C max.	5s

SGNE series


SGNE04/SGNE06 Types

■ SHAPE & DIMENSIONS




Dimensions in mm				
EIA	L	W	T	B
01005	0.4±0.02	0.2±0.02	0.2±0.02	0.07min.
0201	0.6±0.03	0.3±0.03	0.3±0.03	0.1min.

■ RECOMMENDED LAND PATTERN



Dimensions in mm			
EIA	a	b	c
01005	0.20	0.15 to 0.20	0.18 to 0.20
0201	0.25 to 0.35	0.20 to 0.30	0.25 to 0.35

■ CIRCUITS DIAGRAM



SGNE series SGNE04/SGNE06 Types

■ ELECTRICAL CHARACTERISTICS

□ CHARACTERISTICS SPECIFICATION TABLE

Part No.	Maximum continuous voltage Vdc(V) max.	Breakdown voltage V(V) [1mA]	Capacitance C(pF) [1MHz]	Leakage current Vdc(µA) max.	ESD Clamp voltage Average Voltage (V) [IEC61000-4-2, 8kV] max.
EIA01005(0402mm)					
SGNE04C080MT150N25	4.3	8 (6.4 to 9.6)	15 (10.5 to 19.5)	20	25
EIA0201(0603mm)					
SGNE06C080MT150N25	4.3	8 (6.4 to 9.6)	15 (10.5 to 19.5)	20	25
SGNE06C270MT6R8G60	15	27 (21.6 to 32.4)	6.8 (4.8 to 8.8)	20	60


• Short bar residual inductance =0nH

SGNE series SGNE04/SGNE06 Types

■ ELECTRICAL CHARACTERISTICS

SGNE 0603mm Case Size


□ IMPEDANCE vs. FREQUENCY CHARACTERISTICS

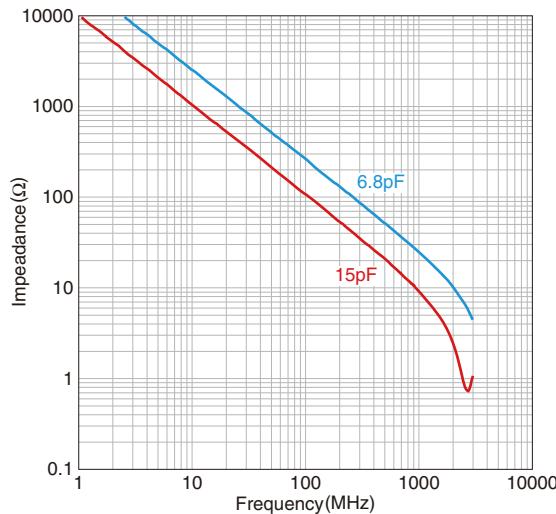

• Short bar residual inductance =0nH


SGNE 15pF Type

□ IMPEDANCE vs. FREQUENCY CHARACTERISTICS

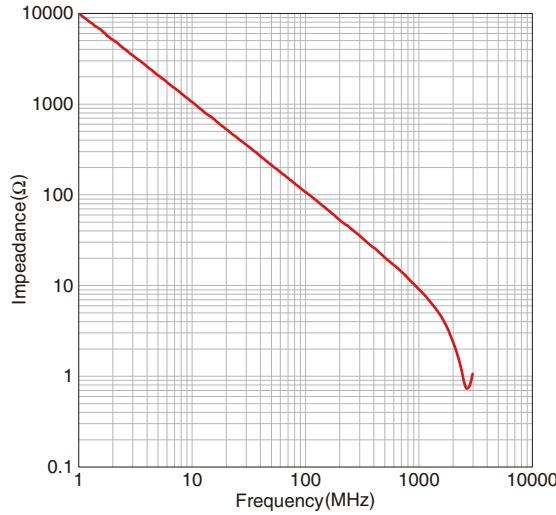


• Short bar residual inductance =0nH

□ CAPACITANCE vs. FREQUENCY CHARACTERISTICS


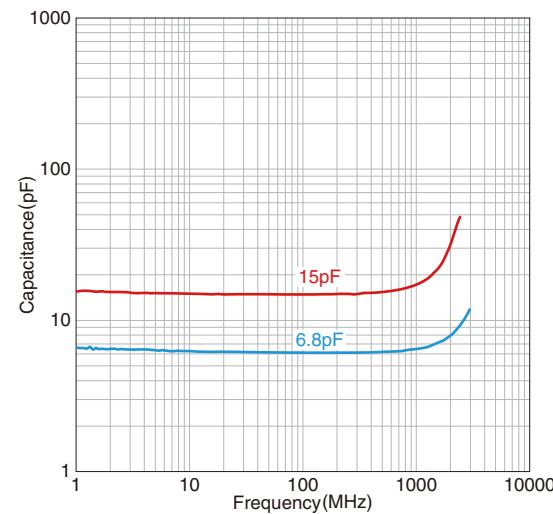


□ CAPACITANCE vs. FREQUENCY CHARACTERISTICS

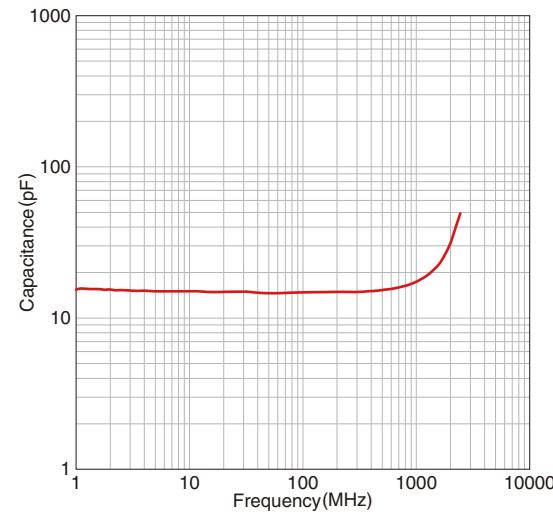


SGNE series SGNE04/SGNE06 Types

■ ESD CLAMP CHARACTERISTICS

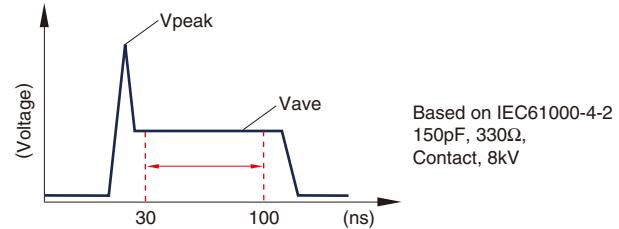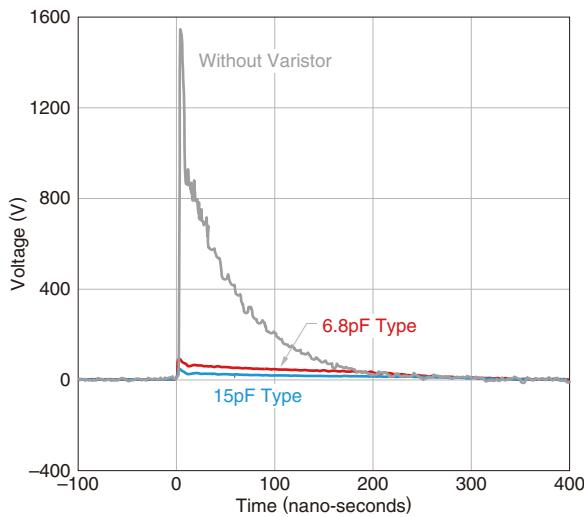


Part No.	ESD Clamping Voltage(V, at 8kV)	
	Vpeak	Vave
Without ESD Device	1561	395
SGNE06C080MT150N25	59	22
SGNE06C270MT6R8G60	99	51
SGNE04C080MT150N25	56	21


□ SGNE06C270MT6R8G60

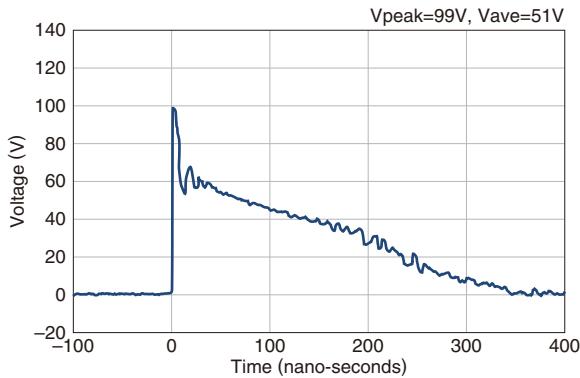

□ SGNE06C080MT150N25

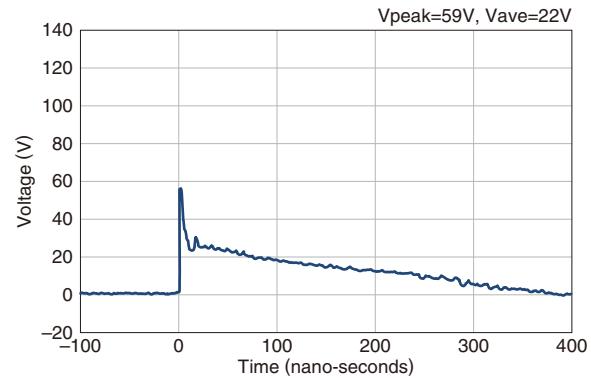


□ SGNE04C080MT150N25

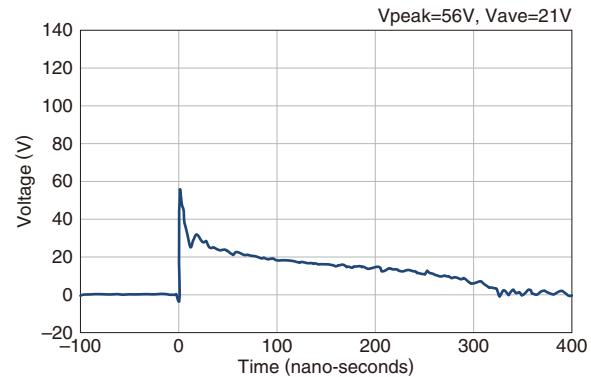

SGNE series

Packaging Style

■ REEL DIMENSIONS

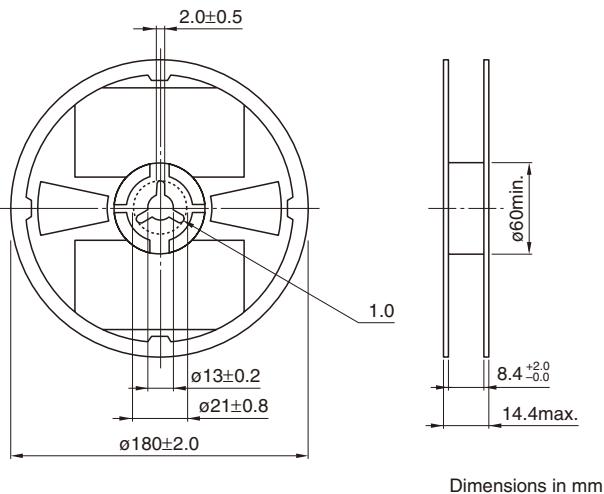

■ TAPE DIMENSIONS

