

CBTL06141

Gen1 display 2 : 1 multiplexer

Rev. 2 — 15 July 2010

Product data sheet

1. General description

The CBTL06141 is a six-channel ('hex') multiplexer for DisplayPort and PCI Express applications at Generation 1 ('Gen1') speeds. It provides four differential channels capable of 1 : 2 switching or 2 : 1 multiplexing (bidirectional and AC-coupled) PCI Express or DisplayPort signals, using high-bandwidth pass-gate technology. Additionally, it provides for switching/multiplexing of the Hot Plug Detect signal as well as the AUX or DDC (Direct Display Control) signals, for a total of six channels on the display side. The AUX and DDC channels provide a four-position multiplexer such that an additional level of multiplexing can be accomplished when AUX and DDC I/Os are on separate pins of the display source device.

The CBTL06141 is designed for Gen1 speeds, at 2.5 Gbit/s for PCI Express or 2.7 Gbit/s for DisplayPort, and for inputs voltages of up to 3.3 V typical. It consumes very low current in operational mode (less than 1 mA typical) and provides for a shutdown function (less than 10 μ A) to support battery-powered applications.

A typical application of CBTL06141 is on motherboards where one of two GPU display sources needs to be selected to connect to a display sink device or connector. A controller chip selects which path to use by setting a select signal HIGH or LOW. Due to the non-directional nature of the signal paths (which use high-bandwidth passgate technology), the CBTL06141 can also be used in the reverse topology, e.g., to connect one display source device to one of two display sink devices or connectors.

Optionally, the hex MUX device can be used in conjunction with an HDMI/DVI level shifter device (PTN3300A, PTN3300B or PTN3301) to allow for DisplayPort as well as HDMI/DVI connectivity.

2. Features and benefits

- 1 : 2 switching or 2 : 1 multiplexing of DisplayPort (v1.1 - 2.7 Gbit/s) or PCI Express (v1.1 - 2.5 Gbit/s) signals
 - ◆ 4 high-speed differential channels with 2 : 1 muxing/switching for DisplayPort or PCI Express signals
 - ◆ 1 channel with 4 : 1 muxing/switching for AUX differential signals or DDC single-ended clock and data signals
 - ◆ 1 channel with 2 : 1 muxing/switching for single-ended HPD signals
- High-bandwidth analog pass-gate technology
- Very low intra-pair differential skew (< 5 ps)
- Very low inter-pair skew (< 180 ps)
- Switch/multiplexer position select CMOS input
- Shutdown mode CMOS input



- Shutdown mode minimizes power consumption while switching all channels off
- DDC and AUX ports tolerant to being pulled to +5 V via 2.2 kΩ resistor
 - ◆ Supports HDMI/DVI incorrect dongle connection
- Single 3.3 V power supply
- Very low operation current of 0.2 mA typical
- Very low shutdown current of < 10 µA
- ESD 8 kV HBM, 1 kV CDM
- ESD 2 kV HBM, 500 V CDM for control pins
- Available in 5 mm × 5 mm, 0.5 mm ball pitch TFBGA48 package

3. Applications

- Motherboard applications requiring DisplayPort and PCI Express switching/multiplexing
- Docking stations
- Notebook computers
- Chip sets requiring flexible allocation of PCI Express or DisplayPort I/O pins to board connectors


4. Ordering information

Table 1. Ordering information

Type number	Solder process	Package			Version
		Name	Description		
CBTL06141EE/G	Pb-free (SnAgCu solder compound)	TFBGA48	plastic thin fine-pitch ball grid array package; 48 balls; body 5 × 5 × 0.8 mm ^[1]		SOT918-1



[1] Total height including solder balls after printed circuit board mounting = 1.15 mm.

5. Functional diagram

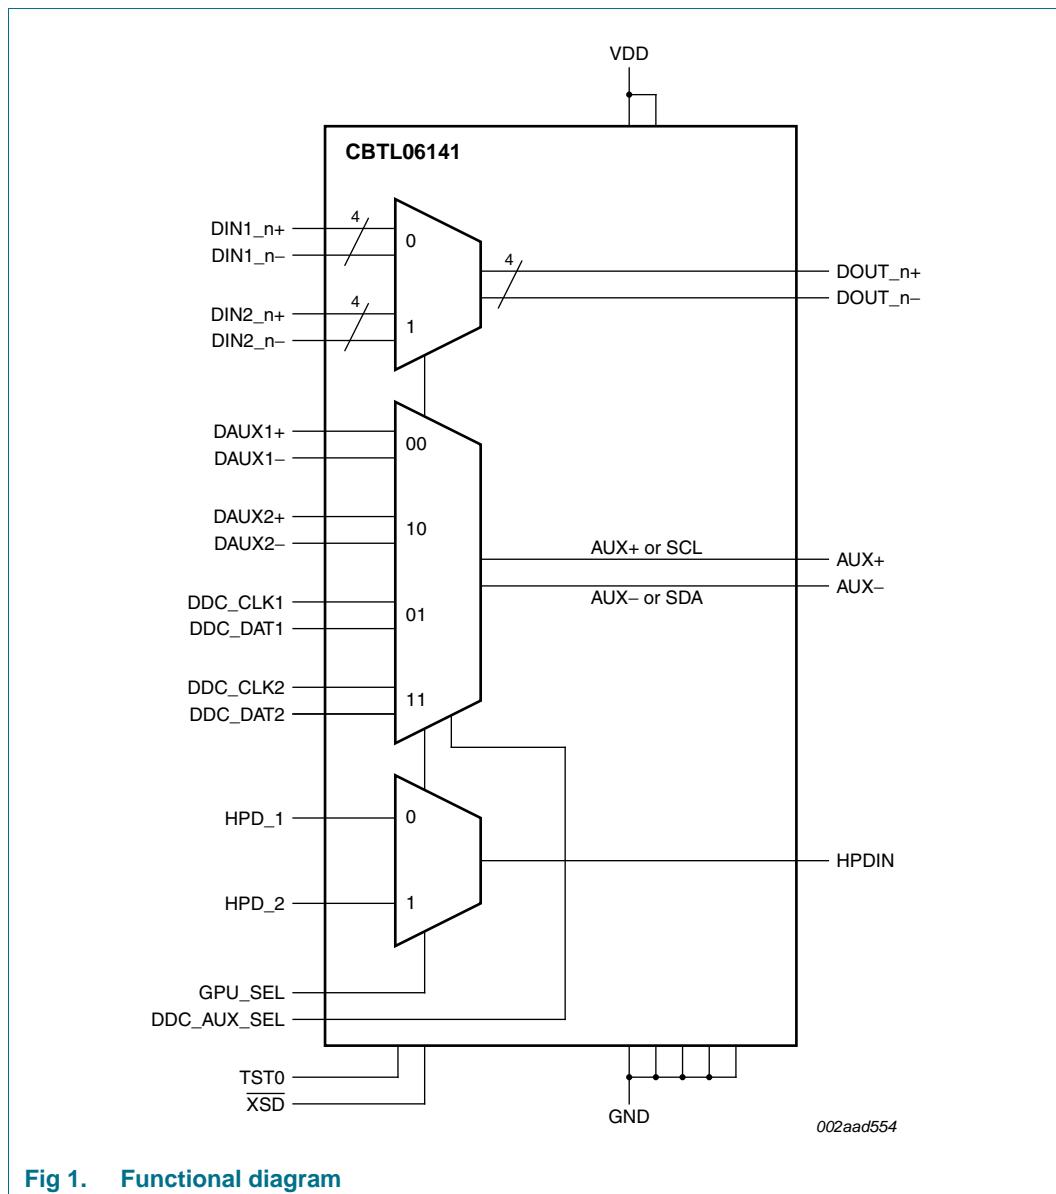

6. Pinning information

6.1 Pinning

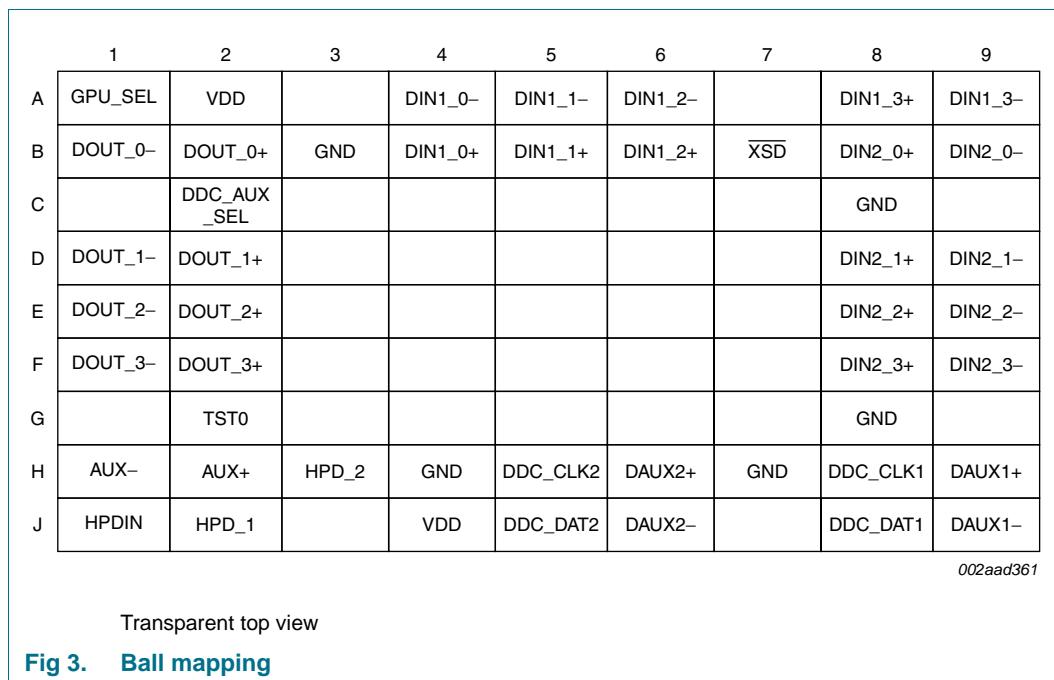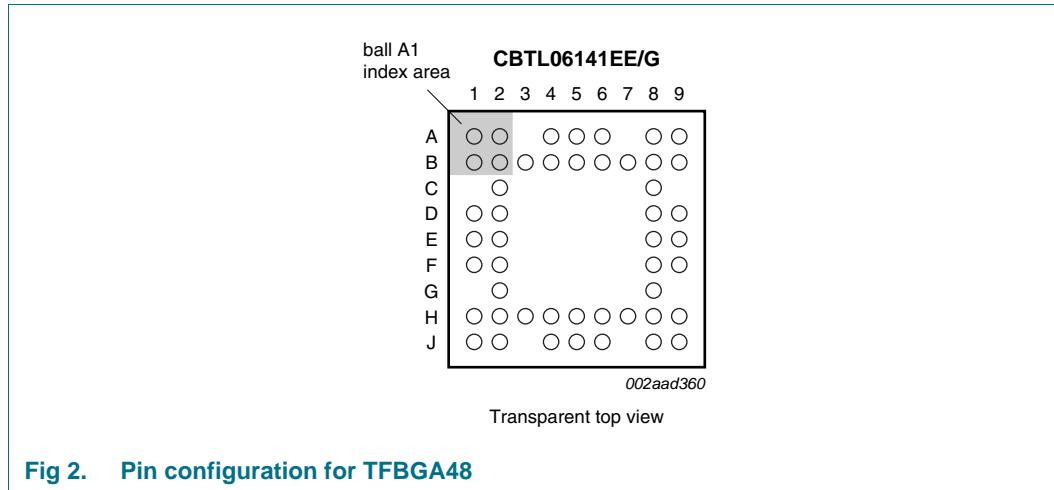

6.2 Pin description

Table 2. Pin description

Symbol	Ball	Type	Description
GPU_SEL	A1	3.3 V low-voltage CMOS single-ended input	Selects between two multiplexer/switch paths. When HIGH, path 2 left-side is connected to its corresponding right-side I/O. When LOW, path 1 left-side is connected to its corresponding right-side I/O.
DDC_AUX_SEL	C2	3.3 V low-voltage CMOS single-ended input	Selects between DDC and AUX paths. When HIGH, the CLK and DAT I/Os are connected to their respective DDCOUT terminals. When LOW, the AUX+ and AUX- I/Os are connected to their respective DDCOUT terminals.
XSD	B7	3.3 V low-voltage CMOS single-ended input	Shutdown pin. Should be driven HIGH or connected to VDD for normal operation. When LOW, all paths are switched off (non-conducting) and supply current consumption is minimized.
TST0	G2	3.3 V low-voltage CMOS single-ended input	Test pin for NXP use only. Should be tied to ground in normal operation.
DIN1_0+	B4	differential I/O	Four high-speed differential pairs for DisplayPort or PCI Express signals, path 1, left-side.
DIN1_0-	A4	differential I/O	
DIN1_1+	B5	differential I/O	
DIN1_1-	A5	differential I/O	
DIN1_2+	B6	differential I/O	
DIN1_2-	A6	differential I/O	
DIN1_3+	A8	differential I/O	
DIN1_3-	A9	differential I/O	
DIN2_0+	B8	differential I/O	Four high-speed differential pairs for DisplayPort or PCI Express signals, path 2, left-side.
DIN2_0-	B9	differential I/O	
DIN2_1+	D8	differential I/O	
DIN2_1-	D9	differential I/O	
DIN2_2+	E8	differential I/O	
DIN2_2-	E9	differential I/O	
DIN2_3+	F8	differential I/O	
DIN2_3-	F9	differential I/O	
DOUT_0+	B2	differential I/O	Four high-speed differential pairs for DisplayPort or PCI Express signals, right-side.
DOUT_0-	B1	differential I/O	
DOUT_1+	D2	differential I/O	
DOUT_1-	D1	differential I/O	
DOUT_2+	E2	differential I/O	
DOUT_2-	E1	differential I/O	
DOUT_3+	F2	differential I/O	
DOUT_3-	F1	differential I/O	
DAUX1+	H9	differential I/O	High-speed differential pair for AUX signals, path 1, left-side.
DAUX1-	J9	differential I/O	
DAUX2+	H6	differential I/O	High-speed differential pair for AUX signals, path 2, left-side.
DAUX2-	J6	differential I/O	

Table 2. Pin description ...continued

Symbol	Ball	Type	Description
DDC_CLK1	H8	differential I/O	Pair of single-ended terminals for DDC clock and data signals, path 1, left-side.
DDC_DAT1	J8	differential I/O	
DDC_CLK2	H5	differential I/O	Pair of single-ended terminals for DDC clock and data signals, path 2, left-side.
DDC_DAT2	J5	differential I/O	
AUX+	H2	differential I/O	High-speed differential pair for AUX or single-ended DDC signals, right-side.
AUX-	H1	differential I/O	
HPD_1	J2	single-ended I/O	Single ended channel for the HPD signal, path 1, left-side.
HPD_2	H3	single-ended I/O	Single ended channel for the HPD signal, path 2, left-side.
HPDIN	J1	single-ended I/O	Single ended channel for the HPD signal, right-side.
VDD	A2, J4	power supply	3.3 V power supply.
GND	B3, C8, G8, H4, H7	ground	Ground.

7. Functional description

Refer to [Figure 1 “Functional diagram”](#).

The CBTL06141 uses a 3.3 V power supply. All main signal paths are implemented using high-bandwidth pass-gate technology and are non-directional. No clock or reset signal is needed for the multiplexer to function.

The switch position for the main channels is selected using the select signal GPU_SEL. Additionally, the signal DDC_AUX_SEL selects between AUX and DDC positions for the DDC / AUX channel. The detailed operation is described in [Section 7.1](#).

7.1 Multiplexer/switch select functions

The internal multiplexer switch position is controlled by two logic inputs GPU_SEL and DDC_AUX_SEL as described below.

Table 3. Multiplexer/switch select control for DIN and DOUT channels

GPU_SEL	DIN1_n	DIN2_n
0	active; connected to DOUT_n	high-impedance
1	high-impedance	active; connected to DOUT_n

Table 4. Multiplexer/switch select control for HPD channel

GPU_SEL	HPD1	HPD2
0	active; connected to HPDIN	high-impedance
1	high-impedance	active; connected to HPDIN

Table 5. Multiplexer/switch select control for DDC and AUX channels

DDC_AUX_SEL	GPU_SEL	DAUX1	DAUX2	DDC_CLK1, DDC_DAT1	DDC_CLK2, DDC_DAT2
0	0	active; connected to AUX	high-impedance	high-impedance	high-impedance
0	1	high-impedance	active; connected to AUX	high-impedance	high-impedance
1	0	high-impedance	high-impedance	active; connected to AUX	high-impedance
1	1	high-impedance	high-impedance	high-impedance	active; connected to AUX

7.2 Shutdown function

The CBTL06141 provides a shutdown function to minimize power consumption when the application is not active but power to the CBTL06141 is provided. Pin \overline{XSD} (active LOW) puts all channels in off mode (non-conducting) while reducing current consumption to near-zero.

Table 6. Shutdown function

XSD	State
0	shutdown
1	active

8. Limiting values

Table 7. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DD}	supply voltage		-0.3	+5	V
T_{case}	case temperature		-40	+85	°C
V_{ESD}	electrostatic discharge voltage	HBM	[1] -	8000	V
		HBM; CMOS inputs	[1] -	2000	V
	CDM		[2] -	1000	V
		CDM; CMOS inputs	[2]	500	V

[1] Human Body Model: ANSI/ESD/ESD-S5.1-1994, standard for ESD sensitivity testing, Human Body Model - Component level; Electrostatic Discharge Association, Rome, NY, USA.

[2] Charged-Device Model: ANSI/ESD/ESD-S5.3-1-1999, standard for ESD sensitivity testing, Charged-Device Model - Component level; Electrostatic Discharge Association, Rome, NY, USA.

9. Recommended operating conditions

Table 8. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DD}	supply voltage		3.0	3.3	3.6	V
V_I	input voltage	CMOS inputs	-0.3	-	$V_{DD} + 0.3$	V
		other inputs	-0.3	-	+2.6	V
		HPD, DDC inputs	[1] -0.3	-	$V_{DD} + 0.3$	V
T_{amb}	ambient temperature	operating in free air	-10	-	+85	°C

[1] HPD input is tolerant to 5 V input, provided a 1 kΩ series resistor between the voltage source and the pin is placed in series. See [Section 11.1 "Special considerations"](#).

10. Characteristics

10.1 General characteristics

Table 9. General characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{DD}	supply current	operating mode ($\overline{XSD} = \text{HIGH}$); $V_{DD} = 3.3 \text{ V}$	-	0.2	1	mA
		shutdown mode ($\overline{XSD} = \text{LOW}$); $V_{DD} = 3.3 \text{ V}$	-	-	10	μA
P_{cons}	power consumption	operating mode ($\overline{XSD} = \text{HIGH}$); $V_{DD} = 3.3 \text{ V}$	-	-	5	mW
t_{startup}	start-up time	supply voltage valid or \overline{XSD} going HIGH to channel specified operating characteristics	-	-	1	ms
t_{rcfg}	reconfiguration time	GPU_SEL or DDC_AUX_SEL state change to channel specified operating characteristics	-	-	1	ms

10.2 DisplayPort channel characteristics

Table 10. DisplayPort channel characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_I	input voltage		-0.3	-	+2.6	V
V_{IC}	common-mode input voltage		0	-	2.0	V
V_{ID}	differential input voltage		-1.2	-	+1.2	V
DDIL	differential insertion loss	channel is on; $0 \text{ Hz} \leq f \leq 1.0 \text{ GHz}$	-2.5	-1.6	-	dB
		channel is on; $f = 2.5 \text{ GHz}$	-4.5	-	-	dB
		channel is off; $0 \text{ Hz} \leq f \leq 3.0 \text{ GHz}$	-	-	-20	dB
DDRL	differential return loss	channel is on; $0 \text{ Hz} \leq f \leq 1.0 \text{ GHz}$	-	-	-10	dB
DDNEXT	differential near-end crosstalk	adjacent channels are on; $0 \text{ Hz} \leq f \leq 1.0 \text{ GHz}$	-	-	-30	dB
B	bandwidth	-3.0 dB intercept	-	2.5	-	GHz
		-5.0 dB intercept	-	4.0	-	GHz
t_{PD}	propagation delay	from left-side port to right-side port or vice versa	-	180	-	ps
$t_{\text{sk(dif)}}$	differential skew time	intra-pair	-	-	5	ps
t_{sk}	skew time	inter-pair	-	-	180	ps

10.3 AUX and DDC ports

Table 11. AUX and DDC port characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_I	input voltage	no series resistor	-0.3	-	$V_{DD} + 0.3$	V
		2.2 k Ω series resistor	-0.3	-	+5.0	V
V_O	output voltage	no series resistor; $V_I = 3.6$ V	3.0	-	3.6	V
		2.2 k Ω series resistor; $V_I = 5.0$ V	3.0	-	4.3	V
V_{IC}	common-mode input voltage	DDC or AUX	0	-	2.0	V
V_{ID}	differential input voltage		-1.2	-	+1.2	V
t_{PD}	propagation delay	from left-side port to right-side port or vice versa	[1]	-	180	ps

[1] Time from DDC/AUX input changing state to AUX output changing state. Includes DDC/AUX rise/fall time.

10.4 HPDIN input, HPD_x outputs

Table 12. HPD input and output characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_I	input voltage	no series resistor	-0.3	-	$V_{DD} + 0.3$	V
		1 k Ω series resistor	[1]	-0.3	-	+5.0
V_O	output voltage	no series resistor; $V_I = 3.6$ V	3.0	-	3.6	V
		1 k Ω series resistor; $V_I = 5.0$ V	3.0	-	4.3	V
t_{PD}	propagation delay	from HPDIN to HPD_x or vice versa	[2]	-	180	ps

[1] Voltage measured at HPD_1 or HPD_2 with input voltage applied to HPDIN, or vice versa.

[2] Time from HPDIN changing state to HPD_x changing state. Includes HPD rise/fall time.

10.5 GPU_SEL, DDC_AUX_SEL and XSD inputs

Table 13. GPU_SEL, DDC_AUX_SEL, XSD input characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{IH}	HIGH-level input voltage		2.0	-	-	V
V_{IL}	LOW-level input voltage		-	-	0.8	V
I_{LI}	input leakage current	$V_{DD} = 3.6$ V; 0.3 V $\leq V_I \leq 3.9$ V	-	-	10	μ A

11. Application information

11.1 Special considerations

Certain cable or dongle misplug scenarios make it possible for a 5 V input condition to occur on pins AUX+ and AUX-, as well as HPDIN. When AUX+ and AUX- are connected through a minimum of 2.2 k Ω each, the CBTL06141 will sink current but will not be damaged. Similarly, HPDIN may be connected to 5 V via at least a 1 k Ω resistor. (Correct functional operation to specification is not expected in these scenarios.) The latter also prevents the HPDIN input from loading down the system HPD signal when power to the CBTL06141 is off.

12. Package outline

TFBGA48: plastic thin fine-pitch ball grid array package; 48 balls; body 5 x 5 x 0.8 mm

SOT918-1

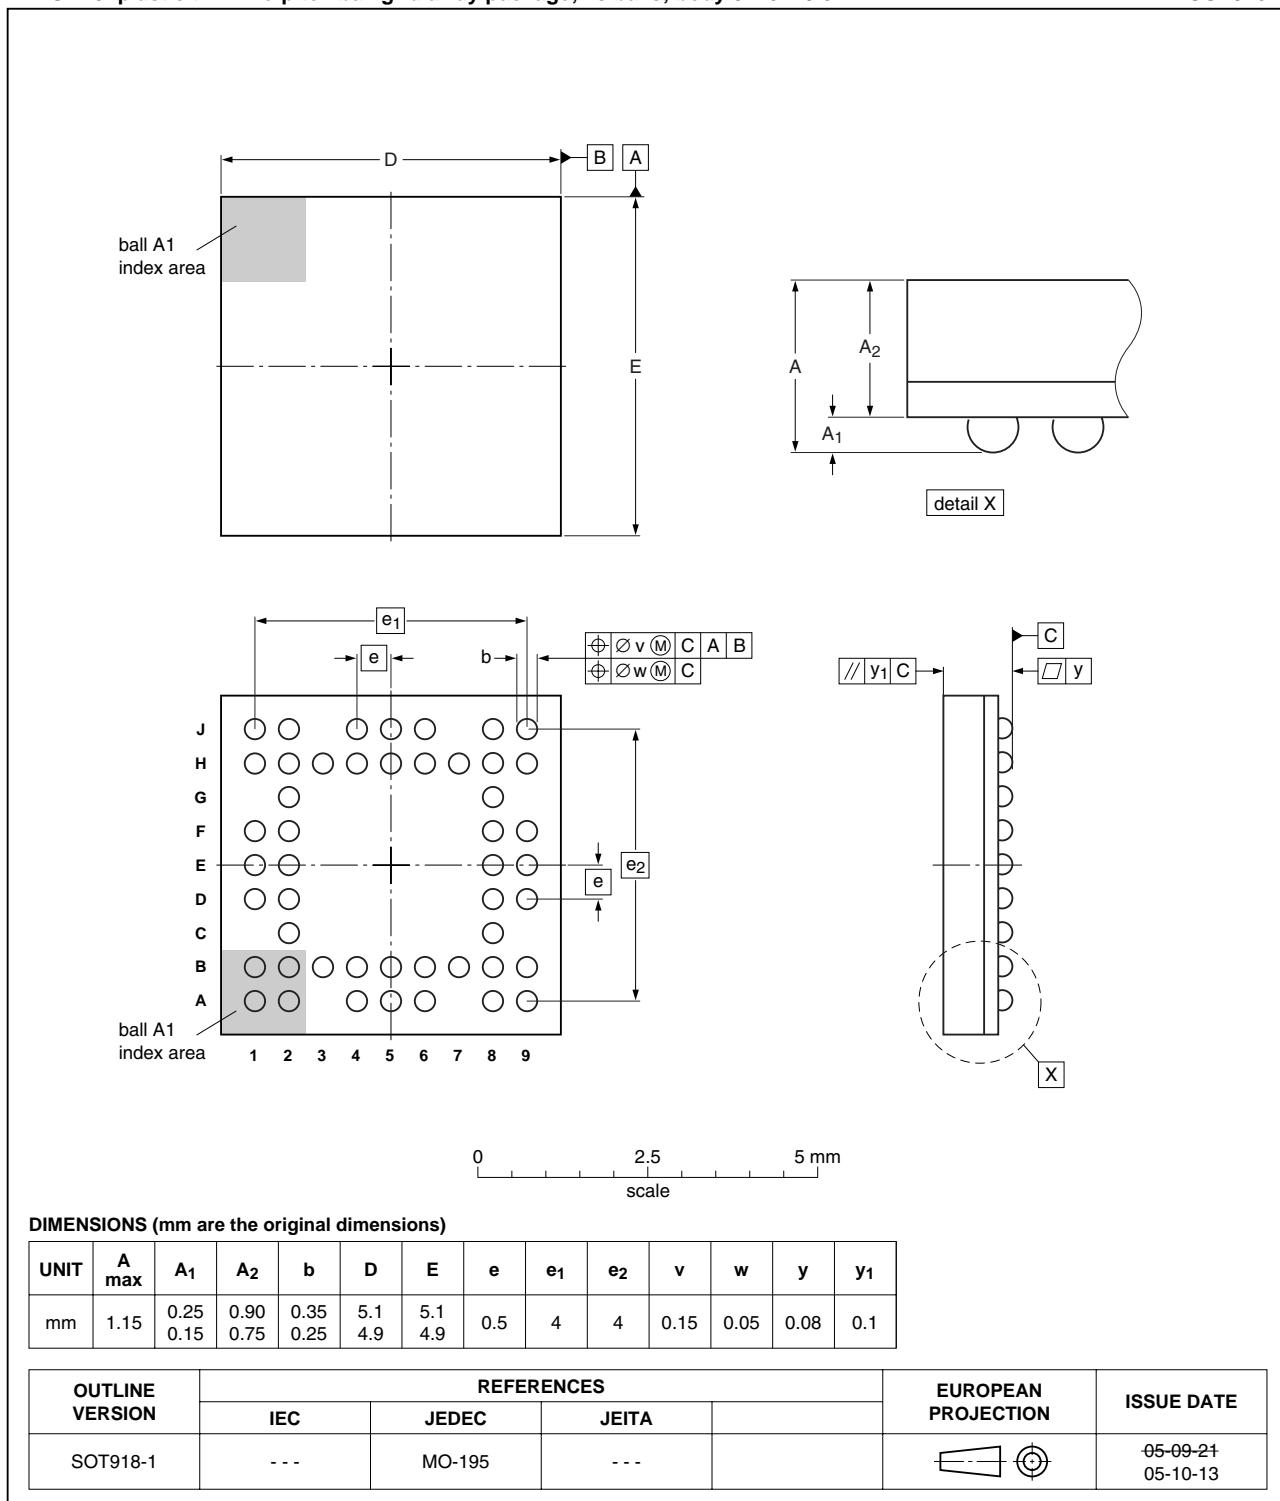


Fig 4. Package outline TFBGA48 (SOT918-1)

13. Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note AN10365 “Surface mount reflow soldering description”.

13.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

13.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leaded or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leaded SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leaded packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

13.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities

13.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 5](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board
- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 14](#) and [15](#)

Table 14. SnPb eutectic process (from J-STD-020C)


Package thickness (mm)	Package reflow temperature (°C)	
	Volume (mm ³)	
	< 350	≥ 350
< 2.5	235	220
≥ 2.5	220	220

Table 15. Lead-free process (from J-STD-020C)

Package thickness (mm)	Package reflow temperature (°C)		
	Volume (mm ³)		
	< 350	350 to 2000	> 2000
< 1.6	260	260	260
1.6 to 2.5	260	250	245
> 2.5	250	245	245

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times.

Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 5](#).

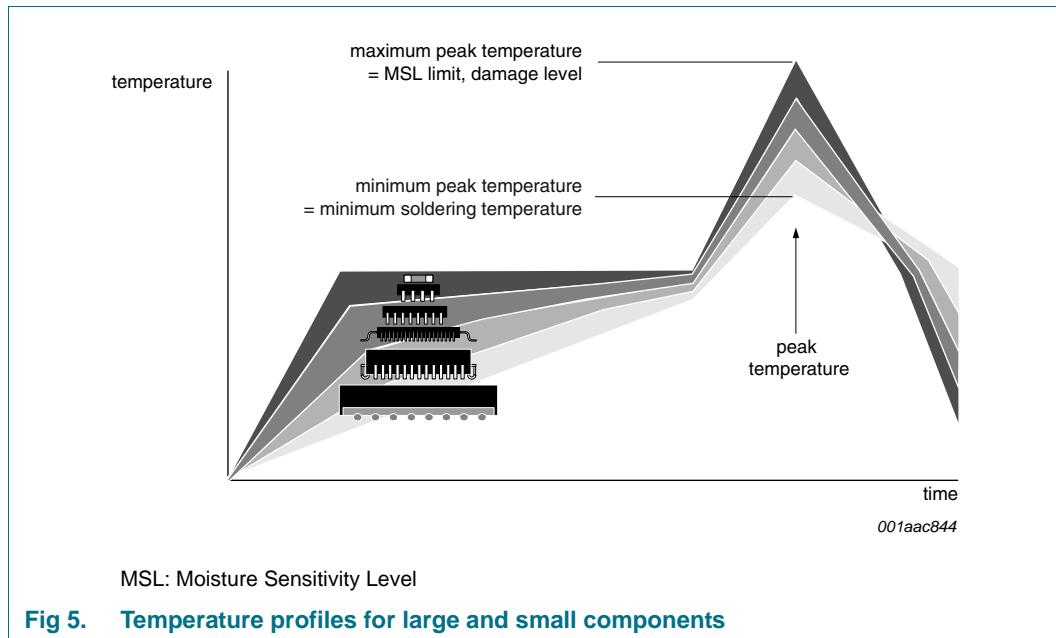

For further information on temperature profiles, refer to Application Note AN10365 "Surface mount reflow soldering description".

14. Abbreviations

Table 16. Abbreviations

Acronym	Description
DDC	Direct Display Control
DUT	Device Under Test
DVI	Digital Video Interface
HDMI	High-Definition Multimedia Interface
PCB	Printed-Circuit Board
SMA	SubMiniature, version A (connector)
TDR	Time-Domain Reflectometry
AUX	Auxiliary channel (in DisplayPort definition)
HPD	Hot Plug Detect
GPU	Graphics Processor Unit
PCIe	PCI Express

15. Revision history

Table 17. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
CBTL06141 v.2	20100715	Product data sheet	-	CBTL06141 v.1
Modifications:	<ul style="list-style-type: none"> Removed "COMPANY CONFIDENTIAL" watermark 			
CBTL06141 v.1	20080624	Product data sheet	-	-

16. Legal information

16.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

16.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

17. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

18. Contents

1	General description	1
2	Features and benefits	1
3	Applications	2
4	Ordering information	2
5	Functional diagram	3
6	Pinning information	4
6.1	Pinning	4
6.2	Pin description	5
7	Functional description	6
7.1	Multiplexer/switch select functions	6
7.2	Shutdown function	7
8	Limiting values	8
9	Recommended operating conditions	8
10	Characteristics	9
10.1	General characteristics	9
10.2	DisplayPort channel characteristics	9
10.3	AUX and DDC ports	10
10.4	HPDIN input, HPD_x outputs	10
10.5	GPU_SEL, DDC_AUX_SEL and \overline{XSD} inputs	10
11	Application information	11
11.1	Special considerations	11
12	Package outline	12
13	Soldering of SMD packages	13
13.1	Introduction to soldering	13
13.2	Wave and reflow soldering	13
13.3	Wave soldering	13
13.4	Reflow soldering	14
14	Abbreviations	15
15	Revision history	15
16	Legal information	16
16.1	Data sheet status	16
16.2	Definitions	16
16.3	Disclaimers	16
16.4	Trademarks	17
17	Contact information	17
18	Contents	18

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2010.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 15 July 2010

Document identifier: CBTL06141