



Single Output A-Series, UWR Models

High-Density, 2" x 2"
3.3/5Vout, 26-40 Watt DC/DC's

Features

- 2.0" x 2.0" plastic package
- Industry standard pinout
- Output voltage/currents available:
 - 3.3Vout @ 8/9 Amps
 - 5Vout @ 7/8 Amps
- Input voltage ranges include:
 - 36-75V (D48)
 - 18-36V (D24)
 - 10-18V (D12)
- No load, full-synchronous topology
- High efficiencies: 90% typical
- $\pm 0.5\%$ line/load regulation
- Output trim; On/Off control
- Fully I/O protected; Thermal shutdown
- UL60950/EN60950 approvals; CE mark
- Fully isolated, 1500Vdc guaranteed

Design advancements coupled with state-of-the-art components now allows DATEL's UWR A-Series to deliver 40 Watts of power in a 2" x 2" package. The UWR 26-40 Watt A-Series DC/DC converters provides up to 9 Amps @ 3.3Vout and up to 8 Amps @ 5Vout from input ranges of 10-18V (D12 models), 18-36V (D24 models) or 36-75V (D48 models).

Designed using an advanced full-synchronous and forward topology, the UWR A-Series attains efficiencies of 90% allowing full power operation to ambient temperatures of $+55^\circ\text{C}$ using only natural convection. Built on a time tested, fully automated, SMT-on-PCB construction, these DC/DC converters provide stable no-load operation, excellent line ($\pm 0.5\%$) and load ($\pm 0.5\%$) regulation and low ripple/noise (75mV typical). Models include a full-featured list of fault protection that includes: input under/over-voltage and output over-voltage protection, output current limiting, short circuit protection and thermal shutdown.

All models include an On/Off Control function with either positive or negative logic and output voltage trim adjustment. All models are certified for 1500Vdc isolation to UL60950 and EN60950 safety requirements. Models that provide input ranges to 75Vin are CE marked.

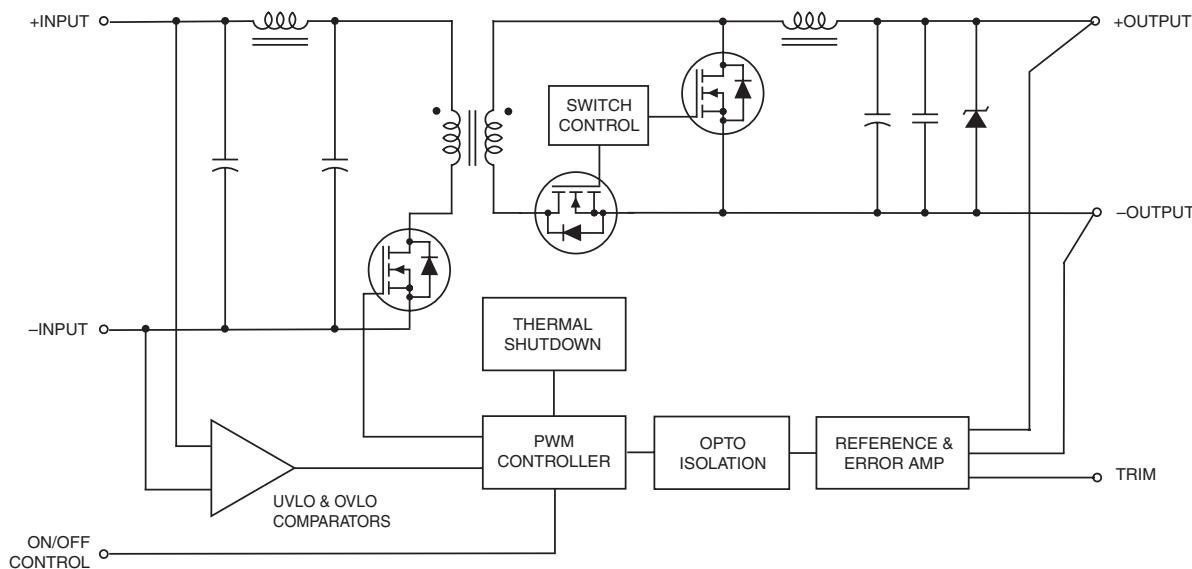


Figure 1. Simplified Schematic

Performance Specifications and Ordering Guide ^①

Model	Output					Input			Efficiency	Package (Case, Pinout)	
	V _{OUT} (Volts)	I _{OUT} (Amps)	R/N (mVp-p) ^②		Regulation (Max.)		V _{IN} Nom. (Volts)	Range (Volts)	I _{IN} ^④ (mA)		
			Typ.	Max.	Line	Load ^③					
UWR-3.3/8-D12A	3.3	8	75	110	±0.5%	±0.5%	12	10-18	145/2510	85% 87.5% C4, P6	
UWR-3.3/9-D24A	3.3	9	75	110	±0.5%	±0.5%	24	18-36	50/1400	86% 88.5% C4, P6	
UWR-3.3/9-D48A	3.3	9	75	110	±0.5%	±0.5%	48	36-75	25/700	86% 88.5% C4, P6	
UWR-5/7-D12A	5	7	75	110	±0.5%	±0.5%	12	10-18	160/3260	85.5% 89.5% C4, P6	
UWR-5/8-D24A	5	8	75	110	±0.5%	±0.5%	24	18-36	70/1850	86% 90% C4, P6	
UWR-5/8-D48A	5	8	75	110	±0.5%	±0.5%	48	36-75	25/930	86% 90% C4, P6	

^① Typical at T_A = +25°C under nominal line voltage and full-load conditions, unless noted.^② Ripple/Noise (R/N) is tested/specified over a 20MHz bandwidth. All models are specified with an external 0.47µF multi-layer ceramic capacitors installed across their output pins.^③ Load regulation is specified over no load-100% load conditions. 1.2-5V models are stable and regulate under no-load conditions. 12/15V models have minimum loading requirements. See Performance/Functional Specifications.^④ Nominal line voltage, no-load/full-load conditions.

PART NUMBER STRUCTURE

UWR-3.3/9-D48ANOutput Configuration:
U = Unipolar

Wide Range Input

Nominal Output Voltage:
3.3 or 5 VoltsMaximum Output Current
in AmpsAdd "N" suffix
as desiredA-Series
High ReliabilityInput Voltage Range:
D12 = 10-18 Volts (12V nominal)
D24 = 18-36 Volts (24V nominal)
D48 = 36-75 Volts (48V nominal)


Part Number Suffixes

UWR 26-40W DC/DC's are designed so an On/Off Control function with either positive polarity (no suffix), or negative polarity ("N" suffix) can be added to the pin 4 position.

No Suffix On/Off Control function (positive polarity) on pin 4

N On/Off Control function (negative polarity) on pin 4

MECHANICAL SPECIFICATIONS

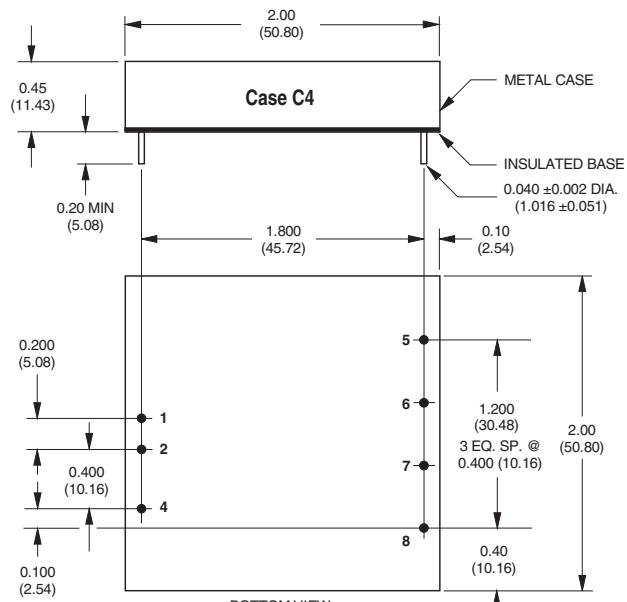

DIMENSIONS ARE IN INCHES (MM)

I/O Connections

Pin	Function P6
1	+Input
2	-Input
3	No Pin
4	On/Off Control
5	No Pin
6	+Output
7	-Output
8	Trim

Note

For D12A and D24A models the case is connected to Pin 2 (-Input).

For D48A models the case is connected to Pin 1 (+Input).

Performance/Functional Specifications

Typical @ TA = +25°C under nominal line voltage and full-load conditions, unless noted. ①②

Input	
Input Voltage Range:	
D12 Models	10-18 Volts (12V nominal)
D24 Models	18-36 Volts (24V nominal)
D48 Models	36-75 Volts (48V nominal)
Overvoltage Shutdown:	
D12 Models	19-23 Volts (21V typical)
D24 Models	37-43 Volts (40V typical)
D48 Models	76.5-81 Volts (78V typical)
Start-Up Threshold: ③	
D12 Models	8.5-10 Volts (9V typical)
D24 Models	16-18 Volts (17V typical)
D48 Models	33.5-36 Volts (35V typical)
Undervoltage Shutdown: ③	
D12 Models	7.5-9 Volts (8V typical)
D24 Models	15-17 Volts (16V typical)
D48 Models	31-33.5 Volts (32V typical)
Input Current:	
Normal Operating Conditions	See Ordering Guide
Standby Mode (Off, OV, UV)	5mA
Input Reflected Ripple Current	250mA _{p-p}
Input Filter Type	
D12 Models	Capacitive (13.2μF)
D24 Models	Pi (0.01μF-1μH-6.6μF)
D48 Models	Pi (0.01μF-2.2μH-2μF)
Reverse-Polarity Protection	Brief duration, 5A maximum
On/Off Control: ④ ⑤	On = open or 13V - +VIN, I _{IN} = 1.6mA max. Off = 0-0.8V, I _{IN} = 2.6mA max. "N" Models On = 0-0.8V, I _{IN} = 1mA max. Off = open or 3.3-+VIN, I _{IN} = 1mA max.
Output	
V_{OUT} Accuracy (50% load):	±1.0%, maximum
Minimum Loading for Specification: ②	10% of I _{OUT} maximum
Minimum Loading for Stability: ⑦	No load
Ripple/Noise (20MHz BW): ① ⑥	See Ordering Guide
Line/Load Regulation	See Ordering Guide
Efficiency	See Ordering Guide
Trim Range ②	±5%
Isolation Voltage:	
Input-to-Output	1500Vdc minimum
Input/Output to Case	1500Vdc minimum
Isolation Capacitance	470pF
Isolation Resistance	100MΩ
Current Limit Inception (@98%V_{OUT}):	
3.3V _{OUT} Models	10.5-11.5 Amps
5V _{OUT} Models	8.5-9.5 Amps
Short Circuit Current: (Average)	
3.3V _{OUT} Models	3 Amps maximum
5V _{OUT} Models	4 Amps maximum
Overvoltage Protection:	Output voltage comparator
3.3V _{OUT} Models	3.7-4.1 Volts
5V _{OUT} Models	5.6-7.1 Volts
Temperature Coefficient	±0.02% per °C.

Dynamic Characteristics	
Dynamic Load Response:	(50-100% load step to 1% V _{OUT}) 200μsec maximum
Start-Up Time:	V _{IN} to V _{OUT} 10ms On/Off to V _{OUT} 10ms
Switching Frequency:	UWR-3.3/8-D12A 360kHz (±36kHz) UWR-3.3/9-D24A, -D48A 300kHz (±30kHz) UWR-5/7-D12A 360kHz (±36kHz) UWR-5/8-D24A, -D48A 310kHz (±30kHz)
Environmental	
MTBF ⑥	Bellcore, ground fixed, full power 25°C ambient UWR-5/8-D24A 1.6 million hours
Operating Temperature (Ambient): ②	D12A Models +50°C D24A/D48A Models +55°C With Derating To +100°C (see Derating Curves)
Thermal Shutdown	+110°C case
Storage Temperature	-40 to +120°C
Physical	
Dimensions	2" x 2" x 0.45" (50.8 x 50.8 x 11.43mm)
Case Material	Corrosion resistant steel with non-conductive, epoxy-based, black enamel finish and plastic baseplate
Pin Material	Brass, solder coated
Weight:	2.7 ounces (76.5 grams)
Primary to Secondary Insulation Level	Functional

① All models are specified with external 0.47μF ceramic output capacitor.

② See Technical Notes/Graphs for details.

③ Applying a voltage to On/Off Control (pin 4) when no input power is applied to the converter can cause permanent damage.

④ Output noise may be further reduced with the addition of additional external output capacitors. See Technical Notes.

⑤ The On/Off Control is designed to be driven with open-collector logic or the application of appropriate voltage levels. Voltages may be referenced to the -Input (pin 2).

⑥ Demonstrated MTBF available on request.

Absolute Maximum Ratings	
Input Voltage:	
Continuous:	
D12A Models	23 Volts
D24A Models	42 Volts
D48A Models	81 Volts
Transient (100msec):	
D12A Models	25 Volts
D24A Models	50 Volts
D48A Models	100 Volts
On/Off Control (pin 4) Max. Voltages	
Referenced to $-I_{Input}$ (pin 2)	
X	$V_{IN} +$
X	$V_{IN} +$
Input Reverse-Polarity Protection	
	Current must be <5 Amps. Brief duration only. Fusing recommended.
Output Current	
	Current limited. Devices can withstand sustained output short circuits without damage.
Case Temperature	
	+100°C
Storage Temperature	
	-40 to +120°C
Lead Temperature (soldering, 10 sec.)	
	+300°C
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than those listed in the Performance/Functional Specifications Table is not implied.	

TECHNICAL NOTES

Floating Outputs

Since these are isolated DC/DC converters, their outputs are "floating," with respect to the input. Designers will normally use the -Output (pin 7) as the ground/return of the load circuit. You can, however, use the +Output (pin 6) as ground/return to effectively reverse the output polarity.

Minimum Output Loading Requirements

UWR 26-40 Watt converters employ a synchronous-rectifier design topology. All models regulate within spec and are stable under no-load conditions.

Filtering and Noise Reduction

All UWR 26-40 Watt DC/DC Converters achieve their rated ripple and noise specifications using the external output capacitor specified in the Performance/Functional Specifications table. In critical applications, input/output noise may be further reduced by installing additional external I/O caps. Input capacitors should be selected for bulk capacitance, low ESR and high rms-ripple-current ratings. Input capacitors serve as energy-storage devices to minimize variations in line voltage caused by transient IR drops in PCB conductors from backplane to the DC/DC. Output capacitors should be selected for low ESR and appropriate frequency response. All caps should have appropriate voltage ratings and be mounted as close to the converters as possible.

The most effective combination of external I/O capacitors will be a function of your particular load and layout conditions. Our Applications Engineers can recommend potential solutions. Contact our Applications Engineering Group for additional details.

Input Fusing

Certain applications and/or safety agencies may require the installation of fuses at the inputs of power conversion components. Fuses should also be used if the possibility of sustained, non-current-limited, input-voltage polarity reversals exists. For DATEL A-Series UWR 26-40 Watt DC/DC Converters, you should use slow-blow type fuses with values no greater than the following.

Model	Fuse Value
UWR-3.3/8-D12	7 Amps
UWR-3.3/9-D24	4 Amps
UWR-3.3/9-D48	2 Amps
UWR-5/7-D12	8 Amps
UWR-5/8-D24	5 Amps
UWR-5/8-D48	3 Amps

Start-Up and Undervoltage Shutdown

Under normal start-up conditions, UWR 26-40W converters will not begin to regulate properly until the ramping input voltage exceeds the Start-Up Threshold. Once operating, devices will turn off when the applied voltage drops below the Undervoltage Shutdown point. Devices will remain off as long as the undervoltage condition continues. Units will automatically restart when the applied voltage is brought back above the Start-Up Threshold.. The hysteresis built into the function avoids an indeterminate on/off condition at a single input voltage . See Performance/Functional Specifications table for actual limits.

On/Off Control

The input-side, remote On/Off Control function (pin 4) can be ordered to operate with either polarity. Positive-polarity devices (standard, no part-number suffix) are enabled when pin 4 is left open or is pulled high (+13V to V_{IN} applied with respect to $-Input$, pin 2, (see Figure 2). Positive-polarity devices are disabled when pin 4 is pulled low (0-0.8V with respect to $-Input$). Negative-polarity devices are off when pin 4 open or pulled high (3.3V to $+V_{IN}$), and on when pin 4 is pulled low (0-0.8V). See Figure 3.

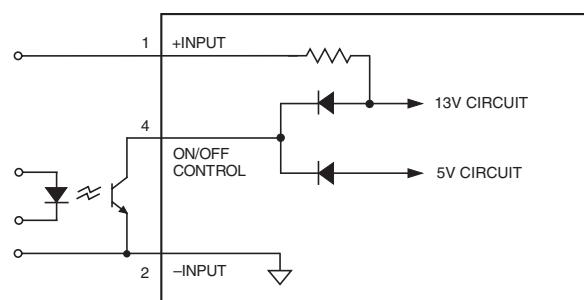


Figure 2. Driving the Positive Polarity On/Off Control Pin

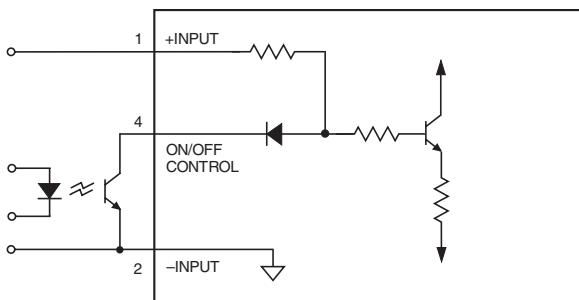


Figure 3. Driving the Negative Polarity On/Off Control Pin

Dynamic control of the remote on/off function is best accomplished with a mechanical relay or an open-collector/open-drain drive circuit (optically isolated if appropriate). The drive circuit should be able to sink appropriate current (see Performance Specs) when activated and withstand appropriate voltage when deactivated.

Applying an external voltage to pin 4 when no input power is applied to the converter can cause permanent damage to the converter.

Sync Function (Optional)

Contact DATEL for further information.

Start-Up Time

The V_{IN} to V_{OUT} start-up time is the interval of time where the input voltage crosses the turn-on threshold point, and the fully loaded output voltage enters and remains within its specified accuracy band. Actual measured times will vary with input source impedance, external input/output capacitance, and load. The UWR 26-40 Watt implements a soft start circuit that limits the duty cycle of the PWM controller at power up, thereby limiting the Input Inrush current.

The On/Off Control to V_{OUT} start-up time assumes the converter has its nominal input voltage applied but is turned off via the On/Off Control pin. The specification defines the interval between the time at which the converter is turned on and the fully loaded output voltage enters and remains within its specified accuracy band. Similar to the V_{IN} to V_{OUT} start-up, the On/Off Control to V_{OUT} start-up time is also governed by the internal soft start circuitry and external load capacitance.

Input Overvoltage/Undervoltage Shutdown and Start-Up Threshold

Under normal start-up conditions, devices will not begin to regulate until the ramping-up input voltage exceeds the Start-Up Threshold Voltage (35V for "D48" models). Once operating, devices will not turn off until the input voltage drops below the Undervoltage Shutdown limit (34V for "D48" models). Subsequent re-start will not occur until the input is brought back up to the Start-Up Threshold. This built in hysteresis prevents any unstable on/off situations from occurring at a single input voltage.

Input voltages exceeding the input overvoltage shutdown specification listed in the Performance/Functional Specifications will cause the device to shutdown. A built-in hysteresis of 0.6 to 1.6 Volts for all models will not allow the converter to restart until the input voltage is sufficiently reduced.

Current Limiting

When output power increases above the rated output current, (see Current Limit in Performance/Functional Specifications) the DC/DC converter will go into a current limiting mode. In this condition the output voltage will decrease proportionately with increases in output current, thereby maintaining a somewhat constant power dissipation. This is commonly referred to as power limiting. Current limit inception is defined as the point where the full-power output voltage falls below the specified tolerance. See Performance/Functional Specifications. If the load current being drawn from the converter is significant enough, the unit will go into a short circuit condition. See "Short Circuit Condition."

Short Circuit Condition

When a converter is in current limit mode the output voltages will drop as the output current demand increases. If the output voltage drops too low, the magnetically coupled voltage used to develop primary side voltages will also drop, thereby shutting down the PWM controller.

Following a time-out period the PWM will restart causing the output voltages to begin ramping to their appropriate values. If the short-circuit condition persists, another shutdown cycle will be initiated. This on/off cycling is referred to as "hiccup" mode. The hiccup cycling reduces the average output current, thereby preventing internal temperatures from rising to excessive levels. The UWR 26-40 Watt A-Series is capable of enduring an indefinite short circuit output condition.

Thermal Shutdown

These A-Series converters are equipped with Thermal Shutdown Circuitry. If environmental conditions cause the internal temperature of the DC/DC converter to rise above the designed operating temperature, a precision temperature sensor will power down the unit. When the internal temperature decreases below the threshold of the temperature sensor the unit will self start. See Performance/Functional Specifications.

Output Overvoltage Protection

The output voltage is monitored for an overvoltage condition via magnetic coupling to the primary side. If the output voltage rises to a fault condition, which could be damaging to the load circuitry (see Performance Specifications), the sensing circuitry will power down the PWM controller causing the output voltage to decrease. Following a time-out period the PWM will restart, causing the output voltage to ramp to its appropriate value. If the fault condition persists, and the output voltages again climb to excessive levels, the overvoltage circuitry will initiate another shutdown cycle. This on/off cycling is referred to as "hiccup" mode.

Trimming Output Voltage

UWR 26-40W converters have a trim capability (pin 8) that allows users to adjust the output voltages $\pm 5\%$. Adjustments to the output voltages can be accomplished via a trim pot (Figure 5) or a single fixed resistor as shown in Figures 6 and 7. A single fixed resistor can increase or decrease the output voltage depending on its connection. Resistors should be located close to the converter and have TCR's less than 100ppm/ $^{\circ}\text{C}$ to minimize sensitivity to changes in temperature. If the trim function is not used, leave the trim pin floating.

A single resistor connected from the Trim (pin 8) to the +Output (pin 6), will decrease the output voltage. A resistor connected from the Trim (pin 8) to the -Output (pin 7), -Sense where applicable, will increase the output voltage.

Trim adjustments greater than the specified $\pm 5\%$ can have an adverse affect on the converter's performance and are not recommended. Excessive trim adjustment of the output voltage can cause the overvoltage protection circuitry to activate (see Performance Specifications for overvoltage limits). Power derating is based on maximum output current and voltage at the converter's output pins. Use of trim can cause output voltages to increase thereby increasing output power beyond the UWR's specified rating or cause output voltages to climb into the output overvoltage region. Therefore:

$$(V_{\text{OUT}} \text{ at pins}) \times (I_{\text{OUT}}) \leq \text{rated output power}$$

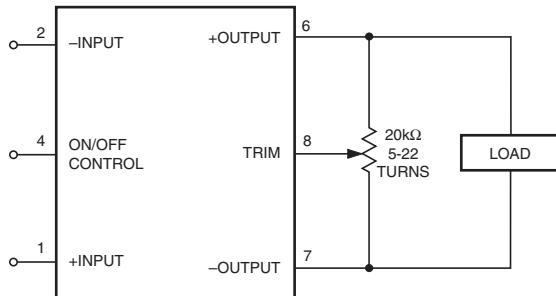


Figure 5. Trim Connections Using A Trimpot

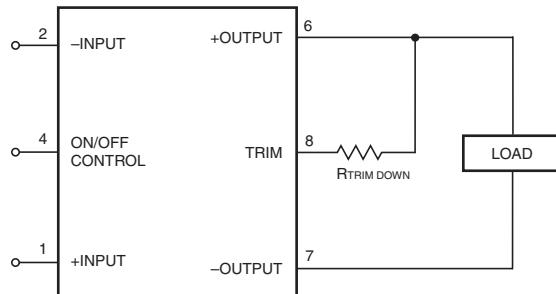


Figure 6. Trim Connections To Decrease Output Voltages Using Fixed Resistors

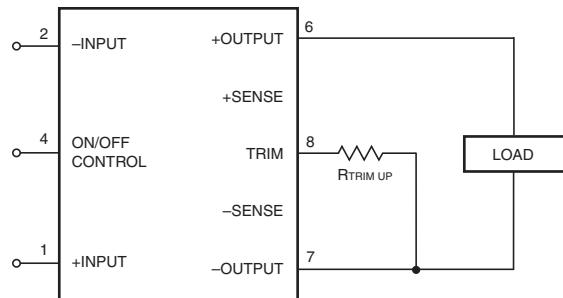


Figure 7. Trim Connections To Increase Output Voltages Using Fixed Resistors

Trim Equations For 3.3 Volt Models

$$R_{T_{\text{DOWN}}} (\text{k}\Omega) = \frac{2.49(V_o - 1.23)}{3.3 - V_o} - 13$$

$$R_{T_{\text{UP}}} (\text{k}\Omega) = \frac{3.06}{V_o - 3.3} - 13$$

Trim Equations For 5 Volt Models

$$R_{T_{\text{DOWN}}} (\text{k}\Omega) = \frac{2.49(V_o - 2.51)}{5 - V_o} - 16.9$$


$$R_{T_{\text{UP}}} (\text{k}\Omega) = \frac{6.25}{V_o - 5} - 16.9$$

Note: Resistor values are in $\text{k}\Omega$. Accuracy of adjustment is subject to the tolerances of resistors and factory-adjusted output accuracy.


V_o = desired output voltage.

TYPICAL PERFORMANCE CURVES


UWR-3.3/8-D12 Efficiency vs. Load @ 25°C Ambient

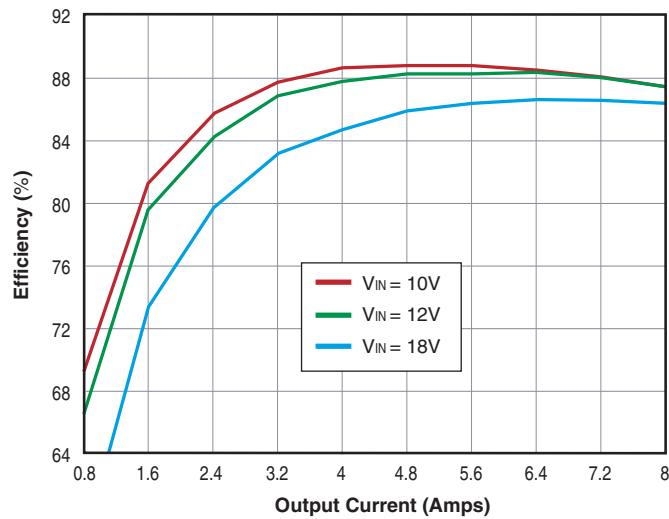


UWR-5/7-D12 Efficiency vs. Load @ 25°C Ambient

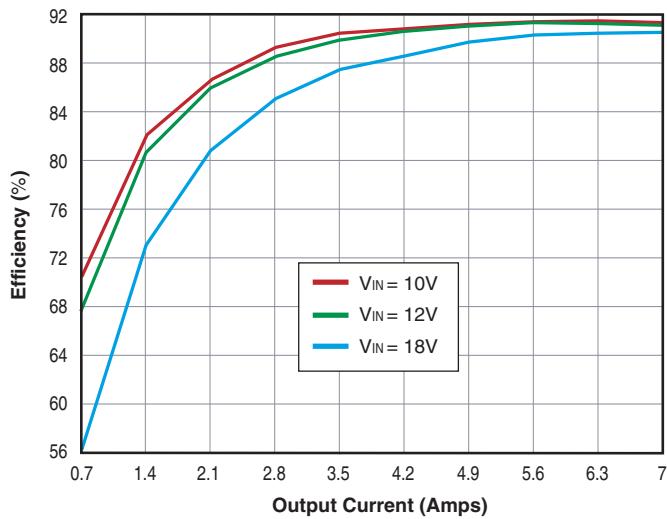


UWR-3.3/9-D24 Efficiency vs. Load @ 25°C Ambient

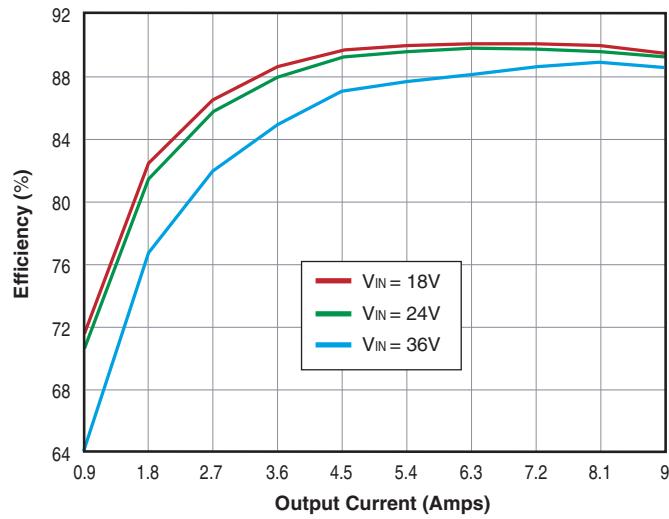


UWR-5/8-D24 Efficiency vs. Load @ 25°C Ambient

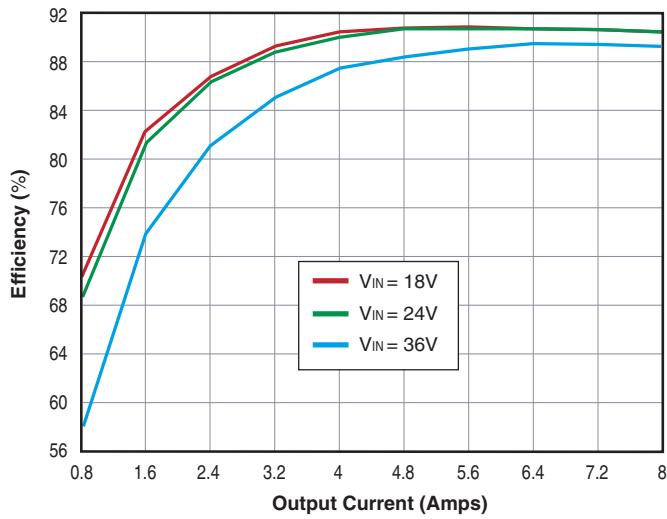


UWR-3.3/9-D48 Efficiency vs. Load @ 25°C Ambient

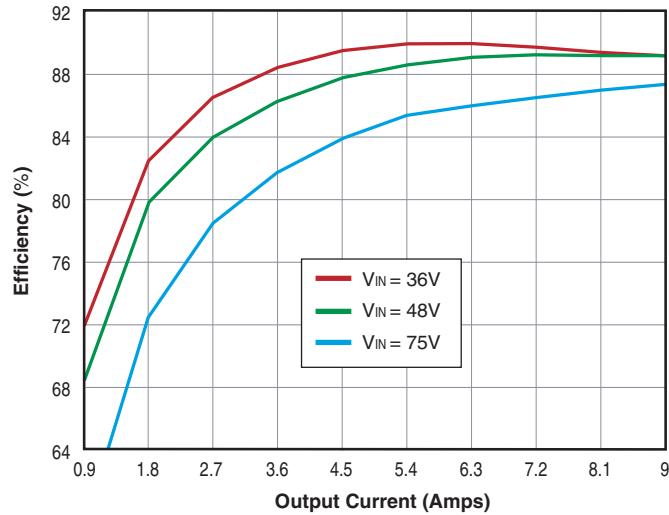



UWR-5/8-D48 Efficiency vs. Load @ 25°C Ambient

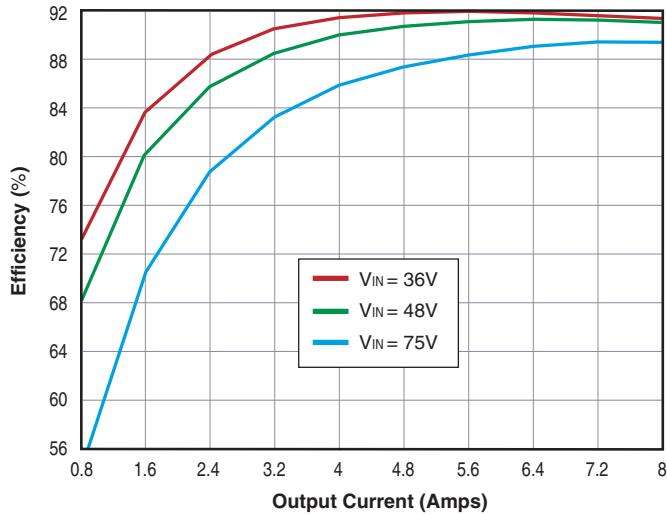



TYPICAL PERFORMANCE CURVES

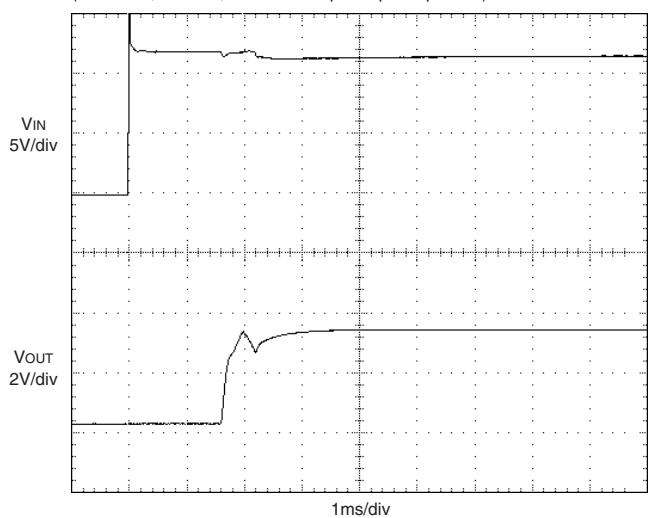UWR-3.3/8-D12A Start-Up from V_{IN}(V_{IN} = 12V, full load, external 0.47μF output capacitor.)


UWR-3.3/8-D12A Output Ripple and Noise (PARD)

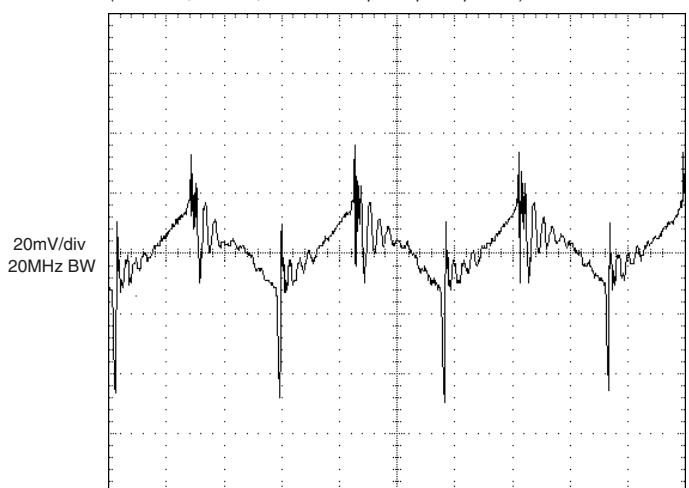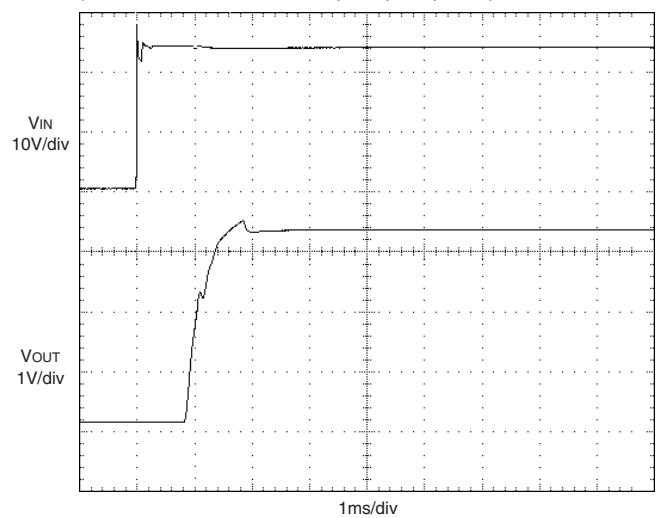(V_{IN} = 12V, full load, external 0.47μF output capacitor.)UWR-3.3/9-D24A Start-Up from V_{IN}(V_{IN} = 24V, full load, external 0.47μF output capacitor.)

UWR-3.3/9-D24A Output Ripple and Noise (PARD)

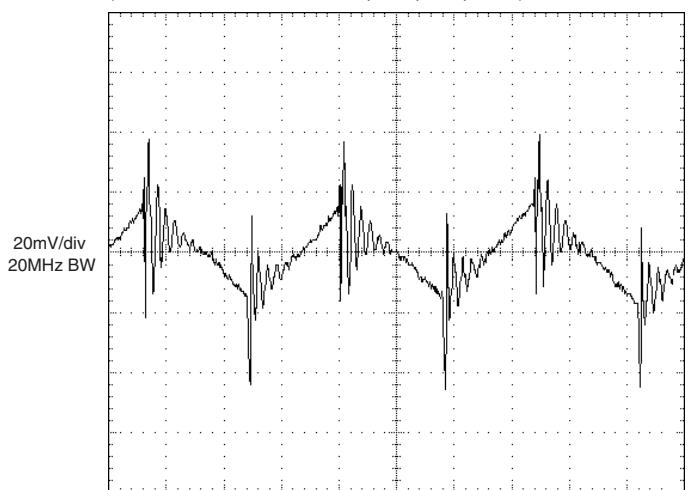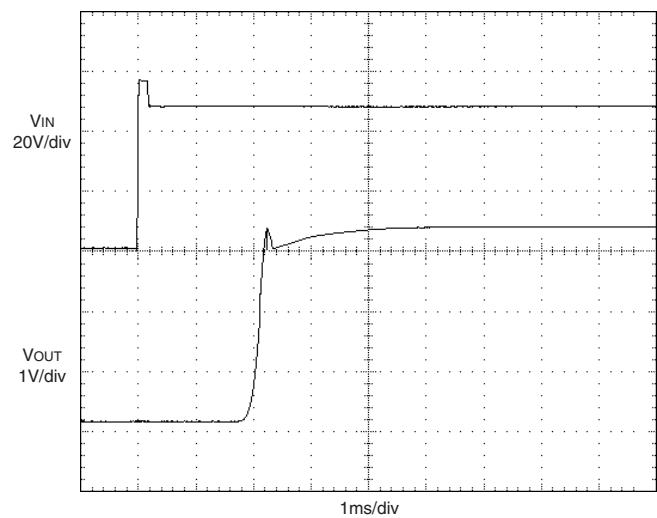(V_{IN} = 24V, full load, external 0.47μF output capacitor.)UWR-3.3/9-D48A Start-Up from V_{IN}(V_{IN} = 48V, full load, external 0.47μF output capacitor.)


UWR-3.3/9-D48A Output Ripple and Noise (PARD)

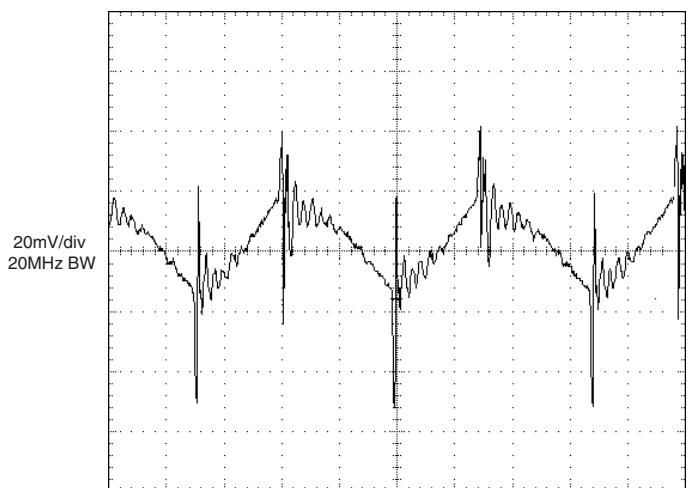(V_{IN} = 48V, full load, external 0.47μF output capacitor.)

TYPICAL PERFORMANCE CURVES


UWR-5/7-D12A Start-Up from VIN

(VIN = 12V, full load, external 0.47µF output capacitor.)

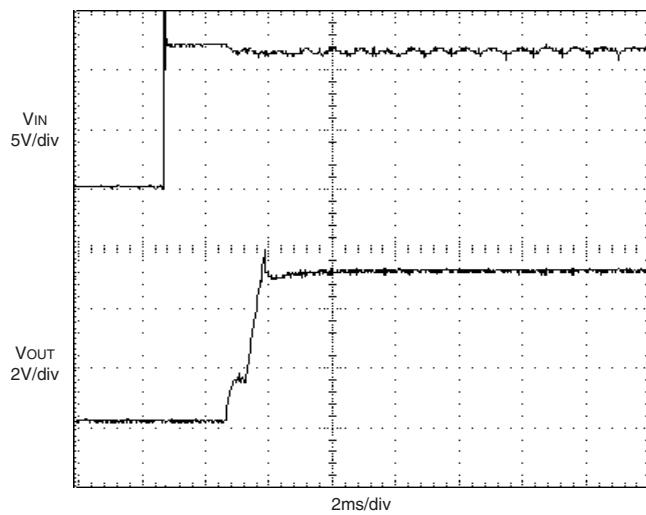


UWR-5/8-D24A Start-Up from VIN

(VIN = 24V, full load, external 0.47µF output capacitor.)

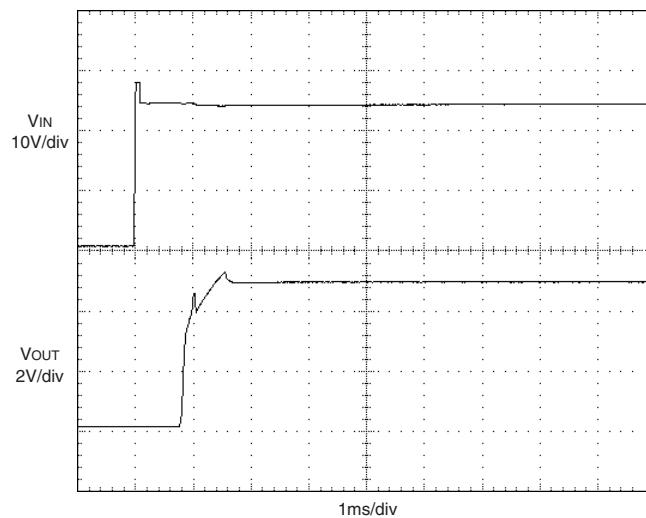


UWR-5/8-D48A Start-Up from VIN

(VIN = 48V, full load, external 0.47µF output capacitor.)

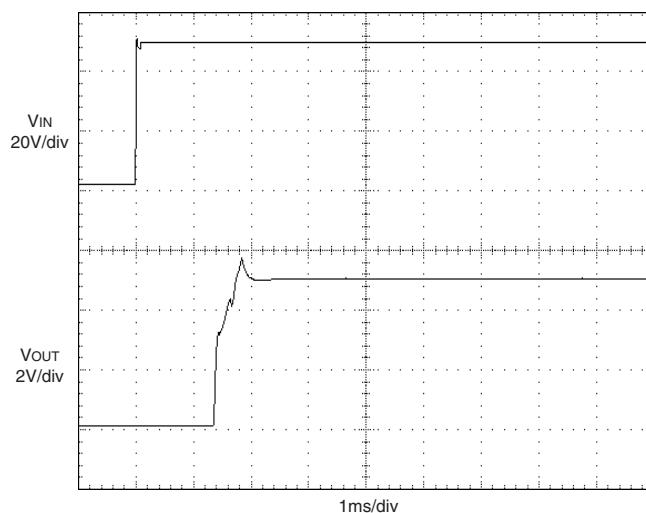


UWR-5/8-D12A Output Ripple and Noise (PARD)

(VIN = 12V, full load, external 0.47µF output capacitor.)

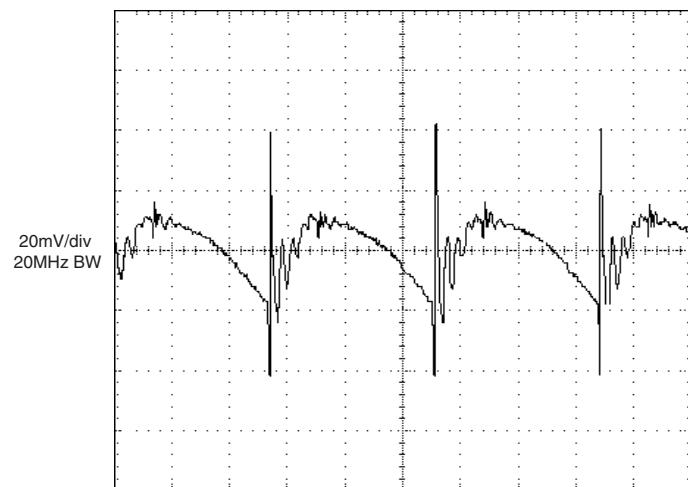


UWR-5/8-D24A Output Ripple and Noise (PARD)

(VIN = 24V, full load, external 0.47µF output capacitor.)

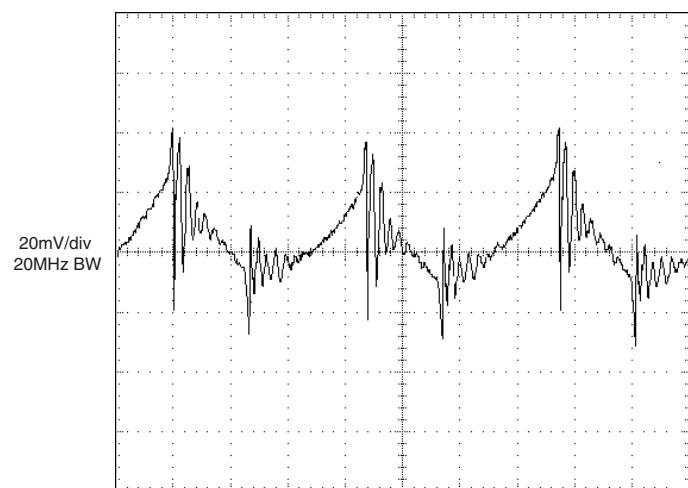


UWR-5/8-D48A Output Ripple and Noise (PARD)

(VIN = 48V, full load, external 0.47µF output capacitor.)

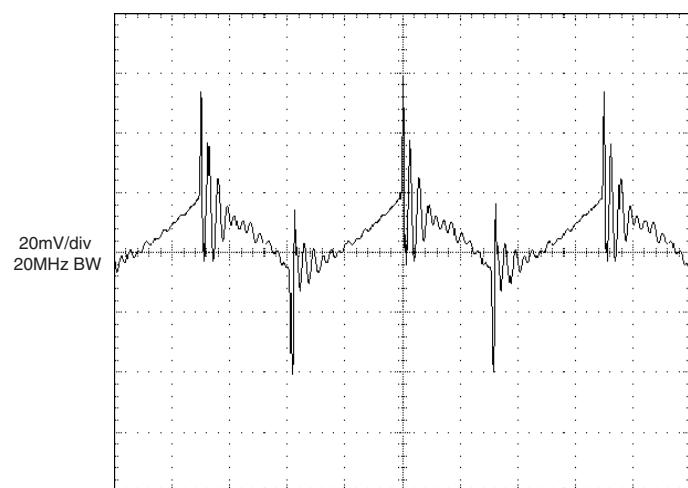

TEMPERATURE DERATING

3.3Vout Temperature Derating – Natural Convection

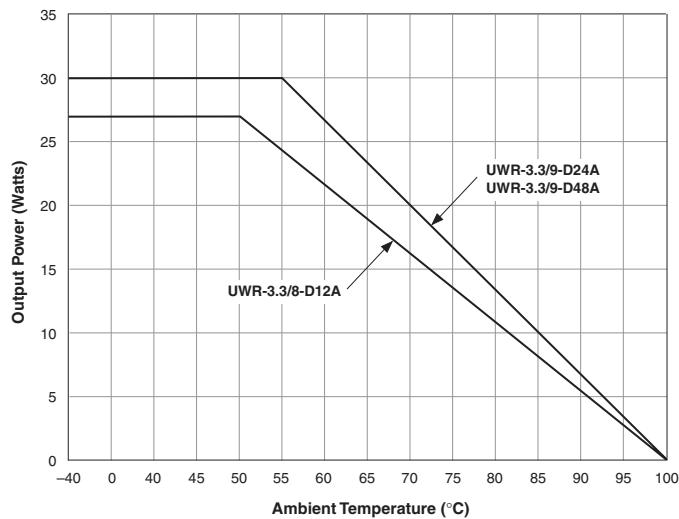

5Vout Temperature Derating – Natural Convection

