



# PCA8576F

## Automotive LCD driver for low multiplex rates

Rev. 1 — 22 November 2013

Product data sheet

## 1. General description

The PCA8576F is a peripheral device which interfaces to almost any Liquid Crystal Display (LCD)<sup>1</sup> with low multiplex rates. It generates the drive signals for any static or multiplexed LCD containing up to four backplanes and up to 40 segments. It can be easily cascaded for larger LCD applications. The PCA8576F is compatible with most microcontrollers and communicates via the two-line bidirectional I<sup>2</sup>C-bus. Communication overheads are minimized by a display RAM with auto-incremented addressing, by hardware subaddressing and by display memory switching (static and duplex drive modes).

For a selection of NXP LCD segment drivers, see [Table 28 on page 47](#).

## 2. Features and benefits

- AEC-Q100 grade 2 compliant for automotive applications
- Single chip LCD controller and driver
- Selectable backplane drive configuration: static or 2, 3, 4 backplane multiplexing
- Selectable display bias configuration: static,  $\frac{1}{2}$ , or  $\frac{1}{3}$
- Internal LCD bias generation with voltage-follower buffers
- 40 segment drives:
  - ◆ Up to 20 7-segment numeric characters
  - ◆ Up to 10 14-segment alphanumeric characters
  - ◆ Any graphics of up to 160 elements
- 40 × 4-bit RAM for display data storage
- Auto-incremented display data loading across device subaddress boundaries
- Display memory bank switching in static and duplex drive modes
- Versatile blinking modes
- Independent supplies possible for LCD and logic voltages
- Wide power supply range: from 1.8 V to 5.5 V
- Wide LCD supply range:
  - ◆ From 2.5 V for low-threshold LCDs
  - ◆ Up to 8.0 V for high-threshold twisted nematic LCDs
- Low power consumption
- 400 kHz I<sup>2</sup>C-bus interface
- May be cascaded for large LCD applications (up to 2560 elements possible)
- No external components required
- Compatible with chip-on-glass and chip-on-board technology

1. The definition of the abbreviations and acronyms used in this data sheet can be found in [Section 19](#).



- Manufactured in silicon gate CMOS process

### 3. Ordering information

Table 1. Ordering information

| Type number | Package  |             |            |
|-------------|----------|-------------|------------|
|             | Name     | Description | Version    |
| PCA8576FUG  | bare die | 59 bumps    | PCA8576FUG |

#### 3.1 Ordering options

Table 2. Ordering options

| Product type number | Sales item (12NC) | Orderable part number | IC revision | Delivery form |
|---------------------|-------------------|-----------------------|-------------|---------------|
| PCA8576FUG/2DA/Q1   | 935302565026      | PCA8576FUG/2DA/QKP    | 1           | chips in tray |

### 4. Marking

Table 3. Marking codes

| Product type number | Marking code |
|---------------------|--------------|
| PCA8576FUG/2DA/Q1   | PC8576F-1    |

5. Block diagram


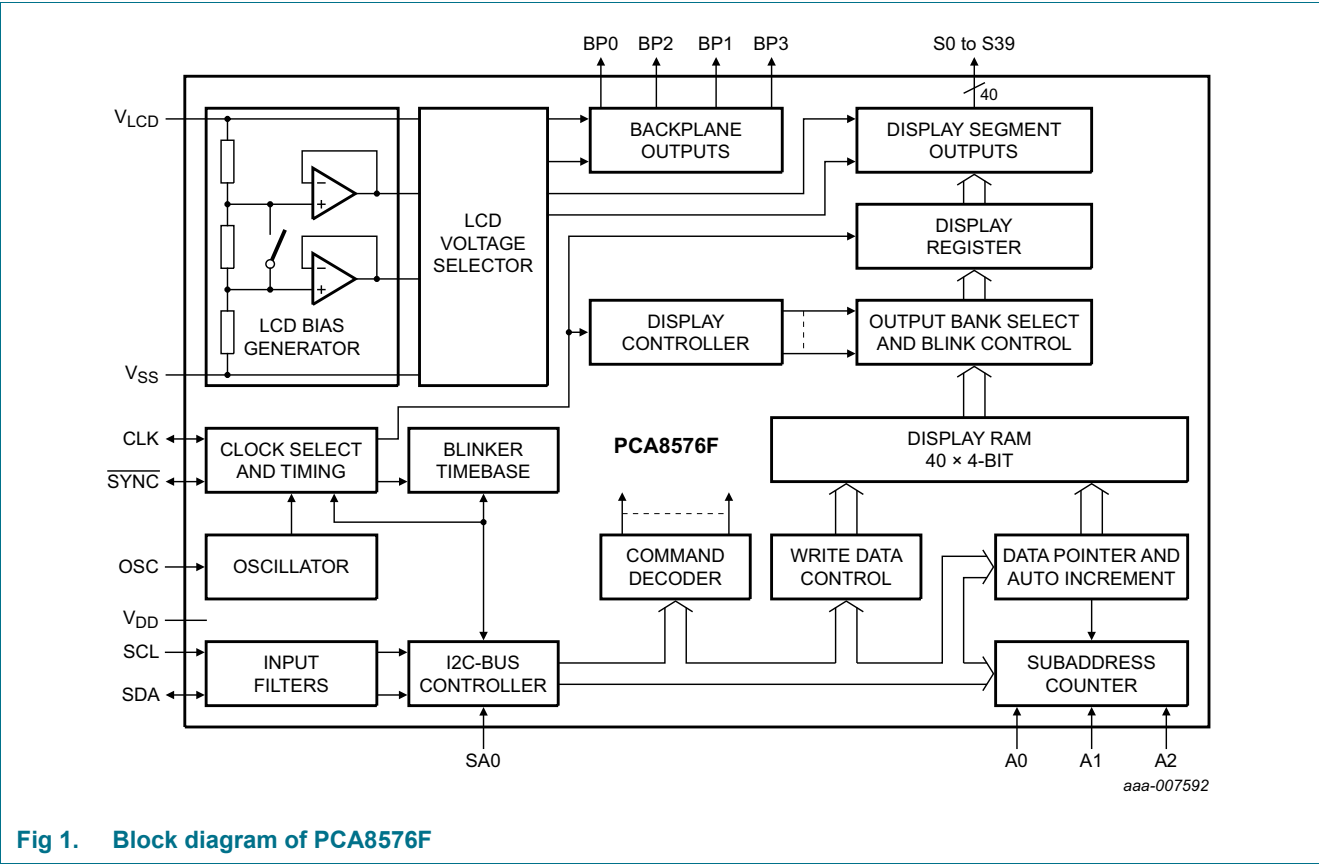


Fig 1. Block diagram of PCA8576F

6. Pinning information

6.1 Pinning

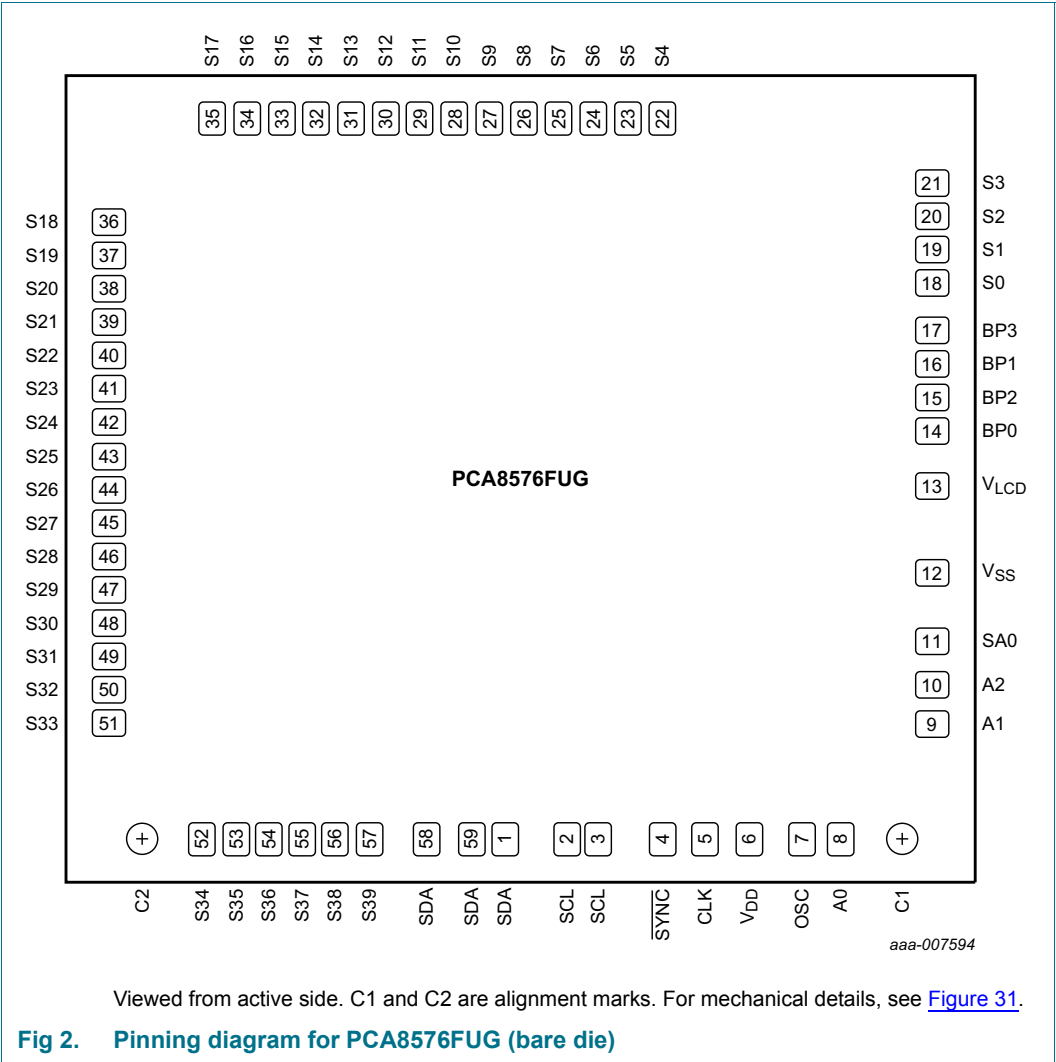

## 6.2 Pin description

**Table 4. Pin description**

*Input or input/output pins must always be at a defined level ( $V_{SS}$  or  $V_{DD}$ ) unless otherwise specified.*

| Symbol                   | Pin               | Description                                                               |
|--------------------------|-------------------|---------------------------------------------------------------------------|
| SDA                      | 1, 58, 59         | I <sup>2</sup> C-bus serial data input and output                         |
| SCL                      | 2, 3              | I <sup>2</sup> C-bus serial clock input                                   |
| CLK                      | 5                 | external clock input or output                                            |
| $V_{DD}$                 | 6                 | supply voltage                                                            |
| $\overline{\text{SYNC}}$ | 4                 | cascade synchronization input or output; if not used it must be left open |
| OSC                      | 7                 | internal oscillator enable input                                          |
| A0 to A2                 | 8 to 10           | subaddress inputs                                                         |
| SA0                      | 11                | I <sup>2</sup> C-bus address input; bit 0                                 |
| $V_{SS}$                 | 12 <sup>[1]</sup> | ground supply voltage                                                     |
| $V_{LCD}$                | 13                | LCD supply voltage                                                        |
| BP0, BP2, BP1, BP3       | 14 to 17          | LCD backplane outputs                                                     |
| S0 to S39                | 18 to 57          | LCD segment outputs                                                       |

[1] The substrate (rear side of the die) is connected to  $V_{SS}$  and should be electrically isolated.

## 7. Functional description

### 7.1 Commands of PCA8576F


The commands available to the PCA8576F are defined in [Table 5](#).

**Table 5. Definition of PCA8576F commands**

| Command           | Operation code |   |        |      |   |        |         |   | Reference                |
|-------------------|----------------|---|--------|------|---|--------|---------|---|--------------------------|
| Bit               | 7              | 6 | 5      | 4    | 3 | 2      | 1       | 0 |                          |
| mode-set          | C              | 1 | 0      | -[1] | E | B      | M[1:0]  |   | <a href="#">Table 7</a>  |
| load-data-pointer | C              | 0 | P[5:0] |      |   |        |         |   | <a href="#">Table 8</a>  |
| device-select     | C              | 1 | 1      | 0    | 0 | A[2:0] |         |   | <a href="#">Table 9</a>  |
| bank-select       | C              | 1 | 1      | 1    | 1 | 0      | I       | O | <a href="#">Table 10</a> |
| blink-select      | C              | 1 | 1      | 1    | 0 | AB     | BF[1:0] |   | <a href="#">Table 11</a> |

[1] Not used.

All available commands carry a continuation bit C in their most significant bit position as shown in [Figure 3](#).

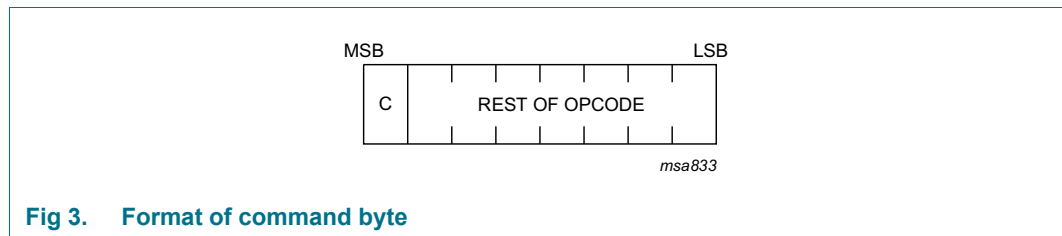

**Fig 3. Format of command byte**

When this bit is set logic 1, it indicates that the next byte of the transfer to arrive will also represent a command. If this bit is set logic 0, it indicates that the command byte is the last in the transfer. Further bytes will be regarded as display data (see [Table 6](#)).

**Table 6. C bit description**

| Bit | Symbol | Value | Description                                                                   |
|-----|--------|-------|-------------------------------------------------------------------------------|
| 7   | C      |       | <b>continue bit</b>                                                           |
|     |        | 0     | last control byte in the transfer; next byte will be regarded as display data |
|     |        | 1     | control bytes continue; next byte will be a command too                       |

#### 7.1.1 Command: mode-set

**Table 7. Mode-set command bit description**

| Bit  | Symbol | Value | Description                 |
|------|--------|-------|-----------------------------|
| 7    | C      | 0, 1  | see <a href="#">Table 6</a> |
| 6, 5 | -      | 10    | fixed value                 |
| 4    | -      | -     | unused                      |
| 3    | E      |       | <b>display status</b> [1]   |
|      |        | 0     | disabled (blank)[2]         |
|      |        | 1     | enabled                     |

**Table 7. Mode-set command bit description ...continued**

| Bit    | Symbol | Value | Description                                  |
|--------|--------|-------|----------------------------------------------|
| 2      | B      |       | <b>LCD bias configuration</b> <sup>[3]</sup> |
|        |        | 0     | $\frac{1}{3}$ bias                           |
|        |        | 1     | $\frac{1}{2}$ bias                           |
| 1 to 0 | M[1:0] |       | <b>LCD drive mode selection</b>              |
|        |        | 01    | static; BP0                                  |
|        |        | 10    | 1:2 multiplex; BP0, BP1                      |
|        |        | 11    | 1:3 multiplex; BP0, BP1, BP2                 |
|        |        | 00    | 1:4 multiplex; BP0, BP1, BP2, BP3            |

[1] The possibility to disable the display allows implementation of blinking under external control.

[2] The display is disabled by setting all backplane and segment outputs to  $V_{LCD}$ .

[3] Not applicable for static drive mode.

### 7.1.2 Command: load-data-pointer

**Table 8. Load-data-pointer command bit description**

See [Section 7.9.5](#).

| Bit    | Symbol | Value            | Description                                                                                               |
|--------|--------|------------------|-----------------------------------------------------------------------------------------------------------|
| 7      | C      | 0, 1             | see <a href="#">Table 6</a>                                                                               |
| 6      | -      | 0                | fixed value                                                                                               |
| 5 to 0 | P[5:0] | 000000 to 100111 | 6 bit binary value, 0 to 39; transferred to the data pointer to define one of forty display RAM addresses |

### 7.1.3 Command: device-select

**Table 9. Device-select command bit description**

See [Section 7.9.6](#).

| Bit    | Symbol | Value      | Description                                                                                                    |
|--------|--------|------------|----------------------------------------------------------------------------------------------------------------|
| 7      | C      | 0, 1       | see <a href="#">Table 6</a>                                                                                    |
| 6 to 3 | -      | 1100       | fixed value                                                                                                    |
| 2 to 0 | A[2:0] | 000 to 111 | 3 bit binary value, 0 to 7; transferred to the subaddress counter to define one of eight hardware subaddresses |

### 7.1.4 Command: bank-select

**Table 10. Bank-select command bit description**

See [Section 7.9.8.2](#) and [Section 7.9.8.3](#).

| Bit    | Symbol | Value | Description                                                    |                              |
|--------|--------|-------|----------------------------------------------------------------|------------------------------|
|        |        |       | Static                                                         | 1:2 multiplex <sup>[1]</sup> |
| 7      | C      | 0, 1  | see <a href="#">Table 6</a>                                    |                              |
| 6 to 2 | -      | 11110 | fixed value                                                    |                              |
| 1      | I      |       | <b>input bank selection</b> ; storage of arriving display data |                              |
|        |        | 0     | RAM row 0                                                      | RAM rows 0 and 1             |
|        |        | 1     | RAM row 2                                                      | RAM rows 2 and 3             |
| 0      | O      |       | <b>output bank selection</b> ; retrieval of LCD display data   |                              |
|        |        | 0     | RAM row 0                                                      | RAM rows 0 and 1             |
|        |        | 1     | RAM row 2                                                      | RAM rows 2 and 3             |

[1] The bank-select command has no effect in 1:3 and 1:4 multiplex drive modes.

### 7.1.5 Command: blink-select

**Table 11. Blink-select command bit description**

See [Section 7.10](#).

| Bit    | Symbol  | Value | Description                                |
|--------|---------|-------|--------------------------------------------|
| 7      | C       | 0, 1  | see <a href="#">Table 6</a>                |
| 6 to 3 | -       | 1110  | fixed value                                |
| 2      | AB      |       | <b>blink mode selection</b>                |
|        |         | 0     | normal blinking <sup>[1]</sup>             |
|        |         | 1     | alternate RAM bank blinking <sup>[2]</sup> |
| 1 to 0 | BF[1:0] |       | <b>blink frequency selection</b>           |
|        |         | 00    | off                                        |
|        |         | 01    | 1                                          |
|        |         | 10    | 2                                          |
|        |         | 11    | 3                                          |

[1] Normal blinking is assumed when the LCD multiplex drive modes 1:3 or 1:4 are selected.

[2] Alternate RAM bank blinking does not apply in 1:3 and 1:4 multiplex drive modes.

## 7.2 Initialization

At power-on the status of the I<sup>2</sup>C-bus and the registers of the PCA8576F is undefined. Therefore the PCA8576F should be initialized as quickly as possible after power-on to ensure a proper bus communication and to avoid display artifacts. The following instructions should be accomplished for initialization:

- I<sup>2</sup>C-bus initialization (only necessary if no communication with another I<sup>2</sup>C device on the bus has already taken place). For information about the I<sup>2</sup>C-bus, see [Section 8](#).
  - generating a START condition
  - sending 0h and ignoring the acknowledge
  - generating a STOP condition

- Mode-set command (see [Table 7](#)), setting
  - bit E = 0
  - bit B to the required LCD bias configuration
  - bits M[1:0] to the required LCD drive mode
- Load-data-pointer command (see [Table 8](#)), setting
  - bits P[5:0] to 0h (or any other required address)
- Device-select command (see [Table 9](#)), setting
  - bits A[2:0] to the required hardware subaddress (for example, 0h)
- Bank-select command (see [Table 10](#)), setting
  - bit I to 0
  - bit O to 0
- Blink-select command (see [Table 11](#)), setting
  - bit AB to 0 or 1
  - bits BF[1:0] to 00 (or to a desired blinking mode)
- writing meaningful information (for example, a logo) into the display RAM

After the initialization, the display can be switched on by setting bit E = 1 with the mode-set command.

### 7.3 Possible display configurations

The possible display configurations of the PCA8576F depend on the number of active backplane outputs required. A selection of display configurations is shown in [Table 12](#). All of these configurations can be implemented in the typical system shown in [Figure 5](#).

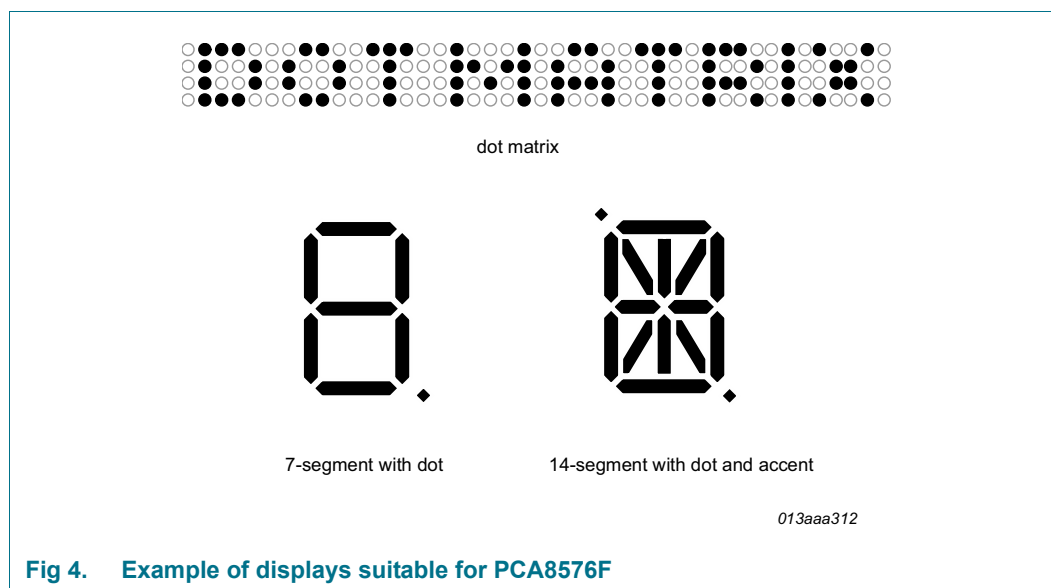


Table 12. Selection of possible display configurations

| Number of Backplanes | Icons | Digits/Characters        |                           | Dot matrix/Elements |
|----------------------|-------|--------------------------|---------------------------|---------------------|
|                      |       | 7-segment <sup>[1]</sup> | 14-segment <sup>[2]</sup> |                     |
| 4                    | 160   | 20                       | 10                        | 160 (4 × 40)        |
| 3                    | 120   | 15                       | 7                         | 120 (3 × 40)        |
| 2                    | 80    | 10                       | 5                         | 80 (2 × 40)         |
| 1                    | 40    | 5                        | 2                         | 40 (1 × 40)         |

- [1] 7 segment display has 8 elements including the decimal point.  
[2] 14 segment display has 16 elements including decimal point and accent dot.

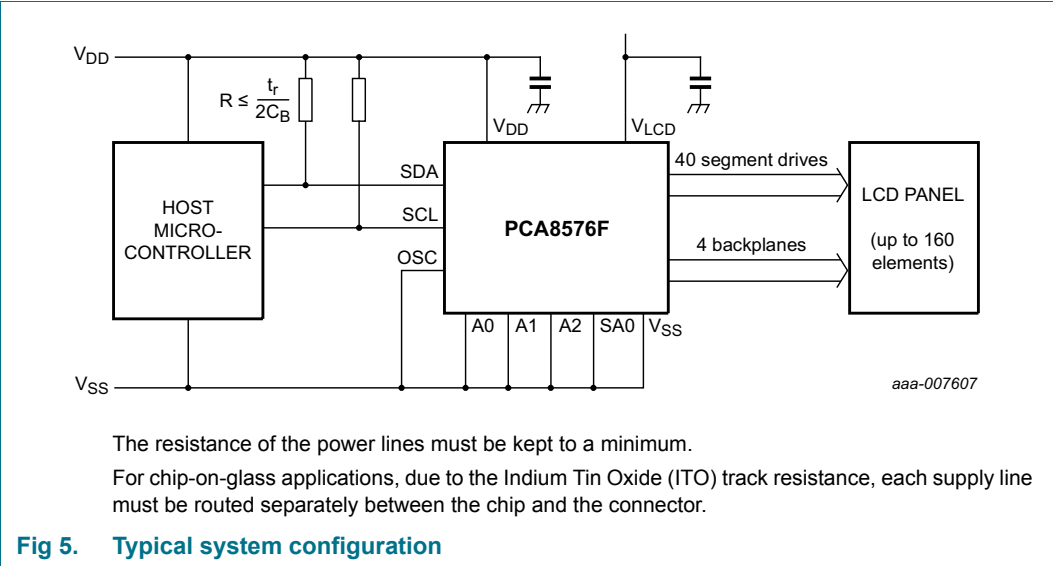


Fig 5. Typical system configuration

The host microcontroller maintains the 2-line I<sup>2</sup>C-bus communication channel with the PCA8576F. The internal oscillator is enabled by connecting pin OSC to pin V<sub>SS</sub>. The appropriate biasing voltages for the multiplexed LCD waveforms are generated internally. The only other connections required to complete the system are to the power supplies (V<sub>DD</sub>, V<sub>SS</sub>, and V<sub>LCD</sub>) and the LCD panel chosen for the application.

7.4 LCD voltage

7.4.1 LCD bias generator

Fractional LCD biasing voltages are obtained from an internal voltage divider of three impedances connected between pins V<sub>LCD</sub> and V<sub>SS</sub>. The center impedance is bypassed by switch if the 1/2 bias voltage level for the 1:2 multiplex drive mode configuration is selected. The LCD voltage can be temperature compensated externally using the supply to pin V<sub>LCD</sub>.

7.4.2 LCD voltage selector

The LCD voltage selector coordinates the multiplexing of the LCD in accordance with the selected LCD drive configuration. The operation of the voltage selector is controlled by the mode-set command from the command decoder. The biasing configurations that apply to

the preferred modes of operation, together with the biasing characteristics as functions of  $V_{LCD}$  and the resulting discrimination ratios (D) are given in [Table 13](#).

Discrimination is a term which is defined as the ratio of the on and off RMS voltage across a segment. It can be thought of as a measurement of contrast.

**Table 13. Biasing characteristics**

| LCD drive mode | Number of: |        | LCD bias configuration | $\frac{V_{off(RMS)}}{V_{LCD}}$ | $\frac{V_{on(RMS)}}{V_{LCD}}$ | $D = \frac{V_{on(RMS)}}{V_{off(RMS)}}$ |
|----------------|------------|--------|------------------------|--------------------------------|-------------------------------|----------------------------------------|
|                | Backplanes | Levels |                        |                                |                               |                                        |
| static         | 1          | 2      | static                 | 0                              | 1                             | $\infty$                               |
| 1:2 multiplex  | 2          | 3      | $\frac{1}{2}$          | 0.354                          | 0.791                         | 2.236                                  |
| 1:2 multiplex  | 2          | 4      | $\frac{1}{3}$          | 0.333                          | 0.745                         | 2.236                                  |
| 1:3 multiplex  | 3          | 4      | $\frac{1}{3}$          | 0.333                          | 0.638                         | 1.915                                  |
| 1:4 multiplex  | 4          | 4      | $\frac{1}{3}$          | 0.333                          | 0.577                         | 1.732                                  |

A practical value for  $V_{LCD}$  is determined by equating  $V_{off(RMS)}$  with a defined LCD threshold voltage ( $V_{th(off)}$ ), typically when the LCD exhibits approximately 10 % contrast. In the static drive mode a suitable choice is  $V_{LCD} > 3V_{th(off)}$ .

Multiplex drive modes of 1:3 and 1:4 with  $\frac{1}{2}$  bias are possible but the discrimination and hence the contrast ratios are smaller.

Bias is calculated by  $\frac{1}{1+a}$ , where the values for a are

a = 1 for  $\frac{1}{2}$  bias

a = 2 for  $\frac{1}{3}$  bias

The RMS on-state voltage ( $V_{on(RMS)}$ ) for the LCD is calculated with [Equation 1](#):

$$V_{on(RMS)} = V_{LCD} \sqrt{\frac{a^2 + 2a + n}{n \times (1 + a)^2}} \quad (1)$$

where the values for n are

n = 1 for static drive mode

n = 2 for 1:2 multiplex drive mode

n = 3 for 1:3 multiplex drive mode

n = 4 for 1:4 multiplex drive mode

The RMS off-state voltage ( $V_{off(RMS)}$ ) for the LCD is calculated with [Equation 2](#):

$$V_{off(RMS)} = V_{LCD} \sqrt{\frac{a^2 - 2a + n}{n \times (1 + a)^2}} \quad (2)$$

Discrimination is the ratio of  $V_{on(RMS)}$  to  $V_{off(RMS)}$  and is determined from [Equation 3](#):

$$D = \frac{V_{on(RMS)}}{V_{off(RMS)}} = \sqrt{\frac{a^2 + 2a + n}{a^2 - 2a + n}} \quad (3)$$

Using [Equation 3](#), the discrimination for an LCD drive mode of 1:3 multiplex with  $\frac{1}{2}$  bias is  $\sqrt{3} = 1.732$  and the discrimination for an LCD drive mode of 1:4 multiplex with  $\frac{1}{2}$  bias is  $\frac{\sqrt{21}}{3} = 1.528$ .

The advantage of these LCD drive modes is a reduction of the LCD full scale voltage  $V_{LCD}$  as follows:

- 1:3 multiplex ( $\frac{1}{2}$  bias):  $V_{LCD} = \sqrt{6} \times V_{off(RMS)} = 2.449 V_{off(RMS)}$
- 1:4 multiplex ( $\frac{1}{2}$  bias):  $V_{LCD} = \left[ \frac{(4 \times \sqrt{3})}{3} \right] = 2.309 V_{off(RMS)}$

These compare with  $V_{LCD} = 3 V_{off(RMS)}$  when  $\frac{1}{3}$  bias is used.

$V_{LCD}$  is sometimes referred as the LCD operating voltage.

#### 7.4.2.1 Electro-optical performance

Suitable values for  $V_{on(RMS)}$  and  $V_{off(RMS)}$  are dependent on the LCD liquid used. The RMS voltage, at which a pixel will be switched on or off, determine the transmissibility of the pixel.

For any given liquid, there are two threshold values defined. One point is at 10 % relative transmission (at  $V_{th(off)}$ ) and the other at 90 % relative transmission (at  $V_{th(on)}$ ), see [Figure 6](#). For a good contrast performance, the following rules should be followed:

$$V_{on(RMS)} \geq V_{th(on)} \quad (4)$$

$$V_{off(RMS)} \leq V_{th(off)} \quad (5)$$

$V_{on(RMS)}$  and  $V_{off(RMS)}$  are properties of the display driver and are affected by the selection of a, n (see [Equation 1](#) to [Equation 3](#)) and the  $V_{LCD}$  voltage.

$V_{th(off)}$  and  $V_{th(on)}$  are properties of the LCD liquid and can be provided by the module manufacturer.  $V_{th(off)}$  is sometimes named  $V_{th}$ .  $V_{th(on)}$  is sometimes named saturation voltage  $V_{sat}$ .

It is important to match the module properties to those of the driver in order to achieve optimum performance.


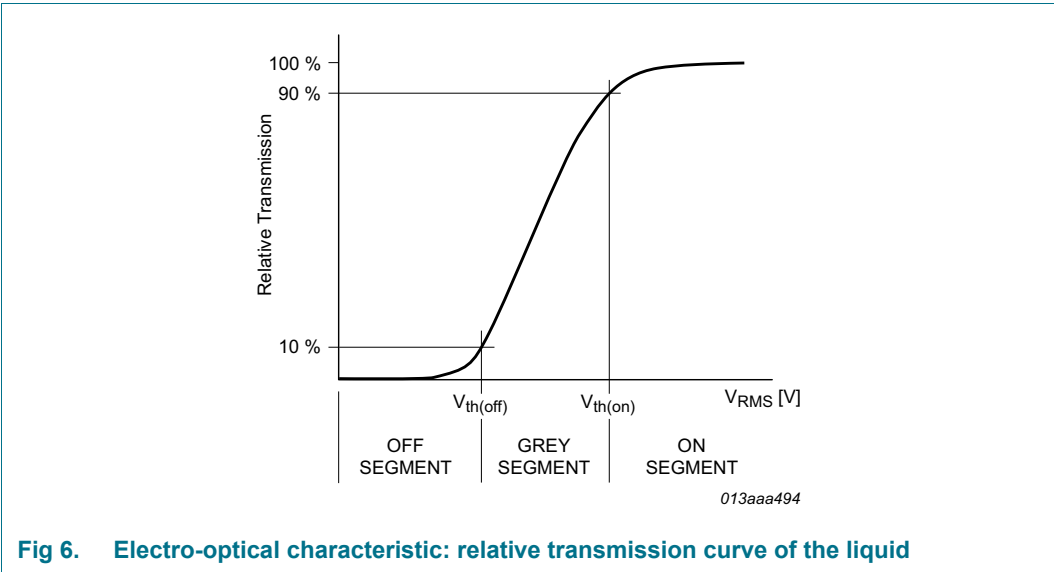


Fig 6. Electro-optical characteristic: relative transmission curve of the liquid

### 7.4.3 LCD drive mode waveforms

#### 7.4.3.1 Static drive mode


The static LCD drive mode is used when a single backplane is provided in the LCD. The backplane (BP<sub>n</sub>) and segment drive (S<sub>n</sub>) waveforms for this mode are shown in [Figure 7](#).

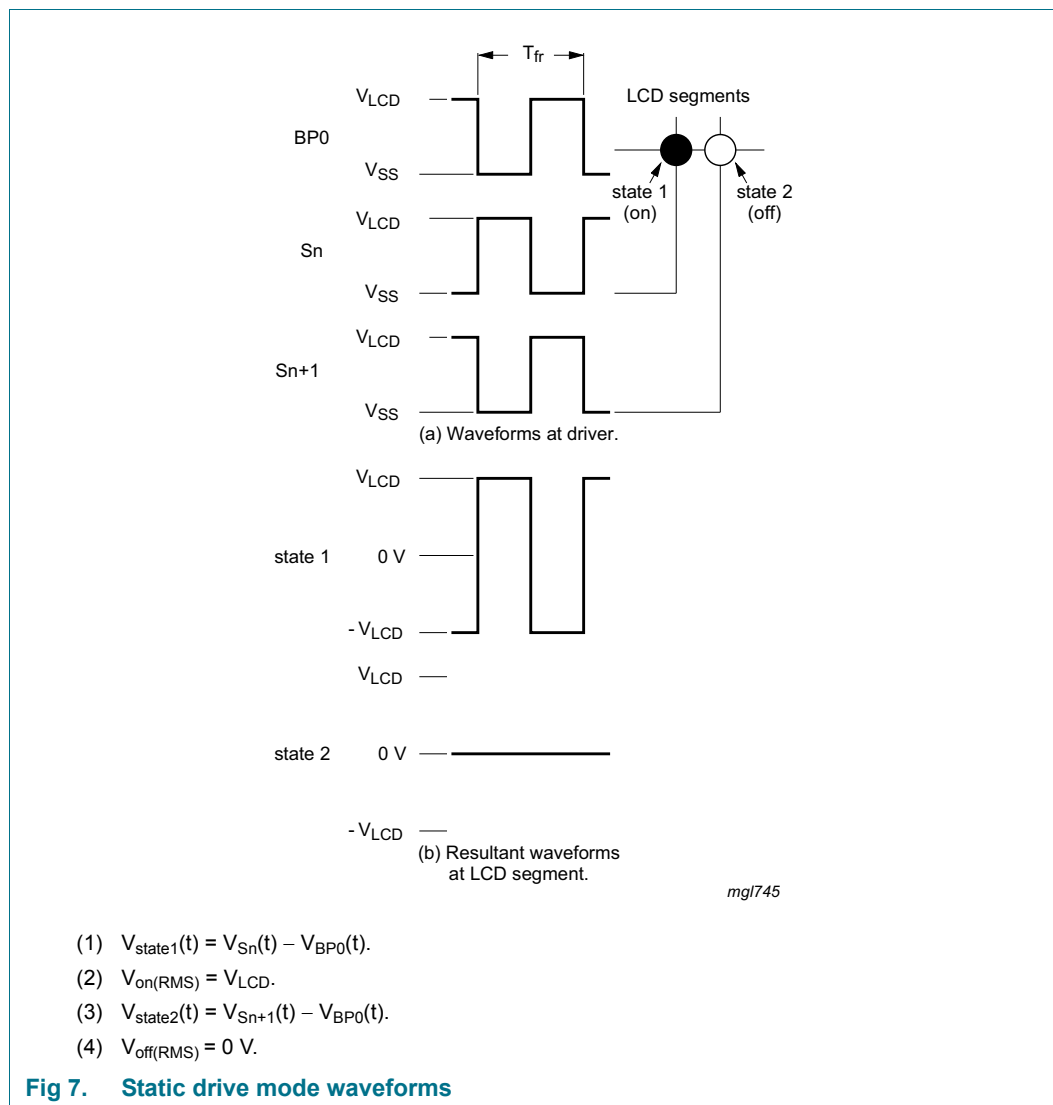


**Fig 7. Static drive mode waveforms**

### 7.4.3.2 1:2 Multiplex drive mode

The 1:2 multiplex drive mode is used when two backplanes are provided in the LCD. This mode allows fractional LCD bias voltages of  $\frac{1}{2}$  bias or  $\frac{1}{3}$  bias as shown in [Figure 8](#) and [Figure 9](#).

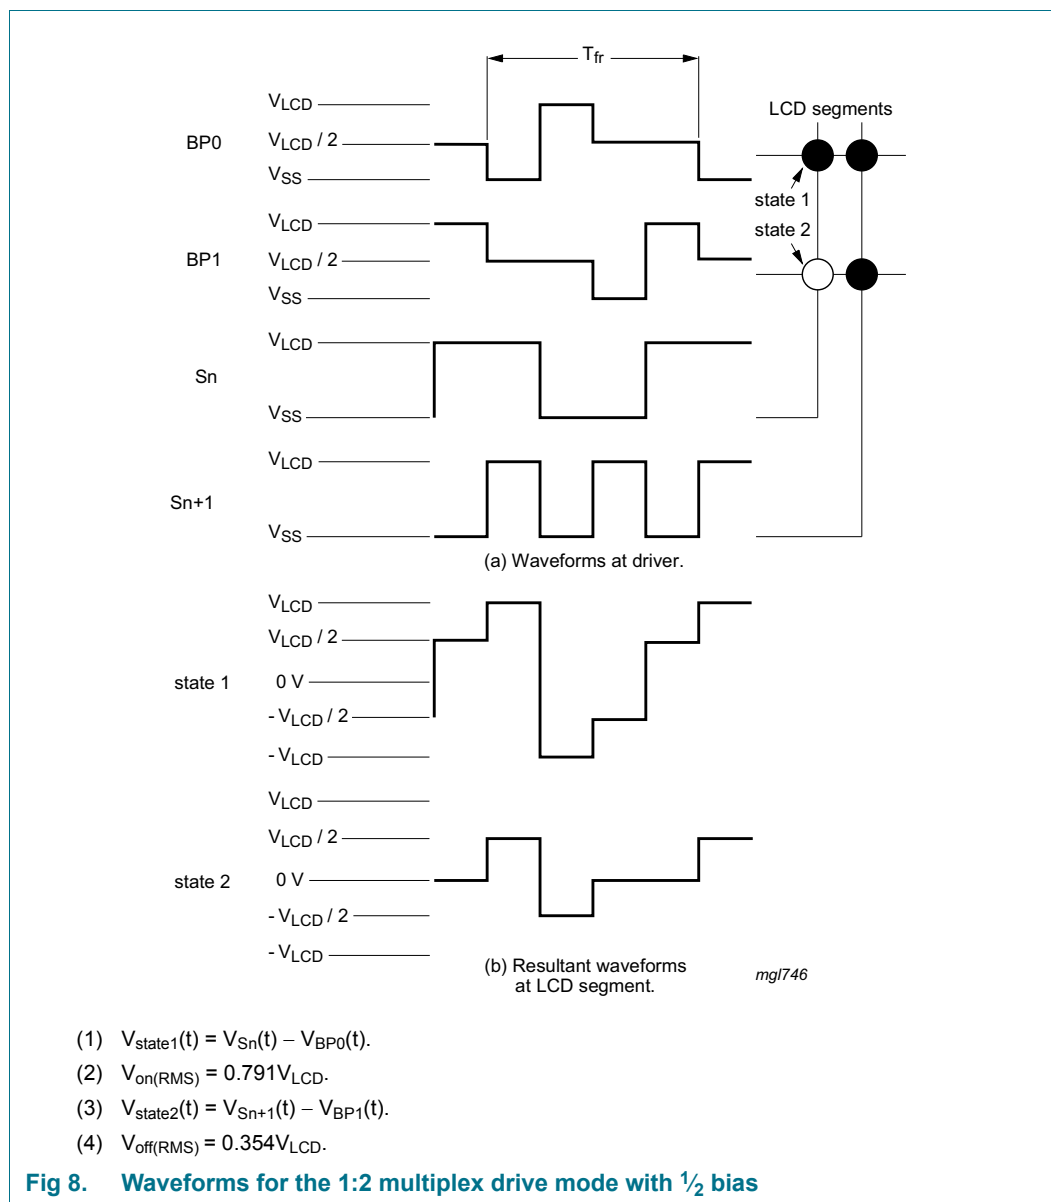


**Fig 8. Waveforms for the 1:2 multiplex drive mode with  $\frac{1}{2}$  bias**

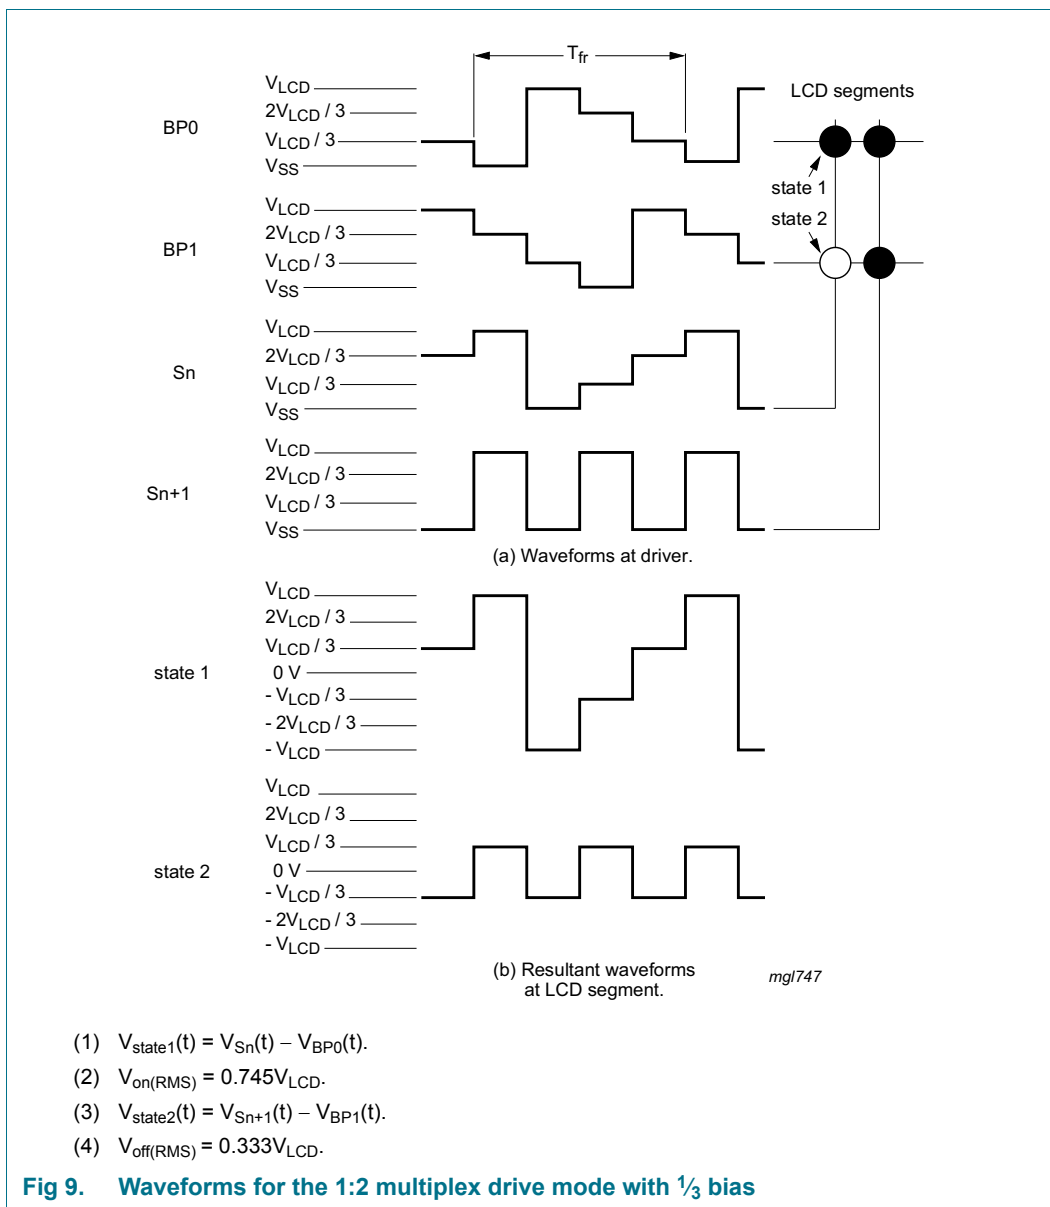


### 7.4.3.3 1:3 Multiplex drive mode

When three backplanes are provided in the LCD, the 1:3 multiplex drive mode applies (see [Figure 10](#)).

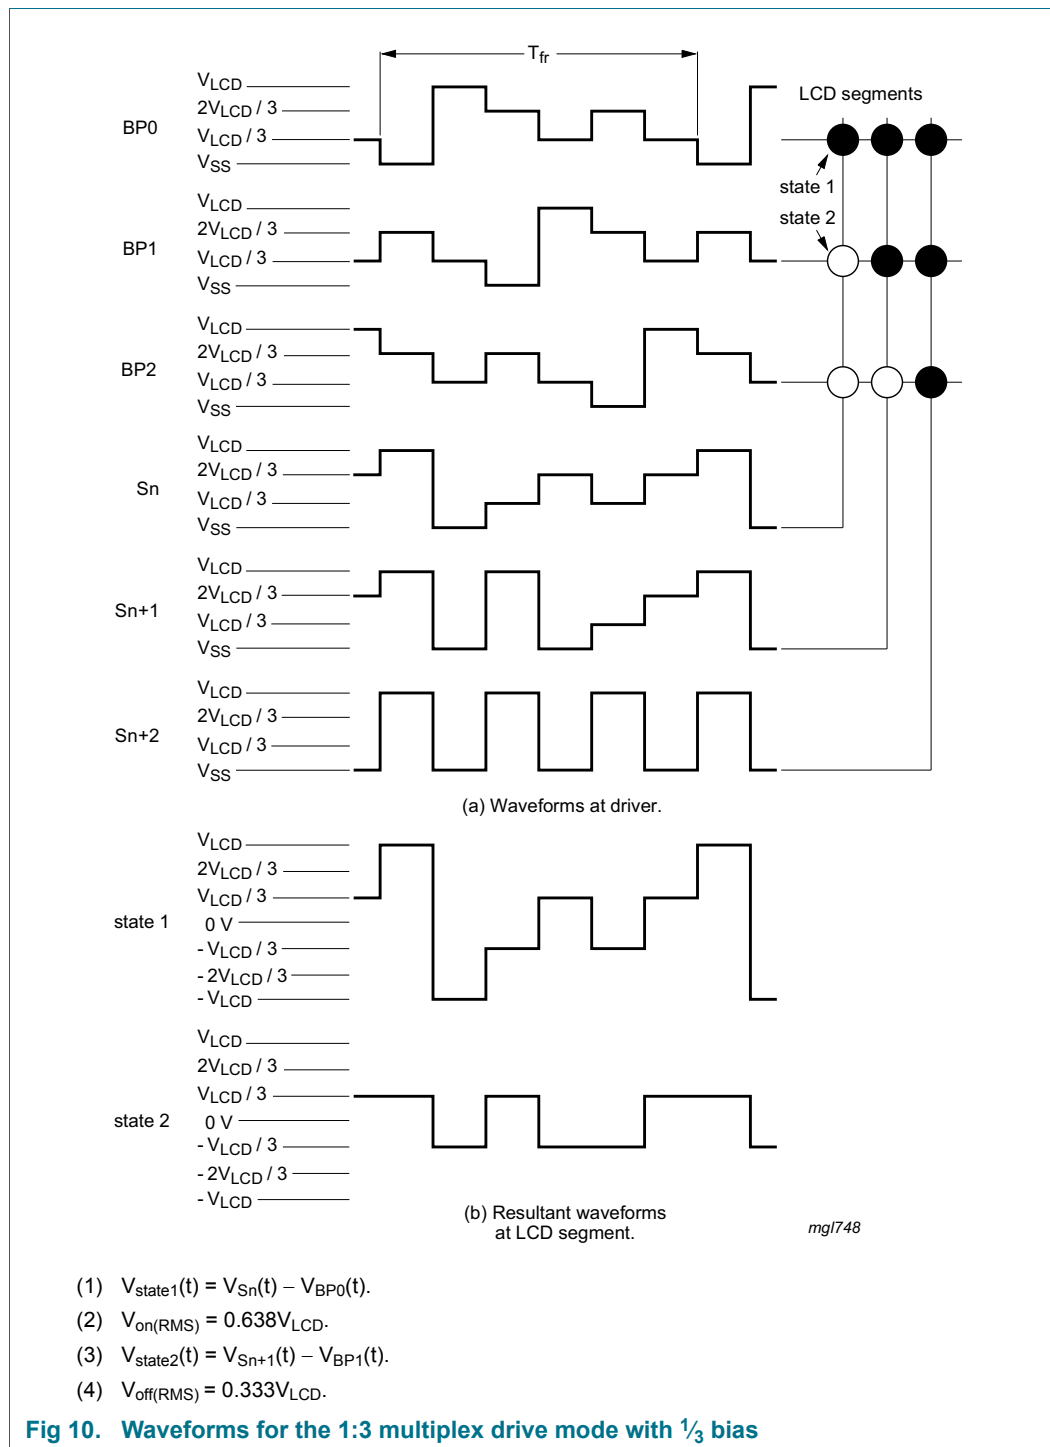

#### 7.4.3.4 1:4 Multiplex drive mode

When four backplanes are provided in the LCD, the 1:4 multiplex drive mode applies (see [Figure 11](#)).

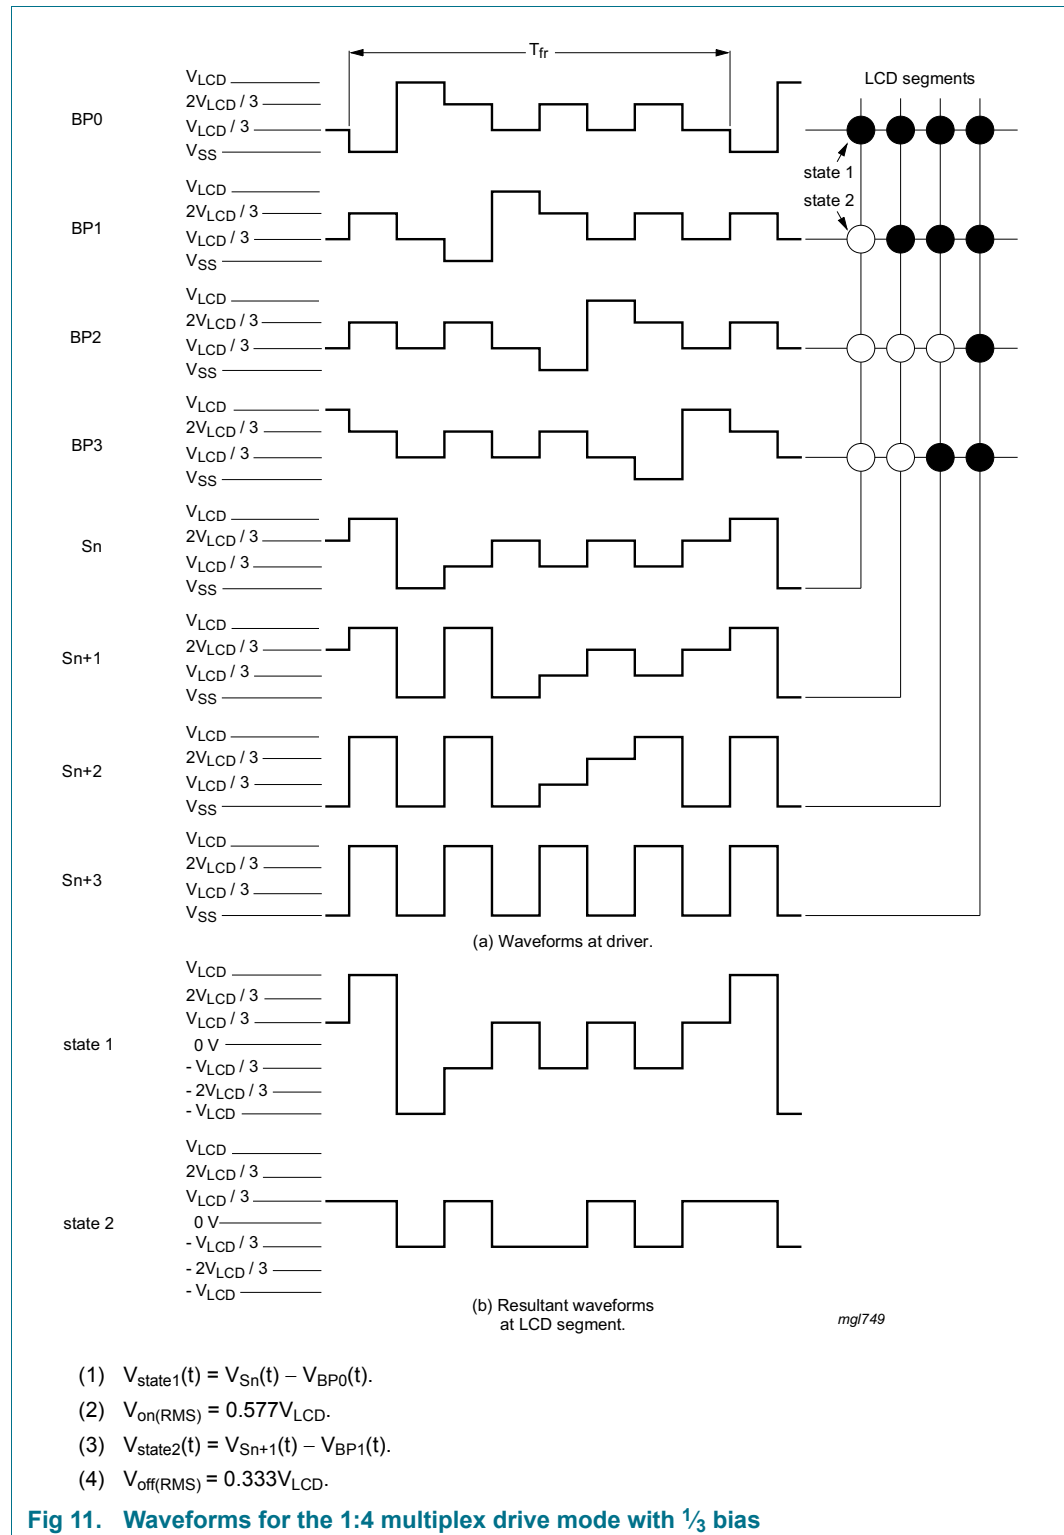

**Fig 11. Waveforms for the 1:4 multiplex drive mode with  $\frac{1}{3}$  bias**

## 7.5 Oscillator

### 7.5.1 Internal clock

The internal logic of the PCA8576F and its LCD drive signals are timed either by its internal oscillator or by an external clock. The internal oscillator is enabled by connecting pin OSC to pin V<sub>SS</sub>. If the internal oscillator is used, the output from pin CLK can be used as the clock signal for several PCA8576Fs in the system that are connected in cascade.

### 7.5.2 External clock

Pin CLK is enabled as an external clock input by connecting pin OSC to V<sub>DD</sub>. The LCD frame signal frequency is determined by the clock frequency ( $f_{clk}$ ).

**Remark:** A clock signal must always be supplied to the device; removing the clock may freeze the LCD in a DC state, which is not suitable for the liquid crystal.

### 7.5.3 Timing and frame frequency

The PCA8576F timing controls the internal data flow of the device. This includes the transfer of display data from the display RAM to the display segment outputs. In cascaded applications, the correct timing relationship between each PCA8576F in the system is maintained by the synchronization signal at pin SYNC. The timing also generates the LCD frame signal whose frequency is derived from the clock frequency. The frame signal frequency is a fixed division of the clock frequency from either the internal or an external

$$\text{clock: } f_{fr} = \frac{f_{clk}}{24}.$$

## 7.6 Segment outputs

The LCD drive section includes 40 segment outputs S0 to S39 which should be connected directly to the LCD. The segment output signals are generated in accordance with the multiplexed backplane signals and with data residing in the display latch. When less than 40 segment outputs are required, the unused segment outputs should be left open-circuit.

## 7.7 Backplane outputs

The LCD drive section includes four backplane outputs BP0 to BP3 which must be connected directly to the LCD. The backplane output signals are generated in accordance with the selected LCD drive mode. If less than four backplane outputs are required, the unused outputs can be left open-circuit.

[Table 14](#) describes which outputs are active for each of the multiplex drive modes and what signal is generated.

**Table 14. Mapping of output pins and corresponding output signals with respect to the multiplex driving mode**

| Multiplex drive mode | Output pin |                    |                    |                    |
|----------------------|------------|--------------------|--------------------|--------------------|
|                      | BP0        | BP1                | BP2                | BP3                |
|                      | Signal     |                    |                    |                    |
| 1:4                  | BP0        | BP1                | BP2                | BP3                |
| 1:3                  | BP0        | BP1                | BP2                | BP1 <sup>[1]</sup> |
| 1:2                  | BP0        | BP1                | BP0 <sup>[1]</sup> | BP1 <sup>[1]</sup> |
| static               | BP0        | BP0 <sup>[1]</sup> | BP0 <sup>[1]</sup> | BP0 <sup>[1]</sup> |

[1] These pins may optionally be connected to the display to improve drive strength. Connect only with the corresponding output pin carrying the same signal. If not required, they can be left open-circuit.

## 7.8 Display register

The display latch holds the display data while the corresponding multiplex signals are generated.

## 7.9 Display RAM


The display RAM is a static  $40 \times 4$ -bit RAM which stores LCD data.

There is a one-to-one correspondence between

- the bits in the RAM bitmap and the LCD elements
- the RAM columns and the segment outputs
- the RAM rows and the backplane outputs.

A logic 1 in the RAM bitmap indicates the on-state of the corresponding LCD element; similarly, a logic 0 indicates the off-state.

The display RAM bit map, [Figure 12](#), shows the rows 0 to 3 which correspond with the backplane outputs BP0 to BP3, and the columns 0 to 39 which correspond with the segment outputs S0 to S39. In multiplexed LCD applications the segment data of the first, second, third and fourth row of the display RAM are time-multiplexed with BP0, BP1, BP2, and BP3 respectively.

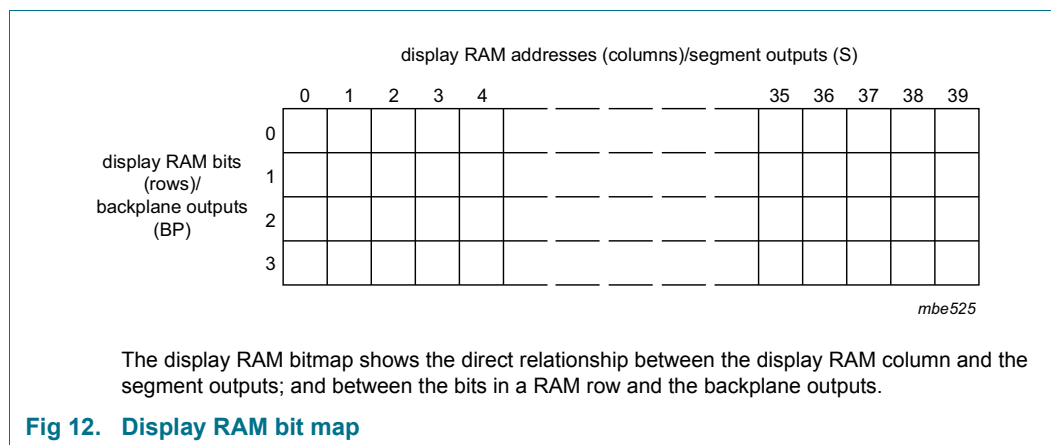

| drive mode                                   | LCD segments | LCD backplanes | display RAM filling order                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | transmitted display byte |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
|----------------------------------------------|--------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------|-------|----------------------------------------------|----------------------------------------------|----------------------------------------------|-------|-------|-------|----------------------------------------------|----|---|---|---|----|----|---------------------------------------------------------------------------------------------------------------------------------|---|----|---|----|---------------------------------------------------------------------------------------------------------------------------------|---|----|---|---|---------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|----|
| static                                       |              |                | <p>columns<br/>display RAM address/segment outputs (s)<br/>byte1</p> <table><tr><th></th><th>n</th><th>n + 1</th><th>n + 2</th><th>n + 3</th><th>n + 4</th><th>n + 5</th><th>n + 6</th><th>n + 7</th></tr><tr><th>rows display RAM rows/backplane outputs (BP)</th><td>0</td><td>c</td><td>b</td><td>a</td><td>f</td><td>g</td><td>e</td><td>d</td><td>DP</td></tr><tr><td>1</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td></tr><tr><td>2</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td></tr><tr><td>3</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td><td>x</td></tr></table> |                          | n     | n + 1 | n + 2                                        | n + 3                                        | n + 4                                        | n + 5 | n + 6 | n + 7 | rows display RAM rows/backplane outputs (BP) | 0  | c | b | a | f  | g  | e                                                                                                                               | d | DP | 1 | x  | x                                                                                                                               | x | x  | x | x | x                                                                                                                               | x | x | 2 | x | x | x | x | x  | x | x | x | x | 3 | x | x | x | x | x | x | x | x | x | <p>MSB</p> <p>LSB</p> <table><tr><td>c</td><td>b</td><td>a</td><td>f</td><td>g</td><td>e</td><td>d</td><td>DP</td></tr></table> | c | b | a | f | g | e | d | DP |
|                                              | n            | n + 1          | n + 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | n + 3                    | n + 4 | n + 5 | n + 6                                        | n + 7                                        |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| rows display RAM rows/backplane outputs (BP) | 0            | c              | b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | a                        | f     | g     | e                                            | d                                            | DP                                           |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1                                            | x            | x              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | x                        | x     | x     | x                                            | x                                            | x                                            |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 2                                            | x            | x              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | x                        | x     | x     | x                                            | x                                            | x                                            |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 3                                            | x            | x              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | x                        | x     | x     | x                                            | x                                            | x                                            |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| c                                            | b            | a              | f                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | g                        | e     | d     | DP                                           |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1:2<br>multiplex                             |              |                | <p>columns<br/>display RAM address/segment outputs (s)<br/>byte1</p> <table><tr><th></th><th>n</th><th>n + 1</th><th>n + 2</th><th>n + 3</th></tr><tr><th>rows display RAM rows/backplane outputs (BP)</th><td>0</td><td>a</td><td>f</td><td>e</td><td>d</td></tr><tr><td>1</td><td>b</td><td>g</td><td>c</td><td>DP</td></tr><tr><td>2</td><td>x</td><td>x</td><td>x</td><td>x</td></tr><tr><td>3</td><td>x</td><td>x</td><td>x</td><td>x</td></tr></table>                                                                                                                                                                                                                                                       |                          | n     | n + 1 | n + 2                                        | n + 3                                        | rows display RAM rows/backplane outputs (BP) | 0     | a     | f     | e                                            | d  | 1 | b | g | c  | DP | 2                                                                                                                               | x | x  | x | x  | 3                                                                                                                               | x | x  | x | x | <p>MSB</p> <p>LSB</p> <table><tr><td>a</td><td>b</td><td>f</td><td>g</td><td>e</td><td>c</td><td>d</td><td>DP</td></tr></table> | a | b | f | g | e | c | d | DP |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
|                                              | n            | n + 1          | n + 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | n + 3                    |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| rows display RAM rows/backplane outputs (BP) | 0            | a              | f                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | e                        | d     |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1                                            | b            | g              | c                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | DP                       |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 2                                            | x            | x              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | x                        |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 3                                            | x            | x              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | x                        |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| a                                            | b            | f              | g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | e                        | c     | d     | DP                                           |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1:3<br>multiplex                             |              |                | <p>columns<br/>display RAM address/segment outputs (s)<br/>byte1</p> <table><tr><th></th><th>n</th><th>n + 1</th><th>n + 2</th></tr><tr><th>rows display RAM rows/backplane outputs (BP)</th><td>0</td><td>b</td><td>a</td><td>f</td></tr><tr><td>1</td><td>DP</td><td>d</td><td>e</td></tr><tr><td>2</td><td>c</td><td>g</td><td>x</td></tr><tr><td>3</td><td>x</td><td>x</td><td>x</td></tr></table>                                                                                                                                                                                                                                                                                                             |                          | n     | n + 1 | n + 2                                        | rows display RAM rows/backplane outputs (BP) | 0                                            | b     | a     | f     | 1                                            | DP | d | e | 2 | c  | g  | x                                                                                                                               | 3 | x  | x | x  | <p>MSB</p> <p>LSB</p> <table><tr><td>b</td><td>DP</td><td>c</td><td>a</td><td>d</td><td>g</td><td>f</td><td>e</td></tr></table> | b | DP | c | a | d                                                                                                                               | g | f | e |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
|                                              | n            | n + 1          | n + 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| rows display RAM rows/backplane outputs (BP) | 0            | b              | a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | f                        |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1                                            | DP           | d              | e                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 2                                            | c            | g              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 3                                            | x            | x              | x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| b                                            | DP           | c              | a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | d                        | g     | f     | e                                            |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1:4<br>multiplex                             |              |                | <p>columns<br/>display RAM address/segment outputs (s)<br/>byte1</p> <table><tr><th></th><th>n</th><th>n + 1</th></tr><tr><th>rows display RAM rows/backplane outputs (BP)</th><td>0</td><td>a</td><td>f</td></tr><tr><td>1</td><td>c</td><td>e</td></tr><tr><td>2</td><td>b</td><td>g</td></tr><tr><td>3</td><td>DP</td><td>d</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                   |                          | n     | n + 1 | rows display RAM rows/backplane outputs (BP) | 0                                            | a                                            | f     | 1     | c     | e                                            | 2  | b | g | 3 | DP | d  | <p>MSB</p> <p>LSB</p> <table><tr><td>a</td><td>c</td><td>b</td><td>DP</td><td>f</td><td>e</td><td>g</td><td>d</td></tr></table> | a | c  | b | DP | f                                                                                                                               | e | g  | d |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
|                                              | n            | n + 1          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| rows display RAM rows/backplane outputs (BP) | 0            | a              | f                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 1                                            | c            | e              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 2                                            | b            | g              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| 3                                            | DP           | d              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |       |       |                                              |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |
| a                                            | c            | b              | DP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | f                        | e     | g     | d                                            |                                              |                                              |       |       |       |                                              |    |   |   |   |    |    |                                                                                                                                 |   |    |   |    |                                                                                                                                 |   |    |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                                                                                                                 |   |   |   |   |   |   |   |    |

001aaj646


x = data bit unchanged.

Fig 13. Relationship between LCD layout, drive mode, display RAM filling order and display data transmitted over the I<sup>2</sup>C-bus

When display data is transmitted to the PCA8576F, the received display bytes are stored in the display RAM in accordance with the selected LCD drive mode. The data is stored as it arrives and depending on the current multiplex drive mode the bits are stored singularly, in pairs, triples, or quadruples. To illustrate the filling order, an example of a 7-segment display showing all drive modes is given in [Figure 13](#); the RAM filling organization depicted applies equally to other LCD types, see [Section 7.9.1](#) to [Section 7.9.4](#).


7.9.1 RAM filling in static drive mode

In the static drive mode the eight transmitted data bits are placed in eight successive display RAM columns in row 0 (see [Figure 14](#)).

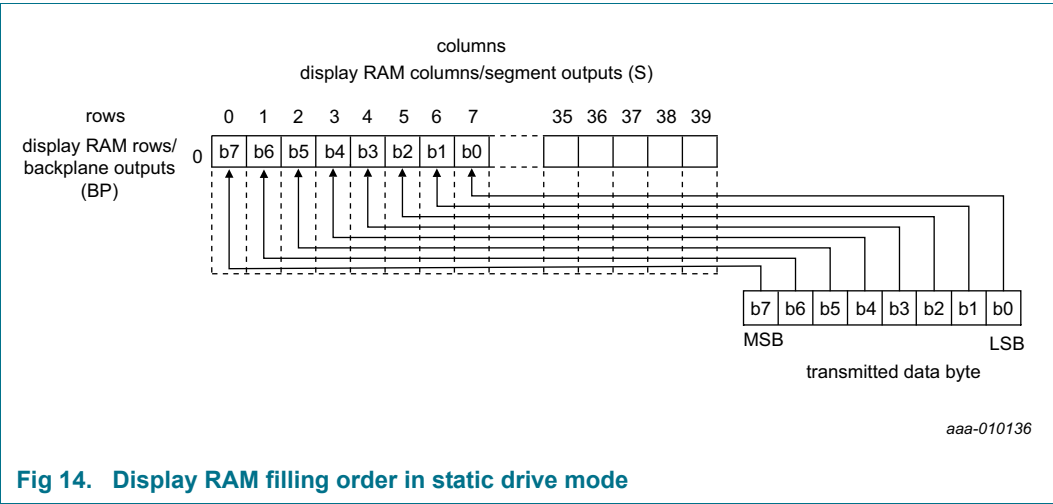

7.9.2 RAM filling in 1:2 multiplex drive mode

In the 1:2 multiplex drive mode the eight transmitted data bits are placed in four successive display RAM columns of two rows (see [Figure 15](#)).

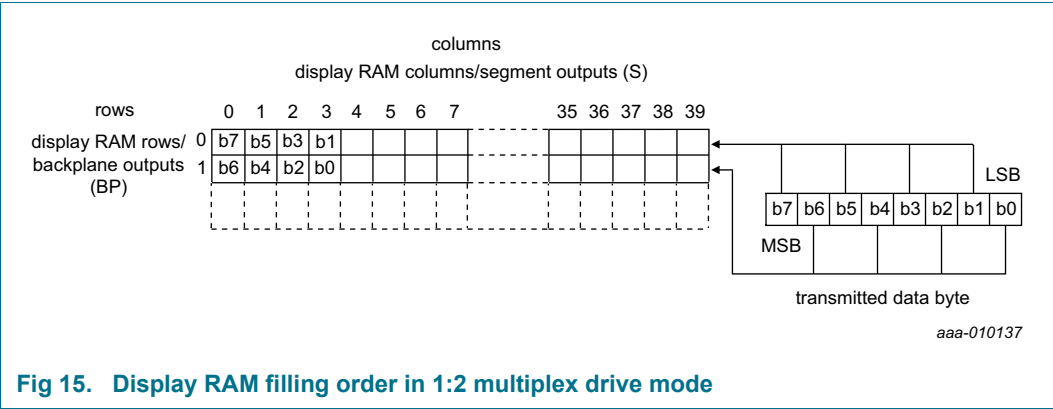

### 7.9.3 RAM filling in 1:3 multiplex drive mode

In 1:3 multiplex drive mode, the RAM is written as shown in [Table 15](#) (see [Figure 13](#) as well).

**Table 15. Standard RAM filling in 1:3 multiplex drive mode**

Assumption: BP2/S2, BP2/S5, BP2/S8 etc. **are not connected** to any elements on the display.

| Display RAM bits (rows)/backplane outputs (BPn) | Display RAM addresses (columns)/segment outputs (Sn) |    |    |    |    |    |    |    |    |    |   |
|-------------------------------------------------|------------------------------------------------------|----|----|----|----|----|----|----|----|----|---|
|                                                 | 0                                                    | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | : |
| 0                                               | a7                                                   | a4 | a1 | b7 | b4 | b1 | c7 | c4 | c1 | d7 | : |
| 1                                               | a6                                                   | a3 | a0 | b6 | b3 | b0 | c6 | c3 | c0 | d6 | : |
| 2                                               | a5                                                   | a2 | -  | b5 | b2 | -  | c5 | c2 | -  | d5 | : |
| 3                                               | -                                                    | -  | -  | -  | -  | -  | -  | -  | -  | -  | : |

If the bit at position BP2/S2 would be written by a second byte transmitted, then the mapping of the segment bits would change as illustrated in [Table 16](#).

**Table 16. Entire RAM filling by rewriting in 1:3 multiplex drive mode**

Assumption: BP2/S2, BP2/S5, BP2/S8 etc. **are connected** to elements on the display.

| Display RAM bits (rows)/backplane outputs (BPn) | Display RAM addresses (columns)/segment outputs (Sn) |    |       |    |       |    |       |    |       |    |   |
|-------------------------------------------------|------------------------------------------------------|----|-------|----|-------|----|-------|----|-------|----|---|
|                                                 | 0                                                    | 1  | 2     | 3  | 4     | 5  | 6     | 7  | 8     | 9  | : |
| 0                                               | a7                                                   | a4 | a1/b7 | b4 | b1/c7 | c4 | c1/d7 | d4 | d1/e7 | e4 | : |
| 1                                               | a6                                                   | a3 | a0/b6 | b3 | b0/c6 | c3 | c0/d6 | d3 | d0/e6 | e3 | : |
| 2                                               | a5                                                   | a2 | b5    | b2 | c5    | c2 | d5    | d2 | e5    | e2 | : |
| 3                                               | -                                                    | -  | -     | -  | -     | -  | -     | -  | -     | -  | : |

In the case described in [Table 16](#) the RAM has to be written entirely and BP2/S2, BP2/S5, BP2/S8 etc. have to be connected to elements on the display. This can be achieved by a combination of writing and rewriting the RAM like follows:

- In the first write to the RAM, bits a7 to a0 are written.
- In the second write, bits b7 to b0 are written, overwriting bits a1 and a0 with bits b7 and b6.
- In the third write, bits c7 to c0 are written, overwriting bits b1 and b0 with bits c7 and c6.

Depending on the method of writing to the RAM (standard or entire filling by rewriting), some elements remain unused or can be used, but it has to be considered in the module layout process as well as in the driver software design.

### 7.9.4 RAM filling in 1:4 multiplex drive mode

In the 1:4 multiplex drive mode the eight transmitted data bits are placed in two successive display RAM columns of four rows (see [Figure 16](#)).

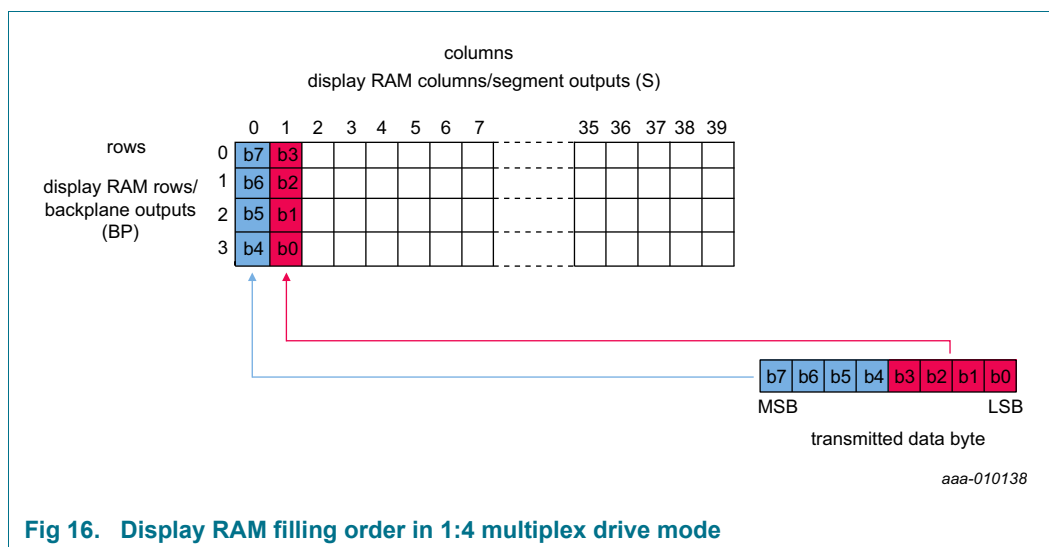


Fig 16. Display RAM filling order in 1:4 multiplex drive mode

### 7.9.5 Data pointer

The addressing mechanism for the display RAM is realized using the data pointer. This allows the loading of an individual display data byte, or a series of display data bytes, into any location of the display RAM. The sequence commences with the initialization of the data pointer by the load-data-pointer command (see [Table 8](#)). Following this command, an arriving data byte is stored at the display RAM address indicated by the data pointer. The filling order is shown in [Figure 13](#). After each byte is stored, the content of the data pointer is automatically incremented by a value dependent on the selected LCD drive mode:

- In static drive mode by eight.
- In 1:2 multiplex drive mode by four.
- In 1:3 multiplex drive mode by three.
- In 1:4 multiplex drive mode by two.

If an I<sup>2</sup>C-bus data access terminates early then the state of the data pointer is unknown. Consequently, the data pointer must be rewritten prior to further RAM accesses.

### 7.9.6 Subaddress counter

The storage of display data is determined by the contents of the subaddress counter. Storage is allowed only when the content of the subaddress counter match with the hardware subaddress applied to A0, A1, and A2. The subaddress counter value is defined by the device-select command (see [Table 9](#)). If the content of the subaddress counter and the hardware subaddress do not match then data storage is inhibited but the data pointer is incremented as if data storage had taken place. The subaddress counter is also incremented when the data pointer overflows.

The storage arrangements described lead to extremely efficient data loading in cascaded applications. When a series of display bytes are sent to the display RAM, automatic wrap-over to the next PCA8576F occurs when the last RAM address is exceeded. Subaddressing across device boundaries is successful even if the change to the next device in the cascade occurs within a transmitted character.

The hardware subaddress must not be changed while the device is being accessed on the I<sup>2</sup>C-bus interface.

7.9.7 Writing over the RAM address boundary

In all multiplex drive modes, depending on the setting of the data pointer, it is possible to fill the RAM over the RAM address boundary. If the PCA8576F is part of a cascade the additional bits fall into the next device that also generates the acknowledge signal. If the PCA8576F is a single device or the last device in a cascade the additional bits will be discarded and no acknowledge signal will be generated.

7.9.8 Bank selection

7.9.8.1 RAM bank switching

The PCA8576F includes a RAM bank switching feature in the static and 1:2 multiplex drive modes. A bank can be thought of as one RAM row or a collection of RAM rows (see [Figure 17](#)). The RAM bank switching gives the provision for preparing display information in an alternative bank and to be able to switch to it once it is complete.


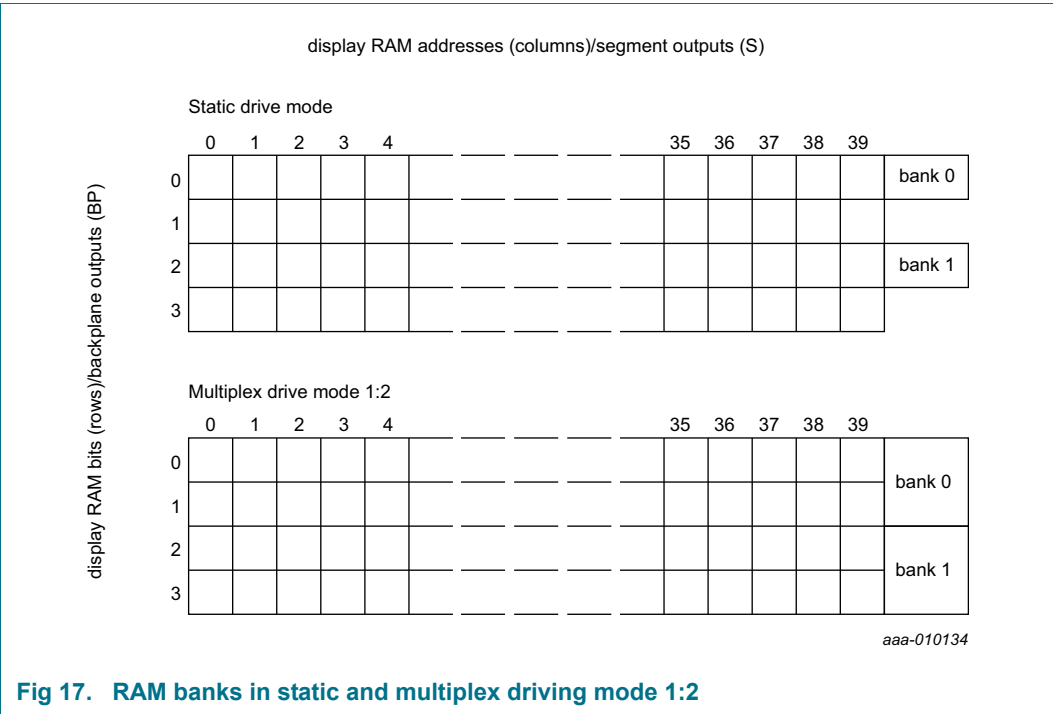



Fig 17. RAM banks in static and multiplex driving mode 1:2

There are two banks; bank 0 and bank 1. [Figure 17](#) shows the location of these banks relative to the RAM map. Input and output banks can be set independently from one another with the Bank-select command (see [Table 10 on page 8](#)). [Figure 18](#) shows the concept.

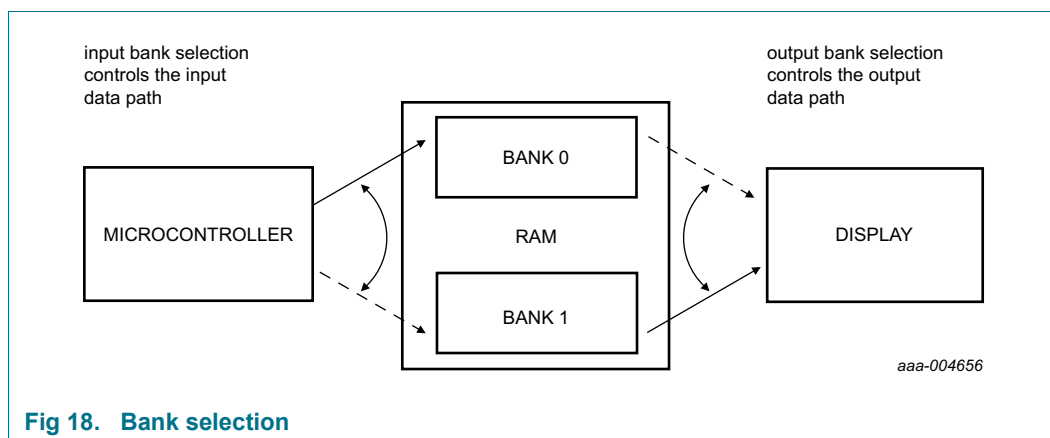

In the static drive mode, the bank-select command may request the contents of row 2 to be selected for display instead of the contents of row 0. In the 1:2 multiplex mode, the contents of rows 2 and 3 may be selected instead of rows 0 and 1. This gives the provision for preparing display information in an alternative bank and to be able to switch to it once it is assembled.

In [Figure 19](#) an example is shown for 1:2 multiplex drive mode where the displayed data is read from the first two rows of the memory (bank 0), while the transmitted data is stored in the second two rows of the memory (bank 1).

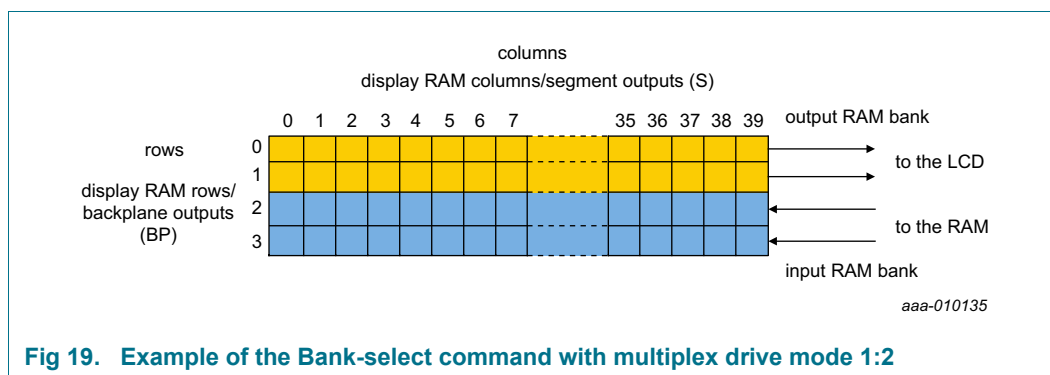

### 7.9.8.2 Output bank selector

The output bank selector (see [Table 10](#)) selects one of the four rows per display RAM address for transfer to the display register. The actual row selected depends on the selected LCD drive mode in operation and on the instant in the multiplex sequence.

- In 1:4 multiplex mode, all RAM addresses of row 0 are selected, these are followed by the contents of row 1, 2, and then 3
- In 1:3 multiplex mode, rows 0, 1, and 2 are selected sequentially
- In 1:2 multiplex mode, rows 0 and 1 are selected
- In static mode, row 0 is selected

### 7.9.8.3 Input bank selector

The input bank selector loads display data into the display RAM in accordance with the selected LCD drive configuration. Display data can be loaded in row 2 in static drive mode or in rows 2 and 3 in 1:2 multiplex drive mode by using the bank-select command (see

[Table 10](#)). The input bank selector functions independently to the output bank selector.

## 7.10 Blinking

The display blinking capabilities of the PCA8576F are very versatile. The whole display can blink at frequencies selected by the blink-select command (see [Table 11](#)). The blink frequencies are derived from the clock frequency. The ratio between the clock and blink frequencies depends on the blink mode selected (see [Table 11](#)).

An additional feature is for an arbitrary selection of LCD elements to blink. This applies to the static and 1:2 multiplex drive modes and can be implemented without any communication overheads. By means of the output bank selector, the displayed RAM banks are exchanged with alternate RAM banks at the blink frequency. This mode can also be specified by the blink-select command.

In the 1:3 and 1:4 multiplex modes, where no alternative RAM bank is available, groups of LCD elements can blink by selectively changing the display RAM data at fixed time intervals.

The entire display can blink at a frequency other than the nominal blink frequency. This can be effectively performed by resetting and setting the display enable bit E at the required rate using the mode-set command (see [Table 7](#)).

**Table 17. Blinking frequencies**

| Blink mode | Normal operating mode ratio | Nominal blink frequency <sup>[1]</sup> | Unit |
|------------|-----------------------------|----------------------------------------|------|
| off        | -                           | blinking off                           | Hz   |
| 1          | $\frac{f_{clk}}{768}$       | 6.2                                    | Hz   |
| 2          | $\frac{f_{clk}}{1536}$      | 3.1                                    | Hz   |
| 3          | $\frac{f_{clk}}{3072}$      | 1.6                                    | Hz   |

[1] Blink modes 1, 2 and 3 and the nominal blink frequencies correspond to an oscillator frequency ( $f_{clk}$ ) of 4800 Hz (see [Section 13](#)).

## 7.11 Display controller


The display controller executes the commands identified by the command decoder. It contains the device's status registers and coordinates their effects. The display controller is also responsible for loading display data into the display RAM in the correct filling order.

## 8. Characteristics of the I<sup>2</sup>C-bus

The I<sup>2</sup>C-bus is for bidirectional, two-line communication between different ICs or modules. The two lines are a Serial Data line (SDA) and a Serial Clock line (SCL). Both lines must be connected to a positive supply via a pull-up resistor when connected to the output stages of a device. Data transfer may be initiated only when the bus is not busy.

### 8.1 Bit transfer

One data bit is transferred during each clock pulse. The data on the SDA line must remain stable during the HIGH period of the clock pulse as changes in the data line at this time will be interpreted as a control signal (see [Figure 20](#)).

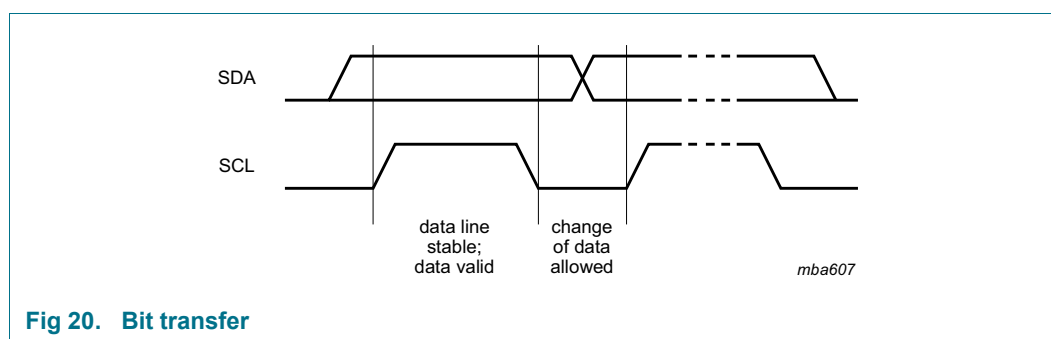


#### 8.1.1 START and STOP conditions

Both data and clock lines remain HIGH when the bus is not busy.

A HIGH-to-LOW transition of the data line while the clock is HIGH is defined as the START condition - S.

A LOW-to-HIGH transition of the data line while the clock is HIGH is defined as the STOP condition - P.

The START and STOP conditions are illustrated in [Figure 21](#).

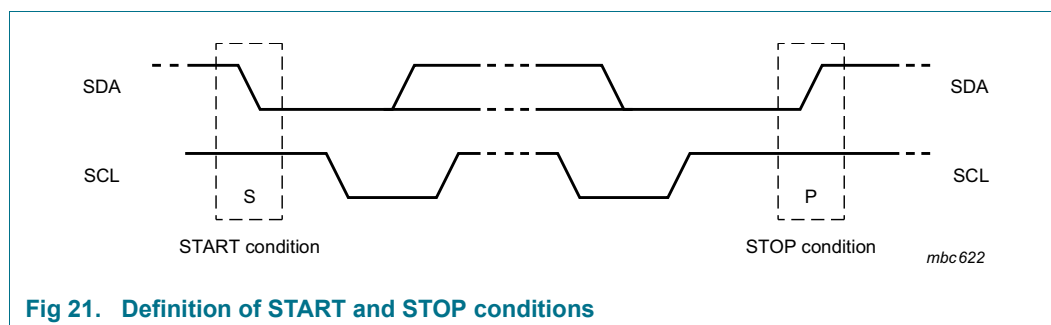

### 8.2 System configuration

A device generating a message is a transmitter, a device receiving a message is the receiver. The device that controls the message is the master and the devices which are controlled by the master are the slaves. The system configuration is shown in [Figure 22](#).

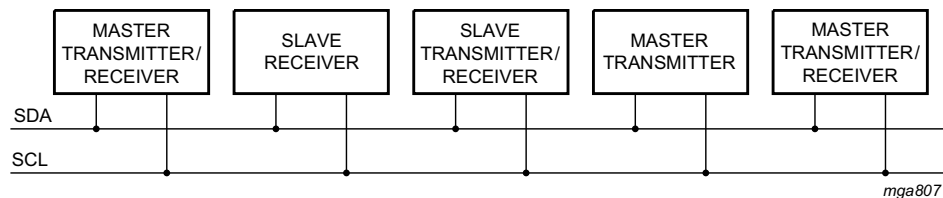


Fig 22. System configuration

### 8.3 Acknowledge

The number of data bytes transferred between the START and STOP conditions from transmitter to receiver is unlimited. Each byte of eight bits is followed by an acknowledge cycle.

- A slave receiver, which is addressed, must generate an acknowledge after the reception of each byte.
- A master receiver must generate an acknowledge after the reception of each byte that has been clocked out of the slave transmitter.
- The device that acknowledges must pull-down the SDA line during the acknowledge clock pulse, so that the SDA line is stable LOW during the HIGH period of the acknowledge related clock pulse (set-up and hold times must be taken into consideration).
- A master receiver must signal an end of data to the transmitter by not generating an acknowledge on the last byte that has been clocked out of the slave. In this event, the transmitter must leave the data line HIGH to enable the master to generate a STOP condition.

Acknowledgement on the I<sup>2</sup>C-bus is illustrated in [Figure 23](#).

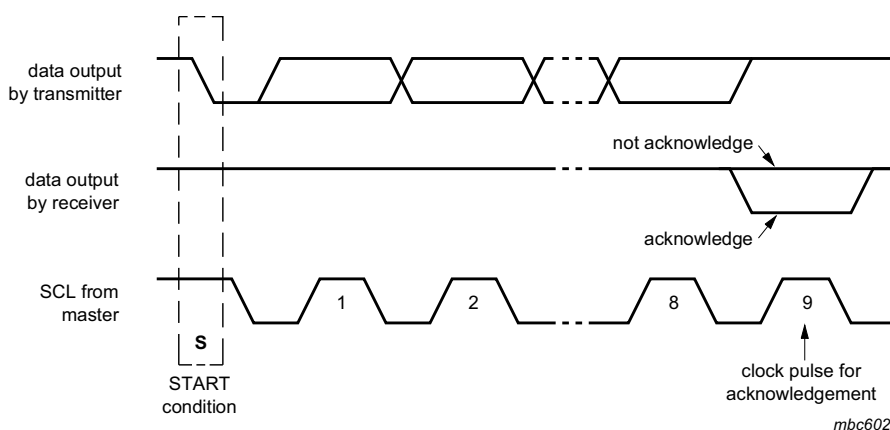


Fig 23. Acknowledgement of the I<sup>2</sup>C-bus

## 8.4 I<sup>2</sup>C-bus controller

The PCA8576F acts as an I<sup>2</sup>C-bus slave receiver. It does not initiate I<sup>2</sup>C-bus transfers or transmit data to an I<sup>2</sup>C-bus master receiver. The only data output from the PCA8576F are the acknowledge signals of the selected devices. Device selection depends on the I<sup>2</sup>C-bus slave address, on the transferred command data and on the hardware subaddress.

In single device applications, the hardware subaddress inputs A0, A1, and A2 are normally tied to V<sub>SS</sub> which defines the hardware subaddress 0. In multiple device applications A0, A1, and A2 are tied to V<sub>SS</sub> or V<sub>DD</sub> using a binary coding scheme, so that no two devices with a common I<sup>2</sup>C-bus slave address have the same hardware subaddress.

## 8.5 Input filters

To enhance noise immunity in electrically adverse environments, RC low-pass filters are provided on the SDA and SCL lines.

## 8.6 I<sup>2</sup>C-bus protocol

Two I<sup>2</sup>C-bus slave addresses (0111 000 and 0111 001) are used to address the PCA8576F. The entire I<sup>2</sup>C-bus slave address byte is shown in [Table 18](#).

**Table 18. I<sup>2</sup>C slave address byte**


| Bit | Slave address |   |   |   |   |   |     | 0   |
|-----|---------------|---|---|---|---|---|-----|-----|
|     | 7<br>MSB      | 6 | 5 | 4 | 3 | 2 | 1   |     |
|     | 0             | 1 | 1 | 1 | 0 | 0 | SA0 | R/W |

The PCA8576F is a write-only device and will not respond to a read access, therefore bit 0 should always be logic 0. Bit 1 of the slave address byte that a PCA8576F will respond to, is defined by the level tied to its SA0 input (V<sub>SS</sub> for logic 0 and V<sub>DD</sub> for logic 1).

Having two reserved slave addresses allows the following on the same I<sup>2</sup>C-bus:

- Up to 16 PCA8576F for very large LCD applications
- The use of two types of LCD multiplex drive

The I<sup>2</sup>C-bus protocol is shown in [Figure 24](#). The sequence is initiated with a START condition (S) from the I<sup>2</sup>C-bus master which is followed by one of two possible PCA8576F slave addresses available. All PCA8576Fs whose SA0 inputs correspond to bit 0 of the slave address respond by asserting an acknowledge in parallel. This I<sup>2</sup>C-bus transfer is ignored by all PCA8576Fs whose SA0 inputs are set to the alternative level.

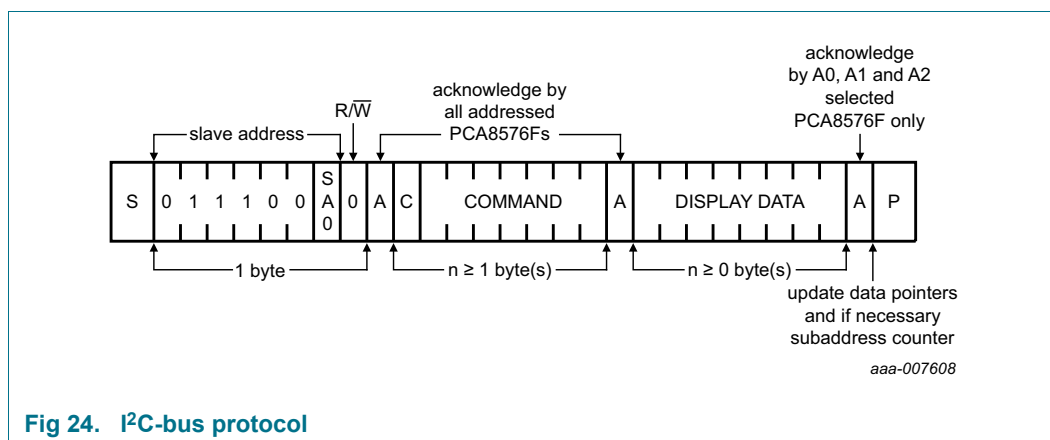

After an acknowledgement, one or more command bytes follow, that define the status of each addressed PCA8576F.

The last command byte sent is identified by resetting its most significant bit, continuation bit C, (see [Section 7.1](#)). The command bytes are also acknowledged by all addressed PCA8576F on the bus.

After the last command byte, one or more display data bytes may follow. Display data bytes are stored in the display RAM at the address specified by the data pointer and the subaddress counter. Both data pointer and subaddress counter are automatically updated and the data directed to the intended PCA8576F device.

An acknowledgement after each byte is asserted only by the PCA8576Fs that are addressed via address lines A0, A1, and A2. After the last display byte, the I<sup>2</sup>C-bus master asserts a STOP condition (P). Alternately a START may be asserted to restart an I<sup>2</sup>C-bus access.

9. Internal circuitry

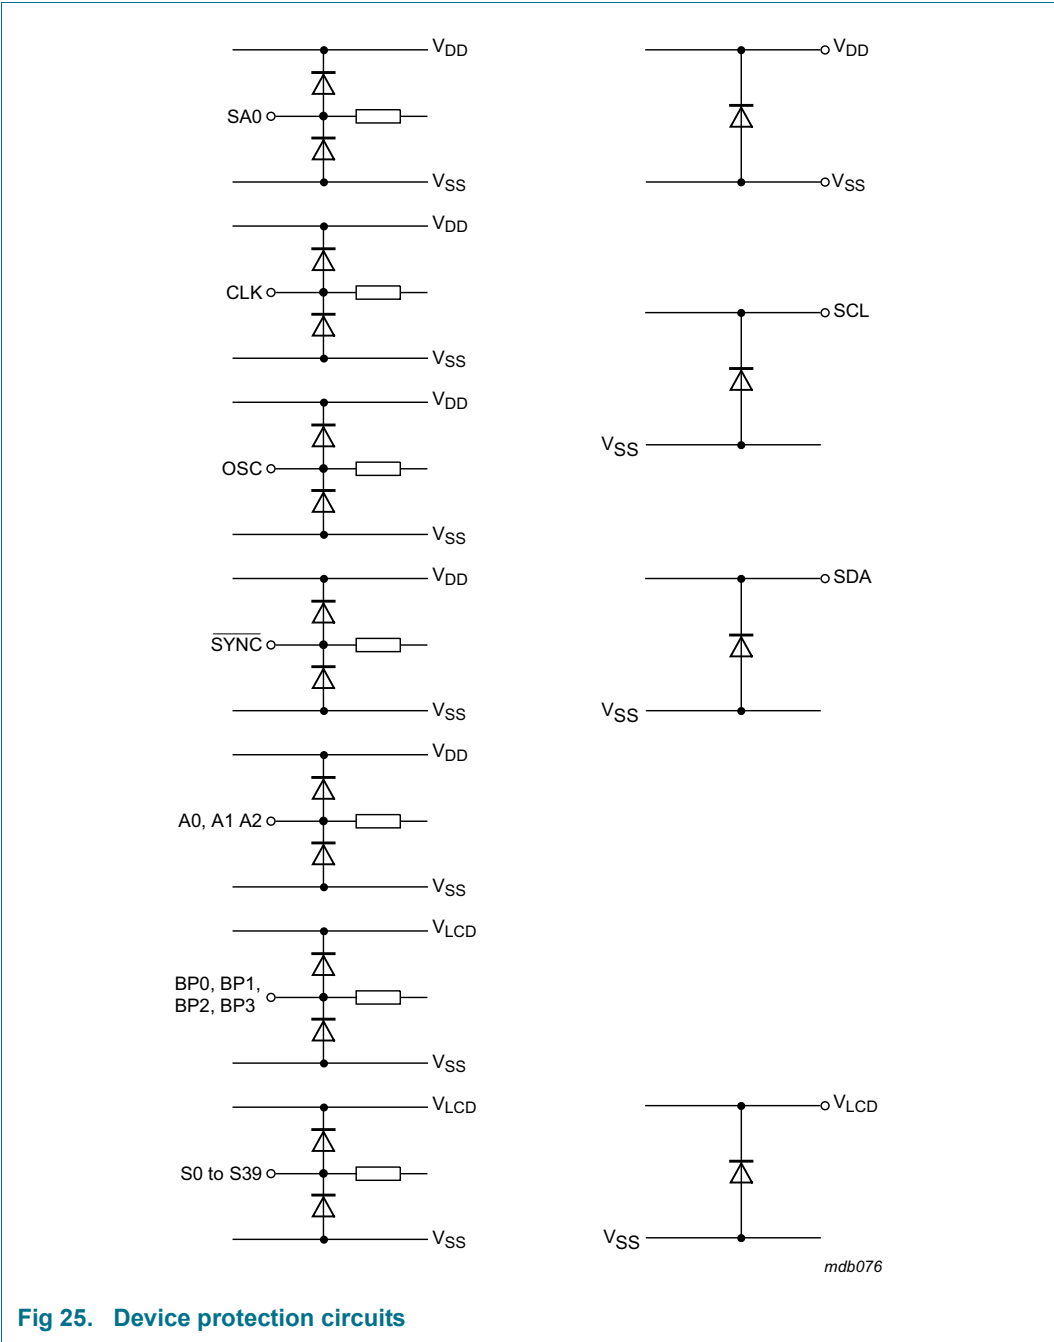


Fig 25. Device protection circuits

## 10. Safety notes

### CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the *ANSI/ESD S20.20*, *IEC/ST 61340-5*, *JESD625-A* or equivalent standards.

### CAUTION



Static voltages across the liquid crystal display can build up when the LCD supply voltage ( $V_{LCD}$ ) is on while the IC supply voltage ( $V_{DD}$ ) is off, or vice versa. This may cause unwanted display artifacts. To avoid such artifacts,  $V_{LCD}$  and  $V_{DD}$  must be applied or removed together.

### CAUTION



Semiconductors are light sensitive. Exposure to light sources can cause the IC to malfunction. The IC must be protected against light. The protection must be applied to all sides of the IC.

## 11. Limiting values

**Table 19. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134).*

| Symbol        | Parameter                       | Conditions                                                  | Min     | Max   | Unit |
|---------------|---------------------------------|-------------------------------------------------------------|---------|-------|------|
| $V_{DD}$      | supply voltage                  |                                                             | -0.5    | +6.5  | V    |
| $V_{LCD}$     | LCD supply voltage              |                                                             | -0.5    | +9.0  | V    |
| $V_I$         | input voltage                   | on each of the pins CLK, SDA, SCL, SYNC, SA0, OSC, A0 to A2 | -0.5    | +6.5  | V    |
| $V_O$         | output voltage                  | on each of the pins S0 to S39, BP0 to BP3                   | -0.5    | +9.0  | V    |
| $I_I$         | input current                   |                                                             | -10     | +10   | mA   |
| $I_O$         | output current                  |                                                             | -10     | +10   | mA   |
| $I_{DD}$      | supply current                  |                                                             | -50     | +50   | mA   |
| $I_{DD(LCD)}$ | LCD supply current              |                                                             | -50     | +50   | mA   |
| $I_{SS}$      | ground supply current           |                                                             | -50     | +50   | mA   |
| $P_{tot}$     | total power dissipation         |                                                             | -       | 400   | mW   |
| $P_o$         | output power                    |                                                             | -       | 100   | mW   |
| $V_{ESD}$     | electrostatic discharge voltage | HBM                                                         | [1] -   | ±5000 | V    |
| $I_{lu}$      | latch-up current                | $V_{LU(VLCD)} = 11.5\text{ V}$                              | [2] -   | 200   | mA   |
| $T_{stg}$     | storage temperature             |                                                             | [3] -65 | +150  | °C   |
| $T_{amb}$     | ambient temperature             | operating device                                            | -40     | +105  | °C   |

[1] Pass level; Human Body Model (HBM) according to [Ref. 9 "JESD22-A114"](#).

[2] Pass level; latch-up testing according to [Ref. 10 "JESD78"](#) at maximum ambient temperature ( $T_{amb(max)}$ ).

[3] According to the store and transport requirements (see [Ref. 13 "UM10569"](#)) the devices have to be stored at a temperature of +8 °C to +45 °C and a humidity of 25 % to 75 %.

## 12. Static characteristics

**Table 20. Static characteristics**


$V_{DD} = 1.8\text{ V to }5.5\text{ V}$ ;  $V_{SS} = 0\text{ V}$ ;  $V_{LCD} = 2.5\text{ V to }8.0\text{ V}$ ;  $T_{amb} = -40\text{ °C to }+105\text{ °C}$ ; unless otherwise specified.

| Symbol                    | Parameter                             | Conditions                                                                                          | Min                | Typ  | Max                | Unit |
|---------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------|------|--------------------|------|
| Supplies                  |                                       |                                                                                                     |                    |      |                    |      |
| V <sub>DD</sub>           | supply voltage                        | V <sub>LCD</sub> ≤ 6.5 V                                                                            | 1.8                | -    | 5.5                | V    |
|                           |                                       | V <sub>LCD</sub> > 6.5 V                                                                            | 2.5                | -    | 5.5                | V    |
| V <sub>LCD</sub>          | LCD supply voltage                    | V <sub>DD</sub> < 2.5 V                                                                             | 2.5                | -    | 6.5                | V    |
|                           |                                       | V <sub>DD</sub> ≥ 2.5 V                                                                             | 2.5                | -    | 8.0                | V    |
| I <sub>DD</sub>           | supply current                        | f <sub>clk(ext)</sub> = 1536 Hz <a href="#">[1][2]</a>                                              | -                  | 6    | 20                 | μA   |
|                           |                                       | V <sub>DD</sub> = 3.0 V;<br>T <sub>amb</sub> = 25 °C                                                | -                  | 2.7  | -                  | μA   |
| I <sub>DD(LCD)</sub>      | LCD supply current                    | f <sub>clk(ext)</sub> = 1536 Hz <a href="#">[1]</a>                                                 | -                  | 18   | 30                 | μA   |
|                           |                                       | V <sub>DD(LCD)</sub> = 3.0 V;<br>T <sub>amb</sub> = 25 °C                                           | -                  | 17.5 | -                  | μA   |
| Logic <a href="#">[3]</a> |                                       |                                                                                                     |                    |      |                    |      |
| V <sub>IL</sub>           | LOW-level input voltage               | on pins CLK, $\overline{\text{SYNC}}$ ,<br>OSC, A0 to A2, SA0,<br>SCL, SDA                          | V <sub>SS</sub>    | -    | 0.3V <sub>DD</sub> | V    |
| V <sub>IH</sub>           | HIGH-level input voltage              | on pins CLK, $\overline{\text{SYNC}}$ ,<br>OSC, A0 to A2, SA0,<br>SCL, SDA <a href="#">[4][5]</a>   | 0.7V <sub>DD</sub> | -    | V <sub>DD</sub>    | V    |
| I <sub>OL</sub>           | LOW-level output current              | output sink current;<br>V <sub>OL</sub> = 0.4 V; V <sub>DD</sub> = 5 V                              |                    |      |                    |      |
|                           |                                       | on pins CLK and $\overline{\text{SYNC}}$                                                            | 1                  | -    | -                  | mA   |
|                           |                                       | on pin SDA                                                                                          | 3                  | -    | -                  | mA   |
| I <sub>OH(CLK)</sub>      | HIGH-level output current on pin CLK  | output source current;<br>V <sub>OH</sub> = 4.6 V; V <sub>DD</sub> = 5 V                            | 1                  | -    | -                  | mA   |
| I <sub>L</sub>            | leakage current                       | V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub> ;<br>on pins CLK, SCL, SDA,<br>A0 to A2 and SA0 | -1                 | -    | +1                 | μA   |
| I <sub>L(OSC)</sub>       | leakage current on pin OSC            | V <sub>I</sub> = V <sub>DD</sub>                                                                    | -1                 | -    | +1                 | μA   |
| C <sub>I</sub>            | input capacitance <a href="#">[6]</a> |                                                                                                     | -                  | -    | 7                  | pF   |

**Table 20. Static characteristics ...continued**  
 $V_{DD} = 1.8\text{ V to }5.5\text{ V}$ ;  $V_{SS} = 0\text{ V}$ ;  $V_{LCD} = 2.5\text{ V to }8.0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C to }+105\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol             | Parameter                | Conditions                                 | Min  | Typ | Max  | Unit      |
|--------------------|--------------------------|--------------------------------------------|------|-----|------|-----------|
| <b>LCD outputs</b> |                          |                                            |      |     |      |           |
| $\Delta V_O$       | output voltage variation | on pins BP0 to BP3 and S0 to S39           | -100 | -   | +100 | mV        |
| $R_O$              | output resistance        | $V_{LCD} = 5\text{ V}$ <a href="#">[7]</a> |      |     |      |           |
|                    |                          | on pins BP0 to BP3                         | -    | 1.5 | -    | $k\Omega$ |
|                    |                          | on pins S0 to S39                          | -    | 6.0 | -    | $k\Omega$ |

- [1] LCD outputs are open-circuit; inputs at  $V_{SS}$  or  $V_{DD}$ ; external clock with 50 % duty factor; I<sup>2</sup>C-bus inactive.
- [2] For typical values, see [Figure 26](#).
- [3] The I<sup>2</sup>C-bus interface of PCA8576F is 5 V tolerant.
- [4] When tested, I<sup>2</sup>C pins SCL and SDA have no diode to  $V_{DD}$  and may be driven to the  $V_I$  limiting values given in [Table 19](#) (see [Figure 25](#) as well).
- [5] Propagation delay of driver between clock (CLK) and LCD driving signals.
- [6] Periodically sampled, not 100 % tested.
- [7] Outputs measured one at a time.

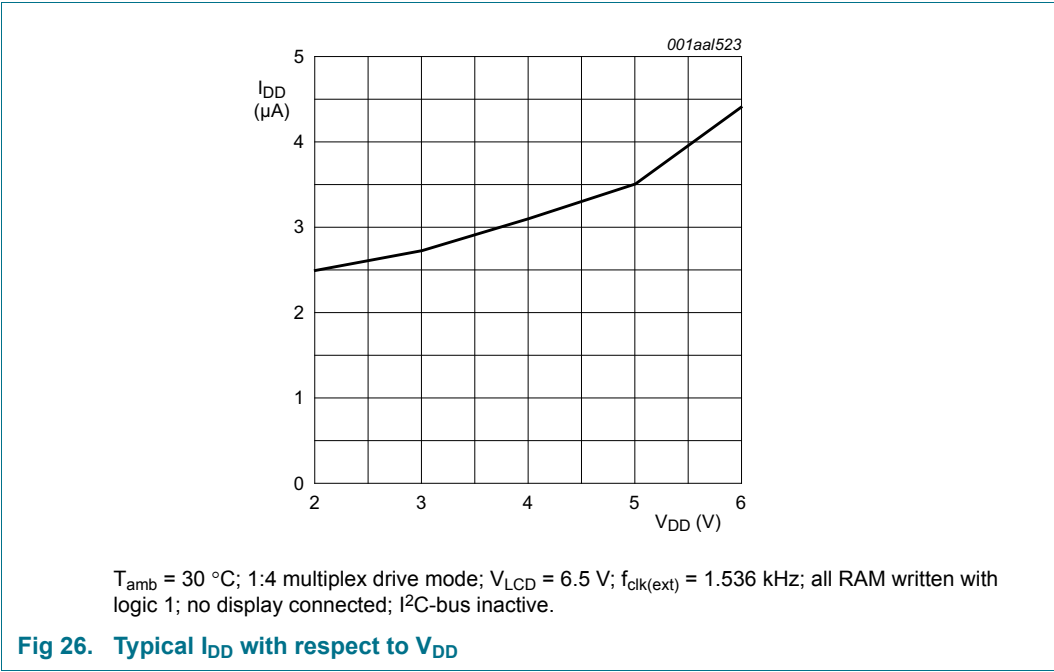

## 13. Dynamic characteristics

**Table 21. Dynamic characteristics**



$V_{DD} = 1.8\text{ V to }5.5\text{ V}$ ;  $V_{SS} = 0\text{ V}$ ;  $V_{LCD} = 2.5\text{ V to }8.0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C to }+105\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol                       | Parameter                                        | Conditions                  | Min  | Typ  | Max  | Unit          |
|------------------------------|--------------------------------------------------|-----------------------------|------|------|------|---------------|
| <b>Clock</b>                 |                                                  |                             |      |      |      |               |
| $f_{clk(int)}$               | internal clock frequency                         | [1]                         | 3505 | 4800 | 6240 | Hz            |
| $f_{clk(ext)}$               | external clock frequency                         |                             | 960  | -    | 6720 | Hz            |
| $f_{fr}$                     | frame frequency                                  | internal clock              | 146  | 200  | 260  | Hz            |
|                              |                                                  | external clock              | 40   | -    | 280  | Hz            |
| $t_{clk(H)}$                 | HIGH-level clock time                            |                             | 60   | -    | -    | $\mu\text{s}$ |
| $t_{clk(L)}$                 | LOW-level clock time                             |                             | 60   | -    | -    | $\mu\text{s}$ |
| <b>Synchronization</b>       |                                                  |                             |      |      |      |               |
| $t_{PD(SYNC\_N)}$            | $\overline{\text{SYNC}}$ propagation delay       |                             | -    | 30   | -    | ns            |
| $t_{SYNC\_NL}$               | $\overline{\text{SYNC}}$ LOW time                |                             | 1    | -    | -    | $\mu\text{s}$ |
| $t_{PD(drv)}$                | driver propagation delay                         | $V_{LCD} = 5\text{ V}$ [2]  | -    | -    | 30   | $\mu\text{s}$ |
| <b>I<sup>2</sup>C-bus[3]</b> |                                                  |                             |      |      |      |               |
| <b>Pin SCL</b>               |                                                  |                             |      |      |      |               |
| $f_{SCL}$                    | SCL clock frequency                              |                             | -    | -    | 400  | kHz           |
| $t_{LOW}$                    | LOW period of the SCL clock                      |                             | 1.3  | -    | -    | $\mu\text{s}$ |
| $t_{HIGH}$                   | HIGH period of the SCL clock                     |                             | 0.6  | -    | -    | $\mu\text{s}$ |
| <b>Pin SDA</b>               |                                                  |                             |      |      |      |               |
| $t_{SU,DAT}$                 | data set-up time                                 |                             | 100  | -    | -    | ns            |
| $t_{HD,DAT}$                 | data hold time                                   |                             | 0    | -    | -    | ns            |
| <b>Pins SCL and SDA</b>      |                                                  |                             |      |      |      |               |
| $t_{BUF}$                    | bus free time between a STOP and START condition |                             | 1.3  | -    | -    | $\mu\text{s}$ |
| $t_{SU,STO}$                 | set-up time for STOP condition                   |                             | 0.6  | -    | -    | $\mu\text{s}$ |
| $t_{HD,STA}$                 | hold time (repeated) START condition             |                             | 0.6  | -    | -    | $\mu\text{s}$ |
| $t_{SU,STA}$                 | set-up time for a repeated START condition       |                             | 0.6  | -    | -    | $\mu\text{s}$ |
| $t_r$                        | rise time of both SDA and SCL signals            | $f_{SCL} = 400\text{ kHz}$  | -    | -    | 0.3  | $\mu\text{s}$ |
|                              |                                                  | $f_{SCL} < 125\text{ kHz}$  | -    | -    | 1.0  | $\mu\text{s}$ |
| $t_f$                        | fall time of both SDA and SCL signals            |                             | -    | -    | 0.3  | $\mu\text{s}$ |
| $C_b$                        | capacitive load for each bus line                |                             | -    | -    | 400  | pF            |
| $t_{w(spike)}$               | spike pulse width                                | on the I <sup>2</sup> C-bus | -    | -    | 50   | ns            |

[1] Typical output duty factor: 50 % measured at the CLK output pin.

[2] Not tested in production.

[3] All timing values are valid within the operating supply voltage and ambient temperature range and are referenced to  $V_{IL}$  and  $V_{IH}$  with an input voltage swing of  $V_{SS}$  to  $V_{DD}$ .

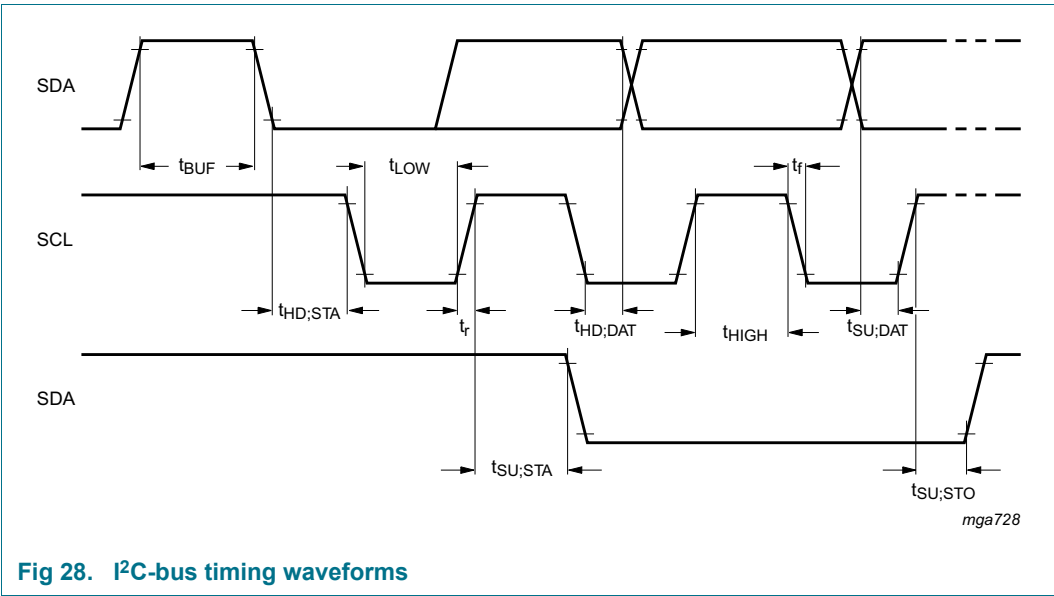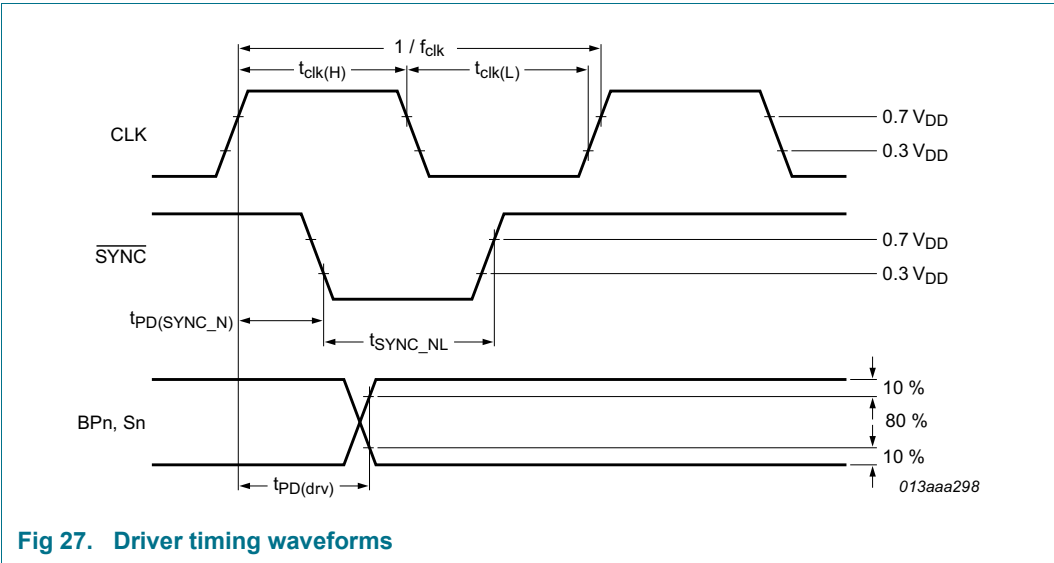

## 14. Application information

### 14.1 Cascaded operation

In large display configurations, up to 16 PCA8576Fs can be differentiated on the same I<sup>2</sup>C-bus by using the 3-bit hardware subaddresses (A0, A1 and A2) and the programmable I<sup>2</sup>C-bus slave address (SA0).

**Table 22. Addressing cascaded PCA8576F**

| Cluster | Bit SA0 | Pin A2 | Pin A1 | Pin A0 | Device |
|---------|---------|--------|--------|--------|--------|
| 1       | 0       | 0      | 0      | 0      | 0      |
|         |         | 0      | 0      | 1      | 1      |
|         |         | 0      | 1      | 0      | 2      |
|         |         | 0      | 1      | 1      | 3      |
|         |         | 1      | 0      | 0      | 4      |
|         |         | 1      | 0      | 1      | 5      |
|         |         | 1      | 1      | 0      | 6      |
|         |         | 1      | 1      | 1      | 7      |
| 2       | 1       | 0      | 0      | 0      | 8      |
|         |         | 0      | 0      | 1      | 9      |
|         |         | 0      | 1      | 0      | 10     |
|         |         | 0      | 1      | 1      | 11     |
|         |         | 1      | 0      | 0      | 12     |
|         |         | 1      | 0      | 1      | 13     |
|         |         | 1      | 1      | 0      | 14     |
|         |         | 1      | 1      | 1      | 15     |

PCA8576Fs connected in cascade are synchronized to allow the backplane signals from only one device in the cascade to be shared. This arrangement is cost-effective in large LCD applications since the backplane outputs of only one device need to be through-plated to the backplane electrodes of the display. The other PCA8576F of the cascade contribute additional segment outputs. The backplanes can either be connected together to enhance the drive capability or some can be left open-circuit (such as the ones from the slave in [Figure 29](#)) or just some of the master and some of the slave will be taken to facilitate the layout of the display.

All PCA8576Fs connected in cascade are correctly synchronized by the automatically generated SYNC signal. The only time that SYNC is likely to be needed is if synchronization is lost accidentally, for example, by noise in adverse electrical environments, or if the LCD multiplex drive mode is changed in an application using several cascaded PCA8576Fs, as the drive mode cannot be changed on all of the cascaded devices simultaneously. SYNC can be either an input or an output signal; a SYNC output is implemented as an open-drain driver with an internal pull-up resistor. The PCA8576F asserts SYNC at the start of its last active backplane signal and monitors the SYNC line at all other times. If cascade synchronization is lost, it is restored by the first PCA8576F to assert SYNC. The timing relationship between the backplane waveforms and the SYNC signal for each LCD drive mode is shown in [Figure 30](#).

The contact resistance between the  $\overline{\text{SYNC}}$  on each cascaded device must be controlled. If the resistance is too high, the device is not able to synchronize properly; this is particularly applicable to chip-on-glass applications. The maximum  $\overline{\text{SYNC}}$  contact resistance allowed for the number of devices in cascade is given in [Table 23](#).

Table 23.  $\overline{\text{SYNC}}$  contact resistance

| Number of devices | Maximum contact resistance |
|-------------------|----------------------------|
| 2                 | 6 kΩ                       |
| 3 to 5            | 2.2 kΩ                     |
| 6 to 10           | 1.2 kΩ                     |
| 10 to 16          | 700 Ω                      |

[Figure 27](#) and [Figure 28](#) show the timing of the synchronization signals.


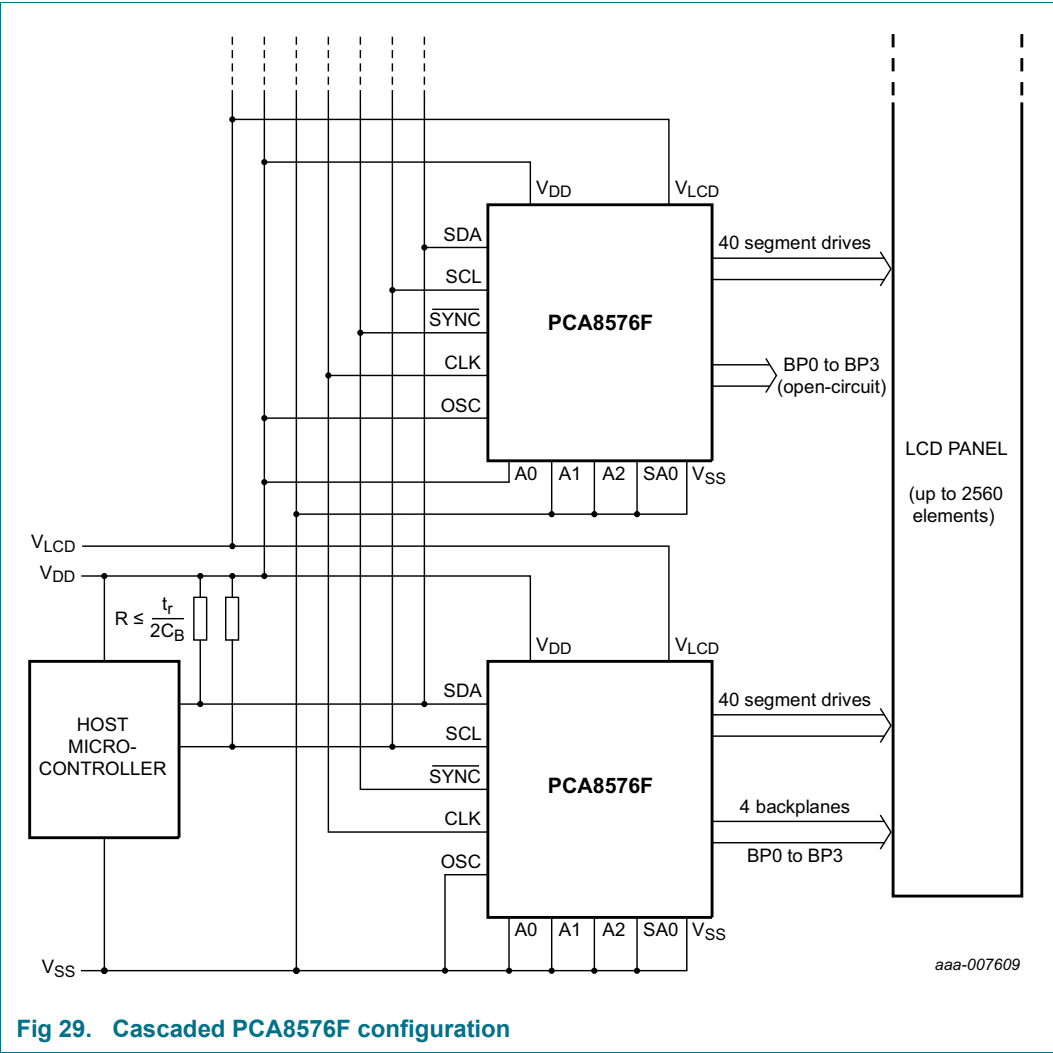


Fig 29. Cascaded PCA8576F configuration

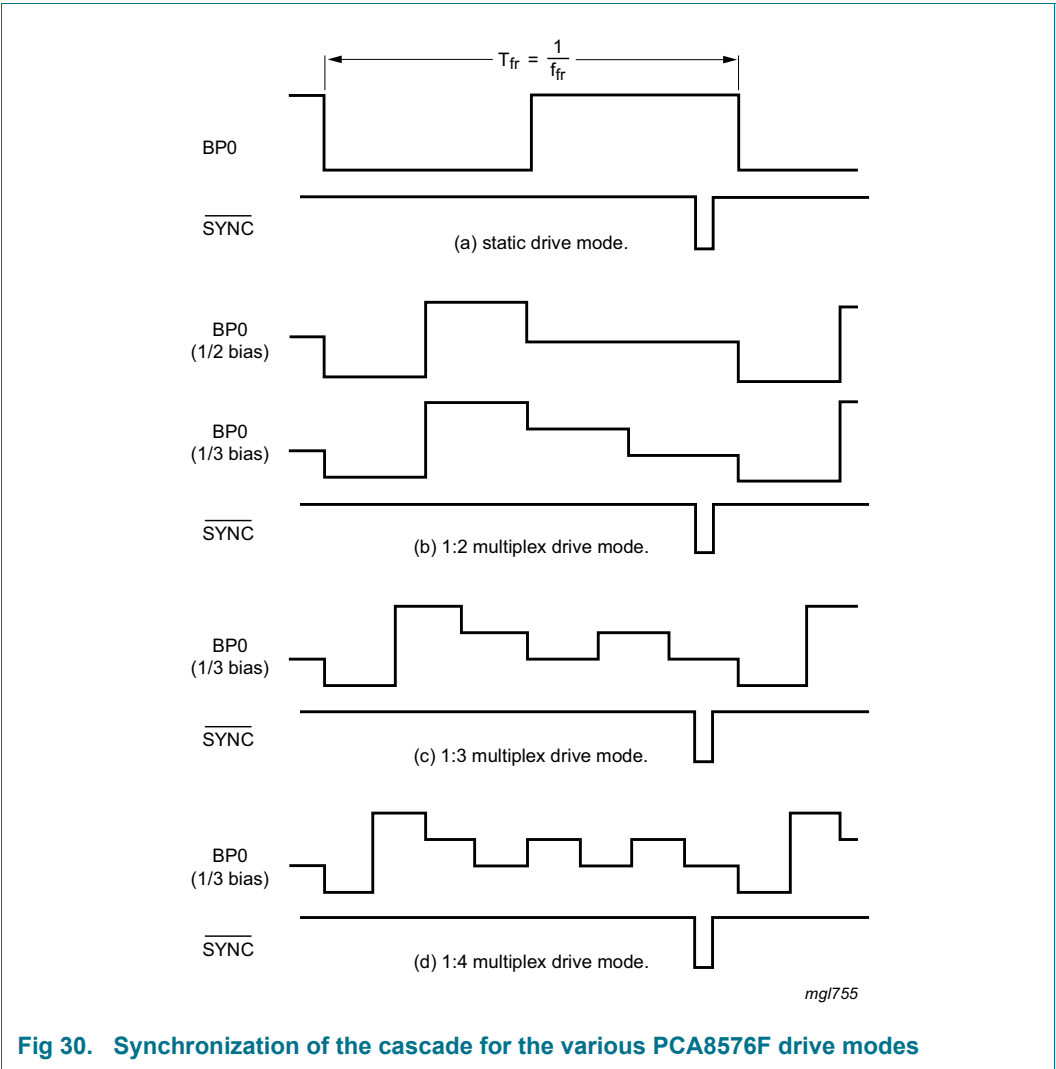

15. Bare die outline

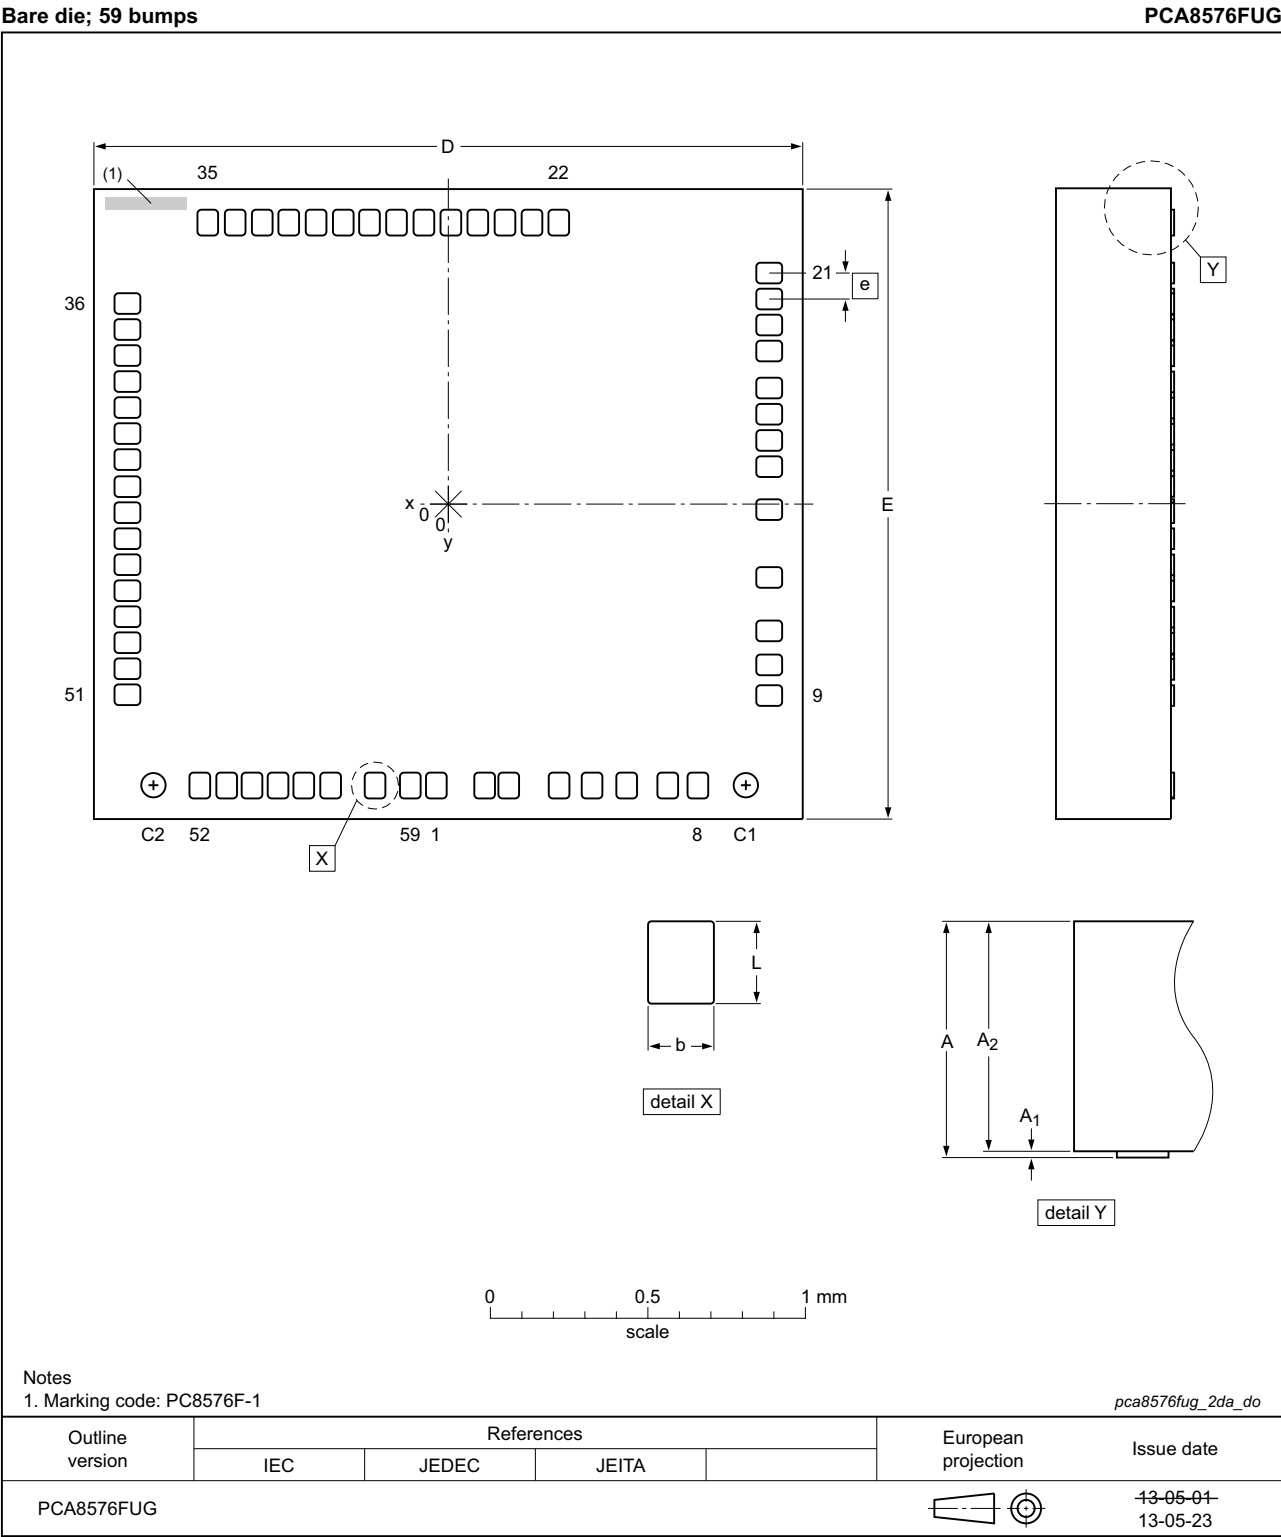


Fig 31. Bare die outline PCA8576FUG (for dimensions see Table 24)

**Table 24. Dimensions of PCA8576FUG**

Original dimensions are in mm.

| Unit (mm) | A    | A <sub>1</sub> | A <sub>2</sub> | b     | D   | E   | e <sup>[1]</sup> | L     |
|-----------|------|----------------|----------------|-------|-----|-----|------------------|-------|
| max       | -    | 0.012          | -              | -     | -   | -   | -                | -     |
| nom       | 0.40 | 0.015          | 0.381          | 0.052 | 2.2 | 2.0 | -                | 0.077 |
| min       | -    | 0.018          | -              | -     | -   | -   | 0.072            | -     |

[1] Dimension not drawn to scale.

**Table 25. Bump location for PCA8576FUG**

All x/y coordinates represent the position of the center of each pad with respect to the center (x/y = 0) of the chip (see [Figure 2](#), and [Figure 31](#)).

| Symbol             | Pad | X (μm)  | Y (μm) | Description                                   |
|--------------------|-----|---------|--------|-----------------------------------------------|
| SDA                | 1   | -34.38  | -876.6 | I <sup>2</sup> C-bus serial data input/output |
| SCL                | 2   | 109.53  | -876.6 | I <sup>2</sup> C-bus serial clock input       |
| SCL                | 3   | 181.53  | -876.6 |                                               |
| SYN $\overline{C}$ | 4   | 365.58  | -876.6 | cascade synchronization input/output          |
| CLK                | 5   | 469.08  | -876.6 | external clock input/output                   |
| V <sub>DD</sub>    | 6   | 577.08  | -876.6 | supply voltage                                |
| OSC                | 7   | 740.88  | -876.6 | internal oscillator enable input              |
| A0                 | 8   | 835.83  | -876.6 | subaddress inputs                             |
| A1                 | 9   | 1005.48 | -630.9 |                                               |
| A2                 | 10  | 1005.48 | -513.9 |                                               |
| SA0                | 11  | 1005.48 | -396.9 | I <sup>2</sup> C-bus address input; bit 0     |
| V <sub>SS</sub>    | 12  | 1005.48 | -221.4 | ground supply voltage                         |
| V <sub>LCD</sub>   | 13  | 1005.48 | 10.71  | LCD supply voltage                            |
| BP0                | 14  | 1005.48 | 156.51 | LCD backplane outputs                         |
| BP2                | 15  | 1005.48 | 232.74 |                                               |
| BP1                | 16  | 1005.48 | 308.97 |                                               |
| BP3                | 17  | 1005.48 | 385.2  |                                               |
| S0                 | 18  | 1005.48 | 493.2  | LCD segment outputs                           |
| S1                 | 19  | 1005.48 | 565.2  |                                               |
| S2                 | 20  | 1005.48 | 637.2  |                                               |
| S3                 | 21  | 1005.48 | 709.2  |                                               |
| S4                 | 22  | 347.22  | 876.6  |                                               |
| S5                 | 23  | 263.97  | 876.6  |                                               |
| S6                 | 24  | 180.72  | 876.6  |                                               |
| S7                 | 25  | 97.47   | 876.6  |                                               |
| S8                 | 26  | 14.22   | 876.6  |                                               |
| S9                 | 27  | -69.03  | 876.6  |                                               |
| S10                | 28  | -152.28 | 876.6  |                                               |
| S11                | 29  | -235.53 | 876.6  |                                               |
| S12                | 30  | -318.78 | 876.6  |                                               |
| S13                | 31  | -402.03 | 876.6  |                                               |

**Table 25. Bump location for PCA8576FUG ...continued**

All x/y coordinates represent the position of the center of each pad with respect to the center (x/y = 0) of the chip (see [Figure 2](#), and [Figure 31](#)).

| Symbol | Pad | X (μm)  | Y (μm) | Description                                   |
|--------|-----|---------|--------|-----------------------------------------------|
| S14    | 32  | -485.28 | 876.6  | LCD segment outputs                           |
| S15    | 33  | -568.53 | 876.6  |                                               |
| S16    | 34  | -651.78 | 876.6  |                                               |
| S17    | 35  | -735.03 | 876.6  |                                               |
| S18    | 36  | -1005.5 | 625.59 |                                               |
| S19    | 37  | -1005.5 | 541.62 |                                               |
| S20    | 38  | -1005.5 | 458.19 |                                               |
| S21    | 39  | -1005.5 | 374.76 |                                               |
| S22    | 40  | -1005.5 | 291.33 |                                               |
| S23    | 41  | -1005.5 | 207.9  |                                               |
| S24    | 42  | -1005.5 | 124.47 |                                               |
| S25    | 43  | -1005.5 | 41.04  |                                               |
| S26    | 44  | -1005.5 | -42.39 |                                               |
| S27    | 45  | -1005.5 | -125.8 |                                               |
| S28    | 46  | -1005.5 | -209.3 |                                               |
| S29    | 47  | -1005.5 | -292.7 |                                               |
| S30    | 48  | -1005.5 | -376.1 |                                               |
| S31    | 49  | -1005.5 | -459.5 |                                               |
| S32    | 50  | -1005.5 | -543   |                                               |
| S33    | 51  | -1005.5 | -625.6 |                                               |
| S34    | 52  | -735.03 | -876.6 |                                               |
| S35    | 53  | -663.03 | -876.6 |                                               |
| S36    | 54  | -591.03 | -876.6 |                                               |
| S37    | 55  | -519.03 | -876.6 |                                               |
| S38    | 56  | -447.03 | -876.6 |                                               |
| S39    | 57  | -375.03 | -876.6 |                                               |
| SDA    | 58  | -196.38 | -876.6 | I <sup>2</sup> C-bus serial data input/output |
| SDA    | 59  | -106.38 | -876.6 |                                               |

**Table 26. Alignment marks**

All x/y coordinates represent the position of the center of each alignment mark with respect to the center (x/y = 0) of the chip (see [Figure 2](#), and [Figure 31](#)).

| Symbol | Location |        | Dimension     |
|--------|----------|--------|---------------|
|        | X (μm)   | Y (μm) | Diameter (μm) |
| C1     | 930.42   | -870.3 | 72            |
| C2     | -829.98  | -870.3 | 72            |

## 16. Handling information

All input and output pins are protected against ElectroStatic Discharge (ESD) under normal handling. When handling Metal-Oxide Semiconductor (MOS) devices ensure that all normal precautions are taken as described in *JESD625-A*, *IEC 61340-5* or equivalent standards.

## 17. Packing information

### 17.1 Tray information

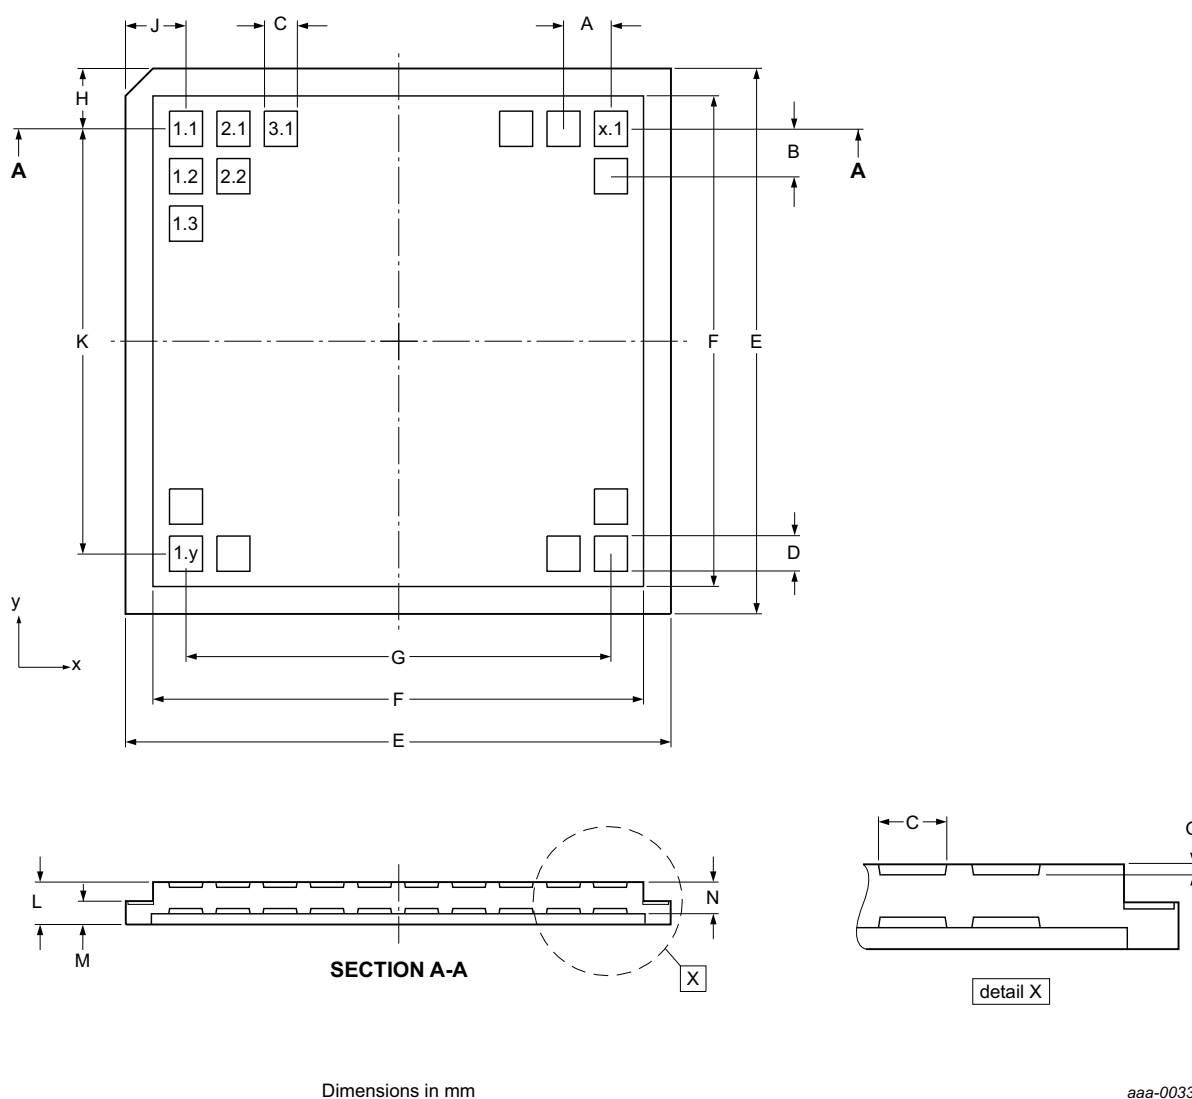


Fig 32. Tray details

Table 27. Description of tray details  
Tray details are shown in [Figure 32](#).

| Tray details      |     |      |      |      |       |      |             |     |      |      |      |      |      |
|-------------------|-----|------|------|------|-------|------|-------------|-----|------|------|------|------|------|
| Dimensions        |     |      |      |      |       |      |             |     |      |      |      |      |      |
| A                 | B   | C    | D    | E    | F     | G    | H           | J   | K    | L    | M    | N    | Unit |
| 3.6               | 3.6 | 2.36 | 2.11 | 50.8 | 45.72 | 39.6 | 5.6         | 5.6 | 39.6 | 3.96 | 2.18 | 2.49 | mm   |
| Number of pockets |     |      |      |      |       |      |             |     |      |      |      |      |      |
| x direction       |     |      |      |      |       |      | y direction |     |      |      |      |      |      |
| 12                |     |      |      |      |       |      | 12          |     |      |      |      |      |      |

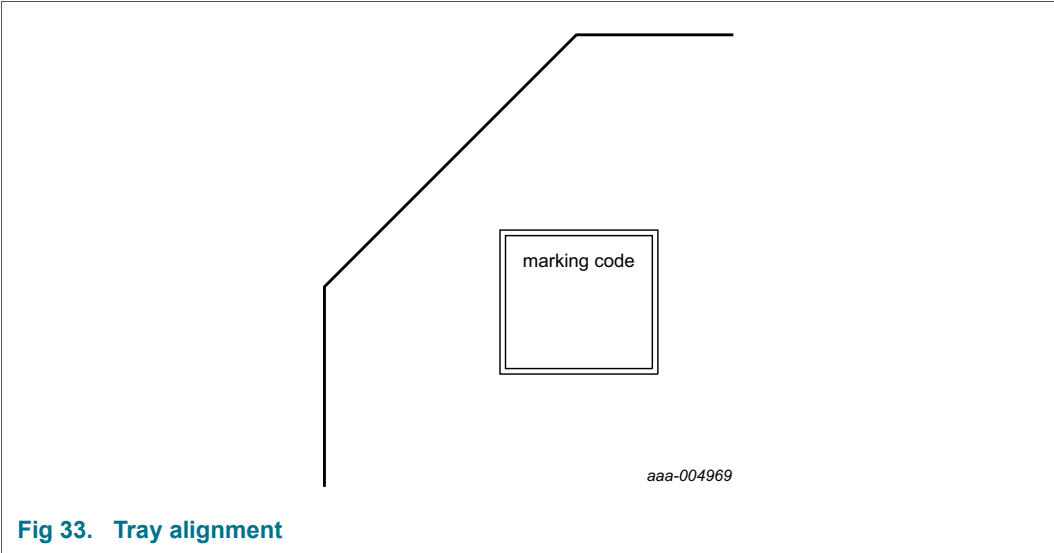


Fig 33. Tray alignment

## 18. Appendix

### 18.1 LCD segment driver selection

Table 28. Selection of LCD segment drivers

| Type name                 | Number of elements at MUX |     |     |     |     |     |     | V <sub>DD</sub> (V) | V <sub>LCD</sub> (V) | f <sub>fr</sub> (Hz)     | V <sub>LCD</sub> (V)<br>charge pump | V <sub>LCD</sub> (V)<br>temperature compensat. | T <sub>amb</sub> (°C) | Interface        | Package | AEC-Q100 |
|---------------------------|---------------------------|-----|-----|-----|-----|-----|-----|---------------------|----------------------|--------------------------|-------------------------------------|------------------------------------------------|-----------------------|------------------|---------|----------|
|                           | 1:1                       | 1:2 | 1:3 | 1:4 | 1:6 | 1:8 | 1:9 |                     |                      |                          |                                     |                                                |                       |                  |         |          |
| PCA8561AHN <sup>[5]</sup> | 18                        | 36  | 54  | 72  | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup> | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C | HVQFN32 | Y        |
| PCA8561BHN <sup>[5]</sup> | 18                        | 36  | 54  | 72  | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup> | N                                   | N                                              | -40 to 105            | SPI              | HVQFN32 | Y        |
| PCF8566TS                 | 24                        | 48  | 72  | 96  | -   | -   | -   | 2.5 to 6            | 2.5 to 6             | 69                       | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | VSO40   | N        |
| PCF85162T                 | 32                        | 64  | 96  | 128 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 82                       | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | TSSOP48 | N        |
| PCA85162T                 | 32                        | 64  | 96  | 128 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 110                      | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C | TSSOP48 | Y        |
| PCA85262ATT               | 32                        | 64  | 96  | 128 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 200                      | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C | TSSOP48 | Y        |
| PCF8551ATT <sup>[5]</sup> | 36                        | 72  | 108 | 144 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 128 <sup>[1]</sup> | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | TSSOP48 | N        |
| PCF8551BTT <sup>[5]</sup> | 36                        | 72  | 108 | 144 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 128 <sup>[1]</sup> | N                                   | N                                              | -40 to 85             | SPI              | TSSOP48 | N        |
| PCA8551ATT <sup>[5]</sup> | 36                        | 72  | 108 | 144 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup> | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C | TSSOP48 | Y        |
| PCA8551BTT <sup>[5]</sup> | 36                        | 72  | 108 | 144 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup> | N                                   | N                                              | -40 to 105            | SPI              | TSSOP48 | Y        |
| PCF85176T                 | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 82                       | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | TSSOP56 | N        |
| PCA85176T                 | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 110                      | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C | TSSOP56 | Y        |
| PCA85276ATT               | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 200                      | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C | TSSOP56 | Y        |
| PCF85176H                 | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 82                       | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | TQFP64  | N        |
| PCA85176H                 | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 82                       | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C | TQFP64  | Y        |
| PCF8553ATT <sup>[5]</sup> | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 128 <sup>[1]</sup> | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | TSSOP56 | N        |
| PCF8553BTT <sup>[5]</sup> | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 128 <sup>[1]</sup> | N                                   | N                                              | -40 to 85             | SPI              | TSSOP56 | N        |
| PCA8553ATT <sup>[5]</sup> | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup> | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C | TSSOP56 | Y        |
| PCA8553BTT <sup>[5]</sup> | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup> | N                                   | N                                              | -40 to 105            | SPI              | TSSOP56 | Y        |
| PCA8546ATT                | -                         | -   | -   | 176 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup> | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C | TSSOP56 | Y        |
| PCA8546BTT                | -                         | -   | -   | 176 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup> | N                                   | N                                              | -40 to 95             | SPI              | TSSOP56 | Y        |
| PCA8547AHT <sup>[5]</sup> | 44                        | 88  | -   | 176 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup> | Y                                   | Y <sup>[3]</sup>                               | -40 to 95             | I <sup>2</sup> C | TQFP64  | Y        |
| PCA8547BHT <sup>[5]</sup> | 44                        | 88  | -   | 176 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup> | Y                                   | Y <sup>[3]</sup>                               | -40 to 95             | SPI              | TQFP64  | Y        |
| PCF85134HL                | 60                        | 120 | 180 | 240 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 82                       | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C | LQFP80  | N        |
| PCA85134H                 | 60                        | 120 | 180 | 240 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 82                       | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C | LQFP80  | Y        |

Table 28. Selection of LCD segment drivers ...continued

| Type name                 | Number of elements at MUX |     |     |     |     |     |     | V <sub>DD</sub> (V) | V <sub>LCD</sub> (V) | f <sub>fr</sub> (Hz)      | V <sub>LCD</sub> (V)<br>charge pump | V <sub>LCD</sub> (V)<br>temperature compensat. | T <sub>amb</sub> (°C) | Interface                            | Package  | AEC-Q100 |
|---------------------------|---------------------------|-----|-----|-----|-----|-----|-----|---------------------|----------------------|---------------------------|-------------------------------------|------------------------------------------------|-----------------------|--------------------------------------|----------|----------|
|                           | 1:1                       | 1:2 | 1:3 | 1:4 | 1:6 | 1:8 | 1:9 |                     |                      |                           |                                     |                                                |                       |                                      |          |          |
| PCA8543AHL                | 60                        | 120 | -   | 240 | -   | -   | -   | 2.5 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y                                              | -40 to 105            | I <sup>2</sup> C                     | LQFP80   | Y        |
| PCF8545ATT                | -                         | -   | -   | 176 | 252 | 320 | -   | 1.8 to 5.5          | 2.5 to 5.5           | 60 to 300 <sup>[1]</sup>  | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C                     | TSSOP56  | N        |
| PCF8545BTT                | -                         | -   | -   | 176 | 252 | 320 | -   | 1.8 to 5.5          | 2.5 to 5.5           | 60 to 300 <sup>[1]</sup>  | N                                   | N                                              | -40 to 85             | SPI                                  | TSSOP56  | N        |
| PCF8536AT <sup>[4]</sup>  | -                         | -   | -   | 176 | 252 | 320 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C                     | TSSOP56  | N        |
| PCF8536BT <sup>[4]</sup>  | -                         | -   | -   | 176 | 252 | 320 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | N                                   | N                                              | -40 to 85             | SPI                                  | TSSOP56  | N        |
| PCA8536AT <sup>[4]</sup>  | -                         | -   | -   | 176 | 252 | 320 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C                     | TSSOP56  | Y        |
| PCA8536BT <sup>[4]</sup>  | -                         | -   | -   | 176 | 252 | 320 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | N                                   | N                                              | -40 to 95             | SPI                                  | TSSOP56  | Y        |
| PCF8537AH                 | 44                        | 88  | -   | 176 | 276 | 352 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 85             | I <sup>2</sup> C                     | TQFP64   | N        |
| PCF8537BH                 | 44                        | 88  | -   | 176 | 276 | 352 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 85             | SPI                                  | TQFP64   | N        |
| PCA8537AH                 | 44                        | 88  | -   | 176 | 276 | 352 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 95             | I <sup>2</sup> C                     | TQFP64   | Y        |
| PCA8537BH                 | 44                        | 88  | -   | 176 | 276 | 352 | -   | 1.8 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 95             | SPI                                  | TQFP64   | Y        |
| PCA9620H                  | 60                        | 120 | -   | 240 | 320 | 480 | -   | 2.5 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 105            | I <sup>2</sup> C                     | LQFP80   | Y        |
| PCA9620U                  | 60                        | 120 | -   | 240 | 320 | 480 | -   | 2.5 to 5.5          | 2.5 to 9             | 60 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 105            | I <sup>2</sup> C                     | bare die | Y        |
| PCF8552DUG <sup>[5]</sup> | 36                        | 72  | 108 | 144 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 128 <sup>[1]</sup>  | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C, SPI                | bare die | N        |
| PCA8552DUG <sup>[5]</sup> | 36                        | 72  | 108 | 144 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 5.5           | 32 to 256 <sup>[1]</sup>  | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C, SPI                | bare die | Y        |
| PCF8576DU                 | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 77                        | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C                     | bare die | N        |
| PCF8576EUG                | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 77                        | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C                     | bare die | N        |
| PCA8576FUG                | 40                        | 80  | 120 | 160 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 200                       | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C                     | bare die | Y        |
| PCF85133U                 | 80                        | 160 | 240 | 320 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 6.5           | 82, 110 <sup>[2]</sup>    | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C                     | bare die | N        |
| PCA85133U                 | 80                        | 160 | 240 | 320 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 82, 110 <sup>[2]</sup>    | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C                     | bare die | Y        |
| PCA85233U                 | 80                        | 160 | 240 | 320 | -   | -   | -   | 1.8 to 5.5          | 2.5 to 8             | 150, 220 <sup>[2]</sup>   | N                                   | N                                              | -40 to 105            | I <sup>2</sup> C                     | bare die | Y        |
| PCA8530DUG <sup>[5]</sup> | 102                       | 204 | -   | 408 | -   | -   | -   | 2.5 to 5.5          | 4 to 12              | 45 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 105            | I <sup>2</sup> C, SPI                | bare die | Y        |
| PCF85132U                 | 160                       | 320 | 480 | 640 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 8             | 60 to 90 <sup>[1]</sup>   | N                                   | N                                              | -40 to 85             | I <sup>2</sup> C                     | bare die | N        |
| PCA85132U                 | 160                       | 320 | 480 | 640 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 8             | 60 to 90 <sup>[1]</sup>   | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C                     | bare die | Y        |
| PCA85232U                 | 160                       | 320 | 480 | 640 | -   | -   | -   | 1.8 to 5.5          | 1.8 to 8             | 117 to 176 <sup>[1]</sup> | N                                   | N                                              | -40 to 95             | I <sup>2</sup> C                     | bare die | Y        |
| PCF8538UG                 | 102                       | 204 | -   | 408 | 612 | 816 | 918 | 2.5 to 5.5          | 4 to 12              | 45 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 85             | I <sup>2</sup> C, SPI <sup>[2]</sup> | bare die | N        |
| PCA8538UG                 | 102                       | 204 | -   | 408 | 612 | 816 | 918 | 2.5 to 5.5          | 4 to 12              | 45 to 300 <sup>[1]</sup>  | Y                                   | Y <sup>[3]</sup>                               | -40 to 105            | I <sup>2</sup> C, SPI <sup>[2]</sup> | bare die | Y        |

[1] Can be selected by command.

[2] Can be selected by pin configuration.

- [3] Extra feature: Temperature sensor.
- [4] Extra feature: 6 PWM channels.
- [5] In development.

PCA8576F

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2013. All rights reserved.

## 19. Abbreviations

Table 29. Abbreviations

| Acronym | Description                             |
|---------|-----------------------------------------|
| CDM     | Charged-Device Model                    |
| CMOS    | Complementary Metal-Oxide Semiconductor |
| HBM     | Human Body Model                        |
| ITO     | Indium Tin Oxide                        |
| LCD     | Liquid Crystal Display                  |
| LSB     | Least Significant Bit                   |
| MM      | Machine Model                           |
| MSB     | Most Significant Bit                    |
| MSL     | Moisture Sensitivity Level              |
| PCB     | Printed Circuit Board                   |
| RAM     | Random Access Memory                    |
| RMS     | Root Mean Square                        |
| SCL     | Serial CLock line                       |
| SDA     | Serial DATA line                        |
| SMD     | Surface Mount Device                    |

## 20. References

---

- [1] **AN10170** — Design guidelines for COG modules with NXP monochrome LCD drivers
- [2] **AN10365** — Surface mount reflow soldering description
- [3] **AN10706** — Handling bare die
- [4] **AN10853** — ESD and EMC sensitivity of IC
- [5] **AN11267** — EMC and system level ESD design guidelines for LCD drivers
- [6] **IEC 60134** — Rating systems for electronic tubes and valves and analogous semiconductor devices
- [7] **IEC 61340-5** — Protection of electronic devices from electrostatic phenomena
- [8] **IPC/JEDEC J-STD-020D** — Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices
- [9] **JESD22-A114** — Electrostatic Discharge (ESD) Sensitivity Testing Human Body Model (HBM)
- [10] **JESD78** — IC Latch-Up Test
- [11] **JESD625-A** — Requirements for Handling Electrostatic-Discharge-Sensitive (ESDS) Devices
- [12] **UM10204** — I<sup>2</sup>C-bus specification and user manual
- [13] **UM10569** — Store and transport requirements

## 21. Revision history

Table 30. Revision history

| Document ID  | Release date | Data sheet status  | Change notice | Supersedes |
|--------------|--------------|--------------------|---------------|------------|
| PCA8576F v.1 | 20131122     | Product data sheet | -             | -          |

## 22. Legal information

### 22.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 22.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 22.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Bare die** — All die are tested on compliance with their related technical specifications as stated in this data sheet up to the point of wafer sawing and are handled in accordance with the NXP Semiconductors storage and transportation conditions. If there are data sheet limits not guaranteed, these will be separately indicated in the data sheet. There are no post-packing tests performed on individual die or wafers.

NXP Semiconductors has no control of third party procedures in the sawing, handling, packing or assembly of the die. Accordingly, NXP Semiconductors assumes no liability for device functionality or performance of the die or systems after third party sawing, handling, packing or assembly of the die. It is the responsibility of the customer to test and qualify their application in which the die is used.

All die sales are conditioned upon and subject to the customer entering into a written die sale agreement with NXP Semiconductors through its legal department.

## 22.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**I<sup>2</sup>C-bus** — logo is a trademark of NXP B.V.

## 23. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 24. Tables

|           |                                                                                                    |    |
|-----------|----------------------------------------------------------------------------------------------------|----|
| Table 1.  | Ordering information                                                                               | 2  |
| Table 2.  | Ordering options                                                                                   | 2  |
| Table 3.  | Marking codes                                                                                      | 2  |
| Table 4.  | Pin description                                                                                    | 5  |
| Table 5.  | Definition of PCA8576F commands                                                                    | 6  |
| Table 6.  | C bit description                                                                                  | 6  |
| Table 7.  | Mode-set command bit description                                                                   | 6  |
| Table 8.  | Load-data-pointer command bit description                                                          | 7  |
| Table 9.  | Device-select command bit description                                                              | 7  |
| Table 10. | Bank-select command bit description                                                                | 8  |
| Table 11. | Blink-select command bit description                                                               | 8  |
| Table 12. | Selection of possible display configurations                                                       | 10 |
| Table 13. | Biasing characteristics                                                                            | 11 |
| Table 14. | Mapping of output pins and corresponding output signals with respect to the multiplex driving mode | 20 |
| Table 15. | Standard RAM filling in 1:3 multiplex drive mode                                                   | 23 |
| Table 16. | Entire RAM filling by rewriting in 1:3 multiplex drive mode                                        | 23 |
| Table 17. | Blinking frequencies                                                                               | 27 |
| Table 18. | I <sup>2</sup> C slave address byte                                                                | 30 |
| Table 19. | Limiting values                                                                                    | 34 |
| Table 20. | Static characteristics                                                                             | 35 |
| Table 21. | Dynamic characteristics                                                                            | 37 |
| Table 22. | Addressing cascaded PCA8576F                                                                       | 39 |
| Table 23. | SYNC contact resistance                                                                            | 40 |
| Table 24. | Dimensions of PCA8576FUG                                                                           | 43 |
| Table 25. | Bump location for PCA8576FUG                                                                       | 43 |
| Table 26. | Alignment marks                                                                                    | 44 |
| Table 27. | Description of tray details                                                                        | 46 |
| Table 28. | Selection of LCD segment drivers                                                                   | 47 |
| Table 29. | Abbreviations                                                                                      | 50 |
| Table 30. | Revision history                                                                                   | 52 |

## 25. Figures

|         |                                                                                                                                   |    |
|---------|-----------------------------------------------------------------------------------------------------------------------------------|----|
| Fig 1.  | Block diagram of PCA8576F                                                                                                         | 3  |
| Fig 2.  | Pinning diagram for PCA8576FUG (bare die)                                                                                         | 4  |
| Fig 3.  | Format of command byte                                                                                                            | 6  |
| Fig 4.  | Example of displays suitable for PCA8576F                                                                                         | 9  |
| Fig 5.  | Typical system configuration                                                                                                      | 10 |
| Fig 6.  | Electro-optical characteristic: relative transmission curve of the liquid                                                         | 13 |
| Fig 7.  | Static drive mode waveforms                                                                                                       | 14 |
| Fig 8.  | Waveforms for the 1:2 multiplex drive mode with $\frac{1}{2}$ bias                                                                | 15 |
| Fig 9.  | Waveforms for the 1:2 multiplex drive mode with $\frac{1}{3}$ bias                                                                | 16 |
| Fig 10. | Waveforms for the 1:3 multiplex drive mode with $\frac{1}{3}$ bias                                                                | 17 |
| Fig 11. | Waveforms for the 1:4 multiplex drive mode with $\frac{1}{3}$ bias                                                                | 18 |
| Fig 12. | Display RAM bit map                                                                                                               | 20 |
| Fig 13. | Relationship between LCD layout, drive mode, display RAM filling order and display data transmitted over the I <sup>2</sup> C-bus | 21 |
| Fig 14. | Display RAM filling order in static drive mode                                                                                    | 22 |
| Fig 15. | Display RAM filling order in 1:2 multiplex drive mode                                                                             | 22 |
| Fig 16. | Display RAM filling order in 1:4 multiplex drive mode                                                                             | 24 |
| Fig 17. | RAM banks in static and multiplex driving mode 1:2                                                                                | 25 |
| Fig 18. | Bank selection                                                                                                                    | 26 |
| Fig 19. | Example of the Bank-select command with multiplex drive mode 1:2                                                                  | 26 |
| Fig 20. | Bit transfer                                                                                                                      | 28 |
| Fig 21. | Definition of START and STOP conditions                                                                                           | 28 |
| Fig 22. | System configuration                                                                                                              | 29 |
| Fig 23. | Acknowledgement of the I <sup>2</sup> C-bus                                                                                       | 29 |
| Fig 24. | I <sup>2</sup> C-bus protocol                                                                                                     | 31 |
| Fig 25. | Device protection circuits                                                                                                        | 32 |
| Fig 26. | Typical I <sub>DD</sub> with respect to V <sub>DD</sub>                                                                           | 36 |
| Fig 27. | Driver timing waveforms                                                                                                           | 38 |
| Fig 28. | I <sup>2</sup> C-bus timing waveforms                                                                                             | 38 |
| Fig 29. | Cascaded PCA8576F configuration                                                                                                   | 40 |
| Fig 30. | Synchronization of the cascade for the various PCA8576F drive modes                                                               | 41 |
| Fig 31. | Bare die outline PCA8576FUG (for dimensions see <a href="#">Table 24</a> )                                                        | 42 |
| Fig 32. | Tray details                                                                                                                      | 45 |
| Fig 33. | Tray alignment                                                                                                                    | 46 |

## 26. Contents

|          |                                                   |          |           |                                                            |           |
|----------|---------------------------------------------------|----------|-----------|------------------------------------------------------------|-----------|
| <b>1</b> | <b>General description</b> . . . . .              | <b>1</b> | 7.11      | Display controller                                         | 27        |
| <b>2</b> | <b>Features and benefits</b> . . . . .            | <b>1</b> | <b>8</b>  | <b>Characteristics of the I<sup>2</sup>C-bus</b> . . . . . | <b>28</b> |
| <b>3</b> | <b>Ordering information</b> . . . . .             | <b>2</b> | 8.1       | Bit transfer . . . . .                                     | 28        |
| 3.1      | Ordering options . . . . .                        | 2        | 8.1.1     | START and STOP conditions . . . . .                        | 28        |
| <b>4</b> | <b>Marking</b> . . . . .                          | <b>2</b> | 8.2       | System configuration . . . . .                             | 28        |
| <b>5</b> | <b>Block diagram</b> . . . . .                    | <b>3</b> | 8.3       | Acknowledge . . . . .                                      | 29        |
| <b>6</b> | <b>Pinning information</b> . . . . .              | <b>4</b> | 8.4       | I <sup>2</sup> C-bus controller . . . . .                  | 30        |
| 6.1      | Pinning . . . . .                                 | 4        | 8.5       | Input filters . . . . .                                    | 30        |
| 6.2      | Pin description . . . . .                         | 5        | 8.6       | I <sup>2</sup> C-bus protocol . . . . .                    | 30        |
| <b>7</b> | <b>Functional description</b> . . . . .           | <b>6</b> | <b>9</b>  | <b>Internal circuitry</b> . . . . .                        | <b>32</b> |
| 7.1      | Commands of PCA8576F . . . . .                    | 6        | <b>10</b> | <b>Safety notes</b> . . . . .                              | <b>33</b> |
| 7.1.1    | Command: mode-set . . . . .                       | 6        | <b>11</b> | <b>Limiting values</b> . . . . .                           | <b>34</b> |
| 7.1.2    | Command: load-data-pointer . . . . .              | 7        | <b>12</b> | <b>Static characteristics</b> . . . . .                    | <b>35</b> |
| 7.1.3    | Command: device-select . . . . .                  | 7        | <b>13</b> | <b>Dynamic characteristics</b> . . . . .                   | <b>37</b> |
| 7.1.4    | Command: bank-select . . . . .                    | 8        | <b>14</b> | <b>Application information</b> . . . . .                   | <b>39</b> |
| 7.1.5    | Command: blink-select . . . . .                   | 8        | 14.1      | Cascaded operation . . . . .                               | 39        |
| 7.2      | Initialization . . . . .                          | 8        | <b>15</b> | <b>Bare die outline</b> . . . . .                          | <b>42</b> |
| 7.3      | Possible display configurations . . . . .         | 9        | <b>16</b> | <b>Handling information</b> . . . . .                      | <b>45</b> |
| 7.4      | LCD voltage . . . . .                             | 10       | <b>17</b> | <b>Packing information</b> . . . . .                       | <b>45</b> |
| 7.4.1    | LCD bias generator . . . . .                      | 10       | 17.1      | Tray information . . . . .                                 | 45        |
| 7.4.2    | LCD voltage selector . . . . .                    | 11       | <b>18</b> | <b>Appendix</b> . . . . .                                  | <b>47</b> |
| 7.4.2.1  | Electro-optical performance . . . . .             | 12       | 18.1      | LCD segment driver selection . . . . .                     | 47        |
| 7.4.3    | LCD drive mode waveforms . . . . .                | 14       | <b>19</b> | <b>Abbreviations</b> . . . . .                             | <b>50</b> |
| 7.4.3.1  | Static drive mode . . . . .                       | 14       | <b>20</b> | <b>References</b> . . . . .                                | <b>51</b> |
| 7.4.3.2  | 1:2 Multiplex drive mode . . . . .                | 15       | <b>21</b> | <b>Revision history</b> . . . . .                          | <b>52</b> |
| 7.4.3.3  | 1:3 Multiplex drive mode . . . . .                | 17       | <b>22</b> | <b>Legal information</b> . . . . .                         | <b>53</b> |
| 7.4.3.4  | 1:4 Multiplex drive mode . . . . .                | 18       | 22.1      | Data sheet status . . . . .                                | 53        |
| 7.5      | Oscillator . . . . .                              | 19       | 22.2      | Definitions . . . . .                                      | 53        |
| 7.5.1    | Internal clock . . . . .                          | 19       | 22.3      | Disclaimers . . . . .                                      | 53        |
| 7.5.2    | External clock . . . . .                          | 19       | 22.4      | Trademarks . . . . .                                       | 54        |
| 7.5.3    | Timing and frame frequency . . . . .              | 19       | <b>23</b> | <b>Contact information</b> . . . . .                       | <b>54</b> |
| 7.6      | Segment outputs . . . . .                         | 19       | <b>24</b> | <b>Tables</b> . . . . .                                    | <b>55</b> |
| 7.7      | Backplane outputs . . . . .                       | 19       | <b>25</b> | <b>Figures</b> . . . . .                                   | <b>56</b> |
| 7.8      | Display register . . . . .                        | 20       | <b>26</b> | <b>Contents</b> . . . . .                                  | <b>57</b> |
| 7.9      | Display RAM . . . . .                             | 20       |           |                                                            |           |
| 7.9.1    | RAM filling in static drive mode . . . . .        | 22       |           |                                                            |           |
| 7.9.2    | RAM filling in 1:2 multiplex drive mode . . . . . | 22       |           |                                                            |           |
| 7.9.3    | RAM filling in 1:3 multiplex drive mode . . . . . | 23       |           |                                                            |           |
| 7.9.4    | RAM filling in 1:4 multiplex drive mode . . . . . | 23       |           |                                                            |           |
| 7.9.5    | Data pointer . . . . .                            | 24       |           |                                                            |           |
| 7.9.6    | Subaddress counter . . . . .                      | 24       |           |                                                            |           |
| 7.9.7    | Writing over the RAM address boundary . . . . .   | 25       |           |                                                            |           |
| 7.9.8    | Bank selection . . . . .                          | 25       |           |                                                            |           |
| 7.9.8.1  | RAM bank switching . . . . .                      | 25       |           |                                                            |           |
| 7.9.8.2  | Output bank selector . . . . .                    | 26       |           |                                                            |           |
| 7.9.8.3  | Input bank selector . . . . .                     | 27       |           |                                                            |           |
| 7.10     | Blinking . . . . .                                | 27       |           |                                                            |           |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2013.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 22 November 2013

Document identifier: PCA8576F