


WIRING SCHEDULE		
	SIDE	PLUG
+	RIBBED	1
-	SMOOTH	2

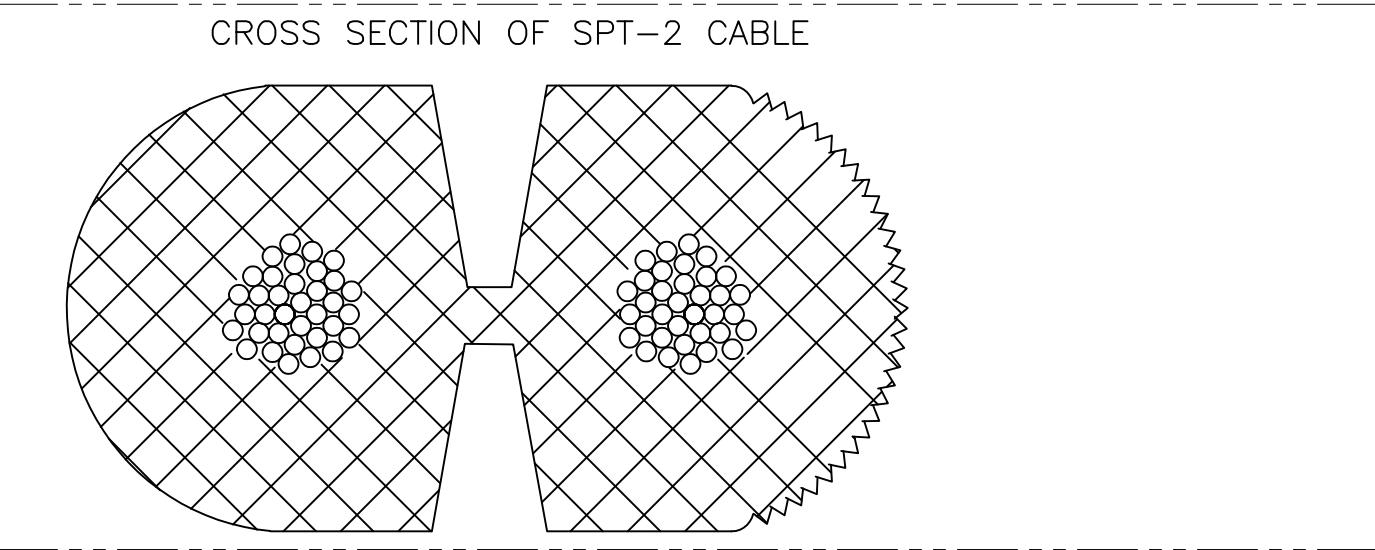

1. PACKAGING ACC. TO TE SPEC.107-18032
BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND
2. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY
AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO
TE-SPEC.108-18857, SUBSECTION 3.1.1

3 WIRING SCHEDULE AS SHOWN

16.0 FT	±3.84	2181195-8
14.0 FT	±3.36	2181195-7
12.0 FT	±2.88	2181195-6
10.0 FT	±2.4	2181195-5
8.0 FT	±1.92	2181195-4
6.0 FT	±1.44	2181195-3
4.0 FT	±.96	2181195-2
2.0 FT	±.48	2181195-1
"L"	TOLERANCES [INCHES]	TE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

-

DWN
E.C. CLAYBAUGH
CHK
P. BECKER
APVD
P. BECKER
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
-

17/JUN/11
13/JUL/11
01/AUG/11

CUSTOMER DRAWING

TE Connectivity

NAME
CABLE ASSY, NECTOR, LV-2, PLUG - PIGTAIL

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2181195

RESTRICTED TO
-

SCALE
NTS

SHEET
1 of 1

REV
A