



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO
POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES
THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE
TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE
USER ASSUMES ALL LIABILITY FOR ANY INADEQUACY,
OMISSION, OR ERROR. POSITRONIC ASSUMES NO RESPONSIBILITY FOR
RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF
SUCH INFORMATION IN WHOLE OR IN PART.

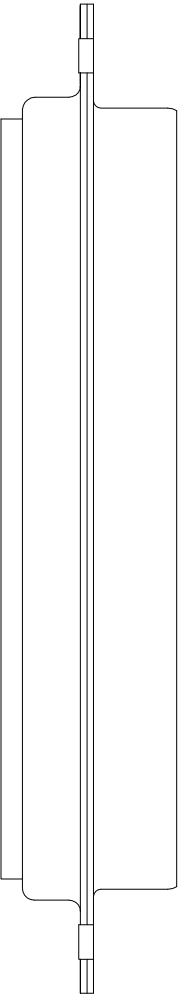

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.
SHELS: STAINLESS STEEL, PASSIVATED.
 2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS.
WORKING VOLTAGE: 300 V r.m.s.
 3. TEMPERATURE RANGE: -55°C TO $+125^{\circ}\text{C}$.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

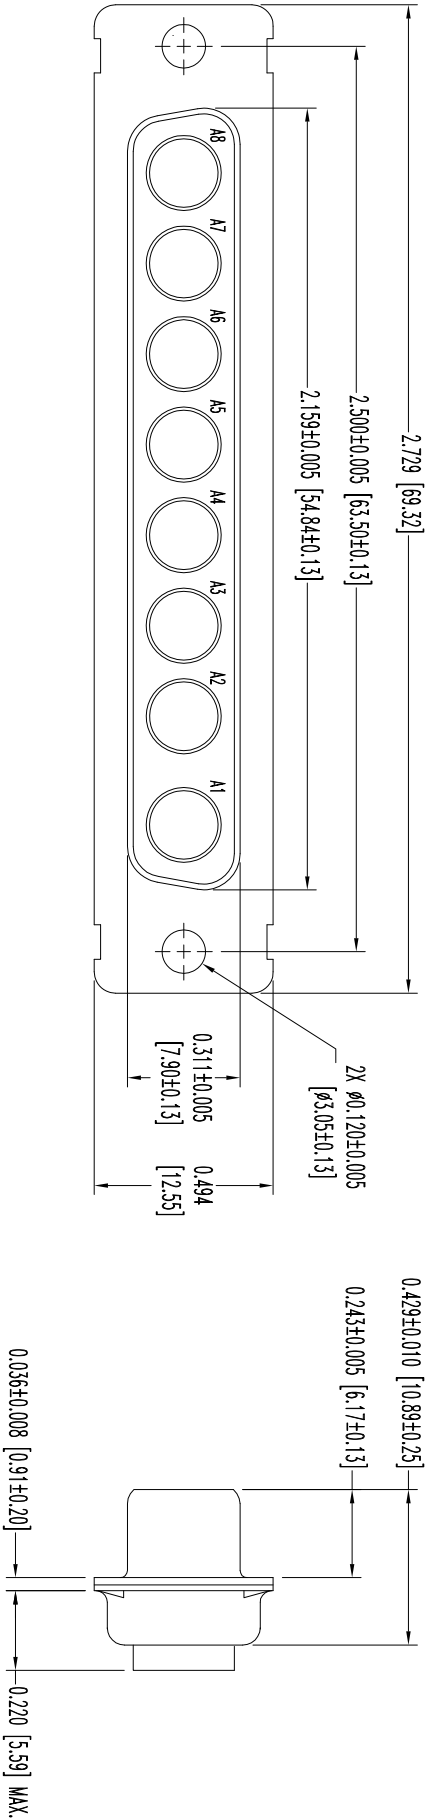

POSITRONIC INDUSTRIES INC.

www.connectpositronic.com

DATE

8-05-09

DRAWING NUMBER

SK10763

REV.

NC

TITLE

CBM8W8S0000S

CBM SERIES

N.T.S.

SCALE

N.T.S.

DRAWN BY

B SHELLBOY

APPROVED BY

R WILLIAMS

DECIMAL TOL.

$\pm 0.015 [0.38]$

ANGULAR TOL.

$\pm 5^{\circ}$

FSCM 28198

DATE	REV	REVISION RECORD	APP	DR	CK
8-05-09	NC	ECO 31056	RCW	BS	TK

SK10763