

Quad comparator

BA10339 / BA10339F / BA10339FV


The BA10339, BA10339F, and BA10339FV each consist of four comparators in a single package. The open collector output allows a wired OR connection.

These products feature a wide range of operating power supply voltages, from 3 to 36V with single power supply operation, and from ± 1.5 to ± 18 V with dual power supply operation. Available packages include 14-pin DIP (BA10339), 14-pin SOP (BA10339F), and 14-pin SSOP-B (BA10339FV).

●Features

- 1) Wide range of operating voltages (single power supply: 3 to 36V; dual power supply: ± 1.5 to ± 18 V)
- 2) Low current dissipation (0.8mA typ., $V_{CC} = 5$ V)
- 3) Low input offset current (5nA typ., $V_{CC} = 5$ V) and input offset voltage (2mV typ., $V_{CC} = 5$ V)
- 4) Wide common-mode input voltage range (0 to $V_{CC} - 1.5$ V).
- 5) Open collector output.

●Block diagram and internal circuit configuration

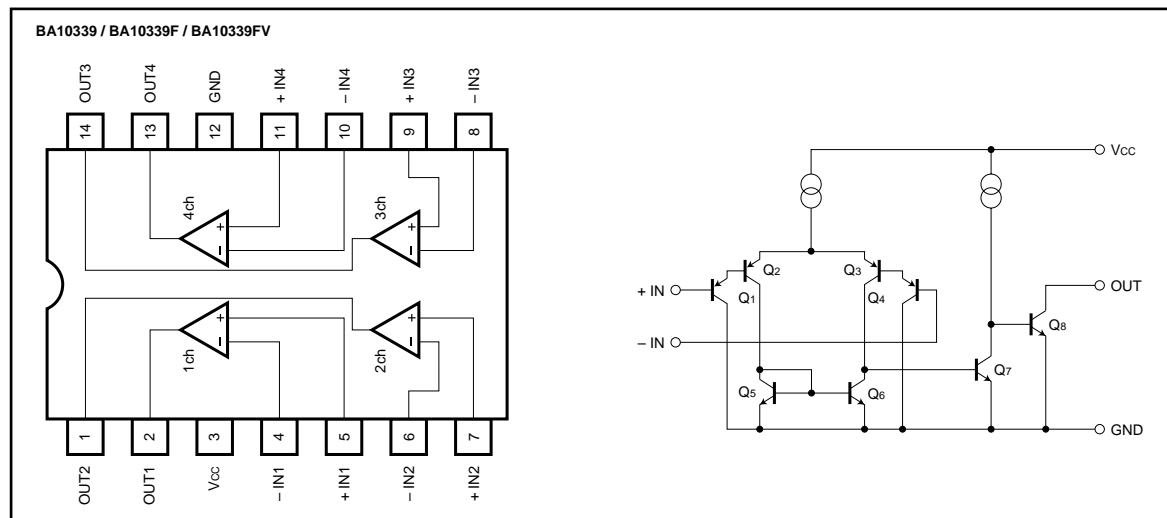

● Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits			Unit
		BA10339	BA10339F	BA10339FV	
Power supply voltage	V_{CC}	36 (± 18)	36 (± 18)	36 (± 18)	V
Power dissipation	P_d	950*	450*	400*	mW
Differential input voltage	V_{ID}	$\pm V_{CC}$	$\pm V_{CC}$	$\pm V_{CC}$	V
Common-mode input voltage	V_I	$-0.3 \sim V_{CC}$	$-0.3 \sim V_{CC}$	$-0.3 \sim V_{CC}$	V
Operating temperature	T_{opr}	$-40 \sim +85$	$-40 \sim +85$	$-40 \sim +85$	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim +125$	$-55 \sim +125$	$-55 \sim +125$	$^\circ\text{C}$

* Refer to the P_d characteristic diagram.

* The Values for BA10339F and BA10339FV are those when it is mounted on a glass epoxy board (50mm \times 50mm \times 1.6mm).

● Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$, $V_{CC} = +5\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input offset voltage	V_{IO}	—	2	5	mV	$V_O = 1.4\text{V}$
Input offset current	I_{IO}	—	5	50	nA	$ I_{IN+} - I_{IN-} $, $V_O = 1.4\text{V}$
Input bias current	I_B	—	25	250	nA	$V_O = 1.4\text{V}$
Common-mode input voltage	V_{ICM}	0	—	$V_{CC} - 1.5$	V	—
Voltage gain	A_V	—	106	—	dB	$R_L = 15\text{k}\Omega$
Quiescent current	I_Q	—	0.8	2	mA	$R_L = \infty$, on All Comparators
Output sink current	I_{sink}	6	16	—	mA	$V_{IN-} = 1\text{V}$, $V_{IN+} = 0\text{V}$, $V_O = 1.5\text{V}$
Output saturation voltage	V_{OL}	—	250	400	mV	$V_{IN-} = 1\text{V}$, $V_{IN+} = 0\text{V}$, $I_{sink} = 3\text{mA}$
Output leakage current	I_{leak}	—	0.1	—	nA	$V_{IN+} = 1\text{V}$, $V_{IN-} = 0\text{V}$, $V_O = 5\text{V}$
Response time	t_r	—	1.3	—	μs	$R_L = 5.1\text{k}\Omega$, $V_{RL} = 5\text{V}$

● Electrical characteristic curves

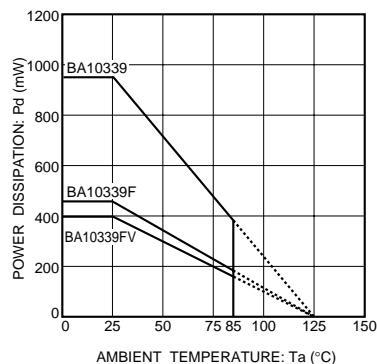


Fig. 1 Power dissipation vs. ambient temperature

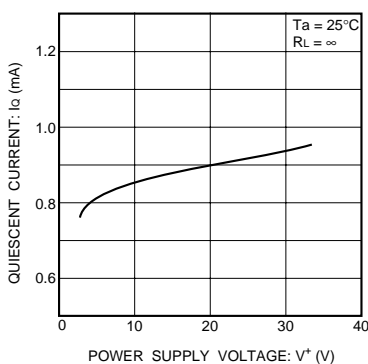


Fig. 2 Quiescent current vs. power supply voltage

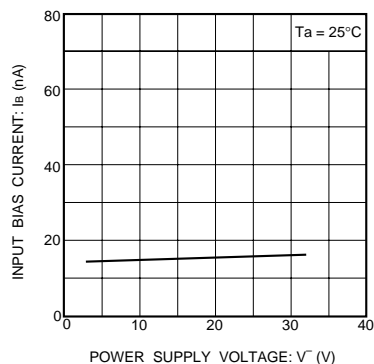


Fig. 3 Input bias current vs. power supply voltage

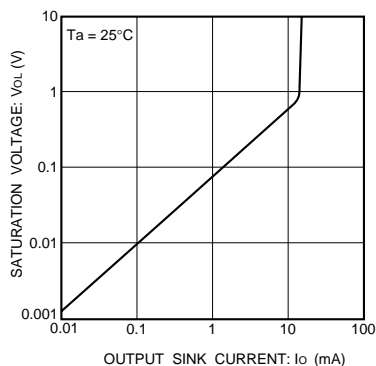


Fig. 4 Output saturation voltage vs. output current

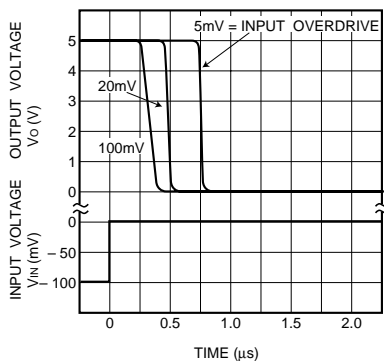


Fig. 5 Propagation characteristics (I)

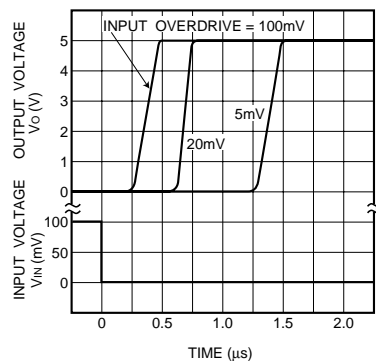


Fig. 6 Propagation characteristics (II)

●Operation notes

(1) Handling unused circuits

If there are any circuits which are not being used, we recommend making connections as shown in Figure 7, with the input going to the potential within the in-phase input voltage range (V_{ICM}), and the output being open.


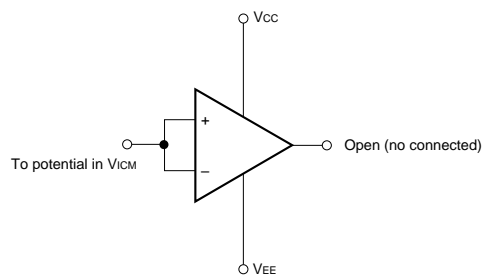


Fig. 7 Unused circuit connections


● External dimensions (Units: mm)

BA10339

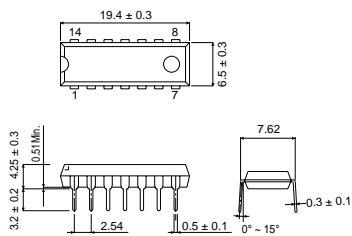


DIP14

BA10339F

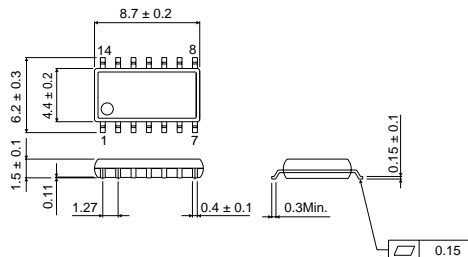

SOP14

BA10339FV

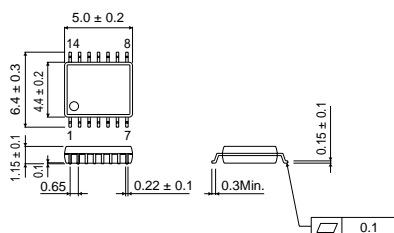

SSOP - B14

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.