
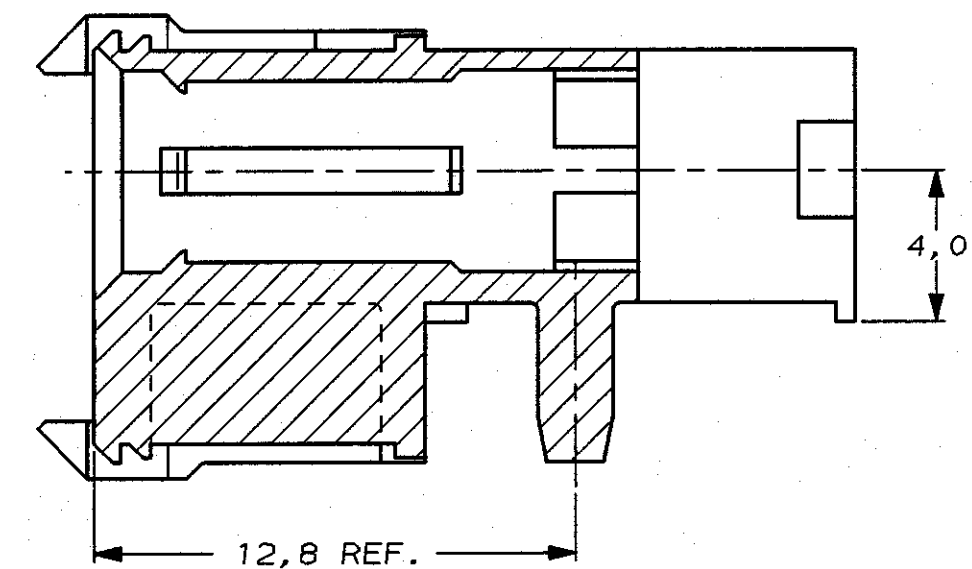
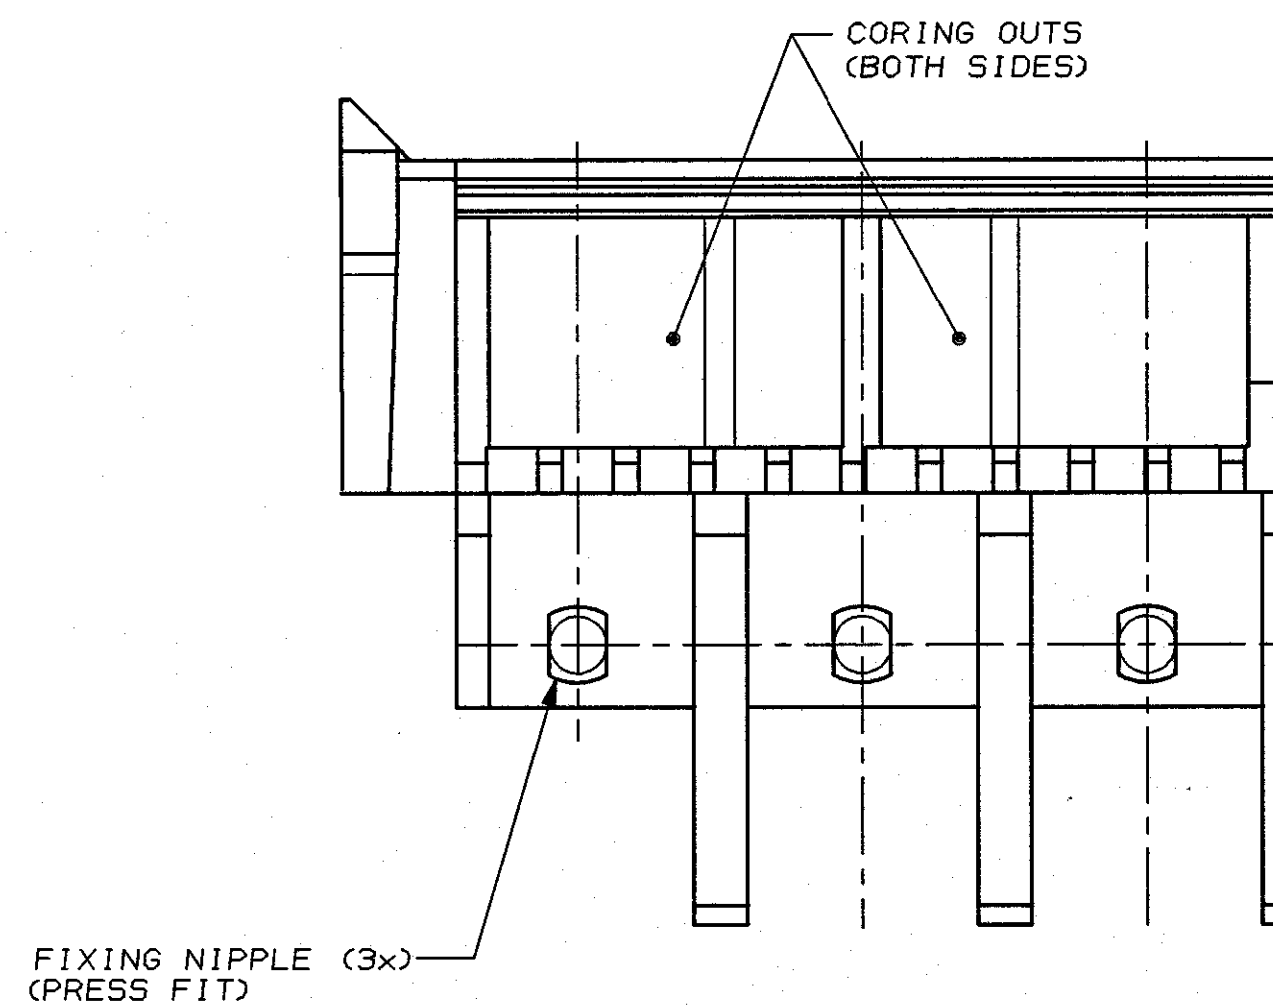
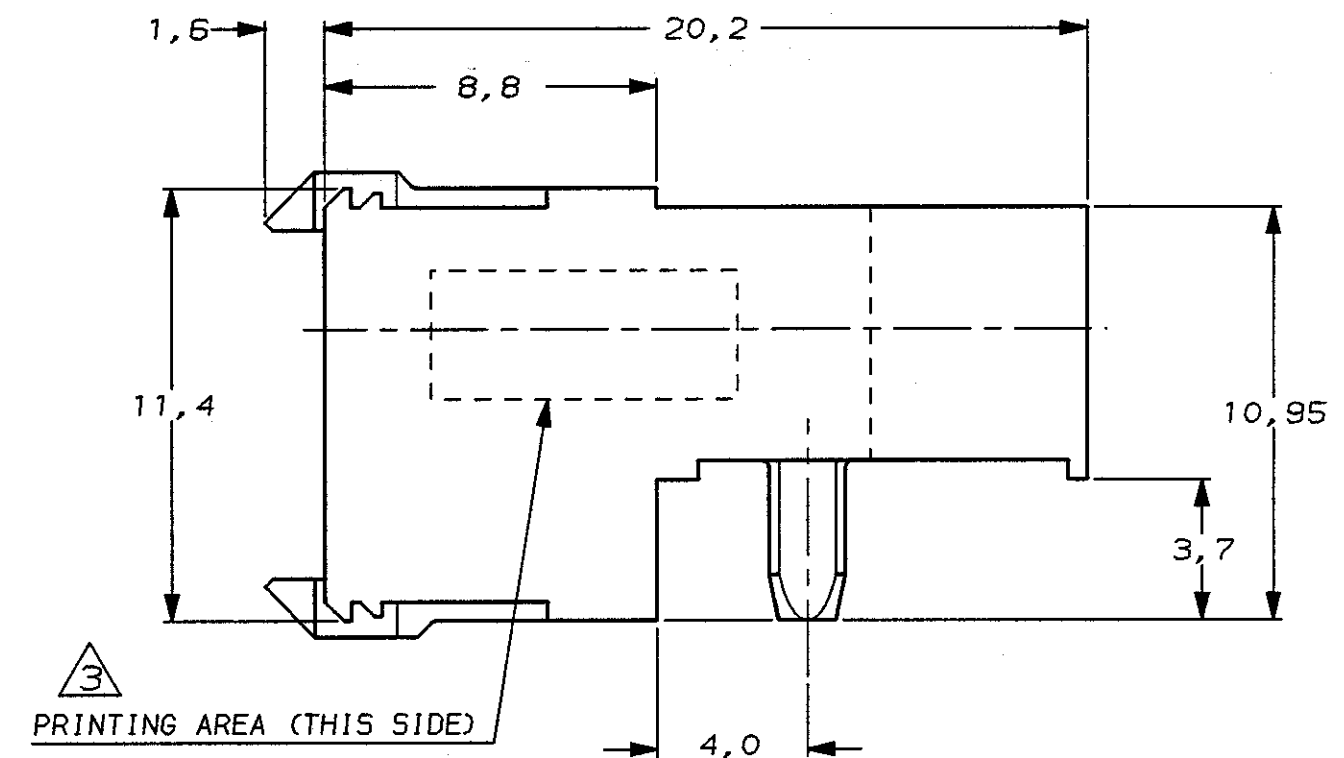


DO NOT SCALE
DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION

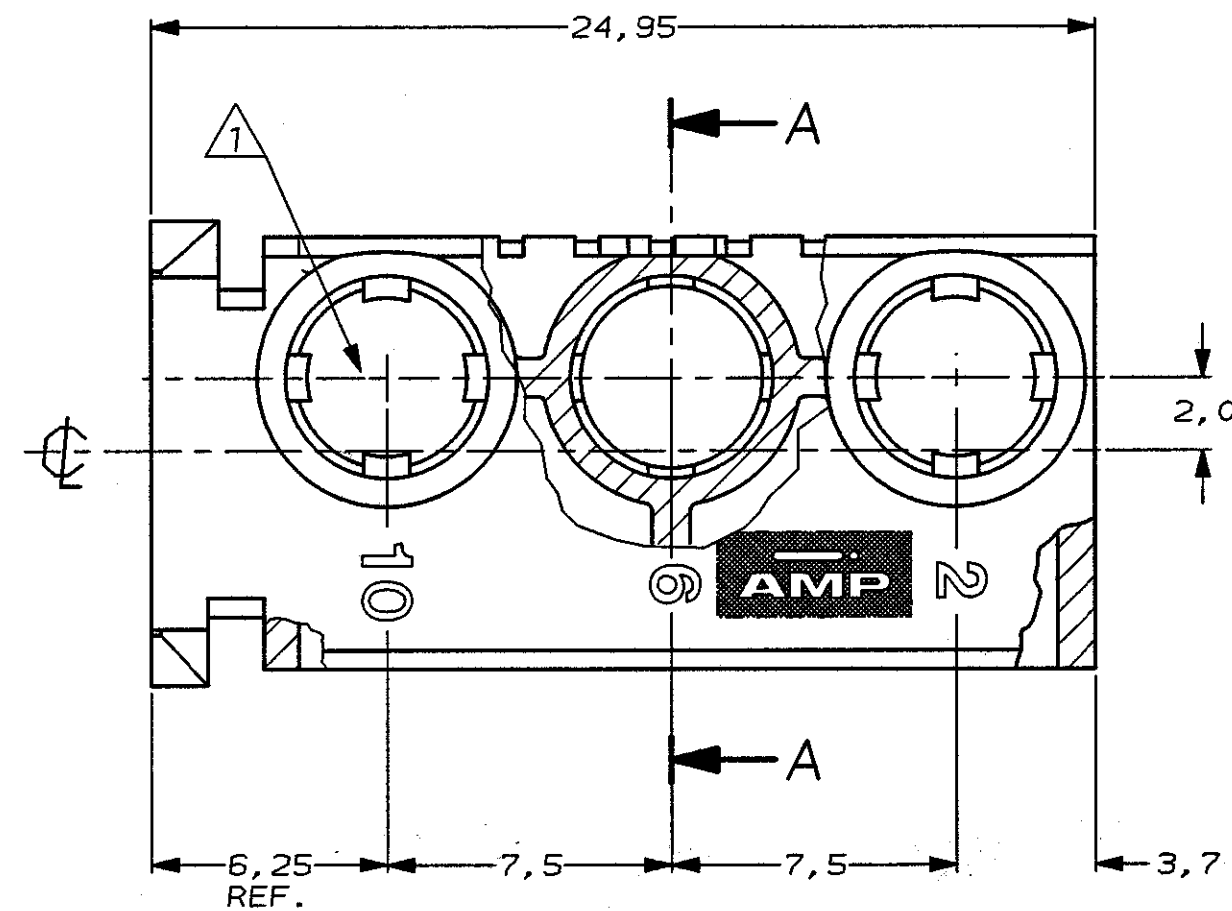

SECTION A-A

- CONTACT CAVITIES SUITABLE FOR 4,8 DIA. HIGH CURRENT, HIGH FREQUENCY OR FIBRE OPTIC CONTACTS AS PER DIN 41626 (SEE ALSO NOTE 5).
- MATERIAL HOUSING : GREY GLASSFILLED POLYESTER.
- CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- NOT PLATED-THROUGH HOLES (3x).
- 1,3 DIA. PLATED-THROUGH HOLES (15x) CAN BE OMITTED IF SPECIAL CONTACTS WITH CABLE CONNECTION OR FIBRE OPTIC CONTACTS ARE USED.

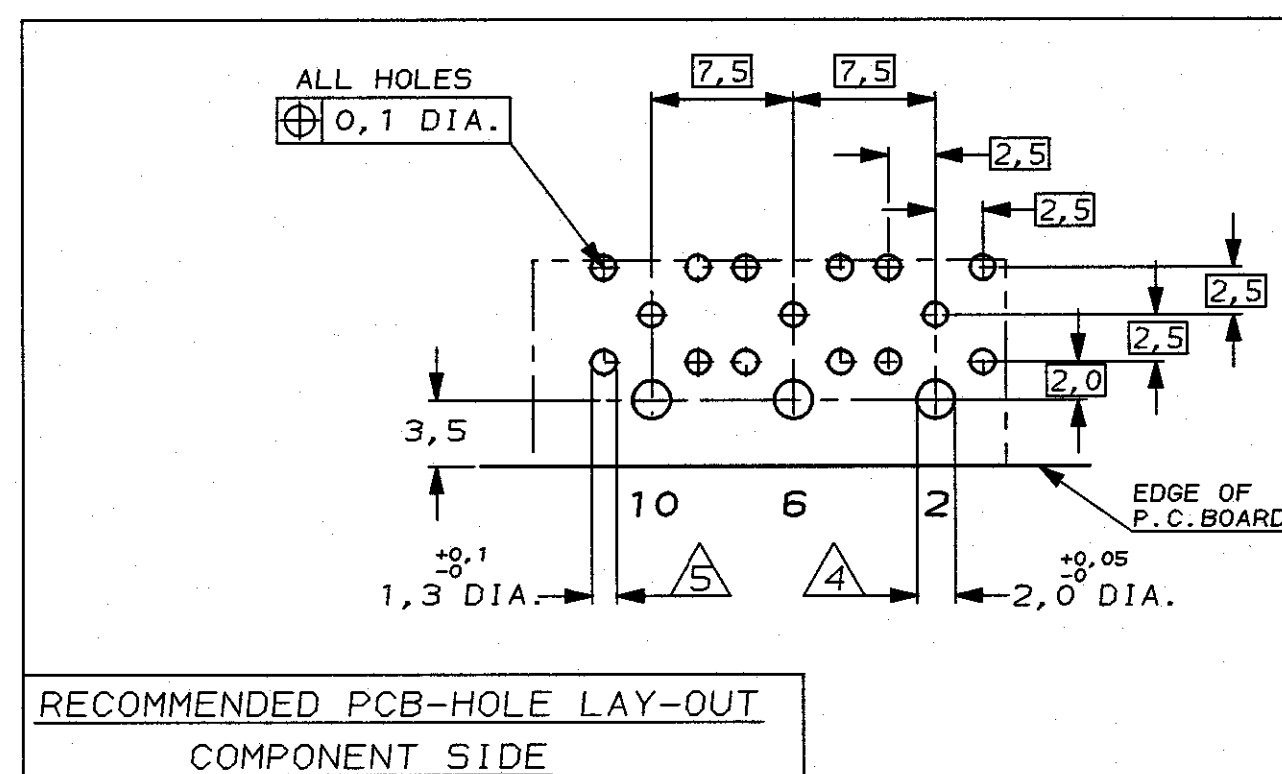

PRELIMINARY

FINISH				MATERIAL		PARTNUMBER	
CUSTOMER DRAWING				FOR REFERENCE ONLY		WILL NOT BE UPDATED	
© COPYRIGHT 1993 BY AMP HOLLAND B.V.				ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.		THIS DRAWING IS UNPUBLISHED	
RELEASED FOR PUBLICATION				AMP HOLLAND B.V.		s-Hertogenbosch, The Netherlands.	
B EH-0720-95				E.D. B.M. 29-06-95		NAME	
A H-9585				B.M. B.M. 01-10-93		Z-PACK 2mm HM	
LTR. REVISION RECORD				DR. CHK. DATE		TYPE N FEMALE CONNECTOR HOUSING	
DR. : S.MEIJSEN				CHK. : B.MOIJ		APP. : L.V.SOEST	
DATE : 17 MAR 92				DATE : 10 APR 1992		DATE : 13 APR 1992	
DWG. No. C-100752				REV. LTR. B		SHEET 1 of 1	