



LOC		DIST		REVISIONS			
GP 00		P LTR		DESCRIPTION		DATE	DMN APD
		A		INITIAL RELEASE		01/AUG/11	ECCC PB

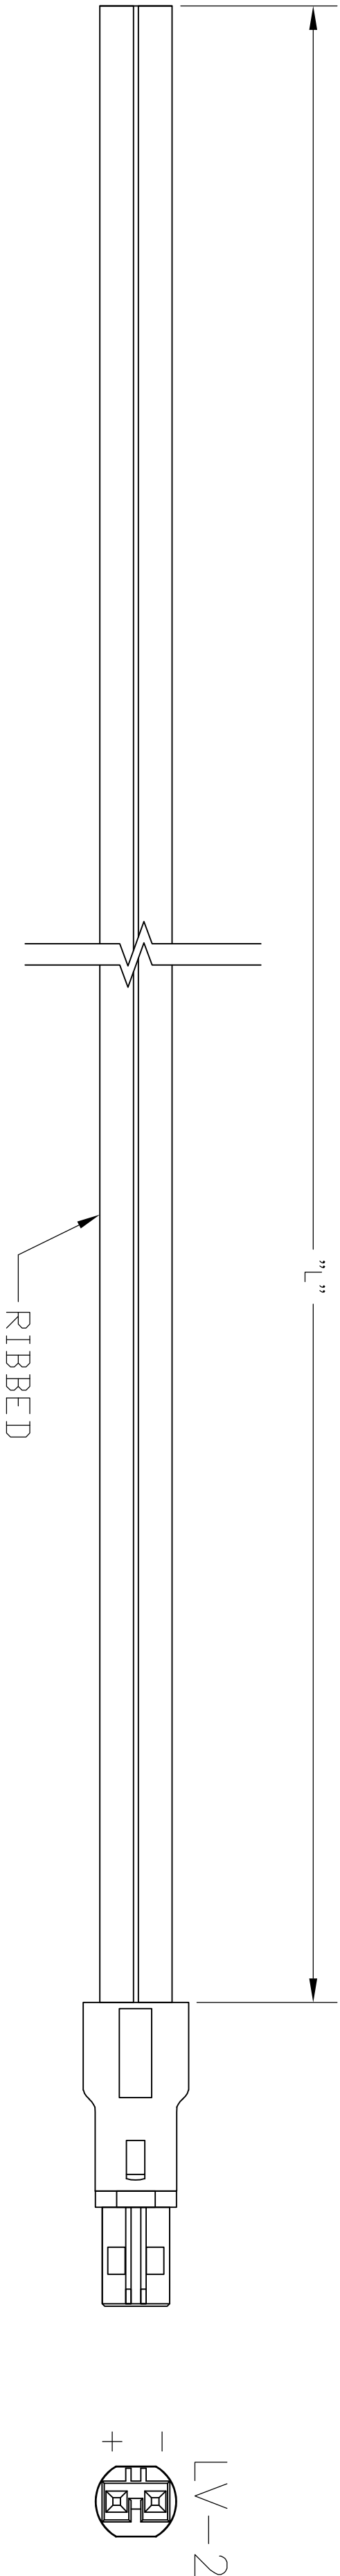

WIRING SCHEDULE		
	SIDE	PLUG
+	RIBBED	1
-	SMOOTH	2

1. PACKAGING ACC. TO TE SPEC.107-18032 BUNDLE EVERY 25 ASSEMBLES WITH A RUBBER BAND
2. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO TE-SPEC.108-18857, SUBSECTION 3.1.1
3. WIRING SCHEDULE AS SHOWN

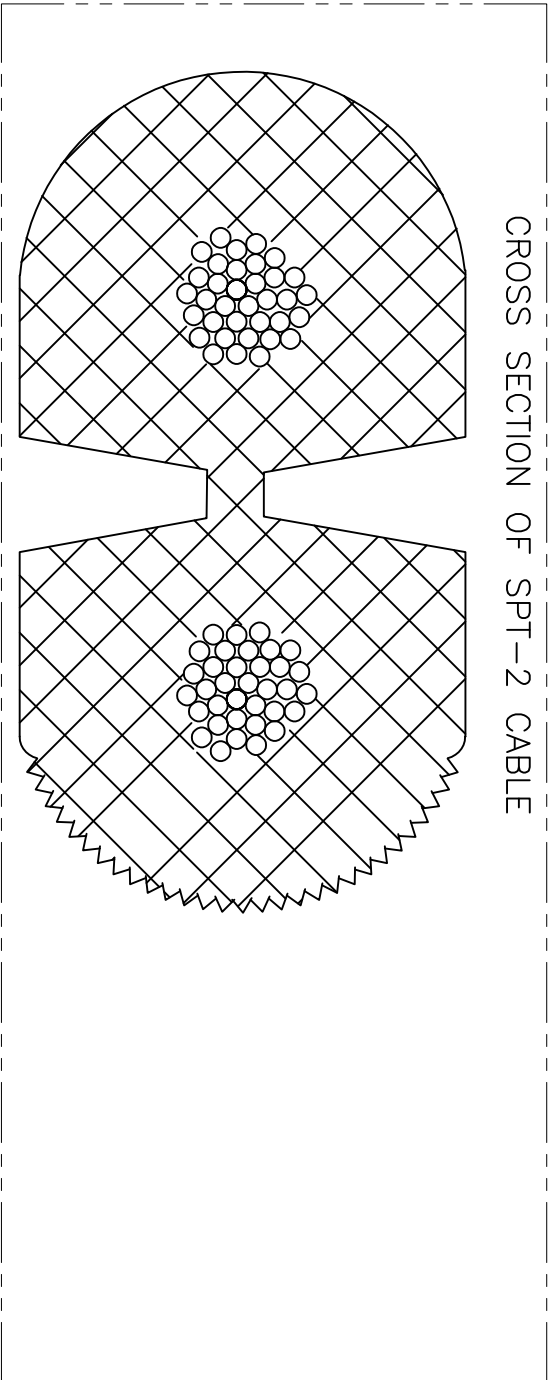

THIS DRAWING IS A CONTROLLED DOCUMENT.				REVISEMENTS			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		CABLE ASSY, NECTOR, LV-2, PLUG - PIGTAIL	
0 PLC		±		DMN		17/JUN/11	
1 PLC		±		CHK		13/JUL/11	
2 PLC		±		P. BECKER		01/AUG/11	
3 PLC		±		APD		P. BECKER	
4 PLC		±		PRODUCT SPEC		APPLICATION SPEC	
ANGLES		±		WEIGHT		A2 00779	
FINISH		-		CUSTOMER DRAWING		C=2181195	
MATERIAL		-		SCALE		NTS	
				SHEET		1 OF 1	
				REV		A	

16.0 FT	±3.84	2181195-8
14.0 FT	±3.36	2181195-7
12.0 FT	±2.88	2181195-6
10.0 FT	±2.4	2181195-5
8.0 FT	±1.92	2181195-4
6.0 FT	±1.44	2181195-3
4.0 FT	±.96	2181195-2
2.0 FT	±.48	2181195-1
"L"	TOLERANCES [INCHES]	TE P/N