
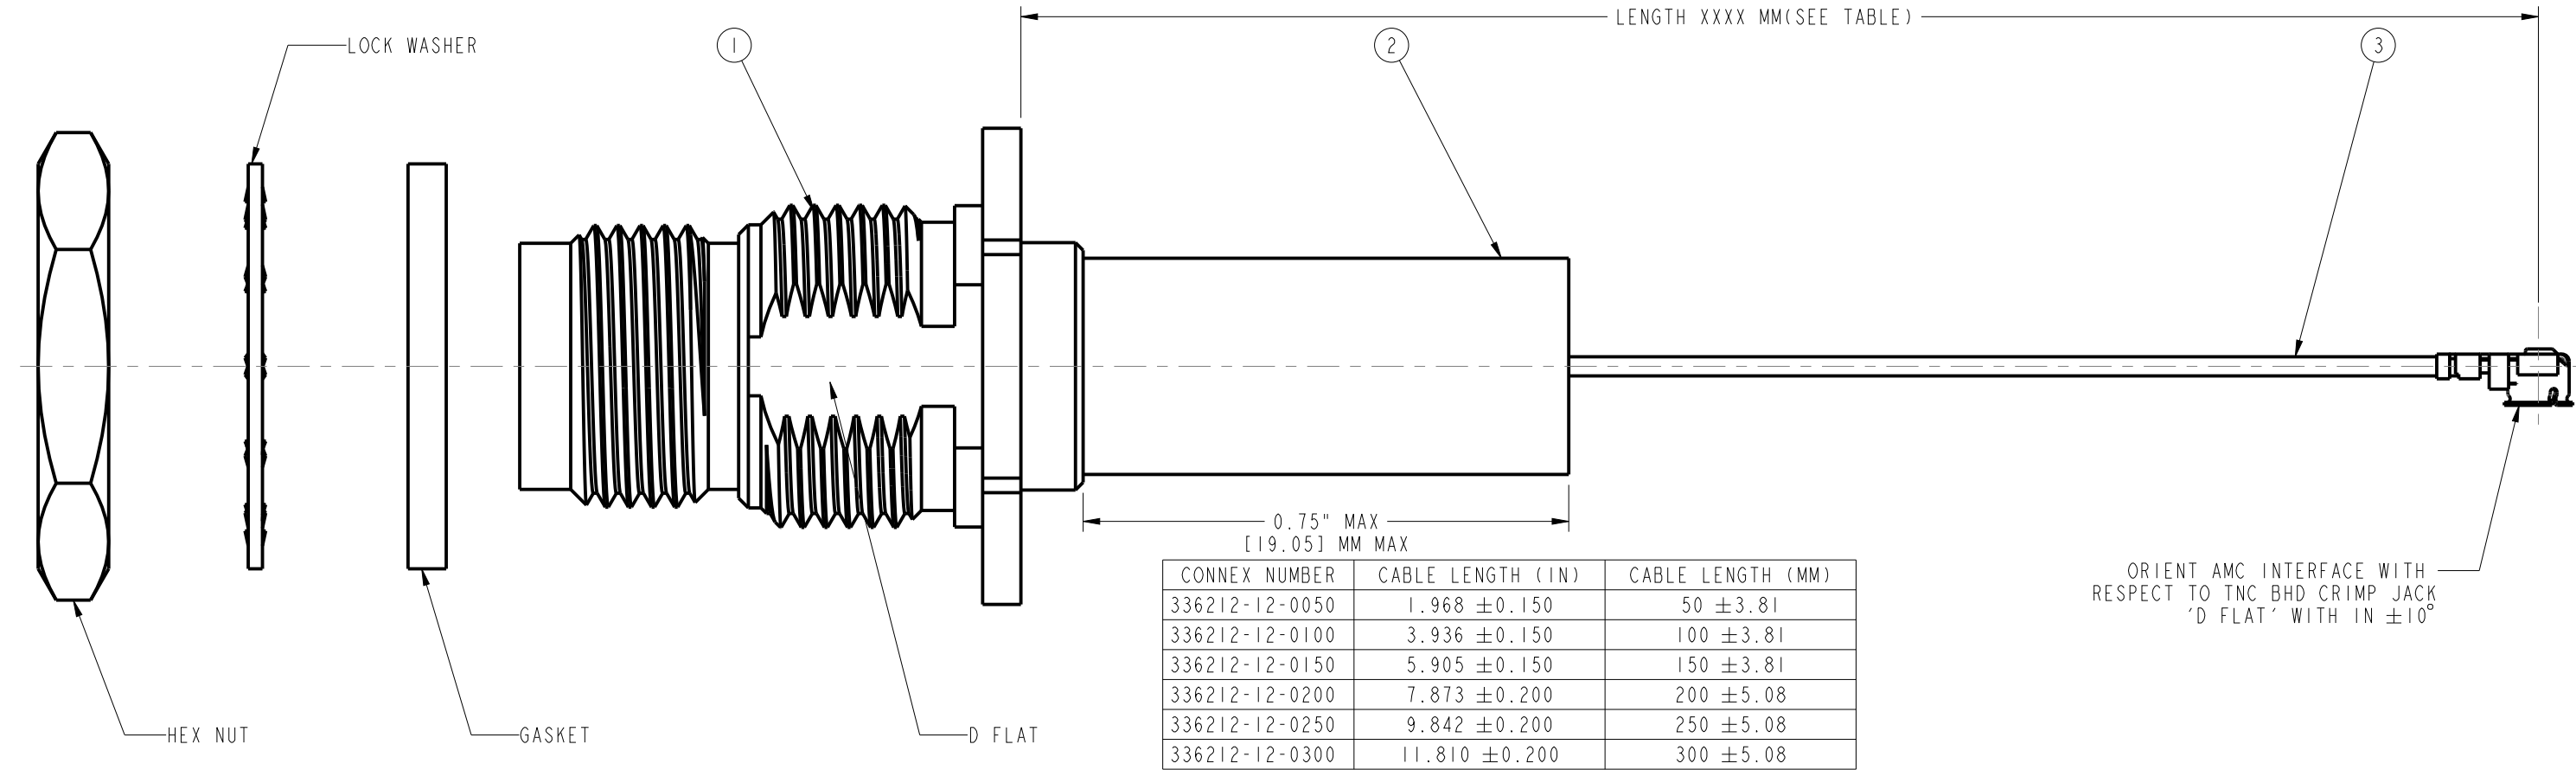


- NOTES:
1. PACKAGE CABLE ASSEMBLY IN BAG.TAG IN BAG WITH "AMPHENOL CONNEX, 336212-12 -XXXX AND DATE CODE".
 2. CABLE ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORTS AND OPEN.

336212-12-XXXX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	08-FEB-11	--	HR

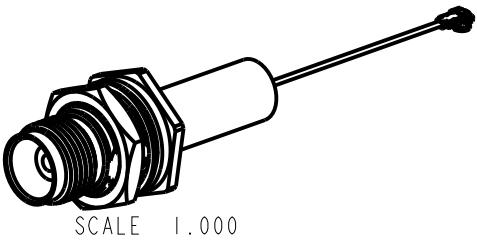

CONNEX NUMBER	CABLE LENGTH (IN)	CABLE LENGTH (MM)
336212-12-0050	1.968 ±0.150	50 ±3.81
336212-12-0100	3.936 ±0.150	100 ±3.81
336212-12-0150	5.905 ±0.150	150 ±3.81
336212-12-0200	7.873 ±0.200	200 ±5.08
336212-12-0250	9.842 ±0.200	250 ±5.08
336212-12-0300	11.810 ±0.200	300 ±5.08

* ADDITIONAL LENGTHS CAN BE PROVIDED
BY CHANGING XXXX TO DESIRED LEGNTH IN MM
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

- ☐ FREQUENCY_____ TO _____ GHz
- ☐ VSWR _____ : 1 MAX
- ☐ INS. LOSS _____ dB MAX
- ☒ CONTINUITY
- ☒ HI-POT :200 VRMS
- ☐ OTHER

100901-02	1	3	MICRO COAX PLUG TERMINATED TO 1.13 MM CABLE	
009-954-458	A/R	2	HEAT SHRINK TUBE	
122542RP	1	1	TNC BLKHD CRIMP JACK RP	
PART NUMBER	QTY	ITEM	DESCRIPTION	FINISH

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ±.015 (0,381 mm) ±.005 (0,127 mm) ANGLES ± 1°	MATERIAL	DRAWN HARI R	DATE 08-Feb-11	TITLE RP TNC BLKHD CRIMP JACK IP 67 TO MICRO COAX PLUG TERMINATED USING 1.13MM XXXX MM,LENGTH	Amphenol Connex	
		ENGINEER HARI R	DATE 08-Feb-11			
	REFERENCE TASK - 564	APPROVED	DATE			
	CAD FILE Root folder:/Cable assembly/336212-12-XXXX			DWG SIZE B	DRAWING NO. 336212-12-XXXX	REV A