


# PCM-9380

Intel® Pentium® M Processor 3.5" SBC,  
CRT, LVDS, LAN, USB, MIO

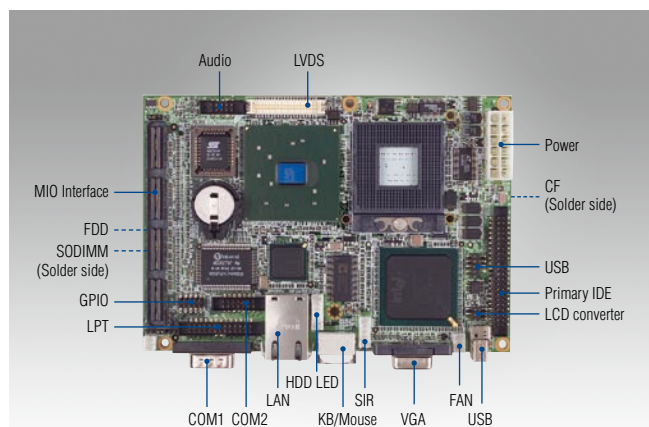

## Features

- Supports Intel Pentium® M/ Celeron® M processor (Socket 478 type)
- Supports ECC DDR 266/333 MHz memory
- 2-channel LVDS supports up to 48-bit (optional), dual independent display (CRT + LVDS)
- +5 V and +12 V power; or single +5 V power
- Supports Embedded software APIs and utilities

### Software APIs:




### Utilities:



## Specifications

Processor System	CPU	Intel Pentium M/Celeron M socket 478 type
	Front Side Bus	400 MHz
	Frequency	Depends on processor
	System Chipset	Intel 855GME + ICH4
Memory	BIOS	Award 4 Mb Flash ROM BIOS
	Technology	DDR 200/266/333 MHz SO-DIMM supported
	Max. Capacity	1 GB
	Socket	1 x 200-pin SODIMM
Display	Chipset	Intel 855GME
	VRAM	Optimized shared memory architecture up to 64 MB system memory
	Graphics Engine	Mobile Intel 855 GME integrated 3D/2D engine
	LVDS	1 x 36-bit LVDS (48-bit optional)
	VGA	CRT: up to 1600 x 1200 @ 32bpp (85 Hz)
	TV Out	Optional with MIO-6254 module
Ethernet	Dual Display	CRT + LVDS
		CRT + TV-out / LVDS + TV-out (w/MIO-6254)
	Speed	10/100 Mbps
		10/100/1000 Mbps (optional)
Audio	Controller	Intel 82551QM 10/100 Mbps LAN
	Connector	Intel 82541PI 10/100/1000 Mbps Giga LAN(Optional)
	Chipset	RJ-45 on LAN
WatchDog Timer		Realtek ALC203 AC97, Line-in, Line-out, Mic-in
Storage	Output System reset	
	CompactFlash	Programmable 1 ~ 255 sec
	IDE	1
Rear I/O	Floppy	1
	Serial	1 (COM1 supports RS-232)
	Ethernet	1 (10/100 Mbps)
	KB/Mouse	1
	VGA	1
	USB	1
Internal I/O	USB	2 x USB 2.0
	Serial	1 x COM
	IDE	COM2 supports RS-232/422/485
	Parallel(LPT)	1
	FDD	1
	SMBUS	Supported
	KB/Mouse	1
	GPIO	8-bit GPIO
	IrDA	115 kbps, SIR, IrDA 1.0 complaint
Power	Expansion	MIO 160
	Power Type	1
	Power Supply Voltage	AT/ATX
	Power Consumption (Typical)	5V + 5%, 12V + 5% (LCD)
	Power Consumption (Max, test in HCT)	Typical: 3.0 A @ 5 V, 0.04 A @ 12 V (Pentium M 1.8 G, DDR266/256 MB)
	Power Management	MAX: 4.26 A @ 5 V, 0.13 A @ 12 V (Pentium M 1.8 G, DDR266/256 MB)
	Battery	APM1.2, ACPI2.0, wake on LAN, and modem ring-in functions
Environment		Lithium 3 V/196 Mah
	Operational	0 ~ 60° C (32 ~ 140° F)
Physical Characteristics	Non-Operational	Operating: 0 ~ 60° C (32 ~ 140° F) (Operating humidity: 40° C @ 85% RH non-condensing)
		Non-Operating: -40° C ~ 85° C and 60° C @ 95% RH non-condensing
	Dimensions (L x W)	146 x 102 mm (5.7" x 4")
	Weight	0.85 kg (1.87 lb), weight of total package

## Board Diagram

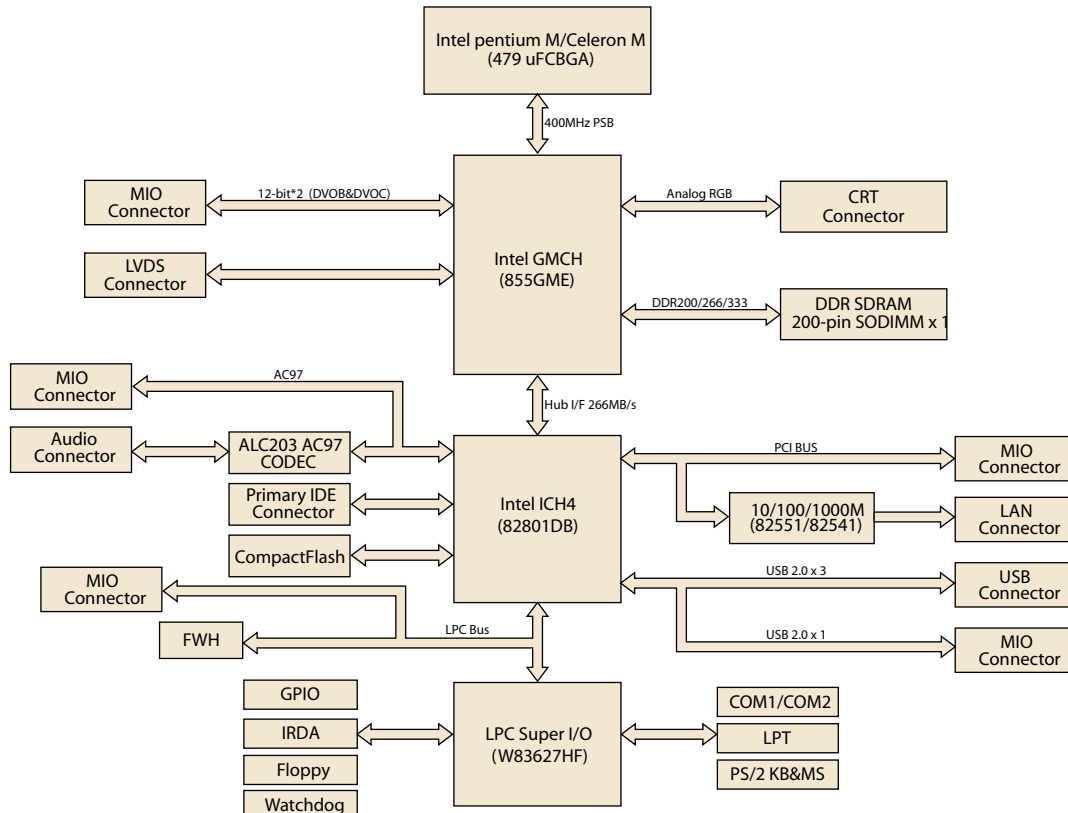

## Ordering Information

Part No.	CPU	CRT	LVDS	DVI	TV Out	LAN	USB	RS-232	RS-232/422/485	LPT	GPIO	IrDA	CF	MIO	Thermal Solution	Operating Temp.
PCM-9380F-00A3E	Socket	1	1	-	-	1 FE	3	1	1	1	4 in, 4 out	1	1	1	Passive	0 ~ 60° C
PCM-9380F-M0A3E	Celeron M 600 MHz (512 KB)	1	1	-	-	1 FE	3	1	1	1	4 in, 4 out	1	1	1	Passive	0 ~ 60° C
PCM-9380F-S0A3E	Celeron M 1.0 GHz	1	1	-	-	1 FE	3	1	1	1	4 in, 4 out	1	1	1	Passive	0 ~ 60° C
PCM-9380FG-00A3E	Socket	1	1	-	-	1GbE	3	1	1	1	4 in, 4 out	1	1	1	Passive	0 ~ 60° C
PCM-9380FG-S0A3E	Celeron M 600 MHz (512 KB)	1	1	-	-	1GbE	3	1	1	1	4 in, 4 out	1	1	1	Passive	0 ~ 60° C

## Packing List

Part No.	Description	Quantity
	PCM-9380 SBC	
	Startup Manual	
	Utility CD	
1701440351	IDE cable (44p/44p)	x 1
1700060202	KB/MS cable	x 1
1701140201	RS-232/RS-422/485 cable	x 1
1700260250	Parallel Port cable	x 1
1703100152	Audio cable	x 1
1703100121	USB cable (2 ports)	x 1
9681000044	26-34 pin FDD Adapter	x 1
1701340700	Flat Cable 34-pin for FDD	x 1
1700000265	ATX power 20P-12P cable	x 1

## Optional Accessories

Part No.	Description
MIO-6250-00A1E	MIO Module w/ 3 LAN, RoHS
MIO-6254-00A1E	MIO module w/ DVI, TV, Audio
MIO-6260-00A1E	MIO module w/ 2 COM, 4 USB, RoHS
1700016161	AT Power cable, 2 x 6P to 3 x 4P 10 cm
1700016141	AT power cable, 2 x 6P to 2 x 10P 10 cm

## Embedded OS

Embedded OS	Part No.	Description
WinCE 5.0	2070000765	Image CE 5.0 Pro Plus EN for P-M with 2 COM
WinCE 6.0	2070001580	CE60 Pro P-M (852/855) 2Com V1.0 ENG
Win XPE	2070000733	Image XPE SP2 (P-4_P-M Boards) V2.20 (ENG) (450 MB)
	2070001573	XPE FP2007 P4&PM-A (to 915) V3.0 ENG

# Value-Added Software Services

**Software API:** An interface that defines the ways by which an application program may request services from libraries and/or operating systems. Provides not only the underlying drivers required but also a rich set of user-friendly, intelligent and integrated interfaces, which speeds development, enhances security and offers add-on value for Advantech platforms. It plays the role of catalyst between developer and solution, and makes Advantech embedded platforms easier and simpler to adopt and operate with customer applications.

## Software APIs

### Control



**GPIO**

General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. It allows users to monitor the level of signal input or set the output status to switch on/off a device. Our API also provides Programmable GPIO, which allows developers to dynamically set the GPIO input or output status.



**SMBus**

SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.



**I2C**

I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface with an embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.

### Display



**Brightness Control**

The Brightness Control API allows a developer to interface with an embedded device to easily control brightness.



**Backlight**

The Backlight API allows a developer to control the backlight (screen) on/off in an embedded device.

### Monitor



**Watchdog**

A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.



**Hardware Monitor**

The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.



**Hardware Control**

The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust fan speed or other devices; it can also be used to adjust the LCD brightness.

### Power Saving



**CPU Speed**


Make use of Intel SpeedStep technology to reduce power consumption. The system will automatically adjust the CPU Speed depending on system loading.



**System Throttling**

Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These APIs allow the user to lower the clock from 87.5% to 12.5%.

## Software Utilities



**BIOS Flash**

The BIOS Flash utility allows customers to update the flash ROM BIOS version, or use it to back up current BIOS by copying it from the flash chip to a file on customers' disk. The BIOS Flash utility also provides a command line version and API for fast implementation into customized applications.



**Embedded Security ID**

The embedded application is the most important property of a system integrator. It contains valuable intellectual property, design knowledge and innovation, but it is easily copied! The Embedded Security ID utility provides reliable security functions for customers to secure their application data within embedded BIOS.



**Monitoring**

The Monitoring utility allows the customer to monitor system health, including voltage, CPU and system temperature and fan speed. These items are important to a device; if critical errors happen and are not solved immediately, permanent damage may be caused.



**eSOS**

The eSOS is a small OS stored in BIOS ROM. It will boot up in case of a main OS crash. It will diagnose the hardware status, and then send an e-mail to a designated administrator. The eSOS also provides remote connection: Telnet server and FTP server, allowing the administrator to rescue the system.



**Flash Lock**

Flash Lock is a mechanism that binds the board and CF card (SQFlash) together. The user can "Lock" SQFlash via the Flash Lock function and "Unlock" it via BIOS while booting. A locked SQFlash cannot be read by any card reader or boot from other platforms without a BIOS with the "Unlock" feature.