


RGP15A THRU RGP15M

GLASS PASSIVATED JUNCTION FAST SWITCHING PLASTIC RECTIFIER

Reverse Voltage - 50 to 1000 Volts

Forward Current - 1.5 Amperes

PATENTED*

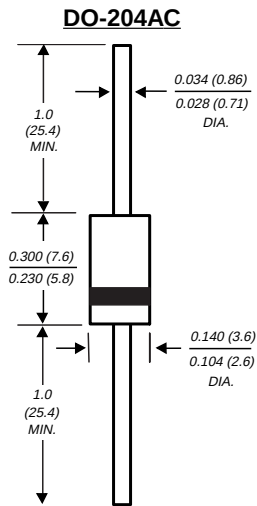

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by
Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930, 306

SUPERRECTIFIER®

FEATURES

- ♦ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ♦ High temperature metallurgically bonded construction
- ♦ Glass passivated cavity-free junction
- ♦ Capable of meeting environmental standards of MIL-S-19500
- ♦ 1.5 Ampere operation at $T_A=55^{\circ}\text{C}$ with no thermal runaway
- ♦ Typical I_R less than $0.1\mu\text{A}$
- ♦ High temperature soldering guaranteed: $350^{\circ}\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-204AC molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.015 ounce, 0.4 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	RGP 15A	RGP 15B	RGP 15D	RGP 15G	RGP 15J	RGP 15K	RGP 15M	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A =55°C	I _(AV)	1.5							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50.0							Amps
Maximum instantaneous forward voltage at 1.5A	V _F	1.3							Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =150°C	I _R	5.0 200.0							μA
Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at T _A =55°C	I _{R(AV)}	100.0							μA
Maximum reverse recovery time (NOTE 1)	t _{rr}	150				250	500		ns
Typical junction capacitance (NOTE 2)	C _J	25.0							pF
Typical thermal resistance (NOTE 3)	R _{θJA}	45.0							°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +175							°C

NOTES:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES RGP15A THRU RGP15M

FIG. 1 - FORWARD CURRENT DERATING CURVE

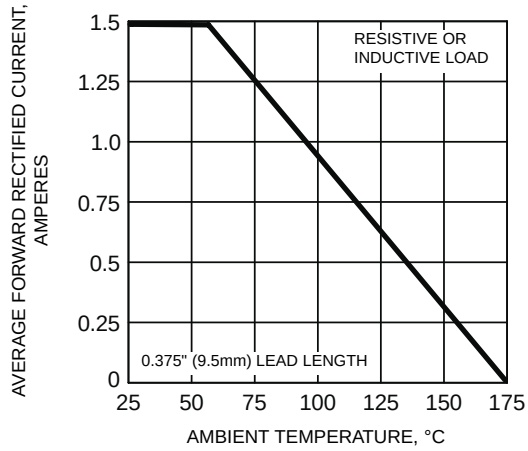


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

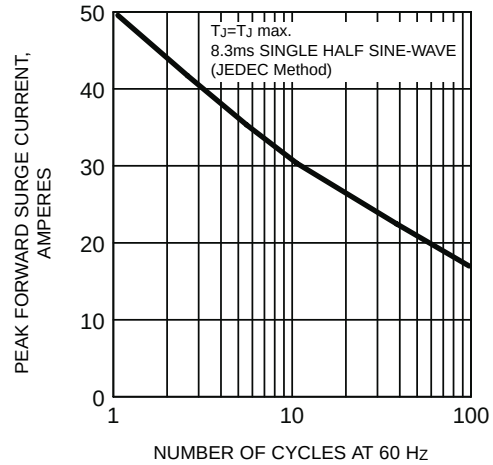


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

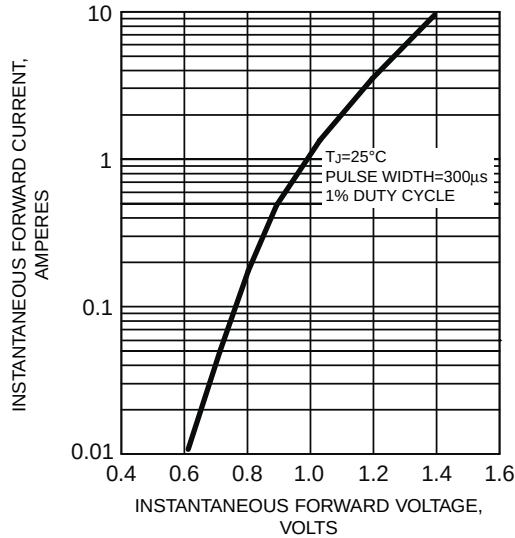


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

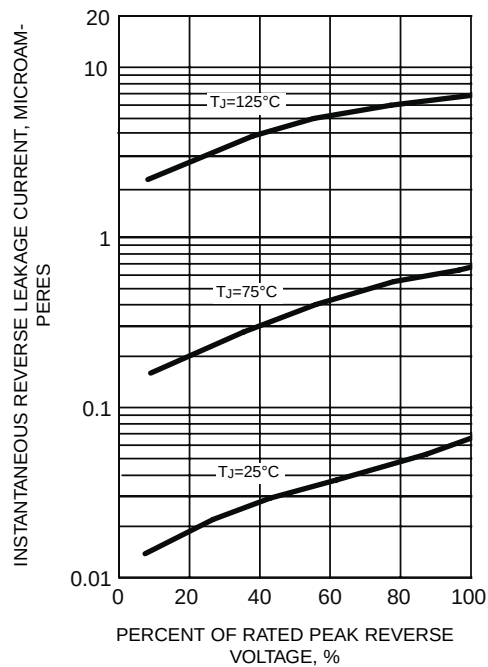


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

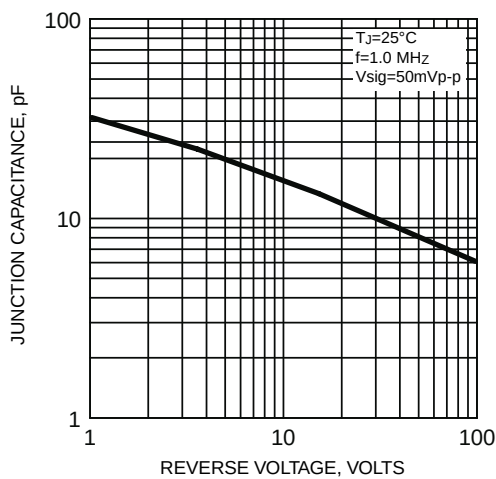


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

