

MINI ANALOG SERIES

0.7μA RAIL-TO-RAIL CMOS COMPARATOR

S-8953xA/B Series

The mini-analog series is a family of standard analog circuits available in small packages.

The S-8953xA/B series is an ultra-low voltage operation and ultra-low current consumption CMOS comparator which provides rail-to-rail operation on both the input and output. The output can swing within 20mV of each rail with $R_L=1M\Omega$. Minimum operation voltage of 0.9V and low current consumption of 0.7μA (typ.) have been achieved.

The S-8953xA/B series gives the optimum solution for small battery-powered portable equipments along with the small and thin package features. The S-8953xA is a single comparator available in miniature SC-88A package. The S-8953xB is a dual comparator available in newly developed 8-pin SON(A) package.

■ **Features**

- CMOS comparator
- Low operating voltage: $V_{DD}=0.9V$ to 5.5V
- Low current consumption: $I_{DD}=0.7\mu A$ (typ.)
- Rail-to-rail* wide input and output voltage range: V_{SS} to V_{DD}
- Low input offset voltage: 5.0mV max.
- Small package: 5-pin SC-88A 2.0 mm × 2.1mm
8-pin SON(A) 2.9 mm × 3.0 mm

■ **Applications**

- Cellular phone
- PDA
- Notebook PC
- Digital camera
- Camcorder

■ **Pin Configuration**

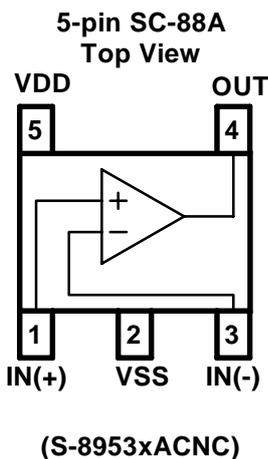


Figure 1

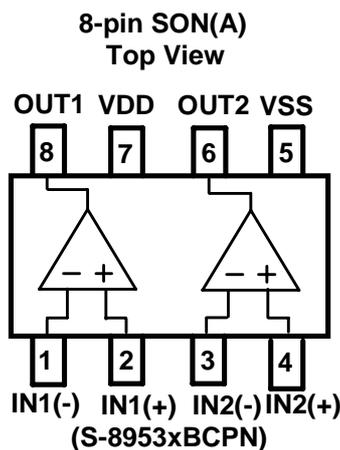


Figure 2

Table 1 Pin Description (S-8953xACNC)

| Pin No. | Symbol | Description |
|---------|--------|---------------------------|
| 1 | IN(+) | Non-inverting input pin |
| 2 | VSS | GND pin |
| 3 | IN(-) | Inverting input pin |
| 4 | OUT | Output pin |
| 5 | VDD | Positive power supply pin |

Table 2 Pin Description (S-8953xBCPN)

| Pin No. | Symbol | Functions |
|---------|--------|---------------------------|
| 1 | IN1(-) | Inverting input pin 1 |
| 2 | IN1(+) | Non-inverting input pin 1 |
| 3 | IN2(-) | Inverting input pin 2 |
| 4 | IN2(+) | Non-inverting input pin 2 |
| 5 | VSS | GND pin |
| 6 | OUT2 | Output pin 2 |
| 7 | VDD | Positive power pin |
| 8 | OUT1 | Output pin 1 |

■ **Packages**

- 5-pin SC-88A (Package drawing code: NP005-B)
- 8-pin SON(A) (Package drawing code: PN008-A)

* Rail-to-rail is a registered trade mark of Motorola Japan Ltd.

■ **Selection Guide**

Table 3

| Offset voltage | Product Name (single). | Product Name (dual). |
|-----------------------------|------------------------|----------------------|
| $V_{IO} = 10\text{mV max.}$ | S-89530ACNC-HCB-TF | S-89530BCPN-HFB-TF |
| $V_{IO} = 50\text{mV max.}$ | S-89531ACNC-HCC-TF | S-89531BCPN-HFC-TF |

■ **Absolute Maximum Ratings**

Table 4

($T_a=25^\circ\text{C}$, unless otherwise specified)

| Parameter | Symbol | Ratings | Unit |
|----------------------------|-----------|-------------|------------------|
| Power voltage | V_{DD} | 7.0 | V |
| Input voltage | V_{IN} | 0 to 7.0 | V |
| Differential input voltage | V_{IND} | ± 5.5 | V |
| Allowable loss | SC-88A | 200 | mW |
| | SON | 300 | |
| Operating temperature | T_{opr} | -40 to +85 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -55 to +125 | $^\circ\text{C}$ |

Note: Although the IC contains protection circuit against static electricity, excessive static electricity or voltage which exceeds the limit of the protection circuit should not be applied to.

■ **Recommended Operating Power Voltage Range**

Table 5

| Parameter | Symbol | Range |
|-------------------------------|-------------|--------------|
| Operating Power Voltage Range | V_{DDope} | 0.9V to 5.5V |

■ Electric Characteristics

Difference between the S-89530ACNC and S-89531ACNC , between the S-89530BCPN and S-89531BCPN is only offset voltage.

Other specifications are the same.

1. $V_{DD}=3.0V$

DC Characteristics($V_{DD}=3.0V$) (per Comparator)

Table 6

($T_a=25^\circ C$, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | Test circuit |
|-------------------------------|--------------|--|------|------|------|---------|--------------|
| Supply current | I_{DDH} | $V_{IN1}=V_{SS}, V_{IN2}=V_{DD}, R_L=\infty$ | — | 0.7 | 1.4 | μA | Fig.8 |
| | I_{DDL} | $V_{IN1}=V_{DD}, V_{IN2}=V_{SS}, R_L=\infty$ | — | 0.25 | 0.5 | μA | Fig.8 |
| Offset voltage | V_{IO} | S-89530A/B: $V_{CMR}=1.5V$ | — | 5 | 10 | mV | Fig.3 |
| | | S-89531A/B: $V_{CMR}=1.5V$ | — | 3 | 5 | mV | Fig.3 |
| Input offset current | I_{IO} | — | — | 1 | — | pA | — |
| Input bias current | I_{BIAS} | — | — | 1 | — | pA | — |
| Common-mode input voltage | V_{CMR} | — | 0 | — | 3.0 | V | Fig.5 |
| Open loop voltage gain | A_{VOL} | $V_{CMR}=1.5V, R_L=1M\Omega$ | — | 86 | — | dB | — |
| Output voltage swing | High | $R_L=1M\Omega$ | 2.98 | — | — | V | Fig.6 |
| | Low | | | | | | |
| Common-mode rejection ratio | CMRR | $V_{SS} \leq V_{CMR} \leq V_{DD}$ | 45 | 65 | — | dB | Fig.5 |
| Power supply rejection ratio | PSRR | $V_{DD}=0.9V$ to $5.5V$ | 66 | 75 | — | dB | Fig.4 |
| Source current ⁽¹⁾ | I_{SOURCE} | $V_{OUT}=V_{DD}-0.1V$ | 380 | 500 | — | μA | Fig.9 |
| | | $V_{OUT}=0V$ | 4000 | 5500 | — | μA | Fig.9 |
| Sink current | I_{SINK} | $V_{OUT}=0.1V$ | 400 | 550 | — | μA | Fig.10 |
| | | $V_{OUT}=V_{DD}$ | 4800 | 6000 | — | μA | Fig.10 |

AC Characteristics($V_{DD}=3.0V$)

Table 7

($T_a=25^\circ C$, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | Test circuit |
|-----------------------------|-----------|--------------------------------|------|------|------|---------|--------------|
| Rise propagation delay time | t_{PLH} | Overdrive =100mV $C_L=15pF$ | — | 110 | — | μs | Fig.11 |
| Fall propagation delay time | t_{PHL} | | — | 280 | — | μs | Fig.11 |
| Output rise time | t_{TLH} | | — | 10 | — | μs | Fig.11 |
| Output fall time | t_{THL} | | — | 30 | — | μs | Fig.11 |

(1) Source current should be used in the range less than 7mA.

2. $V_{DD}=1.8V$

DC Characteristics ($V_{DD}=1.8V$) (per Comparator)

Table 8

($T_a=25^{\circ}C$, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | Test circuit |
|------------------------------|--------------|--|------|------|------|---------|--------------|
| Supply current | I_{DDH} | $V_{IN1}=V_{SS}, V_{IN2}=V_{DD}, R_L=\infty$ | — | 0.7 | 1.4 | μA | Fig.8 |
| | I_{DDL} | $V_{IN1}=V_{DD}, V_{IN2}=V_{SS}, R_L=\infty$ | — | 0.25 | 0.5 | μA | Fig.8 |
| Offset voltage | V_{IO} | S-89530A/B: $V_{CMR}=0.9V$ | — | 5 | 10 | mV | Fig.3 |
| | | S-89531A/B: $V_{CMR}=0.9V$ | — | 3 | 5 | mV | Fig.3 |
| Input offset current | I_{IO} | — | — | 1 | — | μA | — |
| Input bias current | I_{BIAS} | — | — | 1 | — | μA | — |
| Common-mode input voltage | V_{CMR} | — | 0 | — | 1.8 | V | Fig.5 |
| Open loop voltage gain | A_{VOL} | $V_{CMR}=0.9V, R_L=1M\Omega$ | — | 80 | — | dB | — |
| Output voltage swing | High | $R_L=1M\Omega$ | 1.78 | — | — | V | Fig.6 |
| | Low | $R_L=1M\Omega$ | — | — | 0.02 | V | Fig.7 |
| Common-mode rejection ratio | CMRR | $V_{SS} \leq V_{CMR} \leq V_{DD}$ | 35 | 55 | — | dB | Fig.5 |
| | | $V_{SS} \leq V_{CMR} \leq V_{DD}-0.2V$ | 45 | 60 | — | dB | Fig.5 |
| Power supply rejection ratio | PSRR | $V_{DD}=0.9V$ to $5.5V$ | 66 | 75 | — | dB | Fig.4 |
| Source current | I_{SOURCE} | $V_{OUT}=V_{DD}-0.1V$ | 200 | 250 | — | μA | Fig.9 |
| | | $V_{OUT}=0V$ | 1000 | 1500 | — | μA | Fig.9 |
| Sink current | I_{SINK} | $V_{OUT}=0.1V$ | 220 | 300 | — | μA | Fig.10 |
| | | $V_{OUT}=V_{DD}$ | 1200 | 1800 | — | μA | Fig.10 |

AC Characteristics($V_{DD}=1.8V$)

Table 9

($T_a=25^{\circ}C$, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | Test circuit |
|-----------------------------|-----------|--------------------------------|------|------|------|---------|--------------|
| Rise propagation delay time | t_{PLH} | Overdrive =100mV $C_L=15pF$ | — | 90 | — | μs | Fig.11 |
| Fall propagation delay time | t_{PHL} | | — | 160 | — | μs | Fig.11 |
| Output rise time | t_{TLH} | | — | 8 | — | μs | Fig.11 |
| Output fall time | t_{THL} | | — | 25 | — | μs | Fig.11 |

3. $V_{DD}=0.9V$ DC Characteristics($V_{DD}=0.9V$) (per Comparator)**Table 10**

(Ta=25°C, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | Test circuit |
|------------------------------|------------------|--|------|------|------|---------|--------------|
| Supply current | I_{DDH} | $V_{IN1}=V_{SS}, V_{IN2}=V_{DD}, R_L=\infty$ | — | 0.7 | 1.3 | μA | Fig.8 |
| | I_{DDL} | $V_{IN1}=V_{DD}, V_{IN2}=V_{SS}, R_L=\infty$ | — | 0.25 | 0.5 | μA | Fig.8 |
| Offset voltage | V_{IO} | S-89530A/B: $V_{CMR}=0.45V$ | — | 5 | 10 | mV | Fig.3 |
| | | S-89531A/B: $V_{CMR}=0.45V$ | — | 3 | 5 | mV | Fig.3 |
| Input offset current | I_{IO} | — | — | 1 | — | μA | — |
| Input bias current | I_{BIAS} | — | — | 1 | — | μA | — |
| Common-mode input voltage | V_{CMR} | — | 0 | — | 0.9 | V | Fig.5 |
| Open loop voltage gain | A_{VOL} | $V_{CMR}=0.45V, R_L=1M\Omega$ | — | 74 | — | dB | — |
| Output voltage swing | High V_{OH} | $R_L=1M\Omega$ | 0.88 | — | — | V | Fig.6 |
| | Low V_{OL} | $R_L=1M\Omega$ | — | — | 0.02 | V | Fig.7 |
| Common-mode rejection ratio | CMRR | $V_{SS} \leq V_{CMR} \leq V_{DD}$ | 25 | 50 | — | dB | Fig.5 |
| | | $V_{SS} \leq V_{CMR} \leq V_{DD}-0.3V$ | 40 | 60 | — | dB | Fig.5 |
| Power supply rejection ratio | PSRR | $V_{DD}=0.9V$ to 5.5V | 66 | 75 | — | dB | Fig.4 |
| Source current | I_{SOURCE} | $V_{OUT}=V_{DD}-0.1V$ | 10 | 45 | — | μA | Fig.9 |
| | | $V_{OUT}=0V$ | 12 | 70 | — | μA | Fig.9 |
| Sink current | I_{SINK} | $V_{OUT}=0.1V$ | 10 | 65 | — | μA | Fig.10 |
| | | $V_{OUT}=V_{DD}$ | 12 | 120 | — | μA | Fig.10 |

AC Characteristics($V_{DD}=0.9V$)**Table 11**

(Ta=25°C, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | Test circuit |
|-----------------------------|-----------|--------------------------------|------|------|------|---------|--------------|
| Rise propagation delay time | t_{PLH} | Overdrive =100mV $C_L=15pF$ | — | 65 | — | μs | Fig.11 |
| Fall propagation delay time | t_{PHL} | | — | 65 | — | μs | Fig.11 |
| Output rise time | t_{TLH} | | — | 5 | — | μs | Fig.11 |
| Output fall time | t_{THL} | | — | 20 | — | μs | Fig.11 |

■ Measurement Conditions

1. Offset voltage

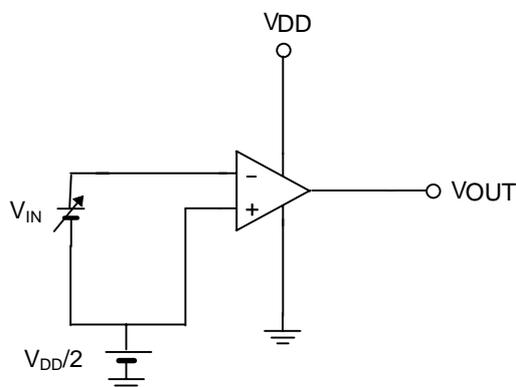


Figure 3

- Offset voltage (V_{IO}),
The offset voltage (V_{IO}) is defined as V_{IN} at which V_{OUT} changes by changing V_{IN} .

2. Power supply rejection ratio

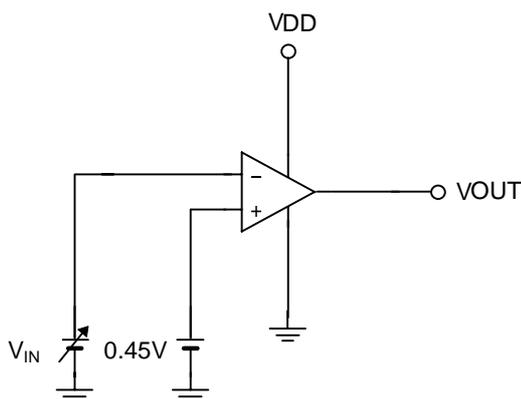


Figure 4

- The power supply rejection ratio (PSRR) is calculated by the following expression, using V_{IO} measured at each V_{DD} .

Measurement conditions :

V_{DD1} is defined as V_{DD} and V_{IO1} is defined as V_{IO} when V_{DD} is 0.9 V.

V_{DD2} is defined as V_{DD} and V_{IO2} is defined as V_{IO} when V_{DD} is 5.5 V.

$$PSRR = -20 \log \left(\left| \frac{V_{IO1} - V_{IO2}}{V_{DD1} - V_{DD2}} \right| \right)$$

- Common-mode input voltage (V_{CMR})
Common-mode input voltage is the input voltage range in which V_{OUT} satisfies the specification for the common-mode rejection ratio when V_{IN} changes.

3. Common-mode rejection rate, Common-mode input voltage

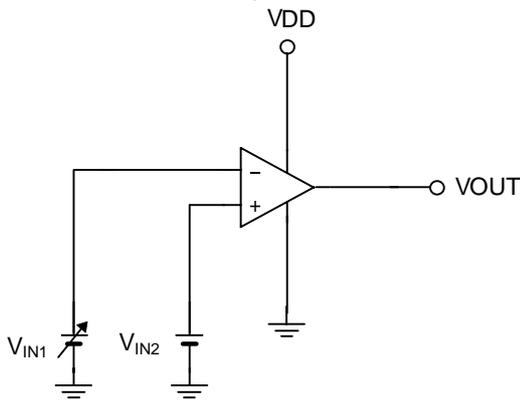


Figure 5

- Common-mode rejection ratio (CMRR)
The offset voltage, V_{IO} is defined as $V_{IN1} - V_{IN2}$ at which V_{OUT} changes when changing V_{IN1} . The common-mode rejection ratio, CMRR is calculated by the following expression.

Measurement conditions:

V_{IO1} is V_{IO} when $V_{IN2} = V_{CMR}(\text{Max.})$

V_{IO2} is V_{IO} when $V_{IN2} = V_{CMR}(\text{Min.})$

$$CMRR = 20 \log \left(\left| \frac{V_{CMR}(\text{Max.}) - V_{CMR}(\text{Min.})}{V_{IO1} - V_{IO2}} \right| \right)$$

- Common-mode input voltage (V_{CMR})
Common-mode input voltage is the input voltage range in which V_{OUT} satisfies the specification for common-mode rejection ratio when V_{IN1} changes.

4. Output voltage swing

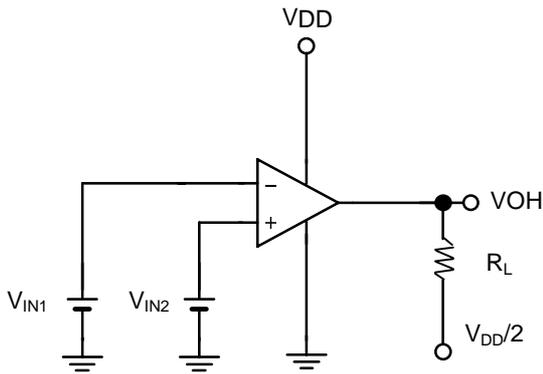


Figure 6

- Output voltage swing high (V_{OH})

Measurement conditions : $V_{IN1} = \frac{V_{DD}}{2} - 0.1V$

$$V_{IN2} = \frac{V_{DD}}{2} + 0.1V$$

$$R_L = 1M\Omega$$

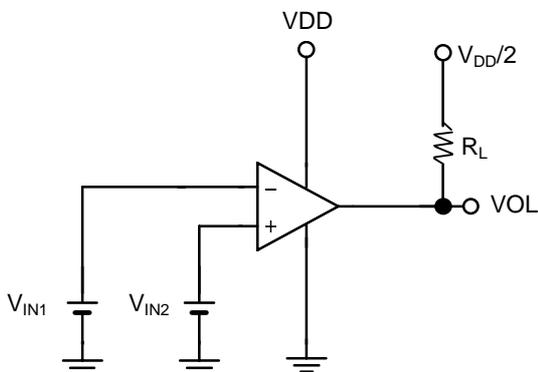


Figure 7

- Output voltage swing low (V_{OL})

Measurement conditions : $V_{IN1} = \frac{V_{DD}}{2} + 0.1V$

$$V_{IN2} = \frac{V_{DD}}{2} - 0.1V$$

$$R_L = 1M\Omega$$

S-8953xA/B Series

5. Supply current

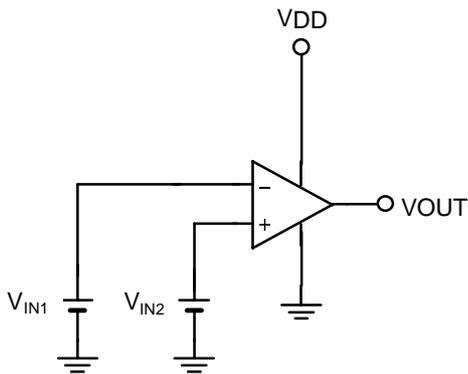


Figure 8

- Supply current (I_{DDH})
Measurement conditions : $V_{IN1}=V_{SS}$
 $V_{IN2}=V_{DD}$
- Supply current (I_{DDL})
Measurement conditions : $V_{IN1}=V_{DD}$
 $V_{IN2}=V_{SS}$

6. Source current

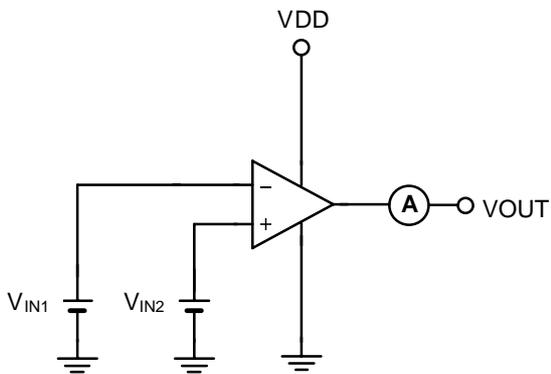


Figure 9

- Source current (I_{SOURCE})
Measurement conditions : $V_{IN1} = \frac{V_{DD}}{2} - 0.1V$
 $V_{IN2} = \frac{V_{DD}}{2} + 0.1V$
 $V_{OUT} = V_{DD} - 0.1V$ or
 $V_{OUT} = 0V$

7. Sink current (I_{SINK})

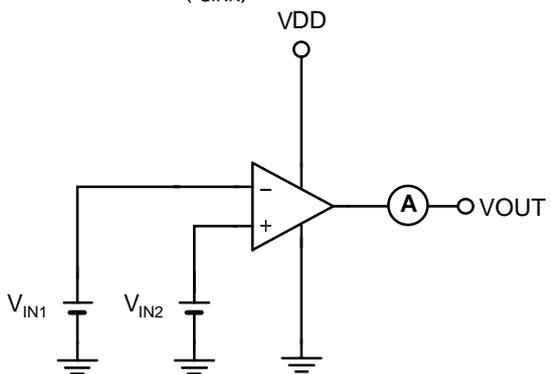


Figure 10

- Sink current (I_{SINK})
Measurement conditions : $V_{IN1} = \frac{V_{DD}}{2} + 0.1V$
 $V_{IN2} = \frac{V_{DD}}{2} - 0.1V$
 $V_{OUT} = 0.1V$ or
 $V_{OUT} = V_{DD}$

8. Propagation delay time / Transient response time

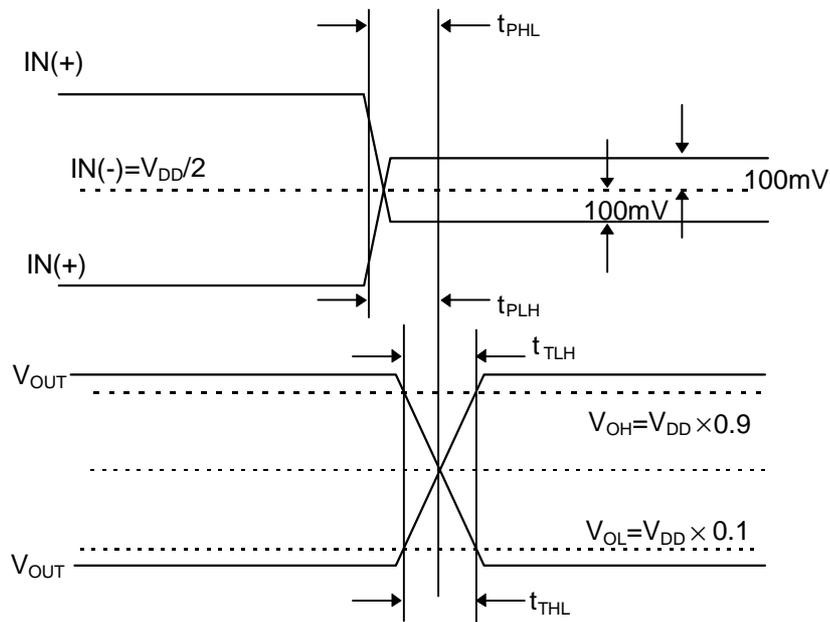




Figure 11

■ **Note**

- For $R_L = 100\text{k}\Omega$, V_{OH} may rise only 0.65V provided that the temperature is -40°C and $V_{DD} = 0.9\text{V}$.
- If the temperature is -20°C , however, V_{OH} rises to 0.8V, which is 100mV below V_{DD} , for $R_L = 100\text{k}\Omega$ and $V_{DD} = 0.9\text{V}$.
- If V_{DD} is 1.2V, V_{OH} rises to 0.88V, which is 20mV below V_{DD} , for $R_L = 100\text{k}\Omega$ even at -40°C .
- These temperature characteristics data described above can be used as references. Note that a 100% testing for these conditions are not accomplished.


■ Typical Performance Characteristics

1. Current consumption- Supply voltage

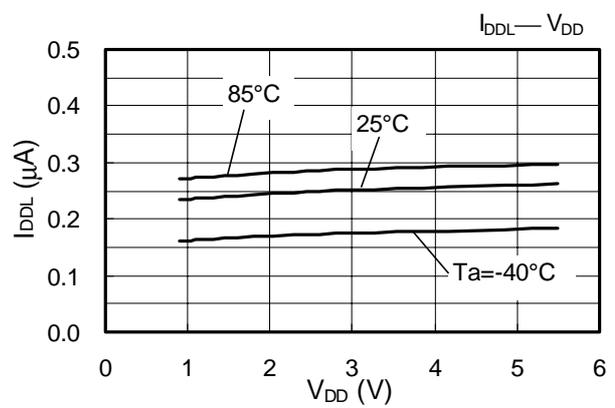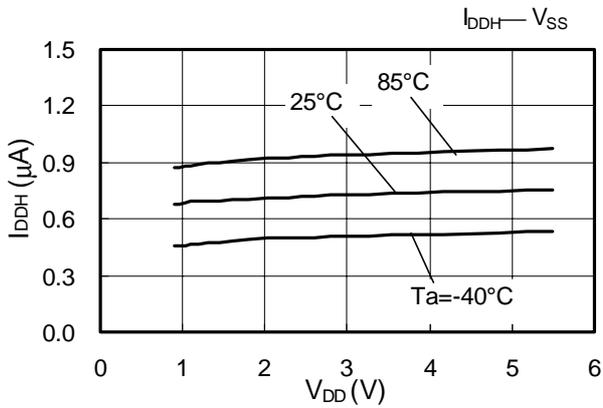


2. Output current



2-1. I_{SOURCE} - Supply voltage

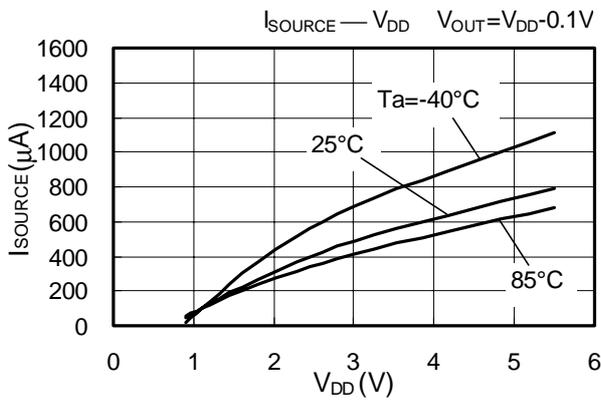


I_{SINK} - Supply voltage



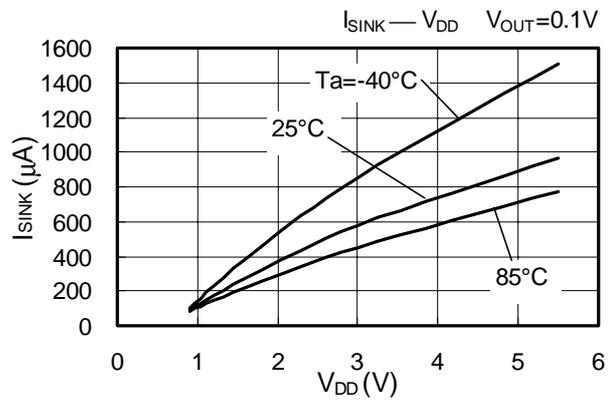


2-2. Output voltage(V_{OH})- I_{SOURCE}

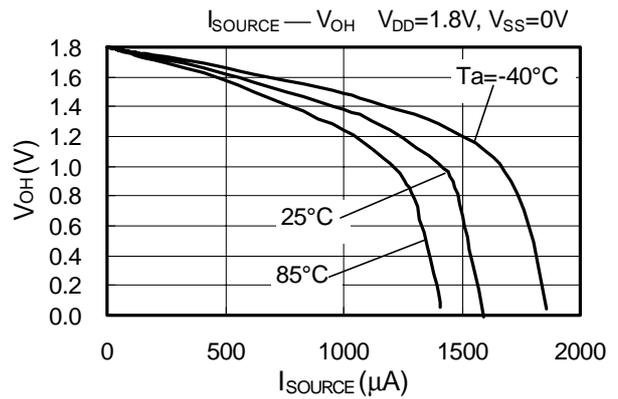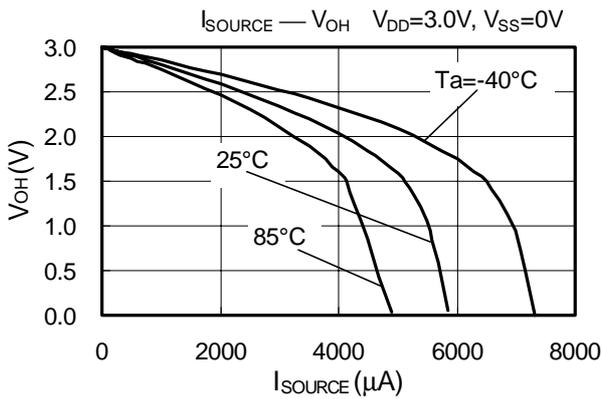

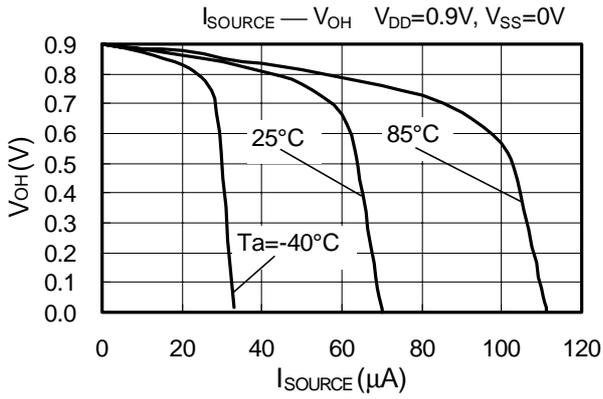

2-3. Output Voltage(V_{OL})- I_{SINK}

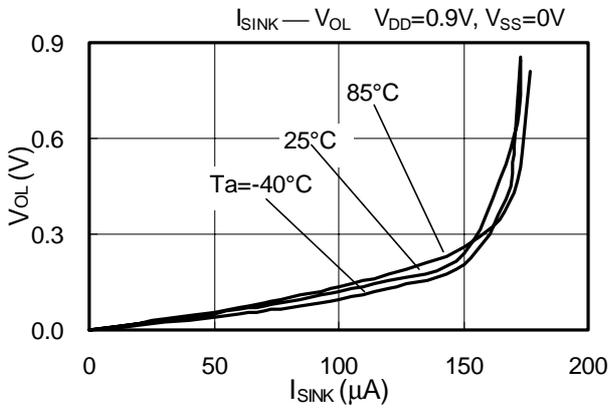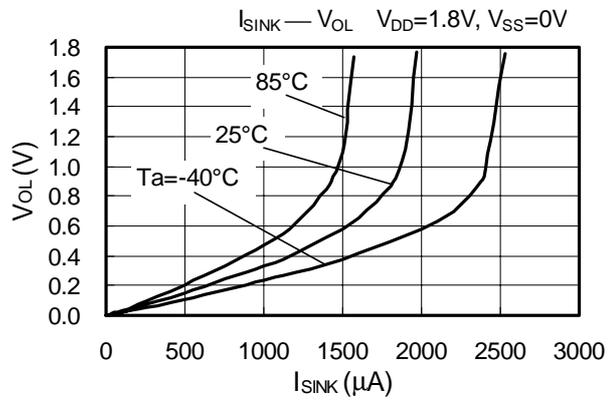
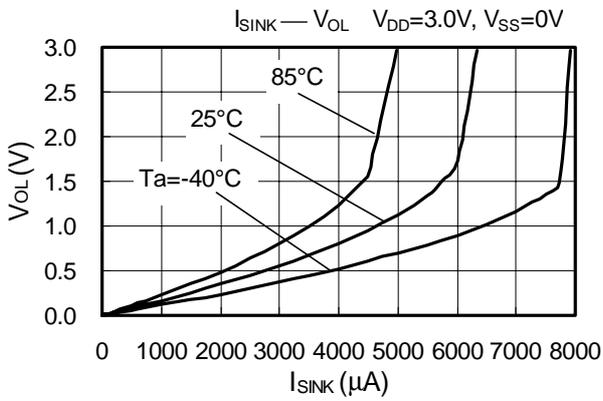


■ SC-88A

NP005-B 990929



●Dimensions

Unit: mm

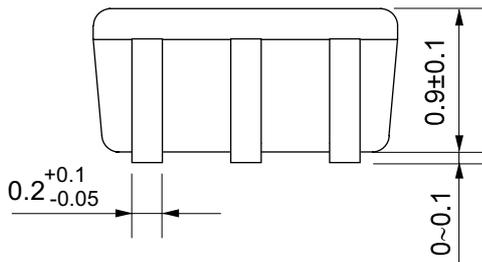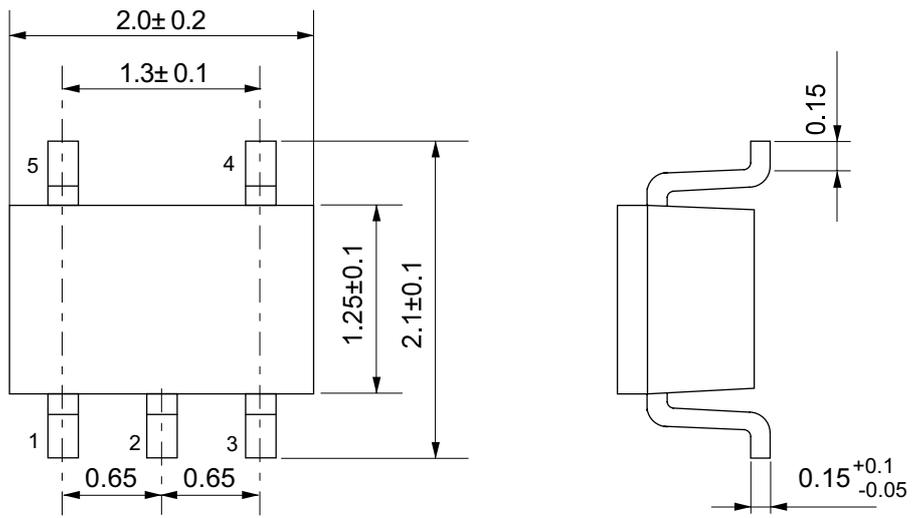

No.:NP005-B-P-SD-1.0


●Taping Specifications

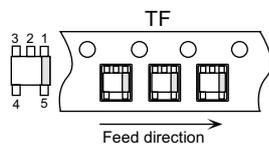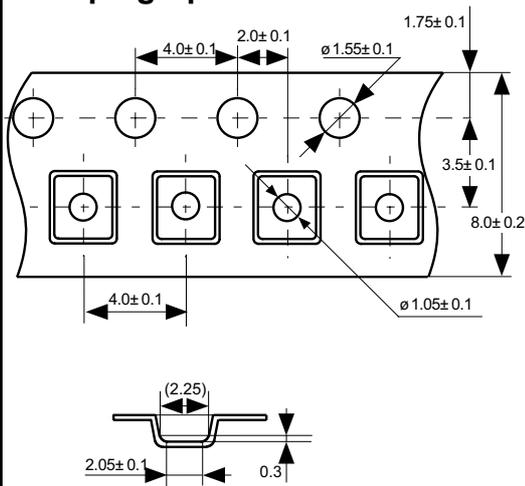


No.:NP005-B-C-SD-0.0

●Reel Specifications

3000 pcs./reel.

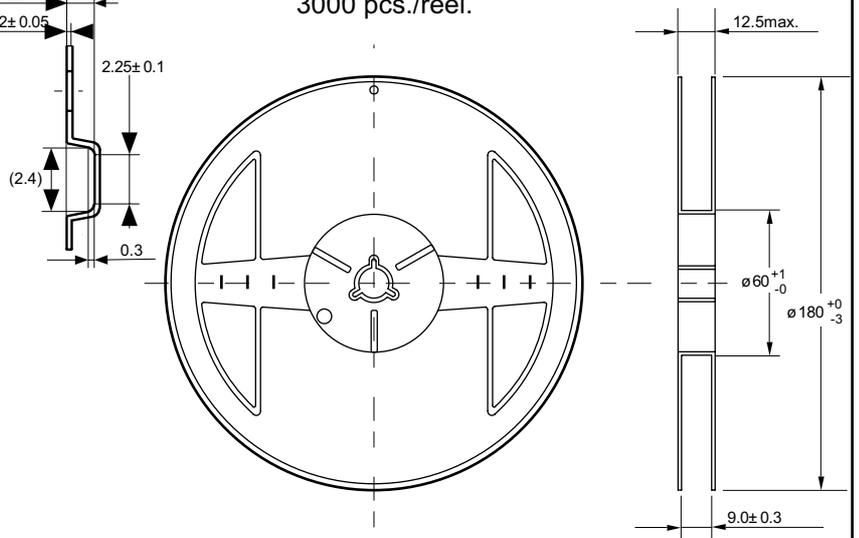

Winding core

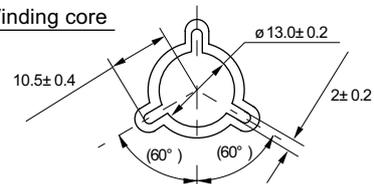


No.:NP005-B-R-SD-1.0

■ Markings

8944x / 8953x

010309

● SC-88A

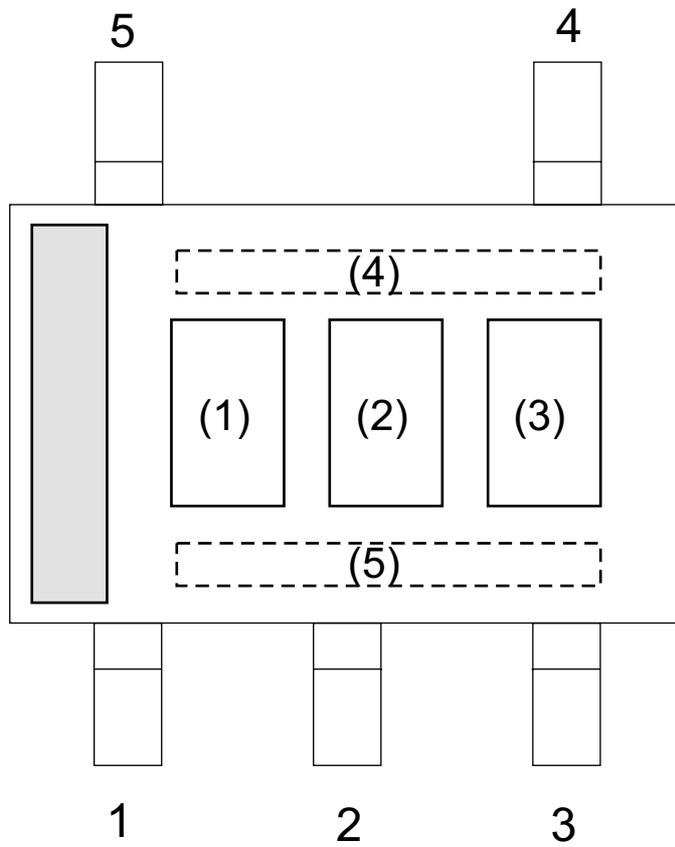




(1) to (3) : Product name

(4) , (5) : Product Lot

No.: NP005-B-M-SD-1.0

● Dimensions




Unit : mm

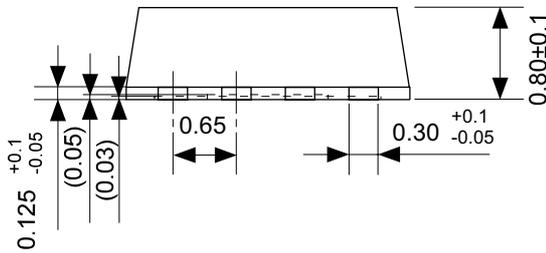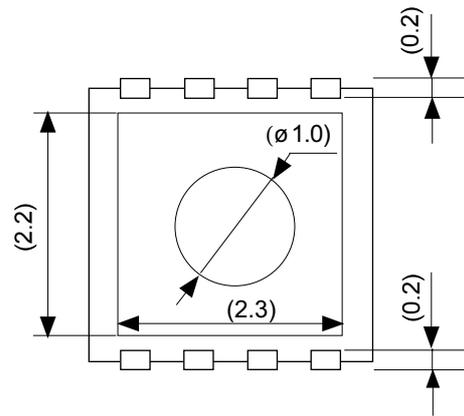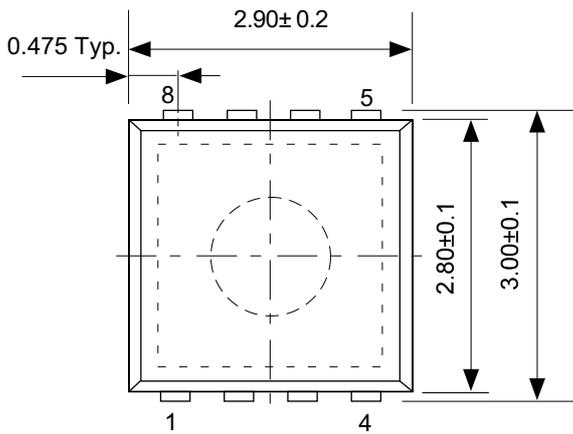


No. : PN008-A-P-SD-1.0

● Taping Specifications

● Reel Specifications

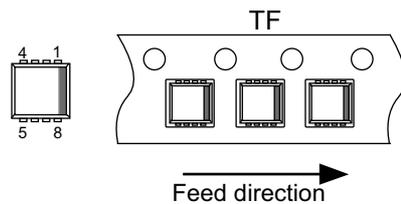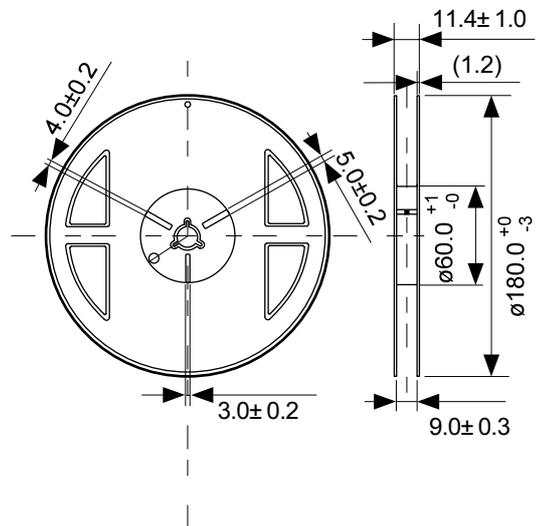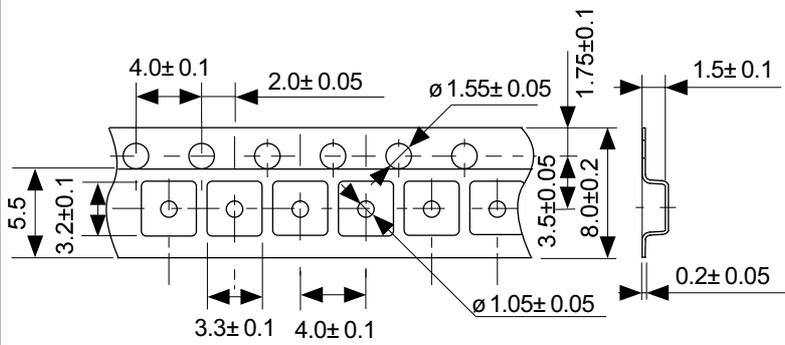


Winding core



No. : PN008-A-C-SD-1.0

No. : PN008-A-R-SD-1.0

● 8-pin SON(A) [SON8A(2928)]

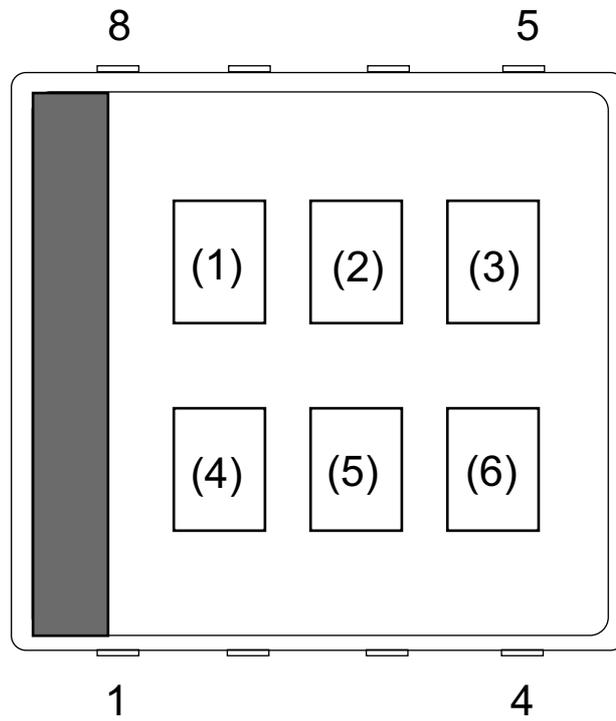

(1) (3) : Product name

(4) : Year of assembly

(5), (6) : Lot No.

No. : PN008-A-M-SD-1.0

- The information described herein is subject to change without notice.
- Seiko Instruments Inc. is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- When the products described herein are regulated products subject to the Wassenaar Arrangement or other agreements, they may not be exported without authorization from the appropriate governmental authority.
- Use of the information described herein for other purposes and/or reproduction or copying without the express permission of Seiko Instruments Inc. is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of Seiko Instruments Inc.
- Although Seiko Instruments Inc. exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.