



GLOBAL TWIN SERIES

UL 489 LISTED

MOLDED CASE CIRCUIT BREAKERS
EARTH LEAKAGE CIRCUIT BREAKERS



50A Frame ~ 800A Frame | Max Voltage 600V

The new FUJI UL489 Molded Case Circuit Breaker and Earth Leakage Circuit Breaker (GLOBAL TWIN series) provide the ultimate in compact design, unprecedented value, and use anywhere in the world.



50A Frame



125A Frame



250A Frame



400A Frame



- ☐ MORE COMPACT (especially 50/100A Frame, 125A Frame, 250A Frame) than any breaker on the market, so control panels take up less space than ever before.
- ☐ Competitive pricing.
- ☐ Conformity to all WORLDWIDE STANDARDS, including UL / CSA / IEC / CE Marking / JIS (Japan) / CCC (China).




Fuji's GLOBAL TWIN series gives you the features and flexibility you need:

- 1) Suitable for branch circuit protection.
- 2) Rated current of 3-800A, Max 600V.
- 3) Standard type and High interrupting capacities are available in identically sized breakers.
- 4) Shunt trip (F), Under voltage release (R) and other accessories are available.
- 5) Screw, Flat, or Lug terminal are available.
- 6) Auxiliary switch, Alarm switch, and Shunt trip can be installed in the field.
- 7) Choose Breaker-Mounted (N type) or Panel Door-Mounted (V type), Flange-Mounted (F type), operating handles.

Table of Contents

	Page
Specifications for MCCB	3
Specifications for ELCB	7
Part Number Structure	10
Characteristic Curves	11
Dimensions	14
Internal Accessories	20
External Accessories	27
Dimensions of Operating Handles	29
Wiring, Wire Sizes and Tightening Torque	33
Flange Disconnect Handle	34
Discontinued Products Cross Chart	37
Terms & Conditions	42

Molded Case Circuit Breakers - New G-Twin, UL489 Listed BW Series

Frame size (A)			50			100							
Type			BW50RAGU-2P		BW50RAGU-3P		BW100EAGU-2P		BW100EAGU-3P				
Appearance (with Screw Terminals, 3 poles)													
SSCR=UL489 interrupting capacity													
Rated insulation voltage (V) (IEC60947-2)			AC	690			690			690			
			DC	—			—			—			
Rated voltage (V) (UL489)			AC	240			240			240			
Rated current (A)			3,5 10,15,20,30,32,40,50			3,5 10,15,20,30,32,40,50			60,63,70,75,80,90,100				
Poles			2			3			2				
Rated frequency (Hz)			50/60			50/60			50/60				
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	600V/△	—			—			—			
			600V/Y	—			—			—			
			480V/△	—			—			—			
			480V/Y	—			—			—			
			240V	14			14			14			
		DC	250V			—			—				
	IEC60947-2 JIS C 8201-2-1 Icu/Ics	AC	690V	—			—			—			
			600V	5/3			5/3			5/3			
			500V	7.5/4			7.5/4			7.5/4			
			440V	10/5			10/5			10/5			
			400V	10/5			10/5			10/5			
			230V	25/13			25/13			25/13			
		DC	250V			5/3			5/3				
	GB14048.2 Icu/Ics	AC	400V	7/4	10/5		7/4	10/5		10/5	10/5		
230V			14/7	25/13		14/7	25/13		25/13	25/13			
Dimension inch (mm)					a	1.969(50)		2.953(75)		1.969(50)		2.953(75)	
					b	4.724(120)		4.724(120)		4.724(120)		4.724(120)	
					c	2.362(60)		2.362(60)		2.362(60)		2.362(60)	
					d	3.307(84)		3.307(84)		3.307(84)		3.307(84)	
Terminal construction	Screw terminals		None	●		●		●		●		●	
	Flat terminals		SF	●		●		●		●		●	
	Lug terminals		SB	—		—		●		●		●	
Internal accessories *4	Auxiliary switch		W	BZ6WR10CU		BZ6W*10CU		BZ6WR10CU		BZ6W*10CU		BZ6WR10CU	
	Auxiliary switch for low current		WD	BZ6WDR10CU		BZ6WD*10CU		BZ6WDR10CU		BZ6WD*10CU		BZ6WDR10CU	
	Alarm switch		K	BZ6KR10CU		BZ6K*10CU		BZ6KR10CU		BZ6K*10CU		BZ6KR10CU	
	Alarm switch for low current		KD	BZ6KDR10CU		BZ6KD*10CU		BZ6KDR10CU		BZ6KD*10CU		BZ6KDR10CU	
	Auxiliary & Alarm switch		WK	BZ6WKR10CU		BZ6WK*10CU		BZ6WKR10CU		BZ6WK*10CU		BZ6WKR10CU	
	Aux and Alarm for low current		WDKD	BZ6WDKDR10CU		BZ6WDKD*10CU		BZ6WDKDR10CU		BZ6WDKD*10CU		BZ6WDKDR10CU	
	Shunt trip		F	BZ6F*10CU		BZ6F*10CU		BZ6F*10CU		BZ6F*10CU		BZ6F*10CU	
	Under voltage trip		R	BZ6R*10CAU		BZ6R*10CU		BZ6R*10CAU		BZ6R*10CU		BZ6R*10CU	
Accessories with terminal block			A	*1		*1		*1		*1		*1	
External accessories	Padlocking device (Cap type)		Q1	BZ6L10CA		BZ6L10CA		BZ6L10CA		BZ6L10CA		BZ6L10CA	
	Handle locking cover			BZ6L10C		BZ6L10C		BZ6L10C		BZ6L10C		BZ6L10C	
	External operating handle		V	BZ6V10D		BZ6V10D		BZ6V10D		BZ6V10D		BZ6V10D	
			N	BZ6N10D		BZ6N10D		BZ6N10D		BZ6N10D		BZ6N10D	
	Field Installable terminal Kit	Flat terminal kit	BZ-SU20B		BZ-SU20B		BZ-SU25B		BZ-SU25B		BZ-SU25B		
		Lug terminal kit	—		—		—		—		—		
	Terminal covers *3	for screw, short type	Provided		Provided		Provided		Provided		Provided		
		for screw, long type	BW9BTAA-L2W		BW9BTAA-L3W		BW9BTAA-L3W		BW9BTAA-L3W		BW9BTAA-L3W		
		for Flat terminal	—		—		—		—		—		
		for Lug terminal	—		—		—		—		—		
Insulation barrier *2			BZ6B10C		BZ6B10C		BZ6B10C		BZ6B10C		BZ6B10C		
Mass: lb. (kg) (screw terminals)			0.88(0.4)		1.10(0.5)		0.88(0.4)		1.10(0.5)		1.10(0.5)		

*1 For internal accessories with terminal block, specify "A" in the accessory P/N. When 50A Frame & 100A Frame are ordered w/UVT, the UVT is supplied with terminal block as standard.


*2 Insulation barriers are only required with flat terminal.

*3 Short terminal covers are supplied as standard. If long terminal covers are required, please order BW9BTAA-L2W or BW9BTAA-L3W.

*4 These internal accessories can be installed in the field. (see page 20 for part number)

●: Available, —: Not available


Molded Case Circuit Breakers - New G-Twin, UL489 Listed BW Series

Frame size (A)			125				250							
Type			BW125JAGU		BW125RAGU		BW250EAGU		BW250JAGU		BW250RAGU			
Appearance (with Screw Terminals, 3 poles)														
SSCR=UL489 interrupting capacity														
Rated insulation voltage (V) (IEC60947-2)			AC DC		690 250		690 250		690 250		690 250			
Rated voltage (V) (UL489)			AC		600Y/347		600Y/347		240		600Y/347			
Rated current (A)			15,20,30,40,50,60,70,75,80,90,100,125						125,150,160,175,200,225,250					
Poles			2		3		2		3		2			
Rated frequency (Hz)			50/60		50/60		50/60		50/60		50/60			
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	600V/△	—	—	—		—		—		—		
			600V/Y	10	10	18		—		10		25		
			480V/△	—	30	50		—		30		50		
			480V/Y	30	30	50		—		30		50		
			240V	50	50	100		22		50		100		
	IEC60947-2 JIS C 8201-2-1 Icu/Ics	DC	250V	10	10	10		10		10		10		
			AC	690V	—		5/3		—		—		5/3	
				500V	15/8		36/18		10/5		18/9		36/18	
				440V	30/15		50/25		18/9		30/15		50/25	
				400V	30/15		50/25		18/9		30/15		50/25	
	GB14048.2 Icu/Ics	AC		380V	30/15		50/25		18/9		30/15		50/25	
			240V	50/25		100/50		36/18		50/25		100/50		
			250V	15/8		40/20		10/5		20/10		40/20		
			400V	30/15		50/25		18/9		30/15		50/25		
			230V	50/25		100/50		36/18		50/25		100/50		
Dimension inch (mm)			a	2.362(60)	3.543(90)	3.543(90)		4.134(105)		4.134(105)		4.134(105)		
			b	6.372(171)		6.372(171)		7.126(181)		7.126(181)				
			c	2.677(68)		2.677(68)		2.677(68)		2.677(68)				
			d	3.740(95)		3.740(95)		3.740(95)		3.740(95)				
Terminal construction	Screw terminals (standard)		None	●	●	●		●		●				
	Flat terminals		SF	●	●	●		●		●				
	Lug terminals		SB	●	●	●		●		●				
Internal accessories	Auxiliary switch		W	BW9W1SG0(-R)		BW9W1SG0(-R)		BW9W1SG0(-R)		BW9W1SG0(-R)		BW9W1SG0(-R)		
	Auxiliary switch for low current		1	BW9W1DG0(-R)		BW9W1DG0(-R)		BW9W1DG0(-R)		BW9W1DG0(-R)		BW9W1DG0(-R)		
	Alarm switch		K	BW9K1SG0(-R)		BW9K1SG0(-R)		BW9K1SG0(-R)		BW9K1SG0(-R)		BW9K1SG0(-R)		
	Alarm switch for low current		8	BW9K1DG0(-R)		BW9K1DG0(-R)		BW9K1DG0(-R)		BW9K1DG0(-R)		BW9K1DG0(-R)		
	Auxiliary & Alarm switch		WK	BW9WKS0G0(-R)		BW9WKS0G0(-R)		BW9WKS0G0(-R)		BW9WKS0G0(-R)		BW9WKS0G0(-R)		
	Aux & Alarm for low current		18	BW9WKDG0(-R)		BW9WKDG0(-R)		BW9WKDG0(-R)		BW9WKDG0(-R)		BW9WKDG0(-R)		
	Shunt trip		F	BW9F*G0		BW9F*G0		BW9F*G0		BW9F*G0		BW9F*G0		
	Under voltage trip		R	—	BW9RGA*	BW9RGA*		BW9RGA*		BW9RGA*		BW9RGA*		
	Accessories with terminal block		A	See page 22		See page 22		See page 22		See page 22		See page 22		
External accessories	Padlocking device		Q1	BW9Q1CA		BW9Q1CA		BW9Q1CA		BW9Q1CA		BW9Q1CA		
			Q2	BW9Q2CA		BW9Q2CA		BW9Q2GA		BW9Q2GA				
	External operating handle		V	—	BW9V0CA	BW9V0CA		BW9V0GA		BW9V0GA		BW9V0GA		
			N	—	BW9N0CA	BW9N0CA		BW9N0GA		BW9N0GA				
			F	—	BW9F0CA	BW9F0CA		BW9F0GA		BW9F0GA				
	Field Installable terminal kit	Flat terminal kit	BZ-S50B-2253 GLOBAL						BW9SS0CA-3 GLOBAL					
		Lug terminal kit	BW9SLOCA-3 GLOBAL						Please see page 28.					
	Terminal covers *1	Short type,gray-white	Provided		Provided		Provided		Provided		Provided			
		Short type,transparent	BW9BTCA-S2	BW9BTCA-S3	BW9BTCA-S3		BW9BTGA-S3		BW9BTGA-S3		BW9BTGA-S3			
		Long type,gray-white	BW9BTCA-L2W	BW9BTCA-L3W	BW9BTCA-L3W		BW9BTGA-L3W		BW9BTGA-L3W		BW9BTGA-L3W			
Long type,transparent		BW9BTCA-L2	BW9BTCA-L3	BW9BTCA-L3		BW9BTGA-L3		BW9BTGA-L3		BW9BTGA-L3				
Insulation barrier		BW9BPCA		BW9BPCA		BW9BPGA		BW9BPGA		BW9BPGA				
Mass: lb. (kg) (screw terminals)			1.76(0.8) 2.65(1.2)		2.20(1.0) 2.65(1.2)		3.09(1.4) 3.53(1.6)		3.09(1.4) 3.53(1.6)		3.09(1.4) 3.53(1.6)			

*1 Short type terminal covers (gray-white) are supplied as standard.

●: Available, -: Not available


Molded Case Circuit Breakers - New G-Twin, UL489 Listed BW Series

Frame size (A)				400								
Type				BW400EAGU		BW400SAGU		BW400RAGU		BW400HAGU		
Appearance (with Flat Terminals, 3 poles)												
SSCR=UL489 interrupting capacity												
Rated insulation voltage (V) (IEC60947-2)				AC	690	690	690	690	690	690		
				DC	250	250	250	250	250	250		
Rated voltage (V) (UL489)				AC	240	480	480	480	480	600		
Rated current (A)				250, 300, 350, 400								
Poles					2	3	2	3	2	3	2	3
Rated frequency (Hz)					50/60	50/60	50/60	50/60	50/60	50/60	50/60	
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	600V/Δ	–	–	–	–	–	–	25		
			600V/Y	–	–	–	–	–	–	25		
			480V/Δ	–	35	35	50	50	65 (50: with lug terminals)	65 (50: with lug terminals)		
			480V/Y	–	35	35	50	50	65 (50: with lug terminals)	65 (50: with lug terminals)		
			240V	22	50	50	100	100	125	125		
		DC	250V	10	10	10	10	10	10	10		
	IEC60947-2 JIS C 8201-2-1 Icu/Ics	AC	690V	–	10/5	10/5	15/8	15/8	15/8	15/8		
			500V	18/9	20/10	20/10	36/18	36/18	42/21	42/21		
			440V	30/15	36/18	36/18	50/25	50/25	70/35	70/35		
			400V	30/15	36/18	36/18	50/25	50/25	70/35	70/35		
			380V	30/15	36/18	36/18	50/25	50/25	70/35	70/35		
			240V	50/25	85/43	85/43	100/50	100/50	125/63	125/63		
		DC	250V	20/10	20/10	20/10	40/20	40/20	40/20	40/20		
	GB14048.2 Icu/Ics	AC	400V	30/15	36/18	36/18	50/25	50/25	70/35	70/35		
			230V	50/25	85/43	85/43	100/50	100/50	125/63	125/63		
Dimension inch (mm)			a	5.512(140)	5.512(140)	5.512(140)	5.512(140)	5.512(140)	5.512(140)			
			b	10.12(257)	10.12(257)	10.12(257)	10.12(257)	10.12(257)	10.12(257)	10.12(257)		
			c	4.055(103)	4.055(103)	4.055(103)	4.055(103)	4.055(103)	4.055(103)	4.055(103)		
			d	5.748(146)	5.748(146)	5.748(146)	5.748(146)	5.748(146)	5.748(146)	5.748(146)		
Terminal construction	Screw terminals		–	–	–	–	–	–	–	–		
	Flat terminals (standard)		None	●	●	●	●	●	●	●		
	Lug terminals		SB	●	●	●	●	●	●	●		
Internal accessories	Auxiliary switch		W	BW9W1SHA	BW9W1SHA	BW9W1SHA	BW9W1SHA	BW9W1SHA	BW9W1SHA	BW9W1SHA		
	Auxiliary switch 2 contacts		V	BW9W2SHA	BW9W2SHA	BW9W2SHA	BW9W2SHA	BW9W2SHA	BW9W2SHA	BW9W2SHA		
	Aux. low current		1	BW9W1DHA	BW9W1DHA	BW9W1DHA	BW9W1DHA	BW9W1DHA	BW9W1DHA	BW9W1DHA		
	Aux. low current 2 contacts		2	BW9W2DHA	BW9W2DHA	BW9W2DHA	BW9W2DHA	BW9W2DHA	BW9W2DHA	BW9W2DHA		
	Alarm switch		K	BW9K1SHA	BW9K1SHA	BW9K1SHA	BW9K1SHA	BW9K1SHA	BW9K1SHA	BW9K1SHA		
	Alarm switch 2 contacts		J	BW9K2SHA	BW9K2SHA	BW9K2SHA	BW9K2SHA	BW9K2SHA	BW9K2SHA	BW9K2SHA		
	Alarm low current		8	BW9K1DHA	BW9K1DHA	BW9K1DHA	BW9K1DHA	BW9K1DHA	BW9K1DHA	BW9K1DHA		
	Alarm low current 2 contacts		9	BW9K2DHA	BW9K2DHA	BW9K2DHA	BW9K2DHA	BW9K2DHA	BW9K2DHA	BW9K2DHA		
	Shunt trip		F	BW9FHA-*	BW9FHA-*	BW9FHA-*	BW9FHA-*	BW9FHA-*	BW9FHA-*	BW9FHA-*		
	Under voltage trip		R	BW9RHA-*	BW9RHA-*	BW9RHA-*	BW9RHA-*	BW9RHA-*	BW9RHA-*	BW9RHA-*		
	Accessories with terminal block		A	See page 22	See page 22	See page 22	See page 22	See page 22	See page 22	See page 22		
External accessories	Padlocking device		QN	BW9QNHA	BW9QNHA	BW9QNHA	BW9QNHA	BW9QNHA	BW9QNHA	BW9QNHA		
			Q2	BW9Q2HA	BW9Q2HA	BW9Q2HA	BW9Q2HA	BW9Q2HA	BW9Q2HA	BW9Q2HA		
	External operating handle		V	BW9V0HA	BW9V0HA	BW9V0HA	BW9V0HA	BW9V0HA	BW9V0HA	BW9V0HA		
			N	BW9N0HA	BW9N0HA	BW9N0HA	BW9N0HA	BW9N0HA	BW9N0HA	BW9N0HA		
			F	BW9F0HA	BW9F0HA	BW9F0HA	BW9F0HA	BW9F0HA	BW9F0HA	BW9F0HA		
	Field Installable terminal		–	–	–	–	–	–	–	–		
	Terminal covers *1	Short type, gray-white		BW9BTHA-S3W	BW9BTHA-S3W	BW9BTHA-S3W	BW9BTHA-S3W	BW9BTHA-S3W	BW9BTHA-S3W	BW9BTHA-S3W		
		Short type, transparent		BW9BTHA-S3	BW9BTHA-S3	BW9BTHA-S3	BW9BTHA-S3	BW9BTHA-S3	BW9BTHA-S3	BW9BTHA-S3		
		Long type, gray-white		BW9BTHA-L3W	BW9BTHA-L3W	BW9BTHA-L3W	BW9BTHA-L3W	BW9BTHA-L3W	BW9BTHA-L3W	BW9BTHA-L3W		
Long type, transparent			BW9BTHA-L3	BW9BTHA-L3	BW9BTHA-L3	BW9BTHA-L3	BW9BTHA-L3	BW9BTHA-L3	BW9BTHA-L3			
Insulation barrier			B-43A	B-43A	B-43A	B-43A	B-43A	B-43A	B-43A			
Mass: lb. (kg) (screw terminals)				10.14(4.6)	12.35(5.6)	10.14(4.6)	12.35(5.6)	10.14(4.6)	12.35(5.6)	10.14(4.6)	12.35(5.6)	

*1 Terminal covers are NOT supplied as standard.

●: Available, –: Not available

Molded Case Circuit Breakers - New G-Twin, UL489 Listed BW Series

Frame size (A)			630		800		
Type			BW630RAGU		BW630HAGU		
Appearance (with Flat Terminals, 3 poles)							
SSCR=UL489 interrupting capacity							
Rated insulation voltage (V) (IEC60947-2)			AC	690	690	690	
			DC	250	250	250	
Rated voltage (V) (UL489)			AC	480	600	480	
Rated current (A)			500, 600, 630			700, 800	
Poles			3		3	3	
Rated frequency (Hz)			50/60		50/60	50/60	
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	600V/Δ	–	25	–	
			600V/Y	–	25	–	
			480V/Δ	50	65 (50: with lug terminals)	50	
			480V/Y	50	65 (50: with lug terminals)	50	
			240V	100	100	125	
		DC	250V	10	10	10	
			690V	15/8	15/8	15/8	
			500V	36/18	42/21	36/18	
			440V	50/25	70/35	50/25	
			400V	50/25	70/35	50/25	
	IEC60947-2 JIS C 8201-2-1 Icu/Ics	AC	380V	50/25	70/35	50/25	
			240V	100/50	125/63	100/50	
			250V	40/20	40/20	40/20	
			400V	50/25	70/35	50/25	
			230V	100/50	125/63	100/50	
Dimension inch (mm)			a	8.268(210)	8.268(210)	8.268(210)	
			b	10.83(275)	10.83(275)	10.83(275)	
			c	4.055(103)	4.055(103)	4.055(103)	
			d	5.748(146)	5.748(146)	5.748(146)	
Terminal construction	Screw terminals		–	–	–	–	
	Flat terminals		None	●	● *2	● *2	
	Lug terminals		SB	● *1	●	●	
Internal accessories	Auxiliary switch		W	BW9W1SHA	BW9W1SHA	BW9W1SHA	
	Auxiliary switch 2 contacts		V	BW9W2SHA	BW9W2SHA	BW9W2SHA	
	Aux. low current		1	BW9W1DHA	BW9W1DHA	BW9W1DHA	
	Aux. low current 2 contacts		2	BW9W2DHA	BW9W2DHA	BW9W2DHA	
	Alarm switch		K	BW9K1SHA	BW9K1SHA	BW9K1SHA	
	Alarm switch 2 contacts		J	BW9K2SHA	BW9K2SHA	BW9K2SHA	
	Alarm low current		8	BW9K1DHA	BW9K1DHA	BW9K1DHA	
	Alarm low current 2 contacts		9	BW9K2DHA	BW9K2DHA	BW9K2DHA	
	Shunt trip		F	BW9FHA-*	BW9FHA-*	BW9FHA-*	
	Under voltage trip		R	BW9RHA-*	BW9RHA-*	BW9RHA-*	
	Accessories with terminal block		A	See page 22	See page 22	See page 22	
External accessories	Padlocking device		QN	BW9QNHA	BW9QNHA	BW9QNHA	
			Q2	BW9Q2JA	BW9Q2JA	BW9Q2JA	
	External operating handle		V	BW9V0JA	BW9V0JA	BW9V0JA	
			N	BW9N0JA	BW9N0JA	BW9N0JA	
	Field Installable terminal		–	–	–	–	
	Terminal covers *3	Short type, gray-white	–	–	–	–	
		Short type, transparent	–	–	–	–	
		Long type, gray-white	BW9BTJA-L3W	BW9BTJA-L3W	BW9BTJA-L3W	BW9BTJA-L3W	
		Long type, transparent	BW9BTJA-L3	BW9BTJA-L3	BW9BTJA-L3	BW9BTJA-L3	
Insulation barrier		B-43A	B-43A	B-43A	B-43A		
Mass: lb. (kg) (screw terminals)			19.62(8.9)		19.62(8.9)	20.72(9.4)	


*1 Lug terminal is **NOT** available for 630 ampere.

*2 Flat terminal is **NOT** available for 800 ampere.

*3 Terminal covers are **NOT** supplied as standard.

●: Available, –: Not available

Earth Leakage Circuit Breakers - New G-Twin, UL489 Listed EW Series

Frame size (A)			50		100				
Type			EW50RAGU-3P		EW100EAGU-2P		EW100EAGU-3P		
Appearance (with Screw Terminals, 3 poles)									
SSCR=UL489 interrupting capacity									
Rated voltage AC (V)			UL	240	240	240			
			IEC	100-230-440	100-230	100-230-440			
Rated current (A)			3, 5, 10, 15, 20, 30, 32, 40, 50				60, 63, 70, 75, 80, 90, 100		
Rated Sensitive Current (mA)			30, 50, 100/200/500				30, 100/200	30, 50, 100/200/500	
Poles			3				2	3	
Rated frequency (Hz)			50/60				50/60	50/60	
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	480V/Δ	–				–	
			480V/Y	–				–	
			240V	14				14	
	IEC60947-2 JIS C 8201-2-2 Icu/Ics	AC	440V	10/5				–	10/5
			415V	10/5				–	10/5
			380V	10/5				–	10/5
			230V	25/13				10/5	25/13
			100V	25/13				10/5	25/13
	GB14048.2 Icu/Ics	AC	400V	10/5				7.5/4	10/5
			230V	25/13				10/5	25/13
Dimension inch (mm)					a	2.953(75)	2.953(75)	2.953(75)	
					b	4.724(120)	4.724(120)	4.724(120)	
					c	2.362(60)	2.362(60)	2.362(60)	
					d	3.307(84)	3.307(84)	3.307(84)	
Terminal construction	Screw terminals		None						
	Flat terminals		SF						
	Lug terminals		SB	–		–	–		
Internal accessories *4	Auxiliary switch		W	BZ6W*10CU	BZ6W*10CU	BZ6W*10CU	BZ6W*10CU		
	Alarm switch		K	BZ6K*10CU	BZ6K*10CU	BZ6K*10CU	BZ6K*10CU		
	Shunt trip		F	BZ6F*10CAU	BZ6F*10CAU	BZ6F*10CAU	BZ6F*10CAU		
	Under voltage trip		R	BZ6R*10CAU	BZ6R*10CAU	BZ6R*10CAU	BZ6R*10CAU		
	Accessories with terminal block		A	*1	*1	*1	*1		
External accessories	Padlocking device (Cap type)		Q1	BZ6L10CA	BZ6L10CA	BZ6L10CA	BZ6L10CA		
	Handle locking cover			BZ6L10C	BZ6L10C	BZ6L10C	BZ6L10C		
	External operating handle		V	BZ6V10D	BZ6V10D	BZ6V10D	BZ6V10D		
			N	BZ6N10D	BZ6N10D	BZ6N10D	BZ6N10D		
	Field Installable terminal kit	Flat terminal kit	BU-SU20B	BU-SU25B	BU-SU25B				
		Lug terminal kit	–	–	–				
	Terminal covers *3	for screw, short type	Provided	Provided	Provided				
		for screw, long type	BW9BTAA-L3W	BW9BTAA-L3W	BW9BTAA-L3W				
		for flat terminal	–	–	–				
		for Lug terminal	–	–	–				
	Insulation barrier *2			BZ6B10C	BZ6B10C	BZ6B10C			
	Mass: lb. (kg) (screw terminals)			1.32(0.6)		1.32(0.6)		1.32(0.6)	

*1 For Internal accessories with terminal block, specify "A" in the accessory P/N. When 50A Frame & 100A Frame are ordered w/UVT, the UVT is supplied with terminal block as standard.


*2 Insulation barriers are only required with flat terminal.

*3 Short terminal covers are supplied as standard. If long terminal covers are required, please order BZ6TB10C2U or BZ6TB10C3U.

*4 These internal accessories can be installed in the field. (see page 20 for part number)

●: Available, –: Not available

Earth Leakage Circuit Breakers - New G-Twin, UL489 Listed EW Series


Frame size (A)			125		250	
Type			EW125JAGU		EW125RAGU	
Appearance (with Screw Terminals, 3 poles)						
SSCR=UL489 interrupting capacity						
Rated voltage AC (V)			UL	240-480	240-480	240-480
			IEC	100-230-440	100-230-440	100-230-440
Rated current (A)			15,20,30,40,50,60,75,100,125		125,150,160,175,200,225,250	
Instantaneous trip type	Rated Sensitive Current (mA)	B	30	30	30	30
	Tripping time (s)		0.1 or less	0.1 or less	0.1 or less	0.1 or less
Instantaneous /time-delay trip type	Rated Sensitive Current (mA)	K	100/200/500/1000	100/200/500/1000	100/200/500/1000	100/200/500/1000
	Tripping time (s)		0.1/0.4/1/2	0.1/0.4/1/2	0.1/0.4/1/2	0.1/0.4/1/2
	Inertia non-tripping time (s)		0/0.2/0.5/1	0/0.2/0.5/1	0/0.2/0.5/1	0/0.2/0.5/1
Poles			3	3	3	3
Rated frequency (Hz)			50/60	50/60	50/60	50/60
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	480V/△	30	50	30
			480V/Y	30	50	30
			240V	50	100	50
	IEC60947-2 JIS C 8201-2-2 Icu/Ics	AC	440V	30/15	50/25	30/15
			415V	30/15	50/25	30/15
			380V	30/15	50/25	30/15
			240V	50/25	100/50	50/25
			100V	50/25	100/50	50/25
	GB14048.2 Icu/Ics	AC	400V	30/15	50/25	30/15
			230V	50/25	100/50	50/25
Dimension inch (mm)			a	3.543(90)	3.543(90)	4.134(105)
			b	6.372(171)	6.372(171)	7.126(181)
			c	2.677(68)	2.677(68)	2.677(68)
			d	3.740(95)	3.740(95)	3.740(95)
Terminal construction	Screw terminals		None	●	●	●
	Flat terminals		SF	●	●	●
	Lug terminals		SB	●	●	●
Internal accessories	Auxiliary switch		W	BW9W1SG0(-R)	BW9W1SG0(-R)	BW9W1SG0(-R)
	Auxiliary switch for low current		1	BW9W1DG0(-R)	BW9W1DG0(-R)	BW9W1DG0(-R)
	Alarm switch		K	BW9K1SG0(-R)	BW9K1SG0(-R)	BW9K1SG0(-R)
	Alarm switch for low current		8	BW9K1DG0(-R)	BW9K1DG0(-R)	BW9K1DG0(-R)
	Auxiliary & Alarm switch		WK	BW9WKSG0(-R)	BW9WKSG0(-R)	BW9WKSG0(-R)
	Aux. & Alarm for low current		18	BW9WKDG0(-R)	BW9WKDG0(-R)	BW9WKDG0(-R)
	Shunt trip		F	BW9F*G0	BW9F*G0	BW9F*G0
	Under voltage trip		R	BW9RGA*	BW9RGA*	BW9RGA*
	Earth alarm switch *2		L	BW9L1SG0	BW9L1SG0	BW9L1SG0
	Accessories with terminal block		A	See page 22	See page 22	See page 22
External accessories	Padlocking device		Q1	BW9Q1CA	BW9Q1CA	BW9Q1CA
			Q2	BW9Q2CA	BW9Q2CA	BW9Q2CA
	External operating handle		V	BW9V0CA	BW9V0CA	BW9V0GA
			N	BW9N0CA	BW9N0CA	BW9N0GA
			F	BW9F0CA	BW9F0CA	BW9F0GA
	Field Installable terminal kit	Flat terminal kit	BW9SS0CA-3 GLOBAL			BZ-S50B-2253 GLOBAL
		Lug terminal kit	BW9SL0CA-3 GLOBAL			Please see page 28.
	Terminal covers *1	Short type, gray-white	Provided	Provided	Provided	Provided
		Short type, transparent	BW9BTCA-S3	BW9BTCA-S3	BW9BTGA-S3	BW9BTGA-S3
Long type, gray-white		BW9BTCA-L3W	BW9BTCA-L3W	BW9BTGA-L3W	BW9BTGA-L3W	
Long type, transparent		BW9BTCA-L3	BW9BTCA-L3	BW9BTGA-L3	BW9BTGA-L3	
Insulation barrier		BW9BPCA	BW9BPCA	BW9BPGA	BW9BPGA	
Mass: lb. (kg) (screw terminals)			2.65(1.2)	2.65(1.2)	3.53(1.6)	3.53(1.6)

*1 Short type terminal covers (gray-white) are supplied as standard.

*2 Right-side mount only.

●: Available, -: Not available

Earth Leakage Circuit Breakers - New G-Twin, UL489 Listed EW Series

Frame size (A)				400			630					
Type				EW400SAGU		EW400RAGU		EW400HAGU		EW630RAGU		
Appearance (with Flat Terminals, 3 poles)												
SSCR=UL489 interrupting capacity												
Rated voltage AC (V)				UL		240-480		240-480		240-480		
				IEC		100-230-440		100-230-440		100-230-440		
Rated current (A)				250, 300, 350, 400						500, 600, 630		
Instantaneous trip type	Rated Sensitive Current (mA)		B	30		30		30		-		
	Tripping time (s)			0.1 or less		0.1 or less		0.1 or less		-		
Instantaneous /time-delay trip type	Rated Sensitive Current (mA)		K	100/200/500/1000		100/200/500/1000		100/200/500/1000		100/200/500/1000		
	Tripping time (s)			0.1/0.4/1/2		0.1/0.4/1/2		0.1/0.4/1/2		0.1/0.4/1/2		
	Inertia non-tripping time (s)			0/0.2/0.5/1		0/0.2/0.5/1		0/0.2/0.5/1		0/0.2/0.5/1		
Poles				3		3		3		3		
Rated frequency (Hz)				50/60		50/60		50/60		50/60		
Rated interrupting capacity sym (kA)	UL489 CAN/CSA C22.2 No.5	AC	480V/Δ	35		50		65 (50: with lug terminals)		50		
			480V/Y	35		50		65 (50: with lug terminals)		50		
			240V	50		100		125		100		
	IEC60947-2 JIS C 8201-2-2 Icu/Ics	AC	440V	36/18		50/25		70/35		50/25		
			415V	36/18		50/25		70/35		50/25		
			380V	36/18		50/25		70/35		50/25		
			240V	85/43		100/50		125/63		100/50		
			100V	85/43		100/50		125/63		100/50		
	GB14048.2 Icu/Ics	AC	400V	36/18		50/25		70/35		50/25		
			230V	85/43		100/50		125/63		100/50		
Dimension inch (mm)				a	5.512(140)		5.512(140)		5.512(140)		8.268(210)	
				b	10.12(257)		10.12(257)		10.12(257)		10.83(275)	
				c	4.055(103)		4.055(103)		4.055(103)		4.055(103)	
				d	5.748(146)		5.748(146)		5.748(146)		5.748(146)	
Terminal construction	Screw terminals		-	-		-		-		-		
	Flat terminals		None	●		●		●		●		
	Lug terminals		SB	●		●		●		●*1		
Internal accessories	Auxiliary switch		W	BW9W1SHA		BW9W1SHA		BW9W1SHA		BW9W1SHA		
	Auxiliary switch, 2 contacts		V	BW9W2SHA		BW9W2SHA		BW9W2SHA		BW9W2SHA		
	Aux. low current		1	BW9W1DHA		BW9W1DHA		BW9W1DHA		BW9W1DHA		
	Aux. low current, 2 contacts		2	BW9W2DHA		BW9W2DHA		BW9W2DHA		BW9W2DHA		
	Alarm switch		K	BW9K1SHA		BW9K1SHA		BW9K1SHA		BW9K1SHA		
	Alarm switch, 2 contacts		J	BW9K2SHA		BW9K2SHA		BW9K2SHA		BW9K2SHA		
	Alarm low current		8	BW9K1DHA		BW9K1DHA		BW9K1DHA		BW9K1DHA		
	Alarm low current, 2 contacts		9	BW9K2DHA		BW9K2DHA		BW9K2DHA		BW9K2DHA		
	Shunt trip		F	BW9FHA-*		BW9FHA-*		BW9FHA-*		BW9FHA-*		
	Under voltage trip		R	BW9RHA-*		BW9RHA-*		BW9RHA-*		BW9RHA-*		
	Earth alarm switch		L	-		-		-		-		
	Accessories with terminal block		A	See page 22		See page 22		See page 22		See page 22		
External accessories	Padlocking device		QN	BW9QNHA		BW9QNHA		BW9QNHA		BW9QNHA		
			Q2	BW9Q2HA		BW9Q2HA		BW9Q2HA		BW9Q2HA		
	External operating handle		V	BW9V0HA		BW9V0HA		BW9V0HA		BW9V2JA		
			N	BW9N0HA		BW9N0HA		BW9N0HA		BW9N0JA		
			F	BW9F0HA		BW9F0HA		BW9F0HA		-		
			Field Installable terminal		-	-		-		-		-
	Terminal covers *2	Short type, gray-white	BW9BTHA-S3W		BW9BTHA-S3W		BW9BTHA-S3W		-		-	
		Short type, transparent	BW9BTHA-S3		BW9BTHA-S3		BW9BTHA-S3		-		-	
		Long type, gray-white	BW9BTHA-L3W		BW9BTHA-L3W		BW9BTHA-L3W		BW9BTHA-L3W		BW9BTHA-L3W	
		Long type, transparent	BW9BTHA-L3		BW9BTHA-L3		BW9BTHA-L3		BW9BTHA-L3		BW9BTHA-L3	
Insulation barrier		B43-A		B43-A		B43-A		B43-A		B43-A		
Mass: lb. (kg) (screw terminals)				12.35(5.6)		12.35(5.6)		12.35(5.6)				

*1 Lug Terminal is NOT available for 630 ampere.

*2 Terminal covers are NOT supplied as standard.

●: Available, -: Not available

Part Number Structure

G-TWIN; MCCB (50 - 800AF)

BW250EAGU - 3P 100 SF

Product category _____
 Number of poles _____
 Rated current (A) _____
 Terminal structure _____

Code	Line side	Load side	BW50RAGU	BW100EAGU, BW125RAGU, BW125RAGU BW250EAGU, BW125JAGU, BW250RAGU	BW400EAGU, BW400SAGU, BW400RAGU, BW400HAGU BW630RAGU, BW630HAGU, BW800RAGU, BW800HAGU
None	Screw	Screw	●	●	—
None	Flat	Flat	—	—	●
SB	Lug	Lug	—	●	●*1
SF	Flat	Flat	●	●	—

*1 Lug terminal is Not available for BW630□AGU-3P630 (Rated current 630 ampere in BW630).

G-TWIN; ELCB (50 - 630AF)

EW50RAGU - 3P 050 K SF

Product category _____
 Number of poles _____
 Rated current (A) _____
 Rated sensitive current (mA) _____

Code	Line side	2 poles	3 poles
B	30mA	●	●
D	50mA*	—	●
K	100/200mA** changeable	●	—
K	100/200/500* or 100/200/500/1000mA changeable	—	●

*Only for EW50RAGU-3P, EW100EAGU-3P

**Only for EW100EAGU-2P


Terminal structure _____

Code	Line side	Load side	EW50RAGU EW100EAGU	EW125JAGU, EW125RAGU EW125JAGU, EW250RAGU	EW400SAGU, EW400RAGU, EW400HAGU EW630RAGU
None	Screw	Screw	●	●	—
None	Flat	Flat	—	—	●
SB	Lug	Lug	—	●	●*1
SF	Flat	Flat	●	●	—


*1 Lug terminal is Not available for EW630RAGU-3P630 (Rated current 630 ampere in EW630).

Characteristic Curves


● BW50RAGU, EW50RAGU (Rated current: 5A, 10A, 32A, 40A)

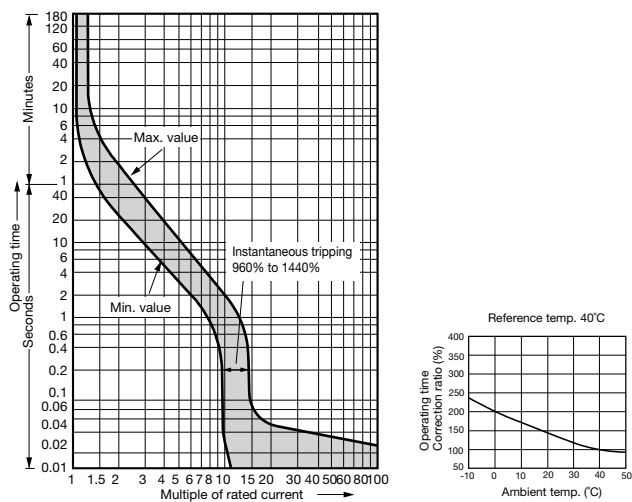


● BW50RAGU, EW50RAGU (Rated current: 3A, 15A, 20A, 30A, 50A)

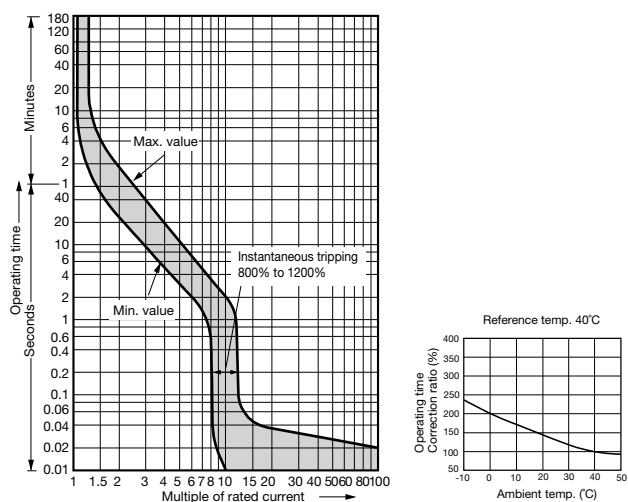


● BW100EAGU, EW100EAGU (Rated current: 60A, 63A, 75A, 80A, 90A)

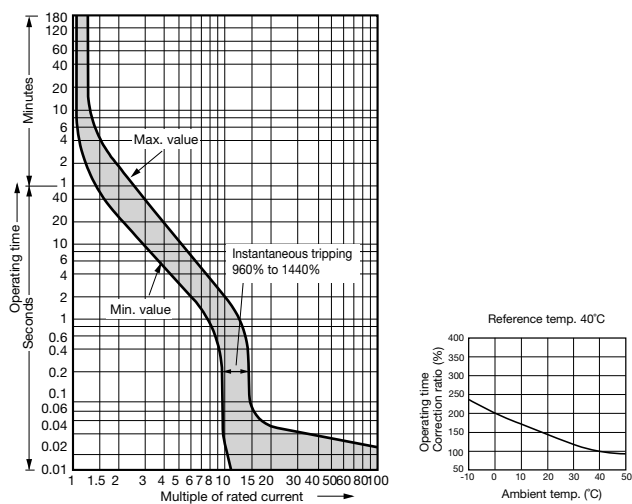


● BW100EAGU, EW100EAGU (Rated current: 100A)

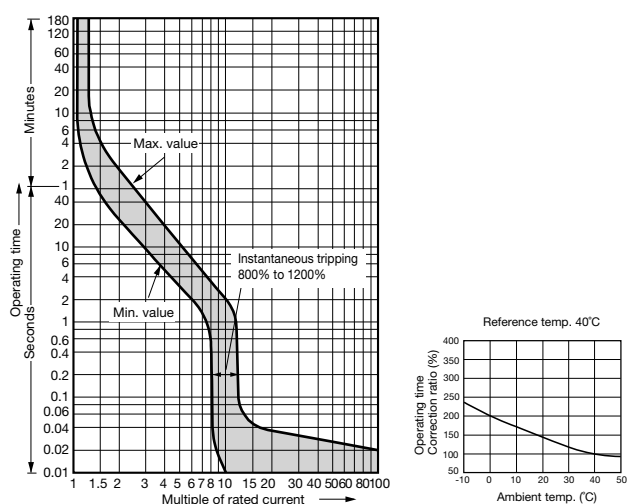

● BW125, EW125 (Rated current: 15A)

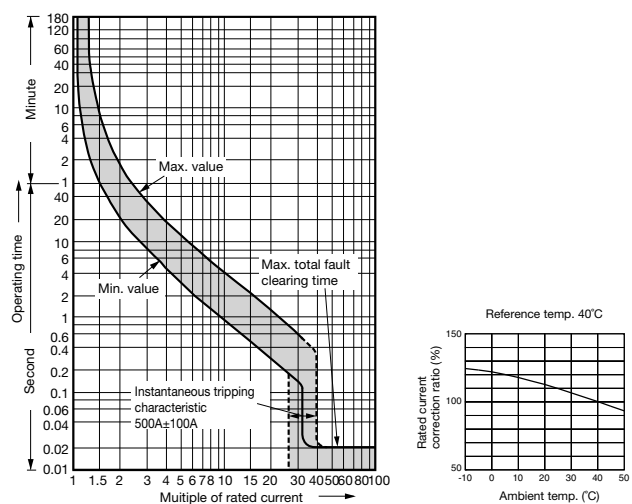


● BW125, EW125 (Rated current: 20A)

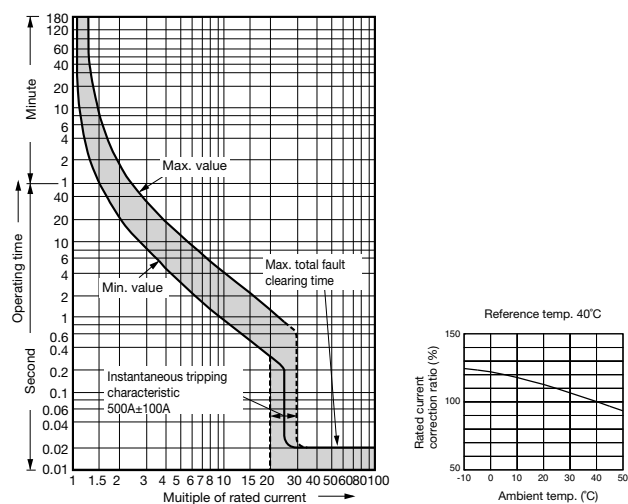


Characteristic Curves


● BW125, EW125 (Rated current: 30A)

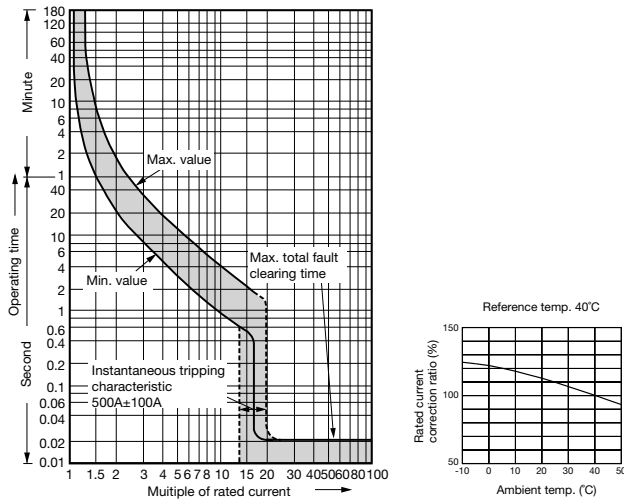


● BW125, EW125 (Rated current: 40A)

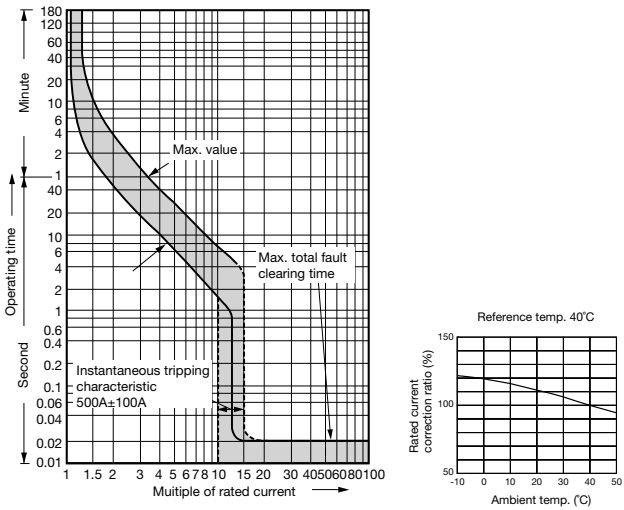


● BW125, EW125 (Rated current: 50 - 125A)

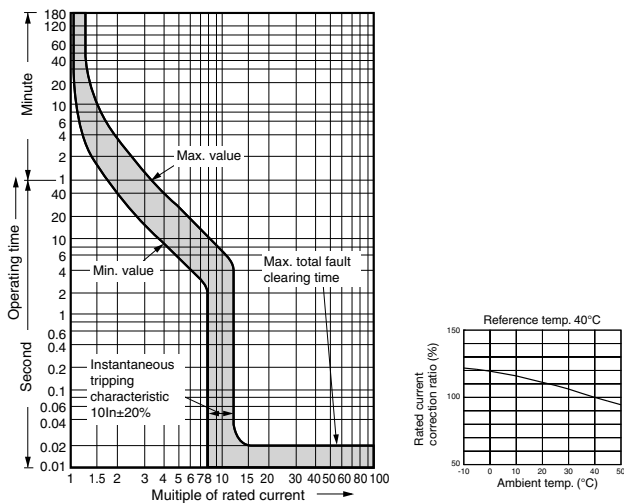


● BW250, EW250

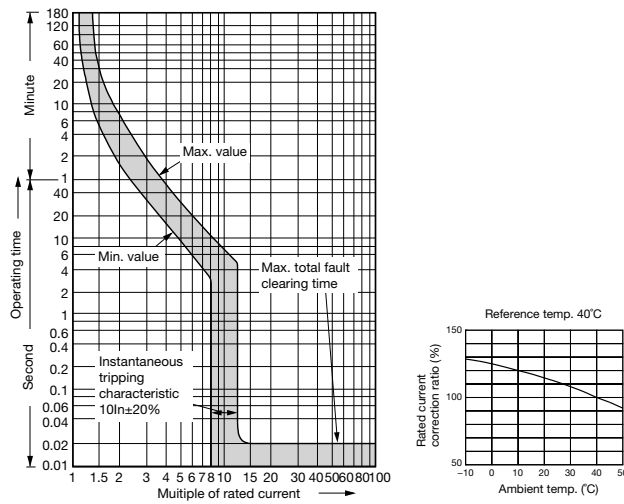

● BW400, EW400

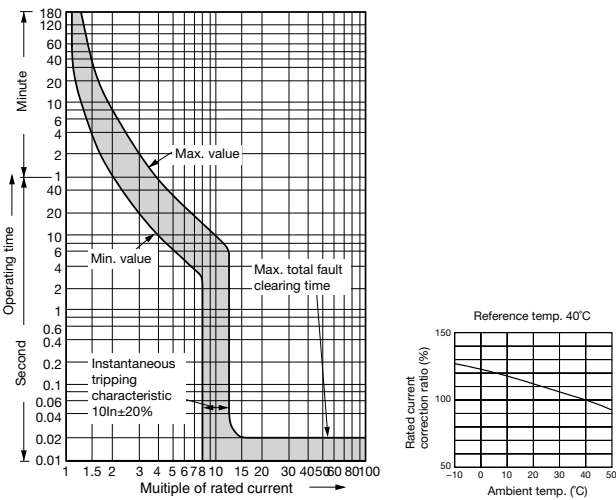


● BW630, EW630

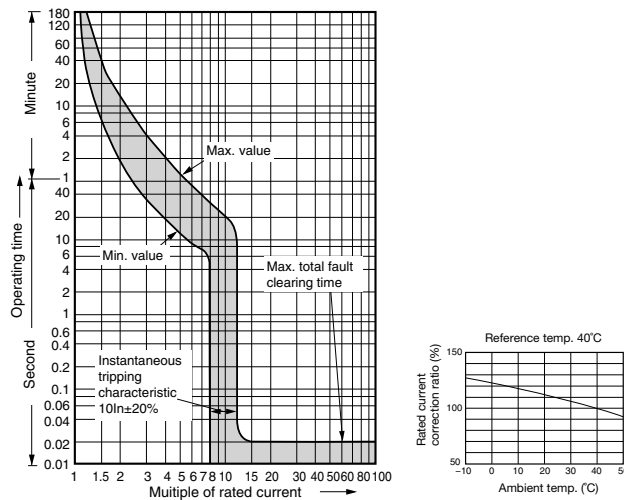


Characteristic Curves


● BW800

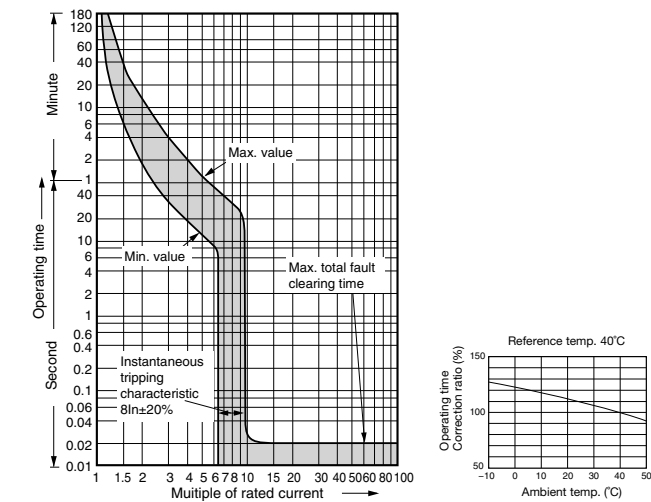

● Earth leakage tripping (EW50, EW100)

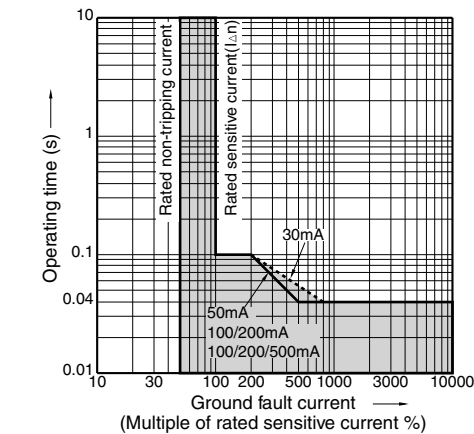


● Earth leakage tripping (EW125, EW250, EW400, EW630)

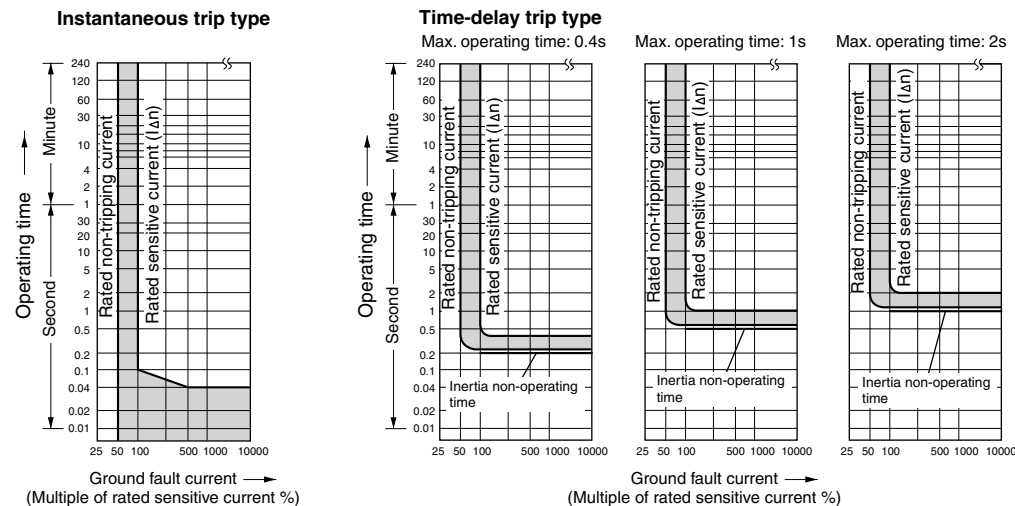


Dimensions: inch (mm)


BW50RAGU-2P, 3P, BW100EAGU-2P, 3P, EW50RAGU-3P, EW100EAGU-2P*, 3P

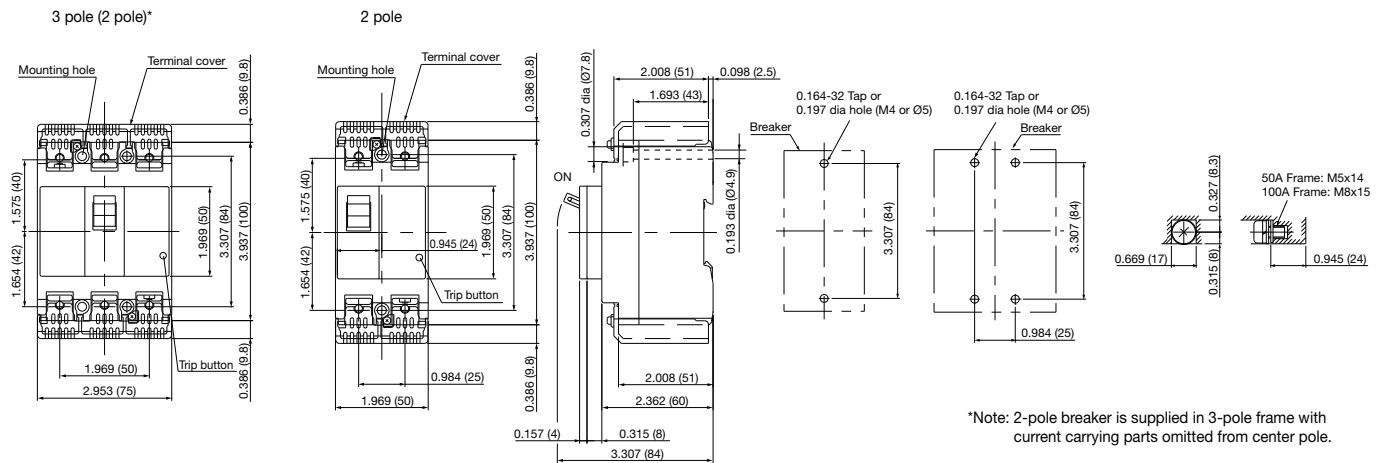

BW50RAGU-2P, 3P(SF), EW50RAGU-3P(SF)

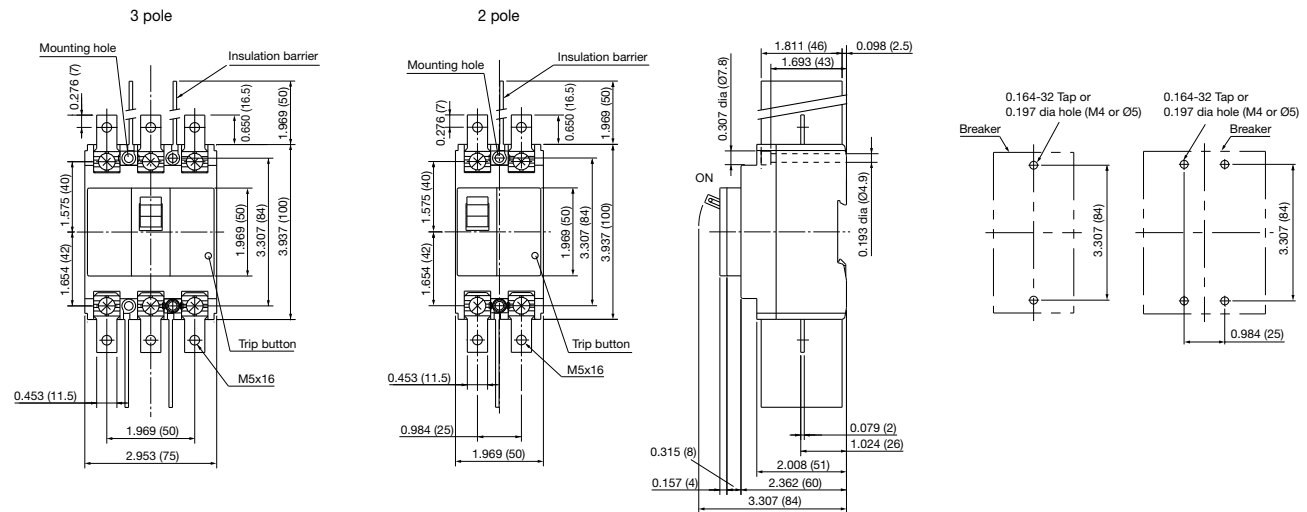


BW100EAGU-2P, 3P(SF), EW100EAGU-2P*, 3P(SF)

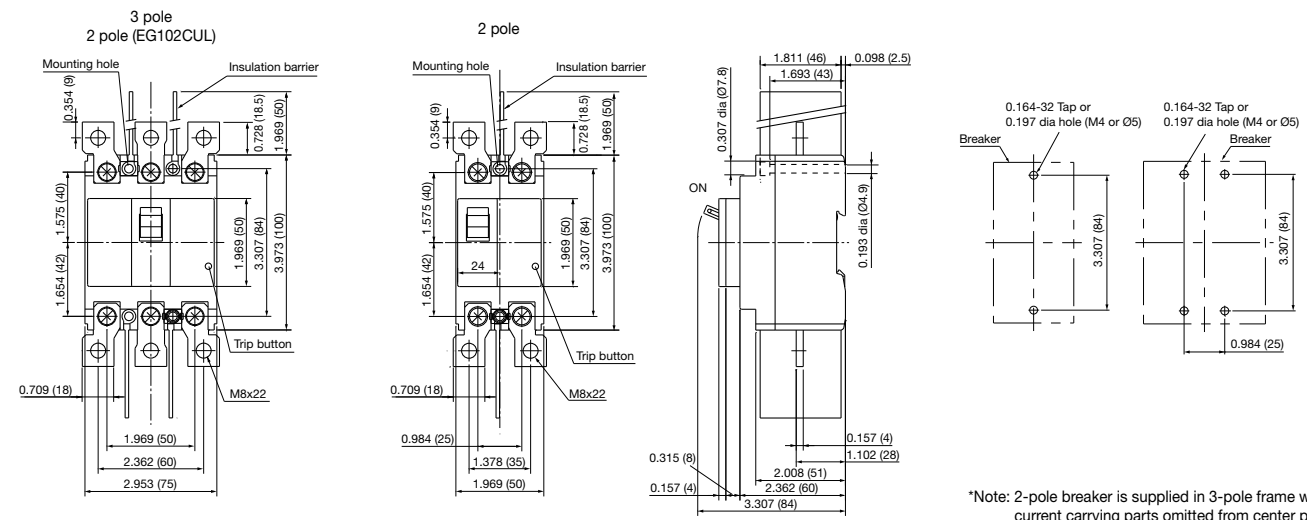


Dimensions: inch (mm)


BW125*U-2P, 3P

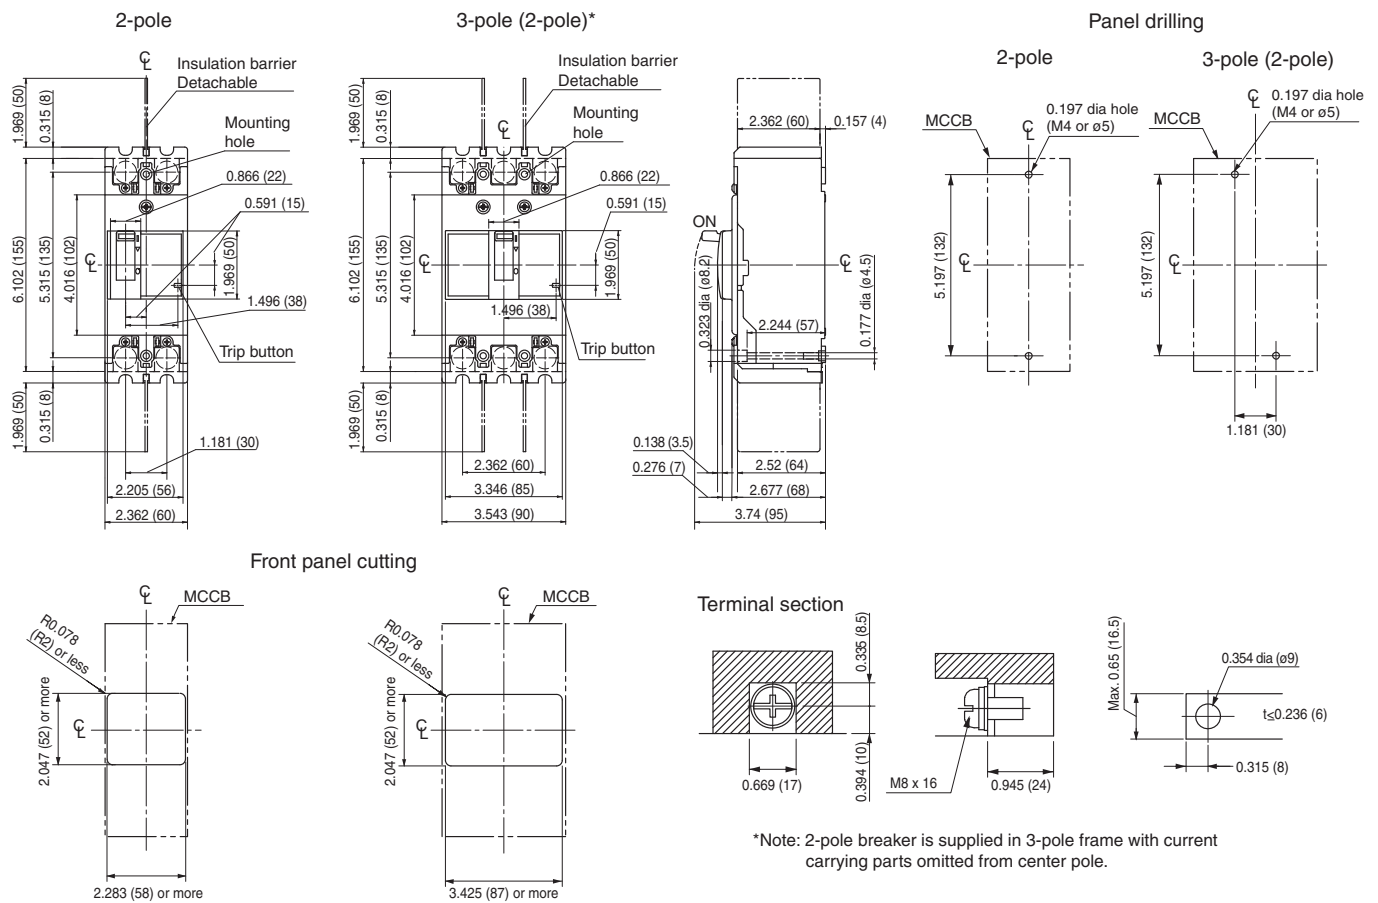


BW250*U-2P, 3P

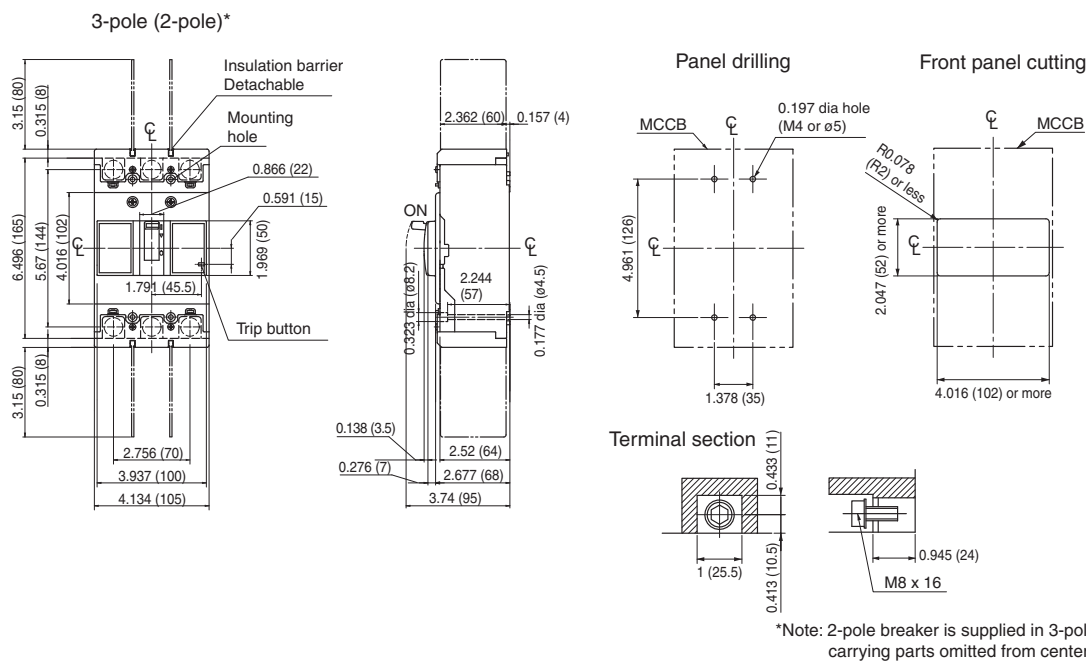

BW400*U-2P, 3P




BW800*U-3P




Dimensions: inch (mm)


EW250*U-3P

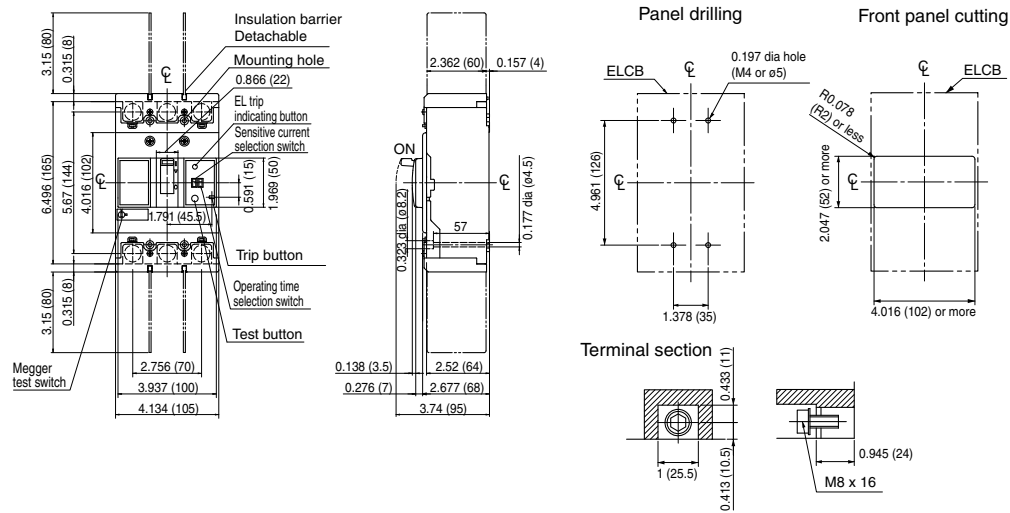

EW400*U-3P

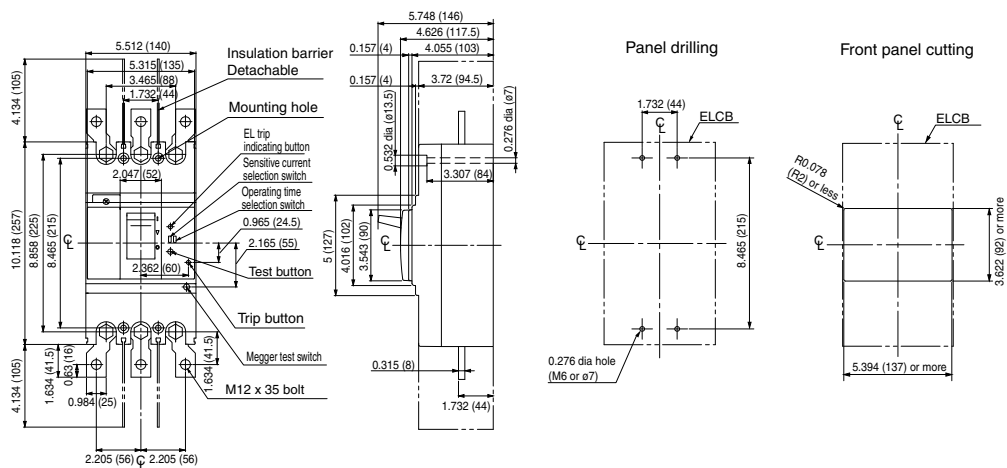


EW630RAGU-3P

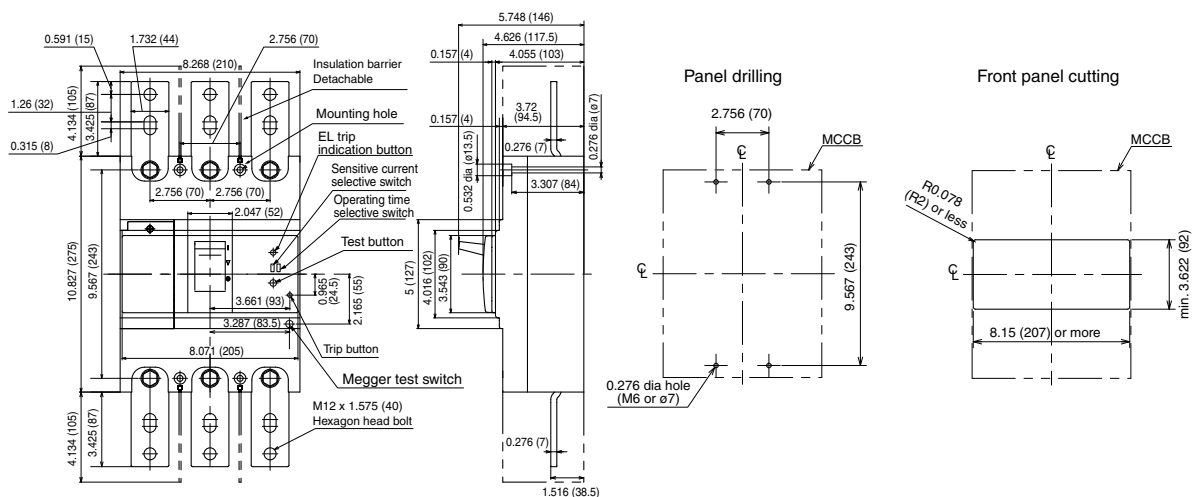


Dimensions of Terminal Blocks for Internal Accessories: inch (mm)


50, 100A Frame




125, 250A Frame



400, 630, 800A Frame

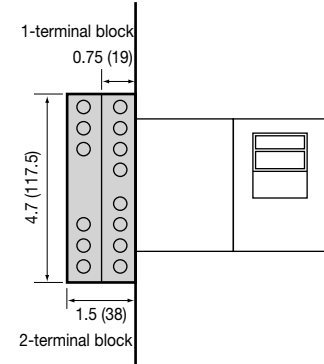


**Dimensions of Undervoltage/Shunt trip device
50 and 100AF Only**



Breakers	W x H
BW50RAGU-2P, BW100EAGU-2P	1.0 (25) x 3.94 (100)
BW50RAGU-3P, BW100EAGU-3P EW50RAGU, EW100EAGU	1.0 (25) x 3.94 (100)

Dimensions of Terminal Covers: inch (mm)

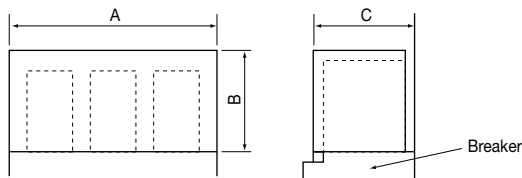

Type			Dimensions: Inch(mm)			Applicable Breakers
Black	Transparent	Gray-white	A	B	C	
—	BW9BTAA-S2 (Short)	BW9BTAA-S2W ** (Short)	1.969 (50)	0.386 (9.8)	2.106 (53.5)	BW50RAGU-2P, BW100EAGU-2P
—	BW9BTAA-L2 (Long)	BW9BTAA-L2W (Long)	1.969 (50)	1.575 (40)	2.106 (53.5)	
—	BW9BTAA-S3 (Short)	BW9BTAA-S3W** (Short)	2.953 (75)	0.386 (9.8)	2.106 (53.5)	BW50RAGU-3P, BW100EAGU-3P EW50RAGU-3P, EW100EAGU-2P
—	BW9BTAA-L3 (Long)	BW9BTAA-L3W (Long)	2.953 (75)	1.575 (40)	2.106 (53.5)	
—	BW9BTCA-S2 (Short)	BW9BTCA-S2W** (Short)	2.362 (60)	0.315 (8)	2.618 (66.5)	BW125*U-2P
—	BW9BTCA-L2 (Long)	BW9BTCA-L2W (Long)	2.362 (60)	1.575 (40)	2.618 (66.5)	
—	BW9BTCA-S3 (Short)	BW9BTCA-S3W** (Short)	3.543 (90)	0.315 (8)	2.618 (66.5)	BW125*U-3P EW125*U-3P
—	BW9BTCA-L3 (Long)	BW9BTCA-L3W (Long)	3.543 (90)	1.575 (40)	2.618 (66.5)	
—	BW9BTGA-S3 (Short)	BW9BTGA-S3W** (Short)	4.134 (105)	0.315 (8)	2.618 (66.5)	BW250*U-2P, BW250*U-3P EW250*U-3P
—	BW9BTGA-L3 (Long)	BW9BTGA-L3W (Long)	4.134 (105)	1.969 (50)	2.618 (66.5)	
—	BW9BTHA-S3 (Short)	BW9BTHA-S3W (Short)	5.512 (140)	2.559 (65)	3.858 (98)	BW400*U-2P, BW400*U-3P EW400*U-3P
—	BW9BTHA-L3 (Long)	BW9BTHA-L3W (Long)	6.772 (172)	4.331 (110)	3.858 (98)	
—	BW9BTJA-L3 (Long)	BW9BTJA-L3W (Long)	8.268 (210)	6.102 (155)	3.858 (98)	BW630*U-3P, BW800*U-3P EW630*U-3P

**A Gray-white terminal cover provided with BW50□U, BW100□U, BW125□U, BW250□U, EW100□U, EW125□U, EW250□U amp frame.

Internal Accessories for G-TWIN

50,100AF

Breaker type: BW50, BW100, EW50, EW100

Auxiliary switches and alarm switches

Lead wire type		BW50RAGU, EW50RAGU BW100EAGU, EW100EAGU	
		Left side	Right side
Aux	W	BZ6WL10CU**1	BZ6WR10CU
Aux low current	WD	BZ6WDL10CU**1	BZ6WDR10CU
Alarm	K	BZ6KL10CU**1	BZ6KR10CU
Alarm low current	KD	BZ6KDL10CU**1	BZ6KDR10CU
Aux & Alarm	WK	BZ6WKL10CU**1	BZ6WKR10CU
Aux & Alarm low current	WDKD	BZ6WDKDL10CU**1	BZ6WDKDR10CU

*1 for 3 pole type only

With terminal block type		BW50RAGU, EW50RAGU BW100EAGU, EW100EAGU	
		Left side	Right side
Aux	W	BZ6WL10CAU**1	BZ6WR10CAU
Aux low current	WD	BZ6WDL10CAU**1	BZ6WDR10CAU
Alarm	K	BZ6KL10CAU**1	BZ6KR10CAU
Alarm low current	KD	BZ6KDL10CAU**1	BZ6KDR10CAU
Aux & Alarm	WK	BZ6WKL10CAU**1	BZ6WKR10CAU
Aux & Alarm low current	WDKD	BZ6WDKDL10CAU**1	BZ6WDKDR10CAU

*1 for 3 pole type only

Rating

Standard; Aux, Alarm

Breaker type	BW50RAGU, EW50RAGU BW100EAGU, EW100EAGU	Minimum load
Operating voltage	Rated current (A)	
120V AC	3.6	5V DC 160mA 30V DC 30mA
240V AC	1.8	
125V DC	0.55	
250V DC	0.27	

For low current; Aux, Alarm

Breaker type	BW50RAGU, EW50RAGU BW100EAGU, EW100EAGU	Minimum load
Operating voltage	Rated current (A)	
30V DC	0.1	5V DC 1mA 30V DC 1mA

Operation

Type of switch	Condition of MCCB		
	ON	OFF	TRIP
Auxiliary switch (W)			
Alarm switch (K)			

Shunt trip devices

Breaker type	Operating voltage	Code	Part number		Spec		
			Lead wire type	With terminal block type	Input (VA)	Internal circuit	Time rating (ms)
BW50RAGU BW100EAGU	24VAC, 24VDC	FR	BZ6FR10CU	BZ6FR10CAU	150	Continuous with burnout prevention circuit	7-13
	100-120VAC 100-110VDC	FA	BZ6FA10CU	BZ6FA10CAU	150		
	200-240VAC	FK	BZ6FK10CU	BZ6FK10CAU	150		
	380-450VAC	FP	BZ6FP10CU	BZ6FP10CAU	200		
EW50RAGU EW100EAGU	100VAC 50Hz 100-110VAC 60Hz	F2	—	BZ6F210CAU	16	Continuous	7-13
	200VAC 50Hz 200-220VAC 60Hz	F7	—	BZ6F710CAU	16		
	400VAC 50Hz 400-440VAC 60Hz	F8	—	BZ6F810CAU	22		


Undervoltage trip devices

Breaker type	Operating voltage	Code	Part number		Spec	
			Lead wire type	With terminal block type	Input (VA)	Operating voltage
BW50RAGU BW100EAGU	100VAC 50Hz 100-110VAC 60Hz	R2	—	BZ6R210CAU	3	Tripping voltage: 70% to 35% of rated voltage
	200VAC 50Hz 200-220VAC 60Hz	RW	—	BZ6RW10CAU	3	
EW50RAGU EW100EAGU	400VAC 50Hz 400-440VAC 60Hz	R9	—	BZ6R910CAU	4	Closing voltage: 85% or more of rated voltage

Internal Accessory Combinations for G-TWIN

50,100AF

Breaker type: BW50, BW100, EW50, EW100



MCCB	BW50RAGU-2P BW100EAGU-2P	BW50RAGU-3P BW100EAGU-3P
Pole	2	3
Auxiliary switch SPDT W		
Alarm switch SPDT K		
Shunt trip F		
Undervoltage trip R		
W2	N/A	
W+K		
W2+K	N/A	
K2	N/A	
W+K2	N/A	
W2+K2	N/A	
W+F	N/A	
W2+F	N/A	N/A
W+R		
W2+R	N/A	
K+F	N/A	
K+R		
W+K+F	N/A	
W+K+R		
K2+F	N/A	N/A
K2+R	N/A	
W2+K+F	N/A	N/A
W2+K+R	N/A	
W+K2+F	N/A	N/A
W+K2+R	N/A	
W2+K2+F	N/A	N/A
W2+K2+R	N/A	

ELCB	EW50RAGU-3P EW100EAGU-2P EW100EAGU-3P
Pole	2, 3
Auxiliary switch SPDT W	
Alarm switch SPDT K	
Shunt trip F	
Undervoltage trip R	
W2	
W+K	
W2+K	
K2	
W+K2	
W2+K2	
W+F	
W+R	
W2+R	
K+F	
K+R	
K2+R	
W+K+F	
W+K+R	
W2+K+R	
W+K2+R	
W2+K2+R	

Internal Accessories for G-TWIN

125, 250AF

Breaker type: BW125, EW125, BW250, EW250

Accessory	Code	Part number				Operating voltage
		Lead wire type		With terminal block type		
		Left side	Right side	Left side	Right side	
Auxiliary switch	W	BW9W1SG0	BW9W1SG0-R	BW9W1SG0-A	BW9W1SG0-RA	–
Auxiliary switch (low current)	1	BW9W1DG0	BW9W1DG0-R	–	–	
Alarm switch	K	BW9K1SG0	BW9K1SG0-R	BW9K1SG0-A	BW9K1SG0-RA	
Alarm switch (low current)	8	BW9K1DG0	BW9K1DG0-R	–	–	
Auxiliary switch + Alarm switch	WK	BW9WKSG0	BW9WKSG0-R	BW9WKSG0-A	BW9WKSG0-RA	
Auxiliary switch + Alarm switch (low current)	18	BW9WKDG0	BW9WKDG0-R	–	–	
Earth alarm switch* ¹	L	–	BW9L1SG0	–	–	
Shunt trip device	FR	BW9FRG0	BW9FRG0	–	BW9FRG0-RA	24V AC/DC
	FS	BW9FSG0	BW9FSG0		BW9FSG0-RA	48V AC/DC
	FA	BW9FAG0	BW9FAG0		BW9FAG0-RA	100-120V AC/100-110V DC
	F1	BW9F1G0	BW9F1G0		BW9F1G0-RA	120-130V AC
	FK	BW9FKG0	BW9FKG0		BW9FKG0-RA	200-240V AC/200-220V DC
	FB	BW9FBG0	BW9FBG0		BW9FBG0-RA	277V AC
	FP	BW9FPG0	BW9FPG0		BW9FPG0-RA	380-440V AC
	FH	BW9FHG0	BW9FHG0		BW9FHG0-RA	440-480V AC
	FJ	BW9FJG0	BW9FJG0		BW9FJG0-RA	500-550V AC
Undervoltage trip device	RR	BW9RGAR	–	–	–	24V DC
	RS	BW9RGAS			48V DC	
	RL	BW9RGAL			100-110V DC	
	R5	BW9RGA5			125V DC	
	RA	BW9RGAA			100-110V AC	
	RT	BW9RGAT			110-130V AC	
	RK	BW9RGAK			200-240V AC	
	RB	BW9RGAB			277V AC	
	RP	BW9RGAP			380-415V AC	
	RH	BW9RGAH			440-480V AC	

*¹ for ELCB only

400, 630, 800AF

Breaker type: BW400, EW400, BW630, EW630, BW800

Accessory	Code	Part number		Operating voltage
		Lead wire type	With terminal block type	
		Left side	Left side	
Auxiliary switch x 1	W	BW9W1SHA	BW9W1SHA-A	–
Auxiliary switch x 2	V	BW9W2SHA	–	
Auxiliary switch (low current) x 1	1	BW9W1DHA	–	
Auxiliary switch (low current) x 2	2	BW9W2DHA	–	
Alarm switch x 1	K	BW9K1SHA	BW9K1SHA-A	
Alarm switch x 2	J	BW9K2SHA	–	
Alarm switch (low current) x 1	8	BW9K1DHA	–	
Alarm switch (low current) x 2	9	BW9K2DHA	–	
Shunt trip device	FR	BW9FHA-R	BW9FHA-RA	24-48V AC/DC
	FA	BW9FHA-A	BW9FHA-AA	100-240V AC/100-220V DC
	FB	BW9FHA-B	BW9FHA-BA	277V AC
	FP	BW9FHA-P	BW9FHA-PA	380-550V AC
Undervoltage trip device	RR	BW9RHA-R	–	24V AC/DC
	RS	BW9RHA-S		48V AC/DC
	RA	BW9RHA-A		100-110 AC/DC
	R1	BW9RHA-1		120-130V AC/125V DC
	RK	BW9RHA-K		200-240V AC/200-220V DC
	RB	BW9RHA-B		277V AC
	RP	BW9RHA-P		380-480V AC

Internal Accessories for G-TWIN

Operation of auxiliary switches (W) and alarm switches (K)

Accessory	Handle position	
	ON	OFF Trip
Auxiliary switch	SPDT: W (1)	
	2PDT: V (2)	
Alarm switch	SPDT: K (8)	
	2PDT: J (9)	

Note: Wire ring mark indication
 () Code of low current type

Operation of earth alarm switch (L)

Accessory	Handle position	
	ON/OFF/Overcurrent trip	EL trip
Earth alarm switch L		

Ratings of auxiliary switches (W) and alarm switches (K)

Standard type

Breaker type	Rated thermal current (A)	Make/break current (A)						Minimum load current
		AC			DC			
		Voltage (V)	Res. load	Ind. load	Voltage (V)	Res. load	Ind. load	
BW125, BW250 BW400 BW630 BW800 EW125, EW250 EW400 EW630	5	24	5	5	24	4	3	5V DC 160mA
		48	5	5	48	2.5	1	30V DC 30mA
		125	5	3	125	0.4	0.4	
		250	3	2	250	0.2	0.2	

Low current type

Breaker type	Rated thermal current (A)	Make/break current (A)				Minimum load current
		AC		DC		
		Voltage (V)	Res. load	Voltage (V)	Res. load	
BW125, BW250 BW400 BW630 BW800 EW125, EW250 EW400, EW630	0.1	30	0.1	30	0.1	5V DC 1mA

Internal Accessories for G-TWIN

Rating of shunt trip (F)

Breaker type	AC		DC		Time rating of coil	Opening time (ms)
	V	VA	V	W		
BW125, BW250 EW125, EW250	24	50	24	50	Continuous (With 1NO contact to prevent coil burn-out)	13-21
	48	50	48	50		
	100-120	50	100-110	50		
	120-130	50	–	–		
	200-240	50	200-220	50		
	277	50	–	–		
	380-440	50	–	–		
	440-480	50	–	–		
BW400, BW630, BW800 EW400, EW630	500-550	50	–	–	Continuous	8-20
	24-48	2	24-48	2		
	100-240	3	100-220	3		
	277	3	–	–		
	380-550	4	–	–		

Note: Allowable voltage function AC voltage: 85% to 110% of coil rated voltage
DC voltage: 75% to 125% of coil rated voltage

Rating of undervoltage trip (R)

Breaker type	AC		DC		Code
	V	VA	V	W	
BW125 *1	–	–	24	5	RR
BW250 *1	–	–	48	5	RS
EW125 *1	–	–	100-110	5	RL
EW250 *1	–	–	125	5	R5
	100-110	5	–	–	RA
	110-130	5	–	–	RT
	200-240	5	–	–	RK
	277	5	–	–	RB
	380-415	5	–	–	RP
	440-480	5	–	–	RH
BW400 *2	24	2	24	2	RR
EW400 *2	48	2	48	2	RS
BW630 *2	100-110	3	100-110	3	RA
EW630 *2	120-130	3	125	3	R1
BW800 *2	200-240	3	200-220	3	RK
	277	3	–	–	RB
	380-480	4	–	–	RP

Note: Allowable voltage function AC voltage: 85% to 110% of coil rated voltage
DC voltage: 75% to 125% of coil rated voltage

*1 Reset-allowed type: When the breaker handle is in the OFF or RESET state, tripping does not occur even if the R coil is not energized.
Turning ON with the R coil not energized causes normal tripping.

*2 Reset-prohibited type: When the R coil is not energized, reset operation cannot reset the tripped breaker to the OFF state.


Lead wire specification

Wire size: AWG20 (0.5mm²)

Wire length: 19.69 inch (500mm)

Internal Accessory Combinations for G-TWIN MCCB

Available configurations



Undervoltage trip: R



Shunt trip: F

○ Auxiliary switch: W
● Alarm switch: K

MCCB	BW125JAGU-2P	BW125 BW250 (Except for BW125JAGU-2P)	BW400 BW630 BW800
Pole	2	2, 3	2, 3
Auxiliary switch SPDT: W (1)			
Alarm switch SPDT: K (8)			
Shunt trip: F			
Undervoltage trip: R			
W+K (1+8)			
Auxiliary switch 2PDT: V (2)			
Alarm switch 2PDT: J (9)			
V+K (2+8)			
W+J (1+9)			
V+J (2+9)			
W+F (1+F)			
W+R (1+R)			
K+F (8+F)			
K+R (8+R)			
W+K+F (1+8+F)			
W+K+R (1+8+R)			
V+F (2+F)			
V+R (2+R)			
J+F (9+F)			
J+R (9+R)			
V+K+F (2+8+F)			
V+K+R (2+8+R)			
W+J+F (1+9+F)			
W+J+R (1+9+R)			
V+J+F (2+9+F)			
V+J+R (2+9+R)			

Notes: • The above table is applied to front mounting type, rear mounting type, flush mounting type, and plug-in mounting type.

• Terminal block is attached on the same side of the accessory.

• () Code of low level circuit

Internal Accessory Combinations for G-TWIN ELCB


Available configurations

2-pole



Handle

3-pole



Handle



Undervoltage trip: R



Shunt trip: F

○ Auxiliary switch: W

● Alarm switch: K

▲ Earth alarm switch: L

ELCB	EW125 EW250	EW400 EW630
Pole	3	3
Auxiliary switch SPDT: W (1)		
Alarm switch SPDT: K (8)		
Shunt trip: F		
Undervoltage trip: R		
W+K (1+8)		
Auxiliary switch 2PDT: V (2)		
Alarm switch 2PDT: J (9)		
V+K (2+8)		
W+J (1+9)		
V+J (2+9)		
W+F (1+F)		
W+R (1+R)		
K+F (8+F)		
K+R (8+R)		
W+K+F (1+8+F)		
W+K+R (1+8+R)		
V+F (2+F)		
V+R (2+R)		
J+F (9+F)		
J+R (9+R)		
V+K+F (2+8+F)		
V+K+R (2+8+R)		
W+J+F (1+9+F)		
W+J+R (1+9+R)		
V+J+F (2+9+F)		
V+J+R (2+9+R)		
Earth alarm switch SPDT: L*1		

Notes: • The above table is applied to front mounting type, rear mounting type, flush mounting type, and plug-in mounting type.

• Terminal block is attached on the same side of the accessory.

• () Code of low level circuit


*1 Earth alarm switch can be mounted regardless of the combination of other accessories.

External Accessories



Operating handles

Conforms to EN60947-1 isolation function.
Available for EN60204-1 power breaking device.
Conforms to UL489(File No. E93289)

N type handles



V type handles

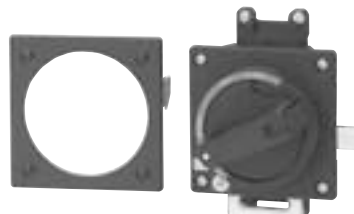

BW9N0CA
N type handle



BW9V0CA
V type handle

Part number		Applicable Breakers
N type (Breaker mount)	V type (Door mount)	
BZ6N10D	BZ6V10D	BW50RAGU, BW100EAGU, EW50RAGU, EW100EAGU
BW9N0CA	BW9V0CA	BW125*1, EW125
BW9N0GA	BW9V0GA	BW250, EW250
BW9N0HA	BW9V0HA	BW400, EW400
BW9N0JA	BW9V0JA	BW630, EW630, BW800

*1 Note that the external operating handle cannot be mounted to the BW125JAGU-2P. Use the BW125RAGU-2P.

Terminal covers

These terminal covers are used as guards to prevent accidental touch with live line terminations.
These terminal covers can be fitted to either line or load side.



Short type



Long type

Short type

Black	Transparent	Gray-White	Packing QTY	Applicable Breakers
-	BW9BTAA-S2	BW9BTAA-S2W*1	2	BW50RAGU-2P, BW100EAGU-2P
-	BW9BTAA-S3	BW9BTAA-S3W*1	2	BW50RAGU-3P, BW100EAGU-3P, EW50RAGU-3P, EW100EAGU
-	BW9BTCA-S2	BW9BTCA-S2W*1	2	BW125JAGU-2P
-	BW9BTCA-S3	BW9BTCA-S3W*1	2	BW125JAGU-3P, EW125*U-3P
-	BW9BTGA-S3	BW9BTGA-S3W*1	2	BW250*U-2P, BW250*U-3P, EW250*U-3P
-	BW9BTHA-S3*2	BW9BTHA-S3W*2	2	BW400*U-2P, BW400*U-3P, EW400*U-3P

Notes: *1 Gray-white short type terminal covers are provided with breaker as standard for 50AF, 100AF, 125AF and 250AF G-TWIN breakers.

*2 Not available with Flat terminal.

Long type

Black	Transparent	Gray-White	Packing QTY	Applicable Breakers
-	BW9BTAA-L2	BW9BTAA-L2W	2	BW50RAGU-2P, BW100EAGU-2P
-	BW9BTAA-L3	BW9BTAA-L3W	2	BW50RAGU-3P, BW100EAGU-3P, EW50RAGU-3P, EW100EAGU
-	BW9BTCA-L2	BW9BTCA-L2W	2	BW125JAGU-2P
-	BW9BTCA-L3	BW9BTCA-L3W	2	BW125*U-3P, EW125*U-3P
-	BW9BTGA-L3	BW9BTGA-L3W	2	BW250*U-2P, BW250*U-3P, EW250*U-3P
-	BW9BTHA-L3	BW9BTHA-L3W	2	BW400*U-2P, BW400*U-3P, EW400*U-3P
-	BW9BTJA-L3	BW9BTJA-L3W	2	BW630*U-3P, EW630*U-3P, BW800*U-3P

External Accessories

Insulation barriers

The barriers are installed in the molded slots between terminals. Installation of these barriers after wiring is possible even when an external accessory is installed.



Insulation barriers		Applicable Breakers
Type	Packing quantity	
BZ6B10C	4	BW50RAGU, BW100EAGU, EW50RAGU, EW100EAGU* ¹
BW9BPCA	4	BW125, EW125* ²
BW9BPGA	4	BW250, EW250* ²
B-43A	4	BW400, EW400, BW630, EW630, BW800* ²

Note: *¹ Insulation Barriers are required only for flat terminal type.

*² Insulation Barriers for line side and load side are provided with the Breaker.

Terminal kits (Field installable)

Flat Terminal Kits		Lug Terminal Kits		Applicable Breakers
Type	Packing quantity	Type	Packing quantity	
BZ-SU20B	3	-	-	BW50RAGU, EW50RAGU
BU-SU25B	3	-	-	BW100EAGU, EW100EAGU
BW9SS0CA-3 GLOBAL	3	BW9SL0CA-3 GLOBAL	3	BW125, EW125
BZ-S50B-2253 GLOBAL	3	BW9SL0GA-3 GLOBAL	3	BW250, EW250 (125A-175A)
		BW9SL1GA-3 GLOBAL	3	BW250, EW250 (200A-250A)

Padlocking device and Handle locking cover

● Description

• Padlocking device

These padlocking devices lock the breaker handle in the OFF position.

Use a commercially available padlock with a shackle diameter of 3.5 to 5mm (5mm for the BZ6L10CA).

• Handle locking cover

These padlocking devices lock the breaker handle in the ON/OFF position.

Tripping is possible while the breaker is locked ON.

Applicable Breakers	Padlocking device		Handle locking cover
	Q1, QN: Cap type	Q2: Plate type	
BW50, BW100, EW50, EW100	BZ6L10CA	Not available	BZ6L10C* ¹
BW125, EW125	BW9Q1CA	BW9Q2CA	Not available
BW250, EW250	BW9Q1CA	BW9Q2GA	Not available
BW400, EW400	BW9QNHA* ¹	BW9Q2HA	Not available
BW630, EW630, BW800	BW9QNHA* ¹	BW9Q2JA	Not available

*¹ ON and OFF locking is possible

Padlocking device for BW and EW

Cap type Q1, QN


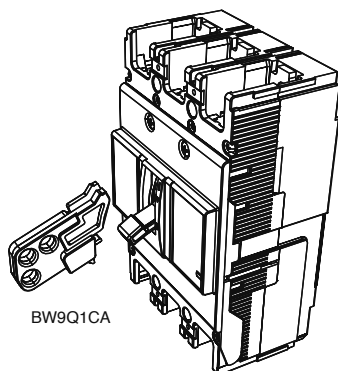



Plate type Q2

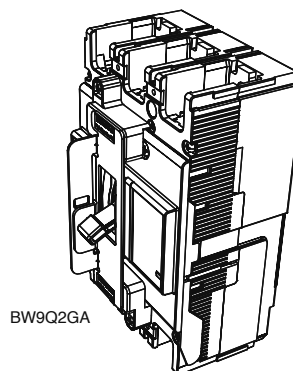

Operating Handles Dimensions: inch (mm)

125A, 250A Frame N type handle


- BW9N0CA, BW9N0GA (BZ-NP-1C: dust proof packing, optional)

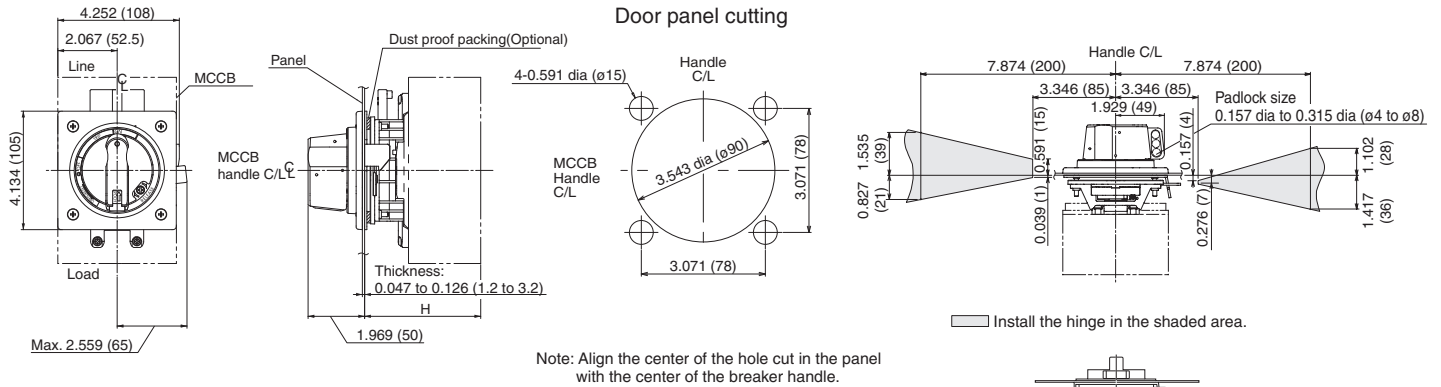

Breaker type	Handle type	Mounting screw	H: inch(mm)	Mass lb. (kg)
BW125 EW125	BW9N0CA	M4 x 3.35(85)	4.055±0.078 (103±2)	1.23 (0.56)
BW250 EW250	BW9N0GA	M4 x 3.35(85)	4.055±0.078 (103±2)	1.23 (0.56)

400A, 630A, 800A Frame N type handle

- BW9N0HA, BW9N0JA (BZ-NP-2: dust proof packing, optional)


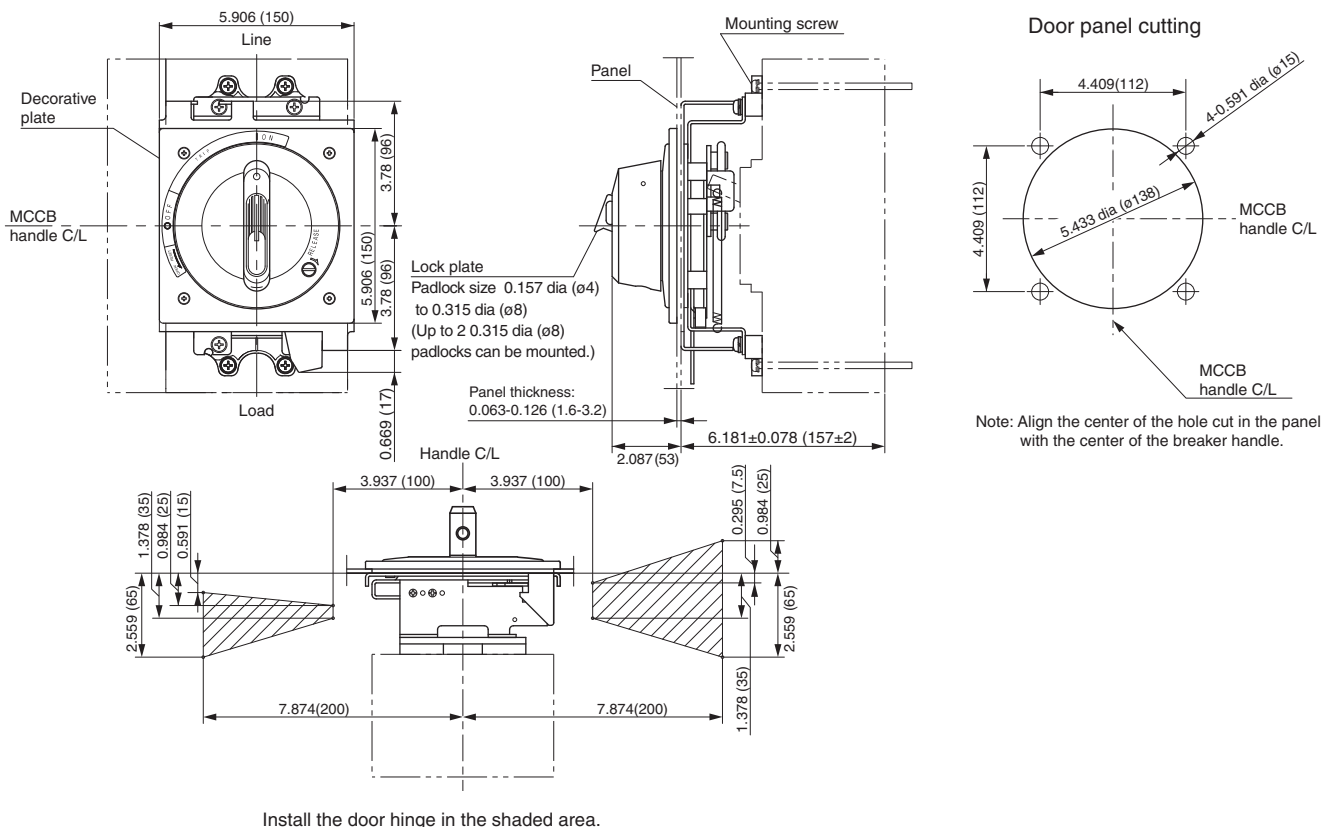


Breaker type	Handle type	Mounting screw	Mass lb. (kg)
BW400, EW400	BW9N0HA	M6 x 4.33 (110)	4.19 (1.9)
BW630, EW630, BW800	BW9N0JA	M6 x 4.33 (110)	4.19 (1.9)


Operating Handles Dimensions: inch (mm)

125A, 250A Frame V type handle


- BW9V0CA, BW9V0GA (BW9VSG0: optional shaft)

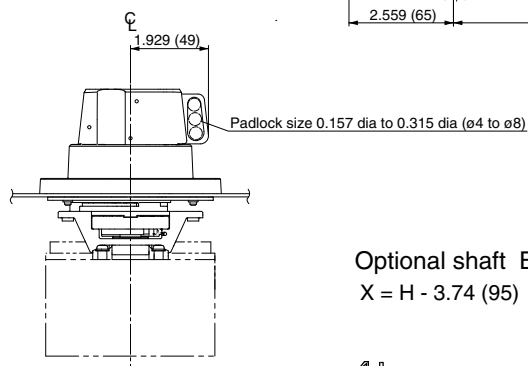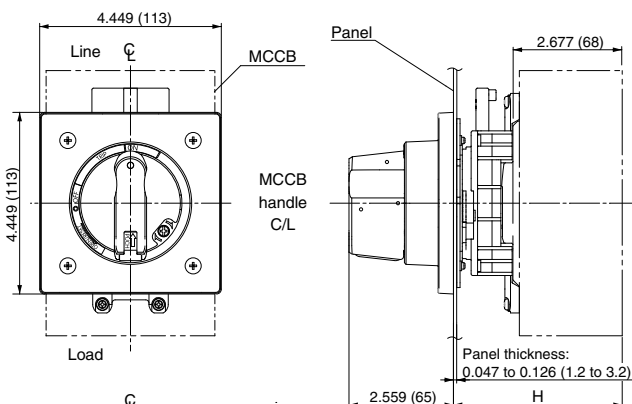


Optional shaft BW9VSG0
 $X = H - 3.74 (95)$




Door panel cutting



Note: Align the center of the hole cut in the panel with the center of the breaker handle.



Door hinge installation area

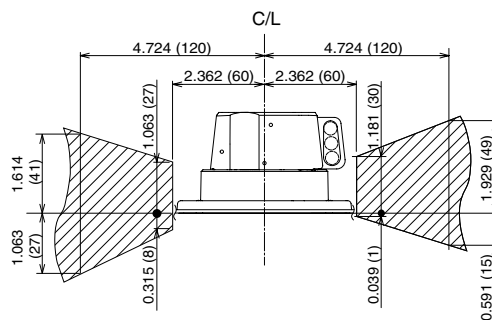


Install the door hinge in the shaded area.

Breaker type	Handle type	Standard type H: inch(mm)	With the optional shaft (X=6.063(154))		Mounting screw	Mass lb. (kg)
			H: inch(mm)	Area in which the hinge with H can be installed		
BW125, EW125*1	BW9V0CA	4.134±0.078 (105±2)	9.843±0.078 (250±2)	5.512 to 9.843 (140 to 250)	M4 x 3.35(85)	1.48 (0.67)
BW250, BW250*1	BW9V0GA	4.134±0.078 (105±2)	9.843±0.078 (250±2)	5.512 to 9.843 (140 to 250)	M4 x 3.35(85)	1.48 (0.67)

Notes:

- The handle does not have any means to hold the door. Provide it separately.
- Not available for side mounting.
- *1 Note that the external operating handle cannot be mounted to the BW125JAGU-2P. Use the BW125RAGU-2P.
- *2 When mounting a terminal cover, cut away part of it because it hides the mounting screws for the breaker.


Remove the shaded parts in the figure below.



Operating Handles Dimensions: inch (mm)

400A, 630A, 800A Frame V type handle

- BW9V0HA, BW9V0JA (BZ-VS2: optional shaft)

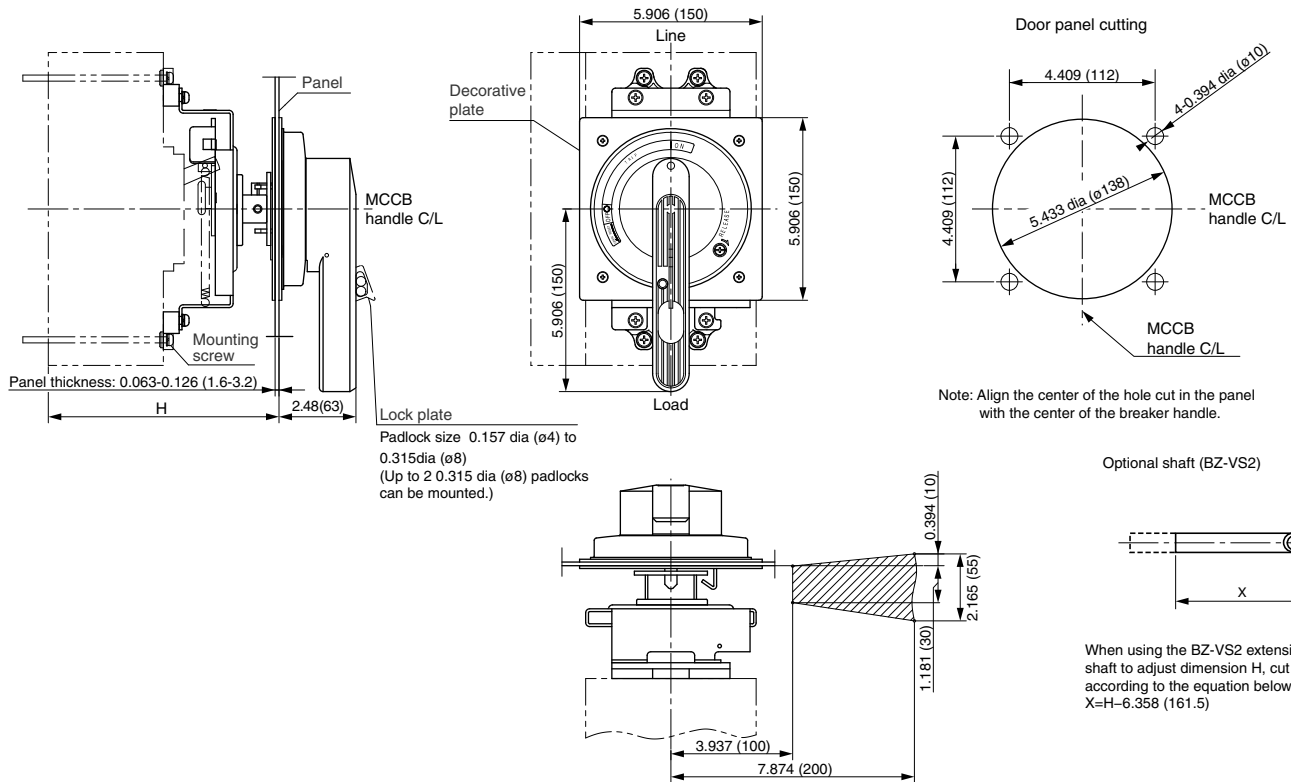

Install the door hinge in the shaded area.

Breaker type	Handle type	Standard type H: inch(mm)	With the optional shaft (X=6.063 (154))		Mass lb. (kg)
			H: inch(mm)	Area in which the hinge with H can be installed	
BW400, EW400	BW9V0HA	7.48±0.078 (190±2)	9.843±0.078 (250±2)	7.953 to 9.843 (202 to 250)	4.85 (2.2)
BW630, EW630, BW800	BW9V0JA				

- Note:
- The handle cannot hold the door.
 - Not available for side mounting.

Wiring

1. Connecting Precautions

- When connecting the wires, follow the instruction of NEC (National Electric Code, USA) or CEC (Canadian Electrical code Part 1, Canada).
- For connecting, use copper wire rated for 75°C. It is recommended to use UL or CSA approved wires.
- Keep the connection of the wire sufficiently tight, because a very large electromagnetic force will be generated, when the short circuit current is applied.
- Perform additional tightening of the terminal screws periodically.

2. Terminal Construction

	Screw Terminals	Flat Terminals	Lug Terminals
50A, 100A Frame	●	●	—
125A, 250A Frame	●	●	●
400A, 630A, 800A Frame	—	●	●

● : Available — : Not available

3. Allowable wire spec for Lug Terminals

Number of strands connecting wires

Wire size AWG or MCM (mm ²)	Number of wires strands
14 – 2 (2.1 – 33.6)	7
1 – 4/0 (42.4 – 107.2)	19
250 – 500 (127 – 250)	37

(mm²) Values are those converted from AWG or MCM size

⚠ Caution

- Two wires can not be connected to the lug terminal at once.
- Follow the number of strands of wire indicated in the table.
- Multiconductor wire can not be connected.
- Do not solder the end of the wire.

Max Wire Sizes and Tightening Torque

Type	Rated current (A)	Wire size AWG or MCM (mm ²)	Tightening torque			Applicable ring (crimp) terminal*1		
			Screw terminal	Flat terminal	Lug terminal	JST (UL file No.E42024)	NICHIFU (UL file No.E44245)	DST (UL file No.E74917)
BW50RAGU EW50RAGU	3	14 AWG (2.1mm ²)	20-25 lb.-In. (2.3-2.8 N-m)	31-40 lb.-in. (3.5-4.5 N-m)	-	R2-5	-	-
	5	14 AWG (2.1mm ²)						
	10	14 AWG (2.1mm ²)						
	15	14 AWG (2.1mm ²)						
	20	12 AWG (3.3mm ²)				R5.5-5		
	30	10 AWG (5.3mm ²)						
	40	8 AWG (8.4mm ²)				R8-5		
	50	8 AWG (8.4mm ²)						
BW100EAGU EW100EAGU	60	6 AWG (13.3mm ²)	49-66 lb.-In. (5.5-7.5 N-m)	71-89 lb.-In. (8-10 N-m)		R14-8		
	75	4 AWG (21.1mm ²)				22-S8		
	100	3 AWG (26.7mm ²)				38-S8		
BW125 EW125	15	14 AWG (2.1mm ²)	51 lb. - In. (5.8 N-m)	80 lb. - In. (9 N-m)	51 lb. - In. (5.8 N-m)	R2-8	R2-8	2-8, 2-B8
	20	12 AWG (3.3mm ²)				5.5-S8, R5.5-8	R3.5-8, R5.5-8	3.5-8, 5.5-8
	30	10 AWG (5.3mm ²)					R5.5-8	5.5-8
	40	8 AWG (8.4mm ²)				8-8NS, R8-8	R8-8	8-8
	50							
	60	6 AWG (13.3mm ²)				14-8NS, 14-S8, R14-8	R14-8S, R14-8	14-S8, 14-8
	70	4 AWG (21.1mm ²)				22-S8, R22-8, CB22-S8	R22-8S, R22-8, CB22-8S	22-S8, 22-8, CB22-8
	75							
	80							
	90	3 AWG (26.7mm ²)				38-S8	R38-8S	38-S8
	100							
	125	1 AWG (42.4mm ²)						
BW250 EW250	125	1 AWG (42.4mm ²)	93 lb. - In. (10.5 N-m)	80 lb. - In. (9 N-m)	204 lb. - In. (23 N-m)	38-S8, R38-8	R38-S, R38-8	38-S8, 38-8
	150	1/0 AWG (53.5mm ²)				60-S8, R60-8	R60-8, CB60-8, CB60-8S	60-8, CB60-8
	175	2/0 AWG (67.4mm ²)				70-8	R70-8	70-8
	200	3/0 AWG (85.0mm ²)				CB80-S8	-	CB80-8
	225	4/0 AWG (107.2mm ²)				CB100-S8	-	CB100-8
	250	250 MCM (127mm ²)				CB150-S8	CB150-B	CB150-8
BW400 EW400	250	250 MCM (127mm ²)	-	398 lb. - In. (45 N-m)	385 lb. - In. (43.5 N-m)	150-12	R150-12	-
	300	350 MCM (177mm ²)				180-12	R180-12	-
	350	500 MCM (253mm ²)				325-12	R325-12S	-
	400	3/0 AWGx2 (85.0mm ² x2)			282 lb. - In. (31.9 N-m)	R80-12	R80-2	-
BW630 EW630	500	250-500MCM x2	-	416 lb. - In. (47.04 N-m)	275 lb. - In. (31.07 N-m)	R150-12	-	R150-12
	600	250-500MCM x2				180-12	-	R180-12
	630	500MCM x2				325-12	R325-12N	R325-12*
BW800	700	250-500MCM x2	-	416 lb. - In. (47.04 N-m)	275 lb. - In. (31.07 N-m)	325-12	-	R325-12*
	800	3/0 AWG-300MCMx2				-	-	-

Notes: *1 Ring (Crimp) Terminal Manufacturer : JST=Japan Solderless Terminal MFG Co., Ltd. (<http://www.jst.com>)
NICHIFU=Nichifu Terminal Co., Ltd. (america@nichifu.com)
DST=Daido Solderless Terminal MFG Co., Ltd. (info@daido-tanshi.jp)

*2 167°F (75°C) Copper wire

Flange Disconnect Handle <F Type Handle>


Features

Flexible cable operation.
 Covering up to 400-amp frame size.
 Easy installation on circuit breakers.
 Complies with NEMA type 12, IP 54 protection degree.
 Accepts ANSI standard American padlock devices.
 Off lockable: 0.394 dia (φ10) padlock device, Max 3 pieces.
 UL listed product. [UL489, File No. E93289]

Ordering information

Main unit and cable are minimum required for assembling.
 Select cable with main unit using below table.

Ex: BW9F0CA, BW9FWCA-15A

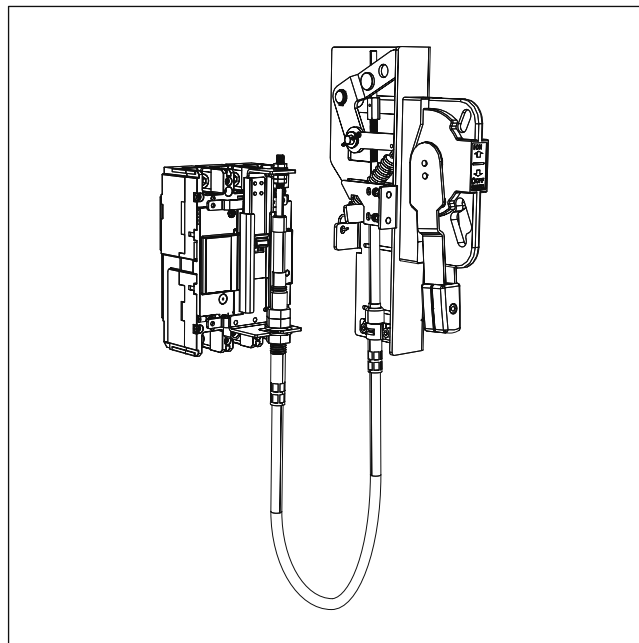

Specifications

Applicable breaker frame size		125 amp frame	250 amp frame	400 amp frame	630/800 amp frame
Part numbers	Main unit	BW9F0CA (Not include cable)	BW9F0GA (Not include cable)	BW9F0HA (Not include cable)	BW9F0JA (Not include cable)
	Terminal cover*2	BW9FBTCA-L3	BW9FBTGA-L3	BW9FBTHA-L3	BW9FBTJA-L3
	Cable 59.06 inch (1.5m)	BW9FWCA-15A	BW9FWGA-15A	BW9FWHA-15A	BW9FWHA-15A
	Cable 78.74 inch (2.0m)	BW9FWCA-20A	BW9FWGA-20A	BW9FWHA-20A	BW9FWHA-20A
	Cable 118.11 inch (3.0m)	BW9FWCA-30A	BW9FWGA-30A	BW9FWHA-30A	BW9FWHA-30A
Applicable breakers	MCCB	BW125JAGU*1 BW125RAGU	BW250EAGU BW250JAGU BW250RAGU	BW400EAGU BW400SAGU BW400RAGU BW400HAGU	BW630RAGU BW630HAGU BW800RAGU BW800HAGU
	ELCB	EW125JAGU EW125RAGU	EW250JAGU EW250RAGU	EW400SAGU EW400RAGU	EW630RAGU
Operating instructions		- Operating handle facing up, Breaker is in ON position. - Operating handle facing down, Breaker is in OFF position or is reset. - Panel door cannot be opened when in ON, OFF or Trip position. In order to open the door, the handle must be turned toward reset position. - Release screw is standard. If you want to open a panel door in ON position, please turn on the release screw using flat head screwdriver.			
Mechanical endurance (cycles)		10,000	8,000	6,000	
Ambient temperature		14 to 140F (- 10 to 40°C)			
Relative humidity		less than 95% RH			
Protection		NEMA Type12 IP54 (IEC60529)			
Conforming standards		NFPA 79(2007), ANSI(Lockout), OSHA(1910.147, Lockout/tagout), UL489(cUL)			
Atmosphere		No excessive dust, smoke, corrosive gases, flammable gases, steam or salt.			


Note: *1 Not available for BW125JAGU-2P

*2 Standards terminal cover in page 27 can not use with Flange Disconnect Handle

Flange Disconnect Handle <F Type Handle>


Dimensions: inch (mm)

• BW9F0CA

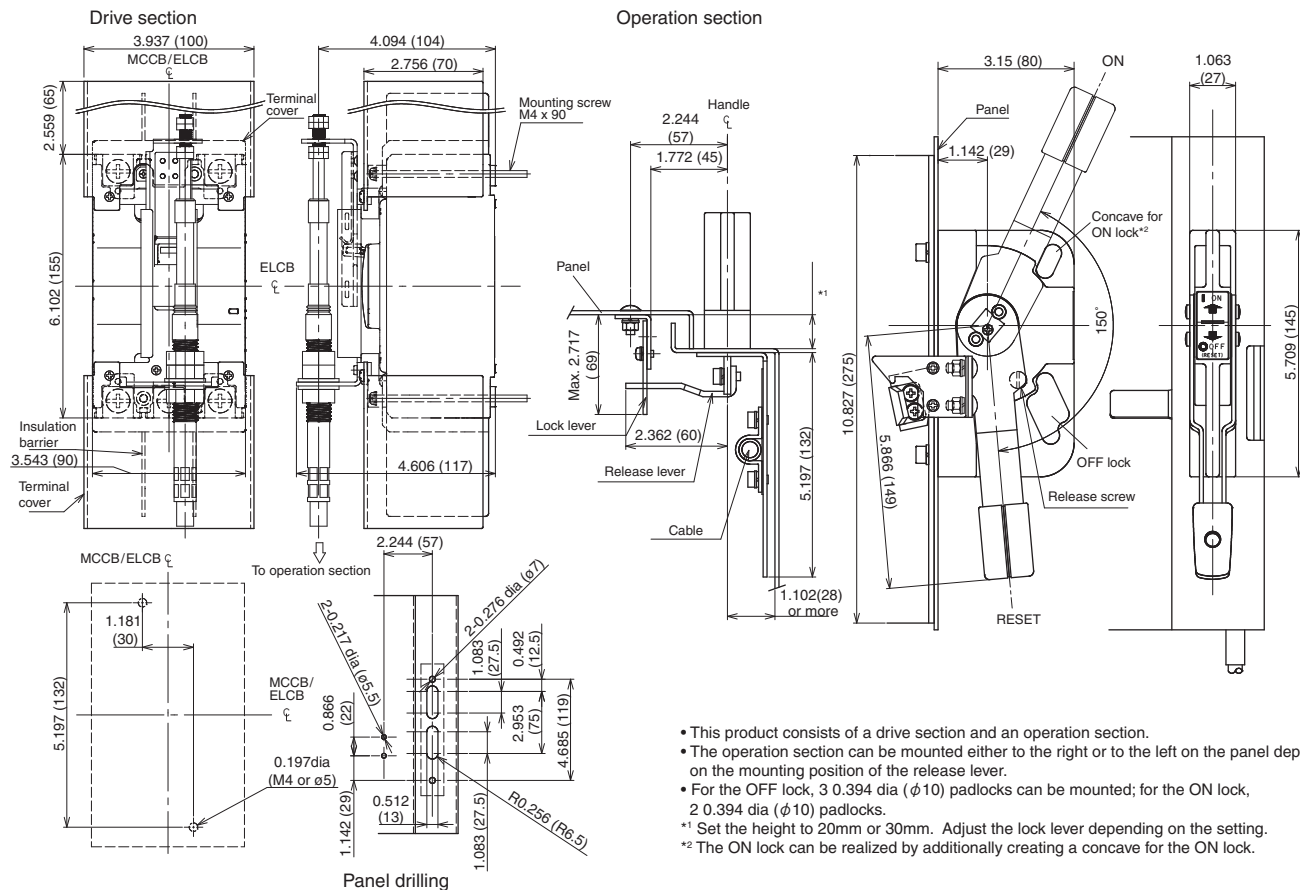

- This product consists of a drive section and an operation section.
- The operation section can be mounted either to the right or to the left on the panel depending on the mounting position of the release lever.
- For the OFF lock, 3 0.394 dia (φ10) padlocks can be mounted; for the ON lock, 2 0.394 dia (φ10) padlocks.
- *1 Set the height to 20mm or 30mm. Adjust the lock lever depending on the setting.
- *2 The ON lock can be realized by additionally creating a concave for the ON lock.

• BW9F0GA

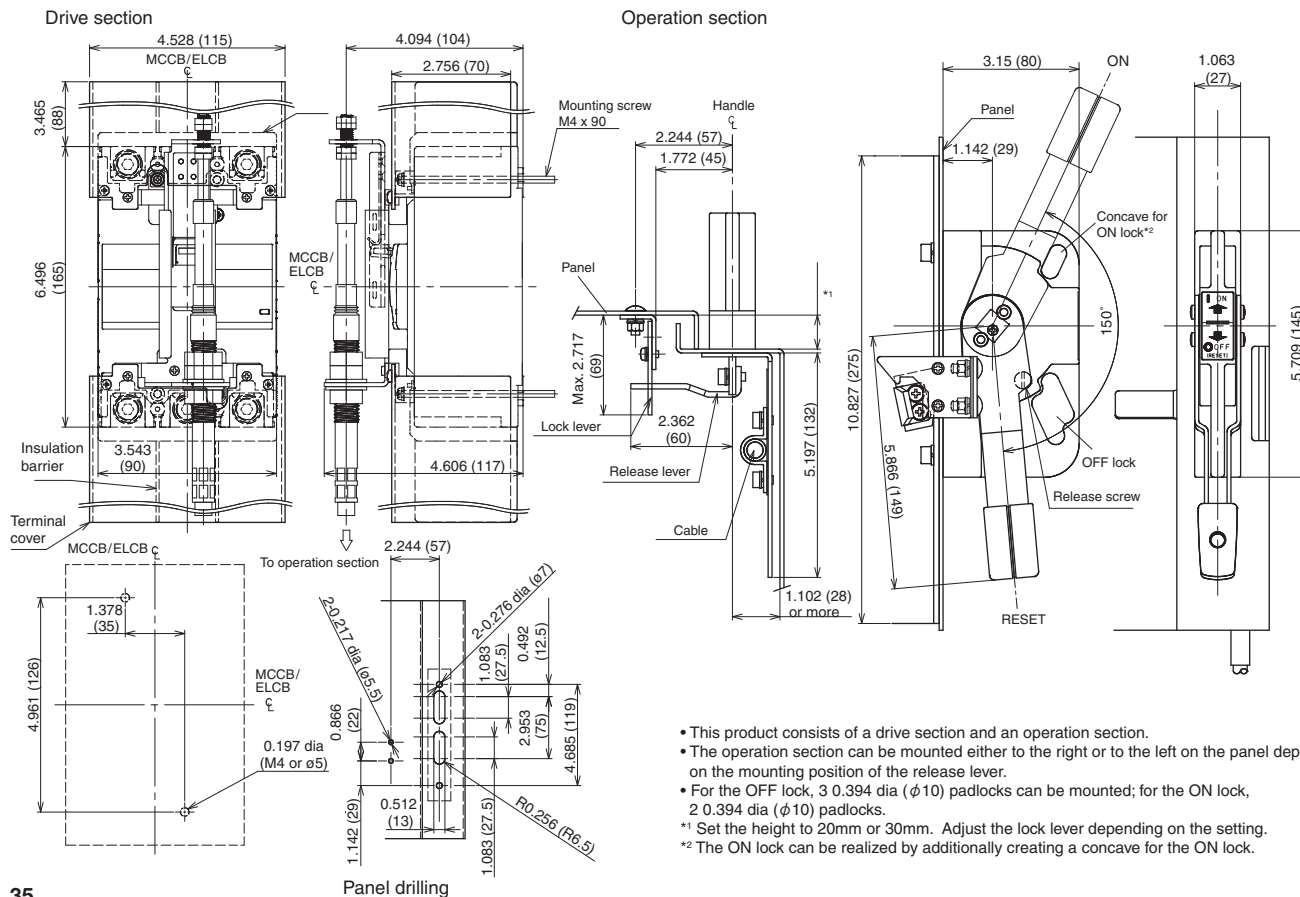



- This product consists of a drive section and an operation section.
- The operation section can be mounted either to the right or to the left on the panel depending on the mounting position of the release lever.
- For the OFF lock, 3 0.394 dia (φ10) padlocks can be mounted; for the ON lock, 2 0.394 dia (φ10) padlocks.
- *1 Set the height to 20mm or 30mm. Adjust the lock lever depending on the setting.
- *2 The ON lock can be realized by additionally creating a concave for the ON lock.

Flange Disconnect Handle <F Type Handle>

Dimensions: inch (mm)



• BW9F0HA

Drive section

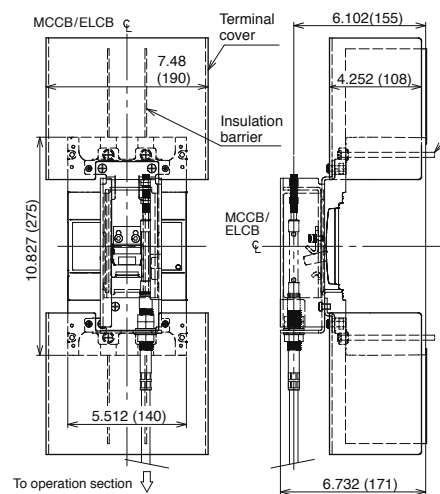

Panel drilling



Operation section

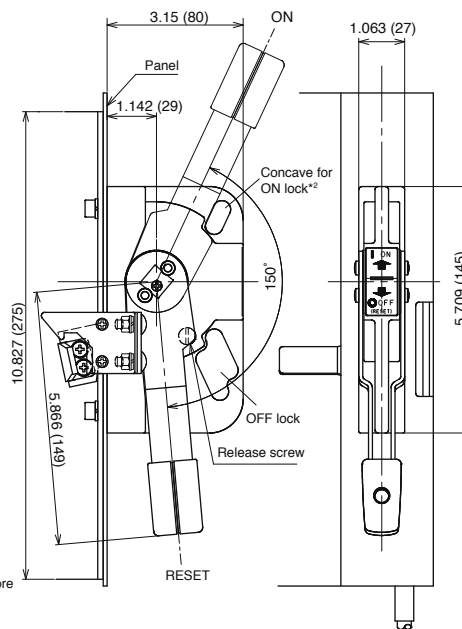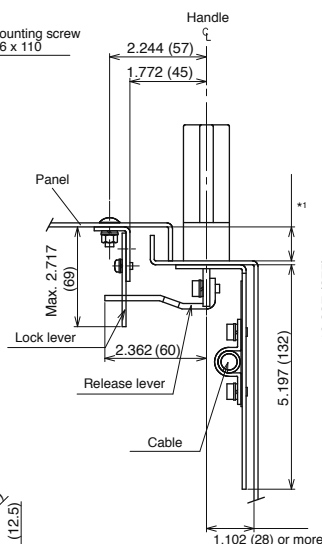

- This product consists of a drive section and an operation section.
- The operation section can be mounted either to the right or to the left on the panel depending on the mounting position of the release lever.
- For the OFF lock, 3 0.394 dia (φ10) padlocks can be mounted; for the ON lock, 2 0.394 dia (φ10) padlocks.
- *1 Set the height to 20mm or 30mm. Adjust the lock lever depending on the setting.
- *2 The ON lock can be realized by additionally creating a concave for the ON lock.



• BW9F0JA

Drive section

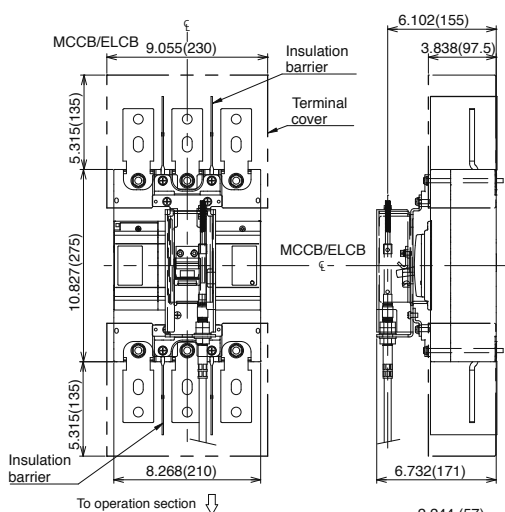

Panel drilling

Operation section

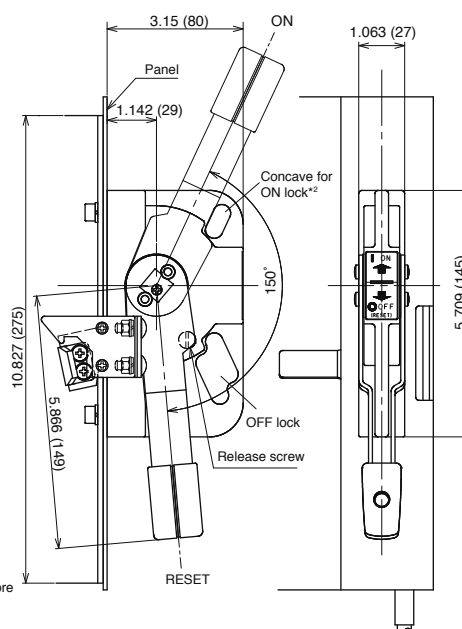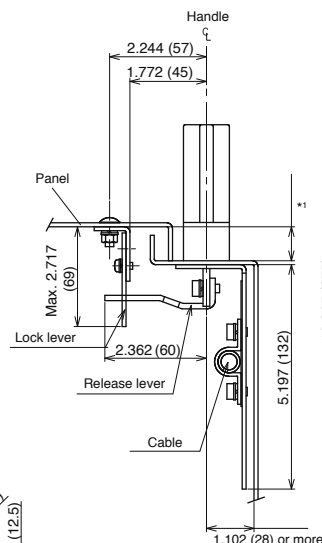

- This product consists of a drive section and an operation section.
- The operation section can be mounted either to the right or to the left on the panel depending on the mounting position of the release lever.
- For the OFF lock, 3 0.394 dia (φ10) padlocks can be mounted; for the ON lock, 2 0.394 dia (φ10) padlocks.
- *1 Set the height to 20mm or 30mm. Adjust the lock lever depending on the setting.
- *2 The ON lock can be realized by additionally creating a concave for the ON lock.

Discontinued Products Cross Charts

*1 Scheduled discountinue date : September 30th, 2010

Series	Frame size		Molded Case Circuit Breakers		Earth Leakage Circuit Breakers	
			Discontinued Models	Replacement - UL489 (Non-UL)	Discontinued Models*2	Replacement - UL489 (Non-UL)
E series	30AF*1	2 poles	EA32 (old rep SA52RCUL)	BW50RAGU-2P	EG32F	(EW32AAG-2P)
		3 poles	EA33 (old rep SA53RCUL)	BW50RAGU-3P	EG33F (old rep SG53RCUL)	EW50RAGU-3P
	50AF*1	2 poles	-	-	EG33B (old rep SG53RCUL)	EW50RAGU-3P
			EA52A (old rep SA52RCUL)	BW50RAGU-2P	EG52F	(EW50AAG-2P)
		3 poles	EA52B (old rep SA52RCUL)	BW50RAGU-2P	EGa52A	(EW50AAG-2P)
			EA53A (old rep SA53RCUL)	BW50RAGU-3P	EG53F (old rep SG53RCUL)	EW50RAGU-3P
	60AF*1	2 poles	EA53B (old rep SA53RCUL)	BW50RAGU-3P	EG53B (old rep SG53RCUL)	EW50RAGU-3P
		3 poles	EA62B (old rep EA102CUL)	BW100EAGU-2P	-	-
	100AF*1	2 poles	EA63B (old rep EA103CUL)	BW100EAGU-3P	EG63B (old rep EG103RCUL)	EW100EAGU-3P
			EA102B (old rep EA102CUL)	BW100EAGU-2P	EG102B (old rep EG102RCUL)	EW100EAGU-2P
		3 poles	EA103F (old rep EA103CUL)	BW100EAGU-3P	EG103F (old rep EG103RCUL)	EW100EAGU-3P
			EA103B (old rep EA103CUL)	BW100EAGU-3P	EG103B(D) (old rep EG103RCUL)	EW100EAGU-3P
	225AF	2 poles	EA103K (old rep EA103CUL)	BW100EAGU-3P	EG103K (old rep EG103RCUL)	EW100EAGU-3P
		3 poles	EA202B	BW250EAGU-2P	-	-
	400AF	2 poles	EA203B	BW250EAGU-3P	EG203B(D)	EW250JAGU-3P
		3 poles	EA402B	BW400EAGU-2P	-	-
S series	30AF*1	2 poles	EA403B	BW400EAGU-3P	EG403B(D)	EW400SAGU-3P
		3 poles	EA603B	BW630RAGU-3P	EG603B(D)	EW630RAGU-3P
	50AF*1	2 poles	EA803B	BW800RAGU-3P	EG803B(D)	(EW800EAG-3P)
			SA32B (old rep SA52RCUL)	BW50RAGU-2P	-	-
		3 poles	SA33B (old rep SA53RCUL)	BW50RAGU-3P	SG33B (old rep SG53RCUL)	EW50RAGU-3P
			SA52B (old rep SA52RCUL)	BW50RAGU-2P	-	-
	60AF*1	2 poles	SA52R (old rep SA52RCUL)	BW50RAGU-2P	-	-
			SA53B (old rep SA53RCUL)	BW50RAGU-3P	SG53B (old rep SG53RCUL)	EW50RAGU-3P
		3 poles	SA53R (old rep SA53RCUL)	BW50RAGU-3P	SG53R (old rep SG53RCUL)	EW50RAGU-3P
			A62B (old rep EA102RCUL)	BW100EAGU-2P	-	-
	100AF	2 poles	SA62R (old rep EA102RCUL)	BW100EAGU-3P	-	-
			SA63B (old rep EA103RCUL)	BW100EAGU-3P	SG63B (old rep EG103RCUL)	EW100EAGU-3P
		3 poles	SA63R (old rep EA103RCUL)	BW100EAGU-3P	SG63R (old rep EG103RCUL)	EW100EAGU-3P
			SA102B	BW125JAGU-2P	-	-
	225AF	2 poles	SA102R	BW125RAGU-2P	-	-
			SA102BA	BW125JAGU-2P	-	-
			SA102RA	BW125RAGU-2P	-	-
			SA103B(N)	BW125JAGU-3P	SG103B(D)	EW125JAGU-3P
		3 poles	SA103R(N)	BW125RAGU-3P	SG103R(D)	EW125RAGU-3P
			SA103BA(N)	BW125JAGU-3P	SG103BA(D)	EW125JAGU-3P
			SA103RA(N)	BW125RAGU-3P	SG103RA(D)	EW125RAGU-3P
			SA202B	BW250JAGU-2P	-	-
	400AF	2 poles	SA202R	BW250RAGU-2P	-	-
			SA202BA	BW250JAGU-2P	-	-
			SA202RA	BW250RAGU-2P	-	-
			SA203B(N)	BW250JAGU-3P	SG203B(D)	EW250JAGU-3P
		3 poles	SA203R(N)	BW250RAGU-3P	SG203R(D)	EW250RAGU-3P
			SA203BA(N)	BW250JAGU-3P	SG203BA(D)	EW250JAGU-3P
			SA203RA(N)	BW250RAGU-3P	SG203RA(D)	EW250RAGU-3P
			SA402B(N)	BW400SAGU-2P	-	-
	600AF	3 poles	SA403R(N)	BW400SAGU-3P	SG403B(D)	EW400SAGU-3P
		2 poles	SA402R(N)	BW400RAGU-2P	-	-
		3 poles	SA403R(N)	BW400RAGU-3P	SG403R(D)	EW400RAGU-3P
		3 poles	SA603R(N)	BW630RAGU-3P	SG603R(D)	EW630RAGU-3P
	800AF	3 poles	SA803R(N)	BW800RAGU-3P	SG803R(D)	(EW800RAG-3P)

Note: All accessories discontinued as well.

- : No replacement

*2: Discontinued Non-UL ELCB has a Trip Lead type, specify "TL" for P/N (Two lead wire comes from inside of the ELCB and labeled as TL1 & TL2). Replacement model P/N specify "T".

Ex: EG33AC/20-30MA-TL → EW32AAG-3P020B T

Discontinued Products Cross Charts

*1 Scheduled discontinue date: September 30th, 2010

Series	Frame size		Molded Case Circuit Breakers		Earth Leakage Circuit Breakers	
			Discontinued Models	Replacement - UL489 (Non-UL)	Discontinued Models*2	Replacement - UL489 (Non-UL)
H series	50AF	2 poles	H52BA / H52C	(BW50HAG-2P)	-	-
		3 poles	H53BA / H53C	(BW50HAG-3P)	HG53B(D)	(EW50HAG-3P)
			H53BAN / H53CN	-	-	-
			H53CM	-	-	-
	100AF	2 poles	H102BA / H102C	(BW125HAG-2P)	-	-
		3 poles	H103BA / H103C	(BW125HAG-3P)	HG103B(D)	(EW125HAG-3P)
			H103BAN / H103CN	-	HG103BN(D)	-
	225AF	2 poles	H202BA / H202C	(BW250HAG-2P)	-	-
		3 poles	H203BA / H203C	(BW250HAG-3P)	HG203B(D)	(EW250HAG-3P)
			H203BAN / H203CN	(BX250HAE-3P)	HG203BN(D)	(EW250HAE-3P)
UL508 EA/SA -UL series*1	50AF	2 poles	EA52BUL (old rep SA52RCUL)	BW50RAGU-2P	-	-
		3 poles	EA53BUL (old rep SA53RCUL)	BW50RAGU-3P	-	-
	100AF	3 poles	EA103BUL (old rep EA103RCUL)	BW100EAGU-3P	-	-
	30AF	2 poles	SA32BUL (old rep SA52RCUL)	BW50RAGU-2P	-	-
		3 poles	SA33BUL (old rep SA53RCUL)	BW50RAGU-3P	-	-
	50AF	2 poles	SA52BUL (old rep SA52RCUL)	BW50RAGU-2P	-	-
		3 poles	SA53BUL (old rep SA53RCUL)	BW50RAGU-3P	-	-
		2 poles	SA52RUL (old rep SA52RCUL)	BW50RAGU-2P	-	-
		3 poles	SA53RUL (old rep SA53RCUL)	BW50RAGU-3P	-	-
	60AF	2 poles	SA62BUL (old rep EA102RCUL)	BW100EAGU-2P	-	-
		3 poles	SA63BUL (old rep EA103RCUL)	BW100EAGU-3P	-	-
		2 poles	SA62RUL (old rep EA103RCUL)	BW100EAGU-2P	-	-
		3 poles	SA63RUL (old rep EA103RCUL)	BW100EAGU-3P	-	-

Note: All accessories discontinued as well.

- : No replacement

*2: Discontinued Non-UL ELCB has a Trip Lead type, specify "TL" for P/N (Two lead wire comes from inside of the ELCB and labeled as TL1 & TL2). Replacement model P/N specify "T".

Ex: EG33AC/20-30MA-TL → EW32AAG-3P020B T

Discontinued Accessories for above circuit breakers.

	Discontinued models	Replacement		Discontinued models	Replacement
Operating Handles (V type)	BZ-V30C	-	Handle Lock Covers	BZ-L30C	-
	BZ-V40C	-		BZ-L40C	-
	BZ-V30C-E	-	Mechanical Interlock	BZ-M130C-2	-
	BZ-V40C-E	-		BZ-S60B-225*	-
	BZ-V30C-S	-		BZ-E30C-100*	-
	BZ-V40C-S	-		BZ-E40B-225*	-
	BZ-V30C-ES	-			
	BZ-V40C-ES	-			
	BZ-V30C-EUL	-			
	BZ-V40C-EUL	-			
	BZ6V10CP*1	BZ6V10D			
Operating Handles (N type)	BZ6N10CP*1	BZ6N10D			

-: No replacement

Discontinued Products Cross Charts

*1 Scheduled discontinue date: September 30th, 2010

Series	Frame size		Molded Case Circuit Breakers		Earth Leakage Circuit Breakers	
			Discontinued Models	Replacement - UL489 (Non-UL)	Discontinued Models*2	Replacement - UL489 (Non-UL)
UL489 series*1	50AF	2 poles	SA52RCUL	BW50RAGU-2P	-	-
		3 poles	SA53RCUL	BW50RAGU-3P	SG53RCUL	EW50RAGU-3P
	100AF	2 poles	EA102CUL	BW100EAGU-2P	EG102CUL	EW100EAGU-2P
		3 poles	EA103CUL	BW100EAGU-3P	EG103CUL	EW100EAGU-3P
	50/100AF	2 poles	BU-ECA2	BW50RAGU-2P BW100EAGU-2P	-	-
		3 poles	BU-ECA3	BW50RAGU-3P BW100EAGU-3P	-	-
	125AF	2 poles	SA102CUL	BW125JAGU-2P	-	-
		3 poles	SA103CUL	BW125JAGU-3P	SG103CUL	EW125JAGU-3P
		2 poles	SA102RCUL	BW125RAGU-2P	-	-
		3 poles	SA103RCUL	BW125RAGU-3P	-	-
	250AF	2 poles	SA202CUL	BW250JAGU-2P	-	-
		3 poles	SA203CUL	BW250JAGU-3P	SG203CUL	EW250JAGU-3P
		2 poles	SA202RCUL	BW250RAGU-2P	-	-
		3 poles	SA203RCUL	BW250RAGU-3P	-	-
		2 poles	BU-GCA2	BW250EAGU-2P	-	-
		3 poles	BU-GCA3	BW250EAGU-3P	-	-
		2 poles	BU-GDA2	BW250EAGU-2P	-	-
		3 poles	BU-GDA3	BW250EAGU-3P	-	-
	400AF	2 poles	SA402CUL	BW400SAGU-2P	-	-
		3 poles	SA403CUL	BW400SAGU-3P	SG403CUL	EW400SAGU-3P
		2 poles	SA402RCUL	BW400RAGU-2P	-	-
		3 poles	SA403RCUL	BW400RAGU-3P	-	-
		2 poles	BU-KDA2	BW400EAGU-2P	-	-
		3 poles	BU-KDA3	BW400EAGU-3P	-	-
		2 poles	BU-KSB2	BW400HAGU-2P	-	-
		3 poles	BU-KSB3	BW400HAGU-3P	-	-
		2 poles	BU-KHB2	BW400HAGU-2P	-	-
		3 poles	BU-KHB3	BW400HAGU-3P	-	-
		2 poles	BU2KHC	BW400HAGU-2P	-	-
		3 poles	BU3KHC	BW400HAGU-3P	-	-
	630AF	3 poles	SA603RCUL	BW630RAGU-3P	-	-
		2 poles	BU-LSB2	-	-	-
		3 poles	BU-LSB3	BW630HAGU-3P	-	-
		2 poles	BU-LHB2	-	-	-
		3 poles	BU-LHB3	BW630HAGU-3P	-	-
		2 poles	BU2LHC	-	-	-
	800AF	3 poles	BU3LHC	BW630HAGU-3P	-	-
		3 poles	SA803RCUL	BW800RAGU-3P	-	-
		2 poles	BU-MSB2	-	-	-
		3 poles	BU-MSB3	BW800HAGU-3P	-	-
		2 poles	BU-MHB2	-	-	-
		3 poles	BU-MHB3	BW800HAGU-3P	-	-
		2 poles	BU2MHC	-	-	-
UL489 SA/UL series	100AF	3 poles	BU3MHC	BW800HAGU-3P	-	-
		2 poles	SA102BAUL	BW125JAGU-2P	-	-
		3 poles	SA103BAUL	BW125JAGU-3P	SG103BAUL	EW125JAGU-3P
		2 poles	SA102RAUL	BW125RAGU-2P	-	-
	225AF	3 poles	SA103RAUL	BW125RAGU-3P	-	-
		2 poles	SA202BAUL	BW250JAGU-2P	-	-
		3 poles	SA203BAUL	BW250JAGU-3P	SG203BAUL	EW250JAGU-3P
		2 poles	SA202RAUL	BW250RAGU-2P	-	-
	400AF	3 poles	SA203RAUL	BW250RAGU-3P	-	-
		2 poles	SA402BUL	BW400SAGU-2P	-	-
		3 poles	SA403BUL	BW400SAGU-3P	-	-
		2 poles	SA402RUL	BW400RAGU-2P	-	-
	600AF	3 poles	SA403RUL	BW400RAGU-3P	-	-
		3 poles	SA603RUL	BW630RAGU-3P	-	-
	800AF	3 poles	SA803RUL	BW800RAGU-3P	-	-

Note: All accessories discontinued as well.

- : No replacement

*2: Discontinued Non-UL ELCB has a Trip Lead type, specify "TL" for P/N (Two lead wire comes from inside of the ELCB and labeled as TL1 & TL2). Replacement model P/N specify "T".

Ex: EG33AC/20-30MA-TL → EW32AAG-3P020B T

Discontinued Products Cross Charts

*1 Scheduled discontinue date: September 30th, 2010

Series	Frame size		Molded Case Circuit Breakers		Earth Leakage Circuit Breakers	
			Discontinued Models	Replacement - UL489 (Non-UL)	Discontinued Models*2	Replacement - UL489 (Non-UL)
E series (Non-UL)*1	30AF	2 poles	EA32AC	BW50RAGU-2P	EG32AC	(EW32AAG-2P)
		3 poles	EA33AC	BW50RAGU-3P	EG33AC	EW50RAGU-3P
		3 poles	-	-	EG33C	EW50RAGU-3P
	50AF	2 poles	EA52AC	BW50RAGU-2P	EG52AC	(EW50AAG-2P)
		3 poles	EA53AC	BW50RAGU-3P	EG53AC	EW50RAGU-3P
		2 poles	EA52C	BW50RAGU-2P	-	-
		3 poles	EA53C	BW50RAGU-3P	EG53C	EW50RAGU-3P
	100AF	2 poles	EA62C	BW100EAGU-2P	-	-
		3 poles	EA63C	BW100EAGU-3P	EG63C	EW100EAGU-3P
		3 poles	EA103AC	BW100EAGU-3P	EG103AC	EW100EAGU-3P
		2 poles	EA102C	BW100EAGU-2P	EG102C	EW100EAGU-2P
		3 poles	EA103C	BW100EAGU-3P	EG103C	EW100EAGU-3P
		3 poles	-	-	EG103CD	(EW100EAD-3P-4B)
	250AF	2 poles	EA202C	BW250EAGU-2P	-	-
		3 poles	EA203C	BW250EAGU-3P	EG203C(D)	EW250JAGU-3P
	400AF	2 poles	EA402C	BW400EAGU-2P	-	-
		3 poles	EA403C	BW400EAGU-3P	EG403C(D)	EW400SAGU-3P
	600AF	3 poles	EA603C	BW630RAGU-3P	EG603C,CD	EW630RAGU-3P
	800AF	3 poles	EA803C	BW800RAGU-3P	EG803C,CD	(EW800EAG-3P)
S series (Non-UL)*1	30AF	2 poles	SA32C	BW50RAGU-2P	-	-
		3 poles	SA33C	BW50RAGU-3P	SG33C	EW50RAGU-3P
	50AF	2 poles	SA52C	BW50RAGU-2P	-	-
		3 poles	SA53C	BW50RAGU-3P	SG53C	EW50RAGU-3P
		2 poles	SA52RC	BW50RAGU-2P	-	-
		3 poles	SA53RC	BW50RAGU-3P	SG53RC	EW50RAGU-3P
	60AF	2 poles	SA62C	BW100EAGU-2P	-	-
		3 poles	SA63C	BW100EAGU-3P	SG63C	EW100EAGU-3P
		2 poles	SA62RC	BW100EAGU-2P	-	-
		3 poles	SA63RC	BW100EAGU-3P	SG63RC	EW100EAGU-3P
	125AF	2 poles	SA102C	BW125JAGU-2P	-	-
		3 poles	SA103C	BW125JAGU-3P	SG103C, CD	EW125JAGU-3P
		4 poles	SA54B, EA104B	(BW125JAG-4P)	SGa104A, AD	(EW125JAG-4P)
		2 poles	SA102RC	BW125RAGU-2P	-	-
		3 poles	SA103RC	BW125RAGU-3P	SG103RC(D)	EW125RAGU-3P
		4 poles	SA104R	(BW125RAG-4P)	SGa104H(D)	(EW125RAG-4P)
	250AF	2 poles	SA202C	BW250JAGU-2P	-	-
		3 poles	SA203C	BW250JAGU-3P	SG203C(D)	EW250JAGU-3P
		4 poles	-	-	SGa204A(D)	(EW250JAG-4P)
S series (Non-UL)*1	250AF	2 poles	SA202RC	BW250RAGU-2P	-	-
		3 poles	SA203RC	BW250RAGU-3P	SG203RC(D)	EW250RAGU-3P
		4 poles	SA204R	(BW250RAG-4P)	SG204H(D)	(EW250RAG-4P)
	400AF	2 poles	SA402C	BW400SAGU-2P	-	-
		3 poles	SA403C	BW400SAGU-3P	SG403C(D)	EW400SAGU-3P
		2 poles	SA402RC	BW400RAGU-2P	-	-
		3 poles	SA403RC	BW400RAGU-3P	SG403RC(D)	EW400RAGU-3P
		4 poles	SA404HA	(BW400RAG-4P)	SGa404A(D)	(EW400RAG-4P)
	600AF	3 poles	SA603RC	BW630RAGU-3P	SG603RC(D)	EW630RAGU-3P
		4 poles	SA604H	(BW630RAG-4P)	-	-
	800AF	3 poles	SA803RC	BW800RAGU-3P	SG803RC(D)	(EW800RAG-3P)
		4 poles	SA804H	(BW800RAG-4P)	-	-
H series (Non-UL)*1	400AF	2 poles	H402C	BW400HAGU-2P	-	-
		3 poles	H403C	BW400HAGU-3P	HG403C(D)	EW400HAGU-3P
	600AF	3 poles	H603C	BW630HAGU-3P	HG603C(D)	(EW630HAG-3P)
	800AF	3 poles	H803C	BW800HAGU-3P	HG803C(D)	(EW800HAG-3P)

Note: All accessories discontinued as well.

- : No replacement

*2: Discontinued Non-UL ELCB has a Trip Lead type, specify "TL" for P/N (Two lead wire comes from inside of the ELCB and labeled as TL1 & TL2). Replacement model P/N specify "T".

Ex: EG33AC/20-30MA-TL → EW32AAG-3P020B T

Replacement for BU series (ESB/FSB/FHB)

Discontinued Date: June 30, 2002

480VAC application

Frame size (A)		Poles	BU series (Discontinued product)						G-TWIN series					BU-C series							
			Type	Rated I.C (kA)	Rated Current (A)	Dimensions (mm)			Type	Rated I.C (kA)	Rated Current (A)	Dimensions (mm)			Type	Rated I.C (kA)	Rated Current (A)	Dimensions (mm)			
				480V		W	H	D			480V		W	H	D		480V		W	H	D
100	2	BU-ESB2	14	15 - 100	105	168	86		BW125RAGU-2P	50	15 - 125	90	171	68		BU2EHC	14	15 - 100	70	160	86
	3	BU-ESB3	14	15 - 100	105	168	86		BW125RAGU-3P	50	15 - 125	90	171	68		BU3EHC	14	15 - 100	105	160	86
150	2	BU-FSB2	22	15 - 100	105	168	86		BW125RAGU-2P	50	15 - 125	90	171	68		BU2FHC	25	15 - 100	105	160	86
				125																	
				150					BW250RAGU-2P	50	125 - 250	105	181	68							
	3	BU-FSB3	22	15 - 125	105	168	86		BW125RAGU-3P	50	15 - 125	105	171	68		BU3FHC	25	15 - 150	105	160	86
				150					BW250RAGU-3P	50	125 - 250	105	181	68							
150	2	BU-FHB2	25	15 - 100	105	168	86		BW125RAGU-2P	50	15 - 125	105	181	68		BU2FHC	25	15 - 100	105	160	86
				125																	
				150					BW250RAGU-2P	50	125 - 250	105	181	68							
	3	BU-FHB3	25	15 - 125	105	168	86		BW125RAGU-3P	50	15 - 125	105	171	68		BU3FHC	25	15 - 150	105	160	86
				150					BW250RAGU-3P	50	125 - 250	105	181	68							

600VAC application

		BU series (Discontinued product)										G-TWIN series										BU-C series					
Frame size (A)	Poles	Type	Rated I.C (kA)	Rated Current (A)	Dimensions (mm)			Type	Rated I.C (kA)	Rated Current (A)	Dimensions (mm)			Type	Rated I.C (kA)	Rated Current (A)	Dimensions (mm)										
					W	H	D				W	H	D				W	H	D								
100	2	BU-ESB2	14	15 - 100	105	168	86	No replacement	-	-	-	-	BU2EHC	14	15 - 100	70	160	86									
	3	BU-ESB3	14	15 - 50 60 - 100	105	168	86	BW50KAGU-3P BW125KAGU-3P	18 25	15 - 50 60 - 100	90 105	171 181	68 86	BU3EHC	14	15 - 100	105	160	86								
150	2	BU-FSB2	14	15 - 100 125, 150	105	168	86	No replacement	-	-	-	-	BU2FHC	18	15 - 100	105	160	86									
	3	BU-FSB3	14	15 - 50 60 - 125 150	105	168	86	BW50KAGU-3P BW125KAGU-3P BW150KAGU-3P	18 25 25	15 - 50 60 - 125 150	90 105 105	171 181 181	68 86 86	BU3FHC	18	15 - 150	105	160	86								
	2	BU-FHB2	18	15 - 100 125, 150	105	168	86	No replacement	-	-	-	-	BU2FHC	18	15 - 100	105	160	86									
	3	BU-FHB3	18	15 - 50 60 - 125 150	105	168	86	BW50KAGU-3P BW125KAGU-3P BW150KAGU-3P	18 25 25	15 - 50 60 - 125 150	90 105 105	171 181 181	68 86 86	BU3FHC	18	15 - 150	105	160	86								

Terms and Conditions of Sale

Prices

All prices are subject to change without notice. In the event of a price change, the effective date of the change will be the date on the new price or discount schedule sheet.

All quotations made or orders accepted after the effective date will be based on the new prices.

Quotations

Written quotations are valid for 30 days from its date unless otherwise stated in the quotation. Verbal quotations expire the same day they are made.

Taxes

The price does not include any taxes. Buyer shall be responsible for the payment of all applicable taxes.

Terms of payment

Terms of payment will be listed on the quotations.

Minimum orders

Terms of minimum order will be shown on quotations, or if orders amounting to less than the latest minimum order amount, a handling fee will be applied.

Delivery

Delivery of products shall be FOB point of origin in the U.S. Seller shall determine the point of origin of shipment. All shipping and other charges shall be paid by Buyer.

Packing

Prices include standard domestic packing. Additional special packing costs required for export or by Buyer's request will be charged to Buyer.

Weight and Dimensions

The weight and dimensions of products described in this catalog are the best information available at the time of going to press. As Seller follows a policy of continuous product improvement, design changes may make this information obsolete. Information in this catalog is subject to change without notice.

Inspection and acceptance of products

Buyer is responsible for evaluating received products or damage for final acceptance. All claims of shortage must be made within thirty (30) days of receipt of products.

Return / Cancellation

No product shall be returned or canceled unless return/order cancel authorization has been secured from Seller. All returns/cancellations must comply with Seller's then current Return / Cancellation policy.

Risk of Loss

Risk of loss or damage to the product shall pass to Buyer at the FOB point.

Catalog Disclaimer

The information contained in this catalog does not constitute an express or implied warranty of quality, any warranty of merchantability or fitness for a particular purpose is hereby disclaimed. Since the Buyer's product information, specific use application, and conditions of use are all outside of Seller's control, it shall be the responsibility of the Buyer to determine the suitability of any of the products mentioned for the Buyer's application.

ONE YEAR LIMITED WARRANTY

The products identified in this catalog shall be sold pursuant to the terms and conditions identified in the Conditions of Sale issued by Fuji Electric with each order confirmation.

Except to the extent otherwise provided for in the Conditions of Sale issued by Fuji Electric, Fuji Electric warrants that the Fuji Electric products identified in this catalog shall be free from significant defects in materials and workmanship provided the products have not been: (1) repaired or altered by others than Fuji Electric; (2) subjected to negligence, accident, misuse, or damage by circumstances beyond Fuji Electric's control; (3) improperly operated, maintained or stored; or (4) used in other than normal use or service. This warranty shall apply only to defects appearing within one (1) year from the date of shipment by Fuji Electric, and in such case, only if such defects are reported to Fuji Electric within thirty (30) days of discovery by purchaser.

Such notice should be submitted in writing to Fuji Electric Corp. of America. The sole and exclusive remedy with respect to the above warranty whether such claim is based on warranty, contract, negligence, strict liability or any other theory, is limited to the repair or replacement of such

product or, at Fuji Electric's option, reimbursement by Fuji Electric of the purchase price paid to Fuji Electric for the particular product.

FUJI ELECTRIC DOES NOT MAKE ANY OTHER REPRESENTATIONS OR WARRANTIES, WHETHER ORAL OR IN WRITING, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY REGARDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Except as provided in the Conditions of Sale, no agent or representative of Fuji Electric is authorized to modify the terms of this Warranty in writing or orally.

In no event shall Fuji Electric be liable for special, indirect or consequential damages, including but not limited to, loss of use of the product, other equipment, plant, power system, loss of profits or revenues, cost of capital, or claims against the purchaser or user by its customers resulting from the use of information, recommendations and descriptions contained herein. Purchaser agrees to pass on to its customers and users, in writing at the time inquiries and orders are received by buyer, Fuji Electric's warranty as set forth above.

Your Local Authorized Stocking Distributor Is:

Fuji Electric Corp. of America | www.fujielectric.com/fecoa

Fuji Electric (Japan) | www.fujielectric.co.jp

Information in this catalog is subject to change without notice.
March, 2011