


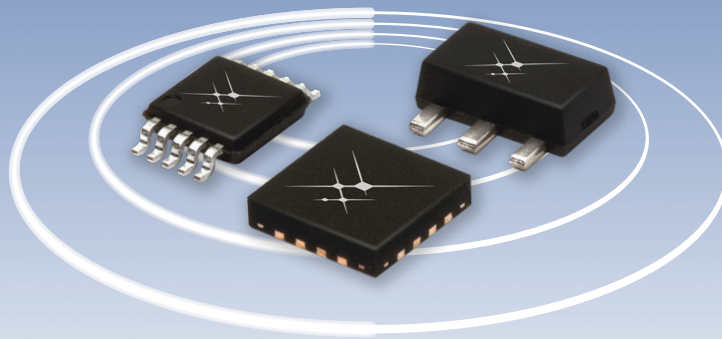

Product Selection Guide

November 2014

Skyworks Solutions

Skyworks Solutions, Inc. is an innovator of high performance analog semiconductors. Leveraging core technologies, Skyworks supports automotive, broadband, wireless infrastructure, energy management, GPS, industrial, medical, military, wireless networking, smartphone, and tablet applications. The Company's portfolio includes amplifiers, attenuators, circulators, demodulators, detectors, diodes, directional couplers, front-end modules, hybrids, infrastructure RF subsystems, isolators, lighting and display solutions, mixers, modulators, optocouplers, optoisolators, phase shifters, PLLs/synthesizers/VCOs, power dividers/combiners, power management devices, receivers, switches, and technical ceramics.

Headquartered in Woburn, Massachusetts, USA, Skyworks is worldwide with engineering, manufacturing, sales and service facilities throughout Asia, Europe, and North America.

New products are continually being introduced at Skyworks. For the latest information, visit our Web site at www.skyworksinc.com, contact your local sales office, or email us at sales@skyworksinc.com.

The Skyworks Advantage

- Broad front-end module and precision analog product portfolio
- Market leadership in key product segments
- Solutions for all air interface standards, including CDMA, GSM / GPRS / EDGE, LTE, WCDMA, and WLAN
- Engagements with a diverse set of top-tier customers
- Strategic partnerships with all leading baseband suppliers
- Analog, RF and mixed-signal design capabilities
- Access to all key process technologies: GaAs HBT, pHEMT, BiCMOS, SiGe, CMOS and RF CMOS, and Silicon
- World-class manufacturing capabilities and scale
- Unparalleled level of customer service and technical support
- Commitment to technology innovation





INDEX

Products

Amplifiers	6
Attenuators	24
Circulators and Isolators	29
Diodes	32
Front-end Modules (FEMs)	75
Mixers	88
Modulators / Demodulators	90
Optocouplers and Optoisolators	91
<i>These products are produced by Isolink™, Inc. (a wholly owned subsidiary of Skyworks Solutions, Inc.)</i>	
PLLs / Synthesizers / VCOs	92
Power Management	93
RF Passives	113
Switches	119
Technical Ceramics	128
<i>These products are produced by Trans-Tech™ (a wholly owned subsidiary of Skyworks Solutions, Inc.)</i>	

Reference Material

Block Diagrams	138
Package Selection Guide	170
Warranty / Order Information	177
Part Number Index	178
Skyworks' Sales Representatives	184
Skyworks' Distributors	186
Skyworks' Sales Offices	195

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.



Innovation to Go™

Select products and sample/designer kits available for purchase online at www.skyworksinc.com.



Skyworks' Green™ products are compliant to all applicable materials legislation and are halogen-free. For additional information, refer to *Skyworks' Definition of Green™*, document number SQ04-0074.



The (Pb)-free symbol or "LF" in the part number denotes lead (Pb)-free, RoHS-compliant package. Tin/lead (SnPb) packaging is not recommended for new designs.

Copyright © 2002–2014, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, "Breakthrough Simplicity," AS²Cwire, Green, Green Initiative, HIP3, Innovation to Go, Isolink, LIPA, S²Cwire, SkyHi, SkyOne, SLiBus, Trans-Tech, and TVLite are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.

Products

Amplifiers	6	PLLs / Synthesizers / VCOs	92
Select Ultra Low Noise Amplifiers (LNAs)	6	High Performance VCOs / Synthesizers	92
Cellular Power Amplifiers	7	Single Fractional-N Synthesizer	92
WiFi Connectivity	17	Dual Fractional-N Synthesizers / PLLs	92
Wireless Infrastructure / Femtocell		Power Management	93
Power Amplifiers	19	Audio	93
Smart Energy—Connected Home and		Battery Chargers	93
Automation 802.15.4, ISM, and ZigBee®	20	Voltage Regulation	96
BDS / GPS / GNSS Low Noise Amplifiers (LNAs) ...	20	Display and Lighting	100
Broad Market Low Noise Amplifiers (LNAs)		Multi-function Power Management	
and Low Noise Transistors	20	Integrated Circuit (PMIC / PMU)	108
Driver Amplifiers / Linear Amplifiers	22	Power Half Bridges	109
Gain Block (General Purpose) Amplifiers	22	Port Protection and Power Distribution	109
Variable Gain Amplifiers (VGAs)	23	Supervisors / Monitors, Voltage Detectors—	
Attenuators	24	Microprocessors	112
Select Digital Attenuators	24	RF Passives	113
Digital Attenuators	25	MIS Silicon Chip Capacitors	113
Fixed Attenuator Pads	26	Couplers	114
Voltage Variable Attenuators	28	Detectors	114
Circulators and Isolators	29	Fixed Attenuator Pads	115
Radar	29	Power Dividers / Combiners	117
Wireless	30	Phase Shifter	118
Diodes	32	Switches	119
Select PIN, Limiter, Schottky, Varactor Diodes ...	32	Select General Purpose RF Switches	119
Limiter	34	SPST RF Switches	120
PIN	36	SPDT (SP2T) RF Switches	121
Schottky	45	High Power SPDT PIN Diode Switches	122
Varactor	59	SP3T RF Switches	123
Front-end Modules (FEMs)	75	SP4T RF Switches	123
Cellular (CDMA, WCDMA, GSM, EDGE, LTE) ...	75	DPDT Antenna Diversity Switches	124
WiFi Connectivity	83	Ultra Linear (SVLTE) Switches	124
Smart Energy—Connected Home and		Dual Pole (xT) RF Switches	125
Automation 802.15.4, ISM, and ZigBee®	87	High Throw Count (>4T) Switches / Antenna	
BDS / GPS / GNSS Front-end Modules	88	Switch Modules (ASM) (GPIO & MIPI RFFE) ...	125
Mixers	88	High Throw Count (>4T) Switches / Antenna	
Single Channel Mixers	88	Switch Modules (ASMs)	126
Diversity Downconverter Mixers	89	Carrier Aggregation Switches	127
Upconversion / Downconversion Mixers	89	Antenna Tuning Switches	127
Modulators / Demodulators	90	LNB / DBS Matrix Switches	127
Broadband Direct Quadrature Modulators	90	Technical Ceramics	128
Broadband Direct Quadrature Demodulator ...	90	<i>These products are produced by Trans-Tech™</i>	
Mixer Modules with Built-in Voltage		<i>(a wholly owned subsidiary of Skyworks Solutions, Inc.)</i>	
Controlled Oscillators (VCOs)	90	Ceramic Coaxial Resonators	128
Optocouplers and Optoisolators	91	Ceramic Coaxial Inductors	130
<i>These products are produced by Isolink™, Inc.</i>		Standard Filters / Diplexers	134
<i>(a wholly owned subsidiary of Skyworks Solutions, Inc.)</i>			

AMPLIFIERS

Skyworks Solutions is pleased to offer a broad selection of power amplifiers (PAs) and low noise amplifiers (LNAs) for cellular applications and diverse markets such as wireless infrastructure, WiFi connectivity, automotive, test & measurement, energy management, and other high performance microwave applications. These amplifier solutions leverage the extensive design knowledge, technical leadership, manufacturing expertise, and superior quality of Skyworks.

Select Ultra Low Noise Amplifiers (LNAs)

Select LNAs Available from Stock for Prototype or High Volume Production

Skyworks' family of low noise amplifiers consists of a series of devices which cover a frequency range from 400 to 5900 MHz. Skyworks also offers low cost, discrete pHEMT FET packaged devices for those designers seeking the ultimate in application flexibility and customization. Applications include high performance GPS, WLAN/WiFi, and cellular infrastructure base station receivers for GSM, WCDMA, and LTE modulation schemes, as well as any other high performance LNA application in the 400–5900 MHz frequency range. These devices come packaged in a variety of industry-standard plastic packages which offer excellent thermal performance.

LNAs for Cellular Infrastructure, GPS, Broadband, ISM Band, and WLAN Applications

Part Number	Application	Frequency Range (GHz)	Test Frequency (MHz)	Gain (dB)	NF (dB)	OIP3 (dBm)	OP ₁ (dBm)	V _{DD} (V) (Operating Range)	I _{DD} (mA) (Operating Range)	Package (mm)
 SKY67151-396LF	Cellular Infrastructure	500–3800	2500	19	0.50	35.0	19	5 (3.0–5.0)	70 (20–100)	DFN 8L 2 x 2 x 0.75
 SKY67101-396LF	Cellular Infrastructure	0.4–1.2	900	17.5	0.50	34.0	19.0	4 (3.3–5.0)	50 (20–90)	DFN 8L 2 x 2 x 0.75
 SKY67100-396LF	Cellular Infrastructure	1.2–2.3	1950	17.5	0.70	34.0	18.5	4 (3.3–5.0)	50 (20–90)	DFN 8L 2 x 2 x 0.75
 SKY67102-396LF	Cellular Infrastructure	2.0–3.0	2600	17.2	0.80	33.8	15.0	4 (3.3–5.0)	50 (20–90)	DFN 8L 2 x 2 x 0.75
 SKY67110-396LF	Cellular Infrastructure	0.3–0.75	450	21.0	0.65	37.0	21.0	5 (50–120)	75 (50–120)	DFN 8L 2 x 2 x 0.75
 SKY67111-396LF	Cellular Infrastructure	0.7–1.2	900	20.5	0.50	40	20.0	5 (50–120)	75 (50–120)	DFN 8L 2 x 2 x 0.75
 SKY67021-396LF	Cellular Infrastructure	0.6–1.2	900	17.5	0.60	40.5	21.0	5 (3.3–5.0)	100 (50–120)	DFN 8L 2 x 2 x 0.75
 SKY67022-396LF	Cellular Infrastructure	1.6–2.1	1850	17.5	0.65	39.5	20.0	5 (3.3–5.0)	100 (50–120)	DFN 8L 2 x 2 x 0.75
 SKY67023-396LF	Cellular Infrastructure	2.0–3.0	2600	17.5	0.88	39.0	19.7	5 (3.3–5.0)	100 (50–120)	DFN 8L 2 x 2 x 0.75
 SKY67161-306LF	Cellular Infrastructure	0.6–1.1	850	38.0	0.30	40.0	25.0	5 (4.0–5.0)	120 (80–140)	QFN 16L 4 x 4 x 0.90
 SKY67105-306LF	Cellular Infrastructure	0.6–1.1	850	37.0	0.70	41.0	26.0	5 (3.5–5.0)	140 (120–155)	QFN 16L 4 x 4 x 0.90
 SKY67106-306LF	Cellular Infrastructure	1.5–3.0	1950	35.0	0.65	37.0	24.0	5 (3.5–5.0)	100 (80–125)	QFN 16L 4 x 4 x 0.90
 SKY67107-306LF	Cellular Infrastructure	2.3–2.8	2600	32.0	0.85	37.5	18.5	5 (3.5–5.0)	125 (50–145)	QFN 16L 4 x 4 x 0.75
 SKY67015-396LF	General Purpose	0.05–0.3	250	17.5	0.80	25	12.5	3.3 (1.8–5.0)	18 (5–30)	DFN 8L 2 x 2 x 0.75

Select Ultra Low Noise Amplifiers (LNAs)

LNAs for Cellular Infrastructure, GPS, Broadband, ISM Band, and WLAN Applications

Part Number	Application	Frequency Range (GHz)	Test Frequency (MHz)	Gain (dB)	NF (dB)	OIP3 (dBm)	OP ₁ dB (dBm)	V _{DD} (V) (Operating Range)	I _{DD} (mA) (Operating Range)	Package (mm)
 SKY67012-396LF	General Purpose	0.3–0.6	450	16.5	0.85	24.0	14.0	3.3 (1.8–5.0)	18 (5–30)	DFN 8L 2 x 2 x 0.75
 SKY67013-396LF	General Purpose	0.6–1.5	900	14.0	0.85	26.0	15.5	3.3 (1.8–5.0)	18 (5–30)	DFN 8L 2 x 2 x 0.75
 SKY67014-396LF	General Purpose	1.5–3.0	2450	13.0	0.85	28.0	15.5	3.3 (1.8–5.0)	18 (5–30)	DFN 8L 2 x 2 x 0.75
SKY65404-31	5.8 GHz WLAN and ISM Band	4.9–5.9	5800	13.0	1.20	20.0	9.0	3.3 (2.8–5.0)	11 (10–15)	DFN 6L 1.5 x 1.5 x 0.45
SKY65405-21	2.4 GHz WLAN and ISM Band	2.4–2.5	2450	15.0	1.10	24.0	15.0	3.3 (2.8–5.0)	12 (10–16)	DFN 6L 1.5 x 1.5 x 0.45

Cellular Power Amplifiers

CDMA PAs

PCS Band

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77176	824–849 1850–1910	Dual-band Power Amplifier Module (PAM) for CDMA/PCS	40	28.0	3.2–4.2	12-pin MCM 3 x 5 x 1.0
 SKY77732	1850–1910	PAM for CDMA/PCS	TBD	27.5	3.2–4.2	10-pad MCM 3 x 3 x 0.9

Cell Band

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77176	824–849 1850–1910	Dual-band PAM for CDMA/PCS	40	28.0	3.2–4.2	12-pin MCM 3 x 5 x 1.0
 SKY77735	824–849	PAM for CDMA	TBD	TBD	3.2–4.2	10-pad MCM 3 x 3 x 0.9 Bottom of Form

Other Bands

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
CX77144	887–925	PAM for J-CDMA	40	27.5	3.2–4.2	10-pin MCM 4 x 4 x 1.5
SKY77166	450–460	PAM for CDMA2000	37	29.0	3.1–4.6	10-pad MCM 4 x 4 x 1.15
 SKY77192-14	450–460	PAM for CDMA2000	40	29.0	3.2–4.2	10-pad MCM 4 x 4 x 0.9

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Cellular Power Amplifiers

GSM / GPRS Quad-band CMOS Power Amplifier

Our CMOS power amplifier allows the use of 0.13 μm Silicon CMOS process technology, integrating all of the functions between transmitter output and transmit/receive switch. The power gain stages, small signal control circuitry, and 50 Ω matching are all realized on a single die.

The AX508 PA amplifies low-level radio frequency (RF) signals to the required high-power levels needed for transmission in GSM/GPRS mobile phone handsets or data modules. The device supports quad-band (GSM 850/900/1800/1900) operation. The integrated 50 Ω input and output matching circuitry enables direct connection to the transceiver output and the transmit/receive switch input without the use of the external matching components. The power level is regulated via a fully integrated closed-loop power controller which ensures that the GSM power/time mask and switching spectrum may be met with adequate margin to allow robust mass production when subjected to a real world cell phone environment, such as highly elevated VSWR, and low supply voltage.

The reliability of our GSM/GPRS quad band CMOS power amplifier has been proven through thousands of hours of life testing, at accelerated operating conditions, including greater than recommended operating temperature, extended duty cycle, load mismatches of greater than VSWR 10:1 at worst case phase angles, and elevated supply voltages.

Our GSM/GPRS quad-band CMOS power amplifier also offers the following:

- GSM/GPRS class 12 operation
- Power supply range of 2.9 to 5.5 V
- RF input range: -2 to 8 dBm
- Fully integrated on chip 50 Ω matching circuits
- Fully integrated closed-loop power control
- <100 dB/V power control slope
- MSL JEDEC Level 2A, lead (Pb)-free, RoHS-compliant package
 - Low profile 5 x 3.5 x 0.9 mm micro lead frame package

Part Number	Description	Package (mm)
AX508	GSM/GPRS Quad-band Power Amplifier	Micro Lead Frame 5 x 3.5 x 0.9

Cellular Power Amplifiers

GSM / GPRS / EDGE PAs

Part Number	Frequency (MHz)	Description	Typical Output Power (dBm) GSM/EDGE	Typical PAE (%)	Supply Voltage (V)	Package (mm)
 SKY77336	824–849	iPAC™ PAM for Quad-band GSM/GPRS/EDGE			3.0–4.8	16-pad MCM 5 x 5 x 1
	880–915	GSM850	35.0	52		
	1710–1785	GSM900	35.0	52		
	1850–1910	DCS1800	33.0	50		
	1850–1910	PCS1900	33.0	50		
 SKY77344	824–849	iPAC™ PAM for Quad-band GSM/EDGE			3.0–4.8	20-pad MCM 5 x 5 x 0.9
	880–915	GSM850	35.0	52		
	1710–1785	GSM900	35.0	52		
	1850–1910	DCS1800	33.5	45		
	1850–1910	PCS1900	33.5	45		
 SKY77346	824–849	iPAC™ PAM for Quad-band GSM/GPRS			2.9–4.8	26-pin MCM 5 x 6 x 0.9
	880–915	GSM850	35.0	52		
	1710–1785	GSM900	35.0	52		
	1850–1910	DCS1800	33.5	52		
	1850–1910	PCS1900	33.5	52		
 SKY77351-13	824–849	PAM for Quad-band GSM/GPRS			3.0–4.8	13-pad MCM 5 x 5 x 1
	880–915	GSM850	35.0	52		
	1710–1785	GSM900	35.0	52		
	1850–1910	DCS1800	33.5	45		
	1850–1910	PCS1900	33.5	45		
 SKY77354	824–849	PAM for Quad-band GSM/GPRS/EDGE	35.35	55	3.0–4.8	14-pad MCM 5 x 3.5 x 0.9
	880–915	GSM850	35.35	55		
	1710–1785	GSM900	35.45	53		
	1850–1910	DCS1800	35.45	53		
	1850–1910	PCS1900	35.45	53		

LTE PAs

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Typical Linear LTE Power (dBm)	Supply Voltage (V)	Package (mm)
 SKY77449	777–798	PAM for LTE/E–UTRA Bands XIII/XIV (777–798 MHz)	36	27.5	29.0	3.0–4.6	16–pad MCM 4 x 4 x 0.85
 SKY77706	2500–2570	PAM for LTE FDD Band VII (2500–2570 MHz)	34	–	28.0	3.2–4.2	10–pad MCM 3 x 3 x 0.9 Bottom of Form
 SKY77707	698–716	PAM for LTE/EUTRAN Bands XII/XVII (698–716 MHz)	36	28.0	–	3.2–4.2	10–pad MCM 3 x 3 x 0.9
 SKY77708	777–798	PAM for LTE/EUTRAN Bands XIII/XIV (777–798 MHz)	36	28.0	–	3.2–4.2	10–pad MCM 3 x 3 x 0.9
 SKY77709	2300–2400	PAM for LTE FDD Band VII (2300–2400 MHz)	36	28.0	–	3.2–4.2	10–pad MCM 3 x 3 x 0.9
 SKY77731	1427.9–1462.9	PAM for WCDMA/LTE Band 11 (1427.9–1447.9 MHz) and Band 21 (1447.9–1462.9 MHz)	TBD	TBD	TBD	3.2–4.2	10–pad MCM 3 x 3 x 0.9
 SKY77733	777–798	SkyHi™ PAM for LTE Bands 13/14 (777–798 MHz)	43	–	32.0	3.0–4.5	10–pad MCM 3 x 3 x 0.9
 SKY77736	832–862	SkyHi™ PAM for LTE Band 20 (832–862 MHz)	42	–	32.0	3.0–4.5	10–pad MCM 3 x 3 x 0.9
 SKY77737	698–716	SkyHi™ PAM for LTE Bands 12/17 (698–716 MHz)	44	–	32.0	3.0–4.5	10–pad MCM 3 x 3 x 0.9
 SKY77761-11	1920–1980	SkyHi™ PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+ Band I (1920–1980 MHz)	48	–	28.5	3.0–4.5	10–pad MCM 3 x 3 x 0.9

Cellular Power Amplifiers

LTE PAs (Continued)

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Typical Linear LTE Power (dBm)	Supply Voltage (V)	Package (mm)
 SKY77761-12	1920–1980	SkyHi™ PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE – Band I (1920–1980 MHz)	46	–	28.5	3.4–4.5	10-pad MCM 3 x 3 x 0.9
 SKY77762	1850–1910	SkyHi™ PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE – Band II (1850–1910 MHz)	46	–	28.6	3.0–4.5	10-pad MCM 3 x 3 x 0.9
 SKY77764	1710–1785	SkyHi™ PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE – Bands III, IV, IX (1710 MHz–1785 MHz)	46	–	28.0	3.4–4.5	10-pad MCM 3 x 3 x 0.9
 SKY77767	2500–2570	SkyHi™ PAM for LTE – Band 7 (2500–2570 MHz)	TBD	TBD	TBD	3.0–4.5	10-pad MCM 3 x 3 x 0.9
 SKY77768	880–915	SkyHi™ PAM for WCDMA/HSDPA/HSUPA/HSPA+/LTE	50	–	28.0	3.2–4.2	10-pad MCM 3 x 3 x 0.9
 SKY77771	1427.9–1462.9	PAM for LTE Band 11/21	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77772-11	699–748	PAM for LTE – Bands 12, 17, 28	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77773	1427.9–1462.9	PAM for LTE Band 11/21	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77778-11	2500–2570	PAM for LTE FDD Band 7	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77778-21	2500–2570 2496–2690 2300–2400 2545–2575	PAM for LTE FDD Band 7, TDD Bands 38/41, Band 40, and AXGP Band FDD Band 7 TDD Bands 38/41 TDD Band 40 AXGP Band	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77778-51	2500–2570 2496–2690 2300–2400 2545–2575	PAM for LTE FDD Band 7, TDD Bands 38/41, Band 40, and AXGP Band FDD Band 7 TDD Bands 38/41 TDD Band 40 AXGP Band	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77778-61	2500–2570	PAM for LTE FDD Band 7	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.9
 SKY77781-11	2500–2570 2305–2315 2496–2690 2300–2400 2545–2575	PAM for LTE FDD Band 7, Band 30, LTE TDD Bands 38/41, Band 40, and AXGP Band LTE B7 LTE B30 LTE B38/41 LTE B40 AXGP Band	TBD	TBD	TBD	TBD	10-pad MCM 2 x 2.5 x 0.85
 SKY77807	2500–2570 2570–2620 2300–2400 2496–2690 2300–2400	Quad-band PAM for FDD/TDD LTE (Tx Bands 7, 38, 40, 41) LTE B7 LTE B38 LTE B40 LTE B41 TD-SCDMA B40	TBD	TBD	TBD	TBD	24-pad MCM 4 x 3 x 1 (Max.)
 SKY77814-11	2500–2570 2305–2315 2496–2690 2300–2400 2545–2575	PAM for LTE FDD Band 7, Band 30, LTE TDD Bands 38/41, Band 40, and AXGP Band LTE B7 LTE B30 LTE B38/41 LTE B40 AXGP Band	TBD	TBD	TBD	TBD	24-pad MCM 4 x 3 x 0.8

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Cellular Power Amplifiers

Multimode / Multiband (MMMB) PAs

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical I _{MAX} (mA)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77601		Multimode/Multiband PAM				3.0–4.5	34-pin MCM 6 x 8 x 0.9
	824–849	GSM850	55	–	33.5		
	880–915	GSM900	55	–	33.5		
	1710–1785	DCS1800	51	–	33.5		
	1850–1910	PCS1900	51	–	33.5		
	1920–1980	WCDMA B1	–	450	27.0		
	1850–1910	WCDMA B2	–	550	27.0		
	824–849	WCDMA B5	–	430	27.0		
	880–915	WCDMA B8	–	450	27.0		
 SKY77603		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	38-pad MCM 6 x 8 x 0.9
	824–849	GSM850					
	880–915	EGSM900					
	1710–1785	GSM1800					
	1850–1910	EGSM1900					
	824–849	WCDMA/LTE B5					
	832–862	WCDMA/LTE B20					
	880–915	WCDMA/LTE B8					
	830–840	LTE B6					
	830–845	LTE B19					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	1710–1755	WCDMA/LTE B4					
	1749.9–1784.9	WCDMA/LTE B9					
	1710–1770	WCDMA/LTE B10					
 SKY77604–11		Multimode/Multiband PAM				2.9–4.7	34-pin MCM 6 x 8 x 0.9
	824–849	GSM850	56	–	–		
	880–915	GSM900	56	–	–		
	1710–1785	DCS1800	50	–	–		
	1850–1910	PCS1900	50	–	–		
	1920–1980	WCDMA B1	–	465	25.0		
	1850–1910	WCDMA B2	–	525	25.0		
	1750–1780	WCDMA B4	–	500	25.0		
	824–849	WCDMA B5	–	420	24.6		
	880–915	WCDMA B8	–	450	25.0		
 SKY77606		Multimode/Multiband PAM				3.2–4.5	24-pad MCM 5 x 7 x 0.9
	824–849	GSM850	50	1740	–		
	880–915	GSM900	50	1740	–		
	1710–1785	DCS1800	50	1075	–		
	1850–1910	PCS1900	50	1075	–		
	1920–1980	WCDMA B1	37	478	27.0		
	824–849	WCDMA B5	35	447	28.0		
	880–915	WCDMA B8	34	467	26.5		
 SKY77615		Multimode/Multiband PAM	TBD	TBD	TBD	TBD	36-pad MCM 6 x 8 x 0.9
	824–849	GSM850					
	880–915	GSM900					
	1710–1785	DCS1800					
	1850–1910	PCS1900					
	1920–1980	WCDMA B1					
	1850–1910	WCDMA B2					
	1710–1785	WCDMA B3					
	1710–1755	WCDMA B4					
	824–849	WCDMA B5					
	830–840	WCDMA B6					
	880–915	WCDMA B8					
	1710–1770	WCDMA B10					

Cellular Power Amplifiers

Multimode / Multiband (MMMB) PAs (Continued)

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical I _{MAX} (mA)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77619		SkyHi™ Multiband/Multimode PAM				0.5–4.2	42-pin MCM 7 x 9 x 0.9
	824–849	GSM850	53	TBD	29		
	880–915	GSM900	53	TBD	29		
	1710–1785	DCS1800	53	TBD	TBD		
	1850–1910	PCS1900	53	TBD	TBD		
	1920–1980	WCDMA B1	44	TBD	TBD		
	1850–1910	WCDMA B2	44	TBD	TBD		
	1750–1780	WCDMA B4	44	TBD	TBD		
	824–849	WCDMA B5	44	TBD	TBD		
	880–915	WCDMA B8	44	TBD	TBD		
 SKY77621-11		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	42-pin MCM 5 x 7 x 0.9
	824–849	GSM/EDGE850					
	880–915	GSM/EDGE900					
	1710–1785	GSM/EDGE1800					
	1850–1910	GSM/EDGE1900					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	1710–1755	WCDMA/LTE B4					
	824–849	WCDMA/LTE B5					
	880–915	WCDMA/LTE B8					
	777–787	LTE Band 13					
	704–716	LTE Band 17					
	832–862	LTE Band 20					
	2010–2025	TD-SCDMA Band 34					
	1880–1920	LTE Band 39					
 SKY77621-31		MMMB PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824–849	GSM/EDGE850					
	880–915	GSM/EDGE900					
	1710–1785	GSM/EDGE1800					
	1850–1910	GSM/EDGE1900					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	1710–1755	WCDMA/LTE B4					
	824–849	WCDMA/LTE B5					
	880–915	WCDMA/LTE B8					
	699–716	LTE B12					
	777–787	LTE B13					
	704–716	LTE B17					
	832–862	LTE B20					
	703–748	LTE B28					
	1880–1920	LTE B39					
	2010–2025	TD-SCDMA Band 34					
 SKY77621-51		Multiband/Multimode Power Amplifier Module	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824–849	GSM850					
	880–915	GSM900					
	1710–1785	DCS1800					
	1850–1910	PCS1900					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	1710–1755	WCDMA/LTE B4					
	824–849	WCDMA/LTE B5					
	880–915	WCDMA/LTE B8					
	832–862	WCDMA/LTE B20					

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Cellular Power Amplifiers

Multimode / Multiband (MMMB) PAs (Continued)

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical I _{MAX} (mA)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77627-11	824-849	GSM/EDGE850	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	880-915	GSM/EDGE900					
	1710-1785	GSM/EDGE1800					
	1850-1910	GSM/EDGE1900					
	1920-1980	WCDMA/LTE B1					
	1850-1910	WCDMA/LTE B2					
	1710-1785	WCDMA/LTE B3					
	1710-1755	WCDMA/LTE B4					
	824-849	WCDMA/LTE B5					
	880-915	WCDMA/LTE B8					
	699-716	LTE B12					
	777-787	LTE B13					
	704-716	LTE B17					
	832-862	LTE B20					
	703-748	LTE B28					
	1880-1920	LTE/TD-SCDMA B39					
	2010-2025	TD-SCDMA B34					
 SKY77629		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824-849	GSM850					
	880-915	GSM900					
	1710-1785	DCS1800					
	1850-1910	PCS1900					
	1920-1980	WCDMA/LTE B1					
	1850-1910	WCDMA/LTE B2					
	1710-1785	WCDMA/LTE B3					
	1710-1755	WCDMA/LTE B4					
	824-849	WCDMA/LTE B5					
	880-915	WCDMA/LTE B8					
 SKY77629-21		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824-849	GSM850					
	880-915	GSM900					
	1710-1785	DCS1800					
	1850-1910	PCS1900					
	1920-1980	WCDMA/LTE B1					
	1850-1910	WCDMA/LTE B2					
	1710-1785	WCDMA/LTE B3					
	1710-1755	WCDMA/LTE B4					
	824-849	WCDMA/LTE B5					
	880-915	WCDMA/LTE B8					
 SKY77629-51		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824-849	GSM850					
	880-915	GSM900					
	1710-1785	DCS1800					
	1850-1910	PCS1900					
	1920-1980	WCDMA/LTE B1					
	1850-1910	WCDMA/LTE B2					
	1710-1785	WCDMA/LTE B3					
	1710-1755	WCDMA/LTE B4					
	824-849	WCDMA/LTE B5					
	880-915	WCDMA/LTE B8					
	832-862	WCDMA/LTE B20					

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Cellular Power Amplifiers

Multimode / Multiband (MMMB) PAs (Continued)

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical I _{MAX} (mA)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77630		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824–849	GSM850					
	880–915	GSM900					
	1710–1785	DCS1800					
	1850–1910	PCS1900					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	824–849	WCDMA/LTE B5					
	880–915	WCDMA/LTE B8					
	832–862	WCDMA/LTE B20					
 SKY77631		Multiband/Multimode PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824–849	GSM850					
	880–915	GSM900					
	1710–1785	DCS1800					
	1850–1910	PCS1900					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	1710–1755	WCDMA/LTE B4					
	824–849	WCDMA/LTE B5					
	699–716	WCDMA/LTE B12					
 SKY77632		Multiband PAM	TBD	TBD	TBD	TBD	42-pad MCM 5 x 7 x 0.9
	824–849	GSM850					
	880–915	GSM900					
	1710–1785	DCS1800					
	1850–1910	PCS1900					
	1920–1980	WCDMA/LTE B1					
	1850–1910	WCDMA/LTE B2					
	1710–1785	WCDMA/LTE B3					
	1710–1755	WCDMA/LTE B4					
	824–849	WCDMA/LTE B5					
	880–915	WCDMA/LTE B8					
 SKY77753		PAM for Penta-band FDD LTE/TD-SCDMA/TDD LTE	TBD	TBD	TBD	TBD	26-pad MCM 5 x 3.5 x 0.9
	2500–2570	LTE B7					
	2570–2620	LTE B38					
	1880–1920	LTE B39					
	2300–2400	LTE B40					
	2496–2690	LTE B41					
	2010–2025	TD-SCDMA B34					
	1880–1920	TD-SCDMA B39					
	2300–2400	TD-SCDMA B40					
 SKY77754-11		PAM for Penta-band TD-SCDMA / TDD LTE – Bands 34, 38, 39, 40, 41	TBD	TBD	TBD	TBD	26-pad MCM 5 x 3.5 x 0.9
	2570–2620	LTE B38					
	1880–1920	LTE B39					
	2300–2400	LTE B40					
	2496–2690	LTE B41					
	2010–2025	TD-SCDMA B34					
	1880–1920	TD-SCDMA B39					

Cellular Power Amplifiers

TD-SCDMA PAs

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
SKY77161	2010–2025	PAM for TD-SCDMA	41	27.5	3.2–4.2	10-pin MCM 4 x 4 x 1.2
 SKY77198-12	1880–1920 2010–2025	PAM for TD-SCDMA	39	27.0	3.2–4.2	10-pad MCM 3 x 3 x 0.85

WCDMA PAs

Single Band Modules—Band 1

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
SKY77174	1920–1980	PAM for WCDMA/HSDPA	38	28.5	3.1–4.6	10-pin MCM 4 x 4 x 1.1
 SKY77446	1920–1980	LIPA® Module for for WCDMA/HSDPA/HSUPA/HSPA+	31	28.0	3.0–4.6	10-pad MCM 4 x 3 x 0.9
 SKY77701	1920–1980	PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE	39	27.0	3.2–4.2	10-pad MCM 3 x 3 x 0.9

Single Band Modules—Band 2

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77447	1850–1910	LIPA® Module for WCDMA/HSDPA/HSUPA/HSPA+	34.5	29.0	3.0–3.4	10-pad MCM 4 x 3 x 0.9
 SKY77702	1850–1910	PAM for WCDMA/HSDPA/HSUPA/HSPA+/LTE	40.0	28.5	3.2–4.2	10-pad MCM 3 x 3 x 0.85

Single Band Modules—Band 4

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77460	1710–1785	LIPA® Module for WCDMA/HSPA+	28.5	29.0	3.0–3.4	10-pad MCM 4 x 3 x 0.9
 SKY77703	1710–1785	PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE	39.0	27.0	3.2–4.2	10-pad MCM 3 x 3 x 0.9

Single Band Modules—Band 5 & 6

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77448	824–849	LIPA® Module for WCDMA/HSDPA/HSUPA/HSPA+	34	28.0	3.0–3.4	10-pad MCM 4 x 3 x 0.9
 SKY77704	824–849	PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE	39	27.0	3.2–4.2	10-pad MCM 3 x 3 x 0.9
 SKY77765	815–849	SkyHi™ PAM for CDMA/WCDMA/HSDPA/HSUPA/HSPA+/LTE	50	28.0	3.2–4.2	10-pad MCM 3 x 3 x 0.9

Cellular Power Amplifiers

WCDMA PAs (Continued)

Single Band Modules—Band 8

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77461	880–915	LIPA® Module for WCDMA/HSPA+	33	28	3.0–3.4	10-pad MCM 4 x 3 x 0.9
 SKY77705	880–915	PAM for WCDMA/HSDPA/HSUPA/HSPA+/LTE	39	27	3.2–4.2	10-pad MCM 3 x 3 x 0.9

Multiband Modules—Band 1 & 8

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77195	1920–1980 880–915	PAM for WCDMA/HSDPA	40	27	3.2–4.2	10-pad MCM 5 x 4 x 0.85
SKY77741	1920–1980 880–915	PAM for CDMA2000/WCDMA/ HSDPA/HSUPA	47	27	3.2–4.2	16-pad MCM 4 x 3 x 0.9
 SKY77751-12	1920–1980 880–915	SkyHi™ PAM for CDMA2000/WCDMA/ HSDPA/HSUPA, LTE	47	27	3.2–4.2	16-pad MCM 4 x 3 x 0.9

Multiband Modules—Band 2 & 5

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77196	1850–1910 824–849	PAM for WCDMA/HSDPA	40	27	3.2–4.2	14-pin MCM 5 x 4 x 0.85
SKY77742	1850–1910 824–849	PAM for CDMA2000/WCDMA/ HSDPA/HSUPA	47	27	3.2–4.2	16-pad MCM 4 x 3 x 0.9
 SKY77752	1850–1910 824–849	SkyHi™ PAM for CDMA2000/WCDMA/ HSDPA/HSUPA, LTE	47	27	3.2–4.2	16-pad MCM 4 x 3 x 0.9

Multiband Modules—Band 1 & 5

Part Number	Frequency (MHz)	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77197	824–849 1920–1980	PAM for WCDMA/HSDPA	40	27	3.2–4.2	14-pad MCM 5 x 4 x 0.85

Multiband Modules—Band 1, 2, 5, 8

Part Number	Frequency (MHz)	Description	Package (mm)
 SKY77742-21	1920–1980 1850–1910 1710–1785 824–849 880–915	Broadband Power Amplifier Module for WCDMA/HSDPA/HSUPA/HSPA+ (Bands I, II, IV, V, VIII) CDMA (Bands I, II, V) WCDMA B1 WCDMA B2 WCDMA B4 WCDMA B5 WCDMA B8	16-pad MCM 3.0 x 4.0 x 0.9
 SKY77758	1920–1980 1850–1910 824–849 880–915	Broadband PAM for WCDMA/HSDPA/HSUPA/HSPA+ (Bands 1, 2, 5, 8) WCDMA B1 WCDMA B2 WCDMA B5 WCDMA B8	14-pad MCM 3.0 x 4.2 x 0.9

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

WiFi Connectivity

2.5 GHz Power Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	PAE (%)	V _{CC} (V)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SE2425U	2.4–2.5	2.45	28.2	–	–	–	3.3	–	–	16-pin QFN 3 x 3 x 0.5
SE2527L	2.4–2.5	2.45	33.0 34.0	–	26.5 28.5	–	3.5 5.0	–	–	16-pin QFN 4 x 4 x 0.9
SE2528L	2.4–2.5	2.45	33.0 34.0	–	26.5 28.5	–	3.3 5.0	–	–	16-pin QFN 4 x 4 x 0.9
SE2565T	2.4–2.5	2.45	31.0	–	30.0	–	3.3	–	–	16-pin QFN 3 x 3 x 0.6
SE2568L	2.4–2.5	2.45	27.0 27.0	–	25.0 25.0	–	3.3 5.0	90 100	–	8-pin QFN 2 x 2 x 0.9
SE2568U	2.4–2.5	2.45	27.0 27.0	–	25.0 25.0	–	3.3 5.0	90 100	–	8-pin QFN 2 x 2 x 0.5
SE2574BL-R	2.4–2.5	2.45	27.0	–	25.0	–	3.3	–	–	8-pin QFN 2 x 2 x 0.9
SE2574L	2.4–2.5	2.45	28.0	–	25.0	–	3.3	–	–	8-pin QFN 2 x 2 x 0.9
SE2576L	2.4–2.5	2.45	33.0	–	32.0	–	5.0	–	–	16-pin QFN 3 x 3 x 0.9
SE2597L	2.4–2.5	2.45	28.0	–	26.5	–	3.3	125	–	16-pin QFN 3 x 3 x 0.9
SE2598L	2.4–2.5	2.45	28.0	–	26.5	–	3.3	125	–	16-pin QFN 3 x 3 x 0.9
SE2604L	2.4–2.5	2.45	32.0	–	30.0	–	3.3	–	–	16-pin QFN 3 x 3 x 0.6
SE2605L	2.4–2.5	2.45	33.0	–	32.0	–	5.0	–	–	16-pin QFN 3 x 3 x 0.9
SE2609L	2.4–2.5	2.45	28.0 28.0	–	25.5 25.5	–	3.3 5.0	100	–	8-pin QFN 2 x 2 x 0.9
SE2623L	2.4–2.5	2.45	33.0	–	32.0	–	5.0	–	–	16-pin QFN 3 x 3 x 0.9
SKY65131	2.4–2.5	2.442	26.0	–	–	28	38.0	3.3	150	16-pin MCM 4 x 4 x 1.5
SKY65152-11	2.4–2.5	2.442	32.0	42	33.0	33	5.0	490	5	20-pin MCM 6 x 6 x 1.05
SKY65174-21	2.4–2.5	2.442	35.0	–	–	–	5.0	285	7	10-pin MCM 4 x 4 x 0.85

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	OP ₁ dB (dBm)	P ₁ dB (dBm)	V _{CC} (V)	V _{DD} (V)	NF (dB)	Typ. Quiescent Current (mA)	Package (mm)
SKY65162-70LF	0.4–2.7	0.915	20.0	46.5	28.0	–	–	5	–	188	4-pin SOT-89 4.5 x 2.4 x 1.5
	0.4–2.7	1.960	15.0	43.0	30.2	–	–	5	–	188	
	0.4–2.7	2.400	13.2	43.5	29.5	–	–	5	–	188	
	0.4–2.7	2.400	13.2	43.8	30.0	–	–	5	–	188	
SKY65900-11	2.4–2.5	TBD	TBD	–	34.0	–	TBD	–	TBD	275	16-pin QFN 4 x 4 x 0.9

WiFi Connectivity

5 GHz Power Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	PAE (%)	V _{CC} (V)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SE2537L	4.90–5.90	5.45	28	–	25	–	3.3	150	–	16-pin QFN 3 x 3 x 0.9
SE2567L	4.90–5.90	5.40	30	–	25	–	3.3	150	–	16-pin QFN 3 x 3 x 0.9
SE5003L	5.15–5.85	5.40	32	–	29	–	5.0	150	–	20-pin QFN 4 x 4 x 0.9
 SE5003L1-R	5.15–5.85	5.40	32	–	32	–	5.0	120	–	20-pin QFN 4 x 4 x 0.9
SE5004L	5.15–5.85	5.40	26	–	34	–	5.0	300	–	20-pin QFN 4 x 4 x 0.9
SE5005L	5.15–5.75	5.40	27	–	25	–	3.3	–	–	16-pin QFN 3 x 3 x 0.9
SE5023L	5.15–5.85	5.40	32	–	34	–	5.0	–	–	16-pin QFN 4 x 4 x 0.9
SKY85402-11	5.15–5.9	5.45	32	–	29	–	5.0	300	–	20-pin QFN 4 x 4 x 0.85

Dual-band Power Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	PAE (%)	V _{CC} (V)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SE2580L	4.9–5.875 (a)	5.15, 5.45	30.0	–	24.0	–	3.3	145	–	20-pin QFN 3 x 3 x 0.9
	2.4–2.5 (b)	2.45	30.0		27.0		3.3	TBD		
	2.4–2.5 (g)	2.45	30.0		27.0		3.3	115		

2.5 GHz Low Noise Amplifiers

Part Number	Frequency (GHz)	Typ. Gain (dB)	V _{DD} (V)	Typ. Noise Figure (dB)	Package (mm)
SE2600S	2.4–2.50	12	3.3	1.8	11-pin CSP 1.07 x 1.05 x 0.38
SE2601T	2.4–2.50	12	3.3	1.8	12-pin QFN 2 x 2 x 0.6
 SKY85202-11	2.4–2.5	14	3.6	2.0	15-bump WL CSP 1.04 x 1.04
 SKY85203-11	2.4–2.5	14	3.6	2.0	12-pin QFN 2 x 2 x 0.5

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

WiFi Connectivity

5 GHz Low Noise Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	OP ₁ dB (dBm)	V _{DD} (V)	Typ. Supply Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SE5008L	4.9–5.850	–	14	–	–	3.3	–	2.2	16-pin QFN 3 x 3 x 0.9
SKY65404-31	4.9–5.900	5.8	13	20	9	3.3	11	1.2	6-pin DFN 1.5 x 1.5 x 0.45
 SKY85606-11	4.9–5.925	–	12	–	–	3.6	–	2.5	15-bump WLCSP 1.04 x 1.04 x 0.285
 SKY85608-11	4.9–5.925	–	12	4	–	3.6	12	2.2	8-pin DFN 1.5 x 1.5 x 0.4

Wireless Infrastructure / Femtocell Power Amplifiers

High Gain Linear PA Modules

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	V _{CC} (V)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SKY65120-21	2.11–2.17	2.14	24.6	48	33.5	5.0	447	8.4	20-pin MCM 6 x 6 x 0.9
SKY65124	1.93–1.99	1.96	24.0	45	33.0	5.0	550	6.3	20-pin MCM 6 x 6 x 1.45
SKY65126-21	0.80–0.90	0.85	30.0	48	32.5	5.0	285	4.5	20-pin MCM 6 x 6 x 1.45
SKY65127	0.70–0.80	0.75	36.5	44	32.5	5.0	264	4.4	20-pin MCM 6 x 6 x 1.45
SKY65129-11	1.98–2.02	2.00	29.5	–	34.5	5.0	425	6.5	20-pin MCM 6 x 6 x 1.35
SKY65170-21	0.86–0.96	0.88	32.0	45	28.0	5.0	200	6.5	20-pin MCM 6 x 6 x 1.35
SKY65171-21	1.93–2.17	1.96	30.0	36	28.0	5.0	150	6.5	20-pin MCM 6 x 6 x 1.35
 SKY66001-11	2.10–2.20	2.14	30.0	40	–	5.0	57	–	10-pin MCM 3 x 3 x 0.9
 SKY66002-11	1.90–2.025	1.96	30.0	40	–	4.2	60	–	10-pin MCM 3 x 3 x 0.9
 SKY66005-11	0.85–0.92	0.883	30.0	–	–	4.2	46	–	10-pin MCM 3 x 3 x 0.9
 SKY66008-11	0.90–0.99	0.9425	30.0	–	–	4.2	48	–	10-pin MCM 3 x 3 x 0.9
 SKY66013-11	0.70–0.80	0.746	27.5	–	–	4.2	46	–	10-pin MCM 3 x 3 x 0.9

Smart Energy—Connected Home and Automation 802.15.4, ISM, and ZigBee®

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	PAE (%)	V _{CC} (V)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SKY65111-348LF	0.60–1.1	0.915	40.0	36	29.5	50	3.5	250	6.5	16-pin QFN 3 x 3 x 0.75
SKY65116	0.39–0.5	0.445	35.0	43	32.5	42	3.6	330	6.0	12-pin MCM 8 x 8 x 1.45
SE2425U	2.4–2.5	2.450	28.2	–	–	–	2.0–3.3	–	–	16-pin QFN 3 x 3 x 0.5
SE2433T	2.4–2.5	2.450	22.0	–	24.0	31	2.0–3.6	30	–	12-pin QFN 2 x 2.5 x 0.55

BDS / GPS / GNSS Low Noise Amplifiers

Part Number	Frequency (MHz)	Test Frequency (MHz)	Description	Gain (dB)	V _{DD} (V)	IP ₁ dB (dBm)	NF (dB)	Package (mm)
 SKY65601-477LF	1561–1606	1575	BDS/GPS/GNSS Low-Noise Amplifier	16.8	2.85	-13	0.8	6-pin DFN 2.0 x 1.3 x 0.45
 SKY65602-477LF	1561–1606	1575	BDS/GPS/GNSS Low-Noise Amplifier	16.0	2.85	-7.5	0.7	6-pin DFN 2.0 x 1.3 x 0.45

Broad Market Low Noise Amplifiers (LNAs) and Low Noise Transistors

Low Noise Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	OP ₁ dB (dBm)	V _{DD} (V)	Typ. Supply Current (mA)	Typ. Noise Figure (dB)	Package (mm)
 SKY65047-360LF	0.4–3.0	1.575	16.5	19.5	0	3.3	5	0.80	8-pin DFN 2 x 2 x 0.9
 SKY65048-360LF	0.7–1.2	0.900	16.5	35.0	18.0	5	85	0.65	8-pin QFN 2 x 2 x 0.9
 SKY65050-372LF	0.45–6.0	2.400	15.5	23.5	10.5	3	20	0.65	4-pin SC-70 2.2 x 1.35 x 1.1
SKY65404-31	4.9–5.9	5.800	13.0	20.0	9.0	3.3	11	1.20	6-pin DFN 1.5 x 1.5 x 0.45
SKY65405-21	2.4–2.5	2.450	15.0	24.0	15.0	3.3	12	1.10	6-pin DFN 1.5 x 1.5 x 0.45
SKY65971-11	2.4–2.5	2.450	14.5	–	–	3.3	13	1.30	6-pin DFN 1.5 x 1.5 x 0.45
SKY65981-11	5.15–5.85	5.800	13.0	–	–	3.3	12	1.50	6-pin DFN 1.5 x 1.5 x 0.45
 SKY67012-396LF	0.3–0.6 0.3–0.6	0.450 0.450	16.5 15.5	24.0 18.0	14.0 15.0	3.3 3.3	15 5	0.85 1.00	8-pin DFN 2 x 2 x 0.75
 SKY67013-396LF	0.6–1.5 0.6–1.5	0.900 0.900	14.0 12.5	26.0 22.2	15.5 15.5	3.3 3.3	15 5	0.85 1.10	8-pin DFN 2 x 2 x 0.75
 SKY67014-396LF	1.5–3.0	2.450	13.0 12.0	28.0 18.0	15.5 16.0	3.3 3.3	18 5	0.85 1.00	8-pin DFN 2 x 2 x 0.75
 SKY67015-396LF	0.03–0.30	0.250	15.5	16.0	12.0	3.3 3.3	18 5	0.80 1.05	8-pin DFN 2 x 2 x 0.75

Broad Market Low Noise Amplifiers (LNAs) and Low Noise Transistors

Low Noise Amplifiers (Continued)

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	OP ₁ dB (dBm)	V _{DD} (V)	Typ. Supply Current (mA)	Typ. Noise Figure (dB)	Package (mm)
 SKY67021-396LF	0.6–1.2	0.900	17.5	40.0	21.7	5	100	0.60	8-pin DFN 2 x 2 x 0.75
 SKY67022-396LF	1.6–2.2	1.850	17.5	39.5	22.0	5	95	0.65	8-pin DFN 2 x 2 x 0.75
 SKY67023-396LF	2.0–3.0	2.600	17.3	39.5	19.5	5	100	0.89	8-pin DFN 2 x 2 x 0.75
 SKY67100-396LF	1.2–3.0	1.950	17.5	34.0	18.5	4	56	0.70	8-pin DFN 2 x 2 x 0.75
 SKY67101-396LF	0.4–1.2	0.900	17.5	34.0	19.0	4	56	0.50	8-pin DFN 2 x 2 x 0.75
 SKY67102-396LF	2.0–3.0	2.600	17.2	33.8	15.0	4	50	0.80	8-pin DFN 2 x 2 x 0.9
 SKY67105-306LF	0.6–1.1	0.850	37.0	41.0	26.0	5	138	0.70	16-pin QFN 4 x 4 x 0.9
 SKY67106-306LF	1.5–3.0	1.950	35.0	37.0	24.0	5	100	0.65	16-pin QFN 4 x 4 x 0.9
 SKY67107-306LF	2.3–2.8	2.600	32.0	37.5	18.5	5	125	0.85	16-pin QFN 4 x 4 x 0.9
 SKY67110-396LF	0.3-0.70	0.500	21.0	37.0	21.0	5	76	0.65	8-pin DFN 2 x 2 x 0.75
 SKY67111-396LF	0.7–1.2	0.900	20.7	39.6	20.0	5	77	0.50	8-pin DFN 2 x 2 x 0.75
 SKY67150-396LF	0.3–2.2	0.450	23.0	36	19	5	82	0.45	8-pin DFN 2 x 2 x 0.75
		0.849	20.5	39	21	5	82	0.23	
		1.900	14.5	36.5	18	5	82	0.38	
 SKY67151-396LF	0.7–3.8	0.900	26.0	36.0	22.0	5	80	0.25	8-pin DFN 2 x 2 x 0.75
		1.900	20.5	36.0	19.0	5	70	0.35	
		2.500	19.0	37.0	19.0	5	70	0.49	
		3.600	16.5	34.0	19.0	5	70	0.70	
 SKY67153-396LF	0.7–3.8	0.849	26.0	34.5	21.5	5	80	0.25	8-pin DFN 2 x 2 x 0.75
		2.500	19.0	36.0	20.0	5	72	0.50	
		3.600	16.5	36.0	18.0	5	80	0.70	
 SKY67161-306LF	0.6–1.1	0.850	38.0	39.0	24.5	5.00	115	0.30	16-pin QFN 4 x 4 x 0.9
 SKY67175-306LF	2.32-2.34	2.34	30.5	31	19	5	80	0.55	16-pin QFN 4 x 4 x 0.9
 SKY67215-11	0.4–0.7	0.500	21.5	35.5	18.5	5.00	75	0.67	16-pin MCM 4 x 4 x 1.3
 SKY67216-11	0.5–1.2	0.850	19.0	35.5	21.0	5.00	65	0.62	16-pin MCM 4 x 4 x 1.3
 SKY67221-11	1.6–2.1	1.950	18.5	37.0	20.7	5.00	85	0.90	16-pin MCM 4 x 4 x 1.3
 SKY67226-11	2.2–3.0	2.500	16.5	37.5	22.0	5.00	89	1.00	16-pin MCM 4 x 4 x 1.3

Driver Amplifiers / Linear Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	OP ₁ dB (dBm)	V _{DD} (V)	Typ. Supply Current (mA)	V _{CC} (V)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SKY65008	0.25–2.7	1.960	20.0	33.0	21.0	–	–	3.3	76	3.0	3-pin MCM 4 x 4 x 1.5
 SKY65009-70LF	0.25–2.5	1.960	12.0	42.0	27.0	–	–	3.3 or 5	100	4.3	4-pin SOT-89 4.5 x 2.5 x 1.5
 SKY65045-70LF	0.39–1.5	0.8975	14.0	37.5	25.0	–	–	5	46	1.8	4-pin SOT-89 4.5 x 2.5 x 1.5
SKY65080-70LF	1.5–2.5	1.850	15.0	40.5	21.0	–	100	5	66	2.3	4-pin SOT-89 4.5 x 2.5 x 1.5
SKY65081-70LF	2.0–3.0	2.600	14.3	43.9	22.3	–	75	5	55	2.0	4-pin SOT-89 4.5 x 2.5 x 1.5
SKY65094-360LF	0.698–0.915	0.830	17.0	46.5	25.5	–	200	5	130	3.2	8-pin DFN 2 x 2 x 0.9
SKY65095-360LF	1.6–2.1	1.880	15.0	46.5	27.0	–	320	5	135	4.4	8-pin DFN 2 x 2 x 0.9
 SKY65099-360LF	0.7–2.7	0.78	23.0	41.5	24.0	–	150	5	88	2.8	8-pin DFN 2 x 2 x 0.9
	0.7–2.7	2.15	15.8	41.0	24.0	–	170	5	88	2.6	
	0.7–2.7	2.60	14.5	41.3	24.0	–	158	5	88	2.5	
SKY65112-84LF	0.4–2.3	0.940	18.0	39.0	27.0	–	–	5	260	–	SOIC-8 Exposed Paddle 5.99 x 4.73 x 1.55
SKY65113-84LF	0.4–2.3	0.940	20.0	40.0	30.0	–	–	5	450	–	SOIC-8 Exposed Paddle 5.99 x 4.73 x 1.55
SKY65162-70LF	0.4–2.7	0.915	20.0	46.5	28.0	5	400	–	188	–	4-pin SOT-89 4.5 x 2.5 x 1.5
		1.960	15.0	43.0	30.2	5	400	–	188	–	
		2.400	13.2	43.5	29.5	5	400	–	188	–	
		2.400	13.2	43.8	30.0	5	400	–	188	–	
SKY65173-70LF	0.869–0.960	0.920	16.5	44.0	26.5	–	235	5	156	2.6	4-pin SOT-89 2.4 x 4.5 x 1.5
 SKY67130-396LF	0.7–2.7	2.600	13.0	39.0	16.0	–	–	3.3 or 5	22	2.6	8-pin DFN 2 x 2 x 0.75

Gain Block (General Purpose) Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
 SKY65013-70LF	0.1–7	2.0	12.5	29	12.5	40	5.5	4-pin SOT-89 4.5 x 2.5 x 1.5
 SKY65013-214LF	LF–6	2.0	11.5	29	12.5	40	5.4	Plastic Micro-X
 SKY65014-70LF	0.1–6	2.0	16.0	36	18.0	70	4.8	4-pin SOT-89 2.4 x 4.5 x 1.5
 SKY65015-70LF	0.1–6	2.0	18.0	35	17.0	70	4.2	4-pin SOT-89 4.5 x 2.5 x 1.5

Gain Block (General Purpose) Amplifiers

Part Number	Frequency Range (GHz)	Test Frequency (GHz)	Typ. Gain (dB)	OIP3 (dBm)	P ₁ dB (dBm)	Typ. Quiescent Current (mA)	Typ. Noise Figure (dB)	Package (mm)
SKY65015-92LF	LF-6	2.0	18.0	35	18.0	70	4.8	6-pin SC-88 2.1 x 2.0 x 0.95
 SKY65016-70LF	0.1-3	2.0	20.0	27	14.0	40	4.8	4-pin SOT-89 4.5 x 2.5 x 1.5
 SKY65017-70LF	0.1-6	2.0	20.0	35	20.0	100	4.5	4-pin SOT-89 4.5 x 2.5 x 1.5

Variable Gain Amplifiers (VGAs)

Part Number	Operating Frequency (MHz)	Architecture	Attenuation Type	Control Range (dB)	Step Size (dB)	Gain (dB)	Min. NF	IP3 (dBm)	P ₁ dB (dBm)	Supply Voltage (V)	Package (mm)
SKY65175	1710-1950	Single Channel	Analog	18.0	N/A	26.0	2.8	OIP3 = 41.5	OP ₁ dB = 29	5	12-pin MCM 8 x 8 x 1.35
 SKY65185	1700-2700	Dual Channel	Digital	31.5	0.5	15.0	4.5	OIP3 = 41	OP ₁ dB = 26	5	32-pin MCM 7 x 7 x 1.35
SKY65186-11	330-2700	Dual Channel	Digital	31.5	0.5	13.5	5.0	OIP3 = 36	OP ₁ dB = 20	5	32-pin MCM 7 x 7 x 1.35
SKY65187-11	2000-2230	Single Channel	Analog	30.0	N/A	24.0	2.7	OIP3 = 41.5	OP ₁ dB = 28	5	12-pin MCM 8.385 x 8.385 x 1.35
 SKY65369-11	832-862	Single Channel	Analog	>35.0	Analog	42.0	0.85	IIP3 = 3.5	IP ₁ dB = -8.5	5	16-pin MCM 8 x 8 x 1.3
 SKY65370-11	814-849	Single Channel	Analog	>35.0	Analog	39.0	0.82	IIP3 = 5	IP ₁ dB = -8.5	5	16-pin MCM 8 x 8 x 1.3
 SKY65371-11	880-915	Single Channel	Analog	>35.0	Analog	39.0	0.82	IIP3 = 5	IP ₁ dB = -7.5	5	16-pin MCM 8 x 8 x 1.3
 SKY65372-11	699-748	Single Channel	Analog	>35.0	Analog	42	0.8	IIP3 = 2	IP ₁ dB = -10	5	16-pin MCM 8 x 8 x 1.3
 SKY65373-11	1710-1785	Single Channel	Analog	>35.0	Analog	42.0	0.82	IIP3 = 5	IP ₁ dB = -11	5	16-pin MCM 8 x 8 x 1.3
 SKY65374-11	1850-1915	Single Channel	Analog	>35.0	Analog	39.0	0.85	IIP3 = 5	IP ₁ dB = -7.5	5	16-pin MCM 8 x 8 x 1.3
 SKY65375-11	1920-1980	Single Channel	Analog	>35.0	Analog	43.0	0.9	IIP3 = 6	IP ₁ dB = -5.5	5	16-pin MCM 8 x 8 x 1.3
 SKY65376-11	2500-2570	Single Channel	Analog	>35.0	Analog	40.0	1.1	IIP3 = 5	IP ₁ dB = -6	5	16-pin MCM 8 x 8 x 1.3
SKY65385-11	791-821	Single Channel	Analog	33.0	N/A	34.0	4.2	46	31	5	12-pin MCM 8.385 x 8.385 x 1.35
 SKY65386-11	2620-2690	Single Channel	Analog	42.0	N/A	25.5	3.9	OIP3 = 41.5	OP ₁ dB = 28.5	5	12-pin MCM 8.385 x 8.385 x 1.35
 SKY65387-11	2000-2230	Single Channel	Analog	35.0	N/A	30.0	3.5	OIP3 = 42	OP ₁ dB = 28	5	12-pin MCM 8.385 x 8.385 x 1.35
SKY65388-11	695-866	Single Channel	Analog	34.0	N/A	29.0	4.5	43	26	5	12-pin MCM 8.385 x 8.385 x 1.35

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

ATTENUATORS

Skyworks Solutions is pleased to offer a broad selection of GaAs digital attenuators, PIN diode voltage variable attenuators, and silicon fixed attenuator pads for infrastructure, test & measurement, and other high performance microwave applications up to 40 GHz. These product solutions leverage the extensive design knowledge, technical leadership, manufacturing expertise, and superior quality of Skyworks.

Our broad product portfolio also includes plastic packaged PIN diodes for attenuator applications, covering the low frequency to 6 GHz range. Please refer to the PIN Diode section of this guide for more information.

Select Digital Attenuators

Select Digital Attenuators Available from Stock for Prototype or High Volume Production

Skyworks' extensive portfolio of RF microwave products include solutions for wireless communications infrastructure systems, such as cellular telephone base stations (4G and LTE), WiFi connectivity access points, land-mobile radio systems, point-to-point radio links, and more. Skyworks' digital attenuators attenuate signals in receive and transmit signal paths, and are controlled by serial or parallel interfaces and offer attenuation bit accuracy as great as 0.25 dB.

Digital Attenuators for IF / UHF / VHF and Broadband RF Applications

Part Number	Frequency Range (GHz)	Number of Bits	Least Significant Bit (dB)	Control Interface	Maximum Attenuation (dB)	Typical Insertion Loss (dB)	Typical IIP3 (dBm)	Package (mm)
AA103-72LF	LF–2.5	1	10	Parallel	10	0.3–0.4	41	SOT-23 5L 2.8 x 2.9 x 1.18
 SKY12406-360LF	0.05–0.6	1	12	Parallel	12	0.3	46	QFN 8L 2 x 2 x 0.9
AA116-72LF	0.004–2.0	1	15	Parallel	15	0.35–0.4	41	SOT-23 5L 2.8 x 2.9 x 1.18
AA104-73LF	LF–2.5	1	32	Parallel	32	0.8–1.0	41	SOT-23 6L 2.8 x 2.9 x 1.18
 SKY12407-321LF	0.05–0.6	2	12	Parallel	12 (100 Ω Differential I/O)	0.3	48	QFN 12L 3 x 3 x 0.75
SKY12324-73LF	0.3–3.0	2	4	Parallel	12	0.9–1.3	43	SOT-23 6L 2.8 x 2.9 x 1.18
 SKY12338-337LF	0.35–4.0	2	6	Parallel	18	0.55–1.3	45	QFN 12L 3 x 3 x 0.75
SKY12325-350LF	0.5–6.0	3	1	Parallel	7	0.7–1.3	47	QFN 16L 3 x 3 x 0.75
 SKY12348-350LF	0.1–3.0	4	1	Parallel	15	0.8–1.2	45	QFN 16L 3 x 3 x 0.75
 SKY12340-364LF	0.3–2.0	5	0.5	SPI	15.5	1.4–1.8	45	QFN 32L 5 x 5 x 0.9
SKY12322-86LF	0.5–4.0	5	0.5	Parallel	15.5	1.4–3.0	45	MSOP 10L 4.9 x 3 x 0.96
SKY12323-303LF	0.5–3.0	5	1	Parallel	31	1.4–2.3	48	MSOP 10L 4.9 x 3 x 0.96
SKY12328-350LF	0.5–4.0	5	0.5	Parallel	15.5	1.1–2.3	42	QFN 16L 3 x 3 x 0.75
 SKY12339-350LF	0.4–3.0	5	1	Parallel	31	1.2–2.0	39	QFN 12L 3 x 3 x 0.75
 SKY12345-362LF	0.7–4.0	5	0.5	SPI	15.5	1.2–2.0	42	QFN 24L 4 x 4 x 0.9
 SKY12347-362LF	LF–3.0	6	0.5	SPI or Parallel	31.5	1.2–2.0	50	QFN 24L 4 x 4 x 0.9
 SKY12343-364LF	0.01–4.0	7	0.25	SPI or Parallel	31.75	1.8–1.9	50	QFN 32L 5 x 5 x 0.9

Digital Attenuators

Part Number	Frequency (GHz)	Control Bits/ Interface Parallel/Serial	Attenuation Range (dB)	LSB Attenuation (dB)	Typ. IL (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
AA103-72LF	LF-2.5	1/P	10.0	10.0	0.3-0.4	41	20	SOT-23 5L 2.8 x 2.9 x 1.18
AA104-73LF	LF-2.5	1/P	32.0	32.0	0.8-1.0	41	21	SOT-23 6L 2.8 x 2.9 x 1.18
AA116-72LF	LF-2.0	1/P	15.0	15.0	0.35-0.4	41	20	SOT 23 5L 2.8 x 2.9 x 1.18
 SKY12406-360LF	0.05-0.60	1/P	12.0	12.0	0.3	46	22	QFN 8L 2 x 2 x 0.9
 SKY12407-321LF	0.05-0.60	2/P	12.0	12.0	0.3	48	31	QFN 12L 3 x 3 x 0.75
 SKY12408-321LF	0.05-0.6	2/P	6.0	6.0	0.3	49	34	QFN 12L 3 x 3 x 0.75
 SKY12355-337LF	0.35-4.0	2/P	18.0	6.0	0.45-0.75	47	28	QFN 12L 3 x 3 x 0.75
SKY12324-73LF	0.5-3.0	2/P	12.0	4.0	0.9-1.3	43	30	SOT-23 6L 2.8 x 2.9 x 1.18
 SKY12338-337LF	0.35-4.0	2/P	18.0	6.0	0.55-1.3	45	30	QFN 12L 3 x 3 x 0.75
SKY12325-350LF	0.5-6.0	3/P	7.0	1.0	0.7-1.3	47	27	QFN 16L 3 x 3 x 0.75
 SKY12348-350LF	0.1-3.0	4/P	15.0	1.0	0.8-1.2	45	30	QFN 16L 3 x 3 x 0.75
SKY12322-86LF	0.5-4.0	5/P	15.5	0.5	1.4-3.0	45	27	MSOP 10L 4.9 x 3 x 0.96
SKY12323-303LF	0.5-3.0	5/P	31.0	1.0	1.4-2.3	48	30	MSOP 10L 4.9 x 3 x 0.96
AA106-86LF	0.5-2.0	5/P	15.5	0.5	2.0-3.0	41	21	MSOP 10L 4.9 x 3 x 0.96
SKY12328-350LF	0.5-4.0	5/P	15.5	0.5	1.1-2.3	42	30	QFN 16L 3 x 3 x 0.75
SKY12329-350LF	0.4-4.0	5/P	31.0	1.0	1.2-2.7	39	29	QFN 16L 3 x 3 x 0.75
 SKY12339-350LF	0.4-3.0	5/P	31.0	1.0	1.2-2.0	39	–	QFN 12L 3 x 3 x 0.75
 SKY12340-364LF	0.3-2.0	5/S	15.5	0.5	1.4-1.8	45	30	QFN 32L 5 x 5 x 0.9
 SKY12349-362LF	0.7-4.0	5/S	15.5	0.5	1.2-2.0	42	32	QFN 24L 4 x 4 x 0.9
 SKY12345-362LF	0.7-4.0	5/S	15.5	0.5	1.2-2.0	42	32	QFN 24L 4 x 4 x 0.9
 SKY12347-362LF	DC-3.0	6/P	31.5	0.5	1.2-2.0	50	–	QFN 24L 4 x 4 x 0.9
SKY12353-470LF	0.01-1.0	6/P	31.5	0.5	1.2-1.8	48	29	QFN 32L 5 x 5 x 0.9
 SKY12343-364LF	0.01-4.0	7/P	31.75	0.25	1.8-1.9	50	35	QFN 32L 5 x 5 x 0.9

Fixed Attenuator Pads

Skyworks Solutions is pleased to now offer two fixed attenuator pad options for radar, test & measurement, high frequency transceivers, and other high performance microwave applications up to 40 GHz. The next generation ATN3590 series offers enhanced RF power handling and attenuation flexibility. The unique ATN3590 die design eliminates the need for RF ground bonds enabling greatly improved return loss and attenuation flatness across multi-octave bandwidths.

These two product solutions, available in die form, leverage Skyworks extensive design knowledge, technical leadership, manufacturing expertise and superior quality.

The ATN3590 and ATN3580 attenuator families are optimized for surface mounting on co-planar waveguide or microstrip printed circuit boards. Bond wires or ribbons are used to connect the input and output ports of the attenuators to the external circuit transmission lines. Connection to ground is accomplished by through-die vias to the die backside metallization on the ATN3590 family and bond wires or ribbons on the ATN3580 family.

The dice are attached using eutectic solder or conductive epoxy and can operate over a temperature range of -65 °C to 150 °C.

ATN3580 Fixed Attenuator Pads

Part Number	Nominal Attenuation (dB)	Attenuation Tolerance @ DC (dB)	Attenuation Flatness			Return Loss		
			0.1–12 GHz (dB)	0.1–26.5 GHz (dB)	0.1–40 GHz (dB)	0.1–12 GHz (dB)	0.1–26.5 GHz (dB)	0.1–40 GHz (dB)
 ATN3580-01	1	±0.15	0.2	0.4	0.6	23	18	15
 ATN3580-02	2	±0.15	0.2	0.4	0.6	23	18	15
 ATN3580-03	3	±0.25	0.2	0.4	0.6	23	18	15
 ATN3580-04	4	±0.25	0.2	0.4	0.6	23	18	15
 ATN3580-05	5	±0.25	0.3	0.5	0.8	23	18	15
 ATN3580-06	6	±0.25	0.3	0.5	0.8	23	18	15
 ATN3580-07	7	±0.25	0.3	0.5	0.8	23	18	15
 ATN3580-08	8	±0.35	0.3	0.5	0.8	23	18	15
 ATN3580-09	9	±0.35	0.3	0.5	0.8	23	18	15
 ATN3580-10	10	±0.35	0.4	0.6	1.0	23	18	15
 ATN3580-12	12	±0.50	0.4	0.6	1.0	23	18	15
 ATN3580-15	15	±0.50	0.4	0.6	1.0	23	18	15
 ATN3580-20	20	±1.10	0.4	0.6	1.0	23	18	15
 ATN3580-30	30	±1.60	0.6	1.0	2.0	23	18	15
 ATN3580-40	40	±1.60	1.0	2.0	4.0	23	18	15

Fixed Attenuator Pads

The ATN3590 family of fixed resistive attenuators are integrated circuits comprising thin film resistors and through-die vias that provide excellent attenuation flatness from low frequency to 40 GHz or higher. These attenuators are available from 0 to 30 dB.

The ATN3590 attenuator family is optimized for surface mounting on co-planar waveguide or microstrip printed circuit boards. Bond wires or ribbons are used to connect the input and output ports of the attenuators to the external circuit transmission lines. Connection to ground is accomplished by through-die vias to the die backside metallization.

The dice are attached using eutectic solder or conductive epoxy and can operate over a temperature range of -65 °C to 150 °C.

ATN3590 Fixed Attenuator Pads

Part Number	Nominal Attenuation (dB)	Attenuation Tolerance @ DC (dB)	Attenuation Flatness				Return Loss			
			DC–12 GHz (dB)	12–26 GHz (dB)	26–33 GHz (dB)	33–40 GHz (dB)	DC–12 GHz (dB)	12–26 GHz (dB)	26–33 GHz (dB)	33–40 GHz (dB)
 ATN3590-00	0	0.25	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-01	1	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-02	2	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-03	3	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-04	4	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-05	5	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-06	6	±0.40	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-07	7	±0.40	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-08	8	±0.40	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-09	9	±0.40	±0.20	±0.20	±0.25	±0.30	28	24	20	16
 ATN3590-10	10	±0.40	±0.20	±0.20	±0.25	±0.50	28	24	20	16
 ATN3590-12	12	±0.40	±0.20	±0.20	±0.30	±0.50	28	24	20	16
 ATN3590-15	15	±0.40	±0.20	±0.20	±0.50	±0.75	28	24	20	16
 ATN3590-20	20	±1.0	±0.20	±0.20	±0.75	±1.0	28	24	20	16
 ATN3590-30	30	±1.0	±0.20	±0.25	±0.75	±2.5	28	24	20	16

Voltage Variable Attenuators

0.7–5 GHz Plastic Packaged Voltage Variable Attenuators—PIN Diode-based

Part Number	Frequency (GHz)	Description	Max. Insertion Loss at Min. Control (dB)	Typ. Attenuation Range at Max. Control (dB)	Min. Input IP3 (dBm)	Control Input Range (mA)	Package (mm)
AV101-12LF	0.7–1.0	HIP3™ Variable Attenuator	1.5	20	47	0–3.0	SOIC 8L 6 x 4.9 x 1.6
AV102-12LF	1.7–2.0	HIP3™ Variable Attenuator	1.5	20	47	0–3.0	SOIC 8L 6 x 4.9 x 1.6
AV111-12LF	0.8–1.0	HIP3™ Variable Attenuator	1.5	25	37	0–1.4	SOIC 8L 6 x 4.9 x 1.6
AV113-12LF	2.1–2.3	HIP3™ Variable Attenuator	1.6	22	37	0–1.5	SOIC 8L 6 x 4.9 x 1.6
SKY12228-12LF	0.7–1.0	HIP3™ Variable Attenuator	1.5	30	60	0–1.5	SOIC 8L 6 x 4.9 x 1.6
SKY12230-12LF	1.7–2.3	HIP3™ Variable Attenuator	1.5	30	53	0–1.5	SOIC 8L 6 x 4.9 x 1.6
 SKY12232-21	2.65–3.65	HIP3™ Variable Attenuator	1.3	27	40	0–5 V	MCM 8L 4.9 x 3.2 x 1.0
 SKY12233-11	2.1–3.1	HIP3™ Variable Attenuator	1.5	34	61	0–5 V	MCM 8L 4.9 x 3.2 x 1.0
 SKY12235-11	1.4–2.4	HIP3™ Variable Attenuator	2.5	36	61	0–5 V	MCM 8L 4.9 x 3.2 x 1.0
 SKY12236-11	2.6–5.0	HIP3™ Variable Attenuator	2.1	25	43 (Typ.)	0–5 V	MCM 8L 4.9 x 3.2 x 1.0

3.0–3.8 GHz Plastic Packaged Voltage Variable Attenuators—FET-based

Part Number	Frequency (GHz)	Description	Typ. Insertion Loss Range (dB)	Attenuation Range (dB)	Typ. IP3 > 0.5 GHz (dBm)	Package (mm)
 SKY12146-321LF	3.0–3.8	20 dB Single CTL	1.5–1.6	32–20	20	QFN 12L 3 x 3 x 0.75

CIRCULATORS AND ISOLATORS

Skyworks is pleased to offer our customers innovative and cost-competitive ferrite circulators and isolators for both military and commercial markets. Our circulators deliver industry-leading insertion loss performance, a critical parameter in radar design, of less than 0.25 dB. Skyworks' MAFR-000493-000001, for example, is designed to operate in the L band. It has a typical insertion loss of just 0.16 dB at 1030 MHz. Our MAFR-000403 S band circulator, optimized from 2.7 GHz to 3.1 GHz, has a typical insertion loss of only 0.25 dB. And these are just a few examples of our product offerings. Skyworks achieves best-in-class performance through a systematic approach including Six Sigma tools and methodologies, which help ensure quality and reliability from product development through volume production. All production facilities are certified to ISO9001 and ISO14001 standards and our products are compliant to the European Union's RoHS directive 2002/95/EC.

Radar

Circulators

Part Number	Frequency (MHz)	Insertion Loss (dB)	Isolation (dB)	Return Loss (dB)	Rotation	Max. Power (W) F/R	Case Size (Inch/mm)	Package
 MAFR-000399-000001	1450–1500	0.30	20	20	CW	1000	1.0/25.4	Drop-in
 MAFR-000409-000001	960–1200	0.50	18	18	CCW	1000	1.0/25.4	Drop-in
 MAFR-000428-000001	960–1200	0.50	18	18	CCW	1200	1.0/25.4	Drop-in
 MAFR-000493-000001	1030–1090	0.30	18	18	CW	1200	1.0/25.4	Drop-in
 MAFR-000514-000001	3100–3500	0.30	23	21	CW	1500/1500	0.75 ² /19 ²	Drop-in
 MAFR-000578-000001	1200–1400	0.30	20	20	CW	1500	1.0/25.4	Drop-in
 MAFR-000608-000001	1200–1400	0.30	20	20	CCW	1500	1.0/25.4	Drop-in
 MAFR-000613-000001	1030–1090	0.30	18	18	CW	1200/1200	1.0 ² /25.4 ²	Drop-in
 MAFR-000627-000001	1350–1850	0.50	18	18	CW	1500	1.0/25.4	Drop-in
 MAFR-000645-000001	960–1215	0.50	16	16	CCW	1000/1000	1.0 ² /25.4 ²	Drop-in
 MAFR-000668-000001	1350–1850	0.50	18	18	CCW	1500/1500	1.0 ² /25.4 ²	Drop-in
 MAFR-000677-000001	2700–3100	0.35	20	20	CW	1300/1300	0.75 ² /19 ²	Drop-in

Isolators

Part Number	Frequency (MHz)	Insertion Loss (dB)	Isolation (dB)	Return Loss (dB)	Rotation	Max. Power (W) F/R	Case Size (Inch/mm)	Package
 MAFR-000430-000001	2700–3100	0.30	20	20	CW	1300/75	0.75 x 1.0/19 x 25.4	Drop-in
 MAFR-000628-000001	1200–1400	0.30	20	20	CCW	1500/2	1.0/25.4	Drop-in
 MAFR-000629-000001	1200–1400	0.30	20	20	CW	1500/25	1.0 x 1.25/25.4 x 31.7	Drop-in
 MAFR-000667-000001	1200–1400	0.30	20	20	CCW	1500/25	1.0 x 1.25/25.4 x 31.7	Drop-in

Wireless

Skyworks circulators and isolators are used in a variety of wireless communications, as well as aerospace and defense applications. Our circulators and isolators assure clean transmit signals by offering low insertion loss and superior inter-modulation distortion (IMD) performance. We can meet high performance, high power device requirements.

- Broad frequency spectrum: 700 MHz to 3.6 GHz
- High isolation capability: 32 dB single junction and >60 dB in dual junction devices
- Low insertion loss capability: 0.15 dB single junction and <0.30 dB in dual junction devices
- IMD capability: up to -85 dBc
- Surface mount and drop-in packaging available for standard and custom components

Circulators

Part Number	Frequency (MHz)	Insertion Loss (dB)	Isolation/Return Loss (dB)	IMD (dBc)	IMD Conditions	Rotation	Case Size (Inch/mm)	Package
 MAFR-000565-000001	791–821	0.30	23	75	2 x 5 W CW Tones, 5 MHz Spacing	CW	1.04/26.6	SMT – Robust Lead
 MAFR-000631-000001	791–821	0.25	20	80	2 x 65 W CW Tones, 1 MHz Spacing	CCW	1.00/25.4	Drop-in
 SKYFR-000736	791–821	0.30	22/22	-65	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.98/25	SMT – Robust Lead
 MAFR-000649-000001	860–894	0.30	20	80	2 x 65 W CW Tones, 1 MHz Spacing	CCW	1.00/25.4	Drop-in
 MAFR-000688-000001	860–960	0.35	20	65	2 x 15 W CW Tones, 5 MHz Spacing	CW	0.80/20.4	SMT – Robust Lead
 MAFR-000601-000001	869–928	0.30	22	55	2 x 37.5 W CW Tones, 5 MHz Spacing	CW	1.04/26.6	SMT – Robust Lead
 MAFR-000630-000001	925–960	0.25	20	80	2 x 65 W CW Tones, 1 MHz Spacing	CCW	1.00/25.4	Drop-in
 MAFR-000562-000001	925–960	0.25	20	74	2 x 25 W CW Tones, 5 MHz Spacing	CW	1.04/26.6	SMT – Robust Lead
 MAFR-000569-000001	925–960	0.25	20	74	2 x 25 W CW Tones, 5 MHz Spacing	CCW	1.04/26.6	SMT – Robust Lead
 SKYFR-000700	925–960	0.25	20	90	2 x 50 W CW Tones, 5 MHz Spacing	CW	1.00/25.4	Drop-in
 SKYFR-000738	925–960	0.30	22/22	-65	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.98/25	SMT – Robust Lead
 MAFR-000632-000001	1805–1880	0.25	20	80	2 x 65 W CW Tones, 1 MHz Spacing	CCW	1.00/25.4	Drop-in
 MAFR-000644-000001	1805–1880	0.25	20	65	2 x 15 W CW Tones, 1 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000533-000001	1840–2055	0.35	20	70	2 x 15 W CW Tones, 5 MHz Spacing	CW	0.80/20.4	SMT – Robust Lead
 MAFR-000566-000001	1840–2055	0.25	20	70	2 x 15 W CW Tones, 5 MHz Spacing	CCW	0.75/18.3	SMT – Robust Lead
 MAFR-000553-000001	1880–1920	0.30	21	65	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000618-000001	1880–2025	0.25	23	65	2 x 25 W CW Tones, 5 MHz Spacing	CCW	0.80/20.4	SMT – Robust Lead
 MAFR-000650-000001	1930–1995	0.30	20	80	2 x 65 W CW Tones, 1 MHz Spacing	CCW	1.00/25.4	Drop-in
 MAFR-000663-000001	1930–1995	0.29	20	65	2 x 15 W CW Tones, 1 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000554-000001	2010–2025	0.30	20	63	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000592-000001	2010–2025	0.30	21	60	2 x 25 W CW Tones, 5 MHz Spacing	CCW	0.61/15.5	SMT – Robust Lead
 MAFR-000653-000001	2110–2170	0.25	20	74	2 x 5 W CW Tones, 5 MHz Spacing	CW	0.80/20.4	SMT – Robust Lead
 MAFR-000654-000001	2110–2170	0.25	20	74	2 x 5 W CW Tones, 5 MHz Spacing	CCW	0.80/20.4	SMT – Robust Lead

Wireless

Circulators (Continued)

Part Number	Frequency (MHz)	Insertion Loss (dB)	Isolation/Return Loss (dB)	IMD (dBc)	IMD Conditions	Rotation	Case Size (Inch/mm)	Package
 SKYFR-000709	2110–2170	0.32	20/20	-58	2 x 40 W CW Tones, 5 MHz Spacing	CW	0.59/15	SMT – Robust Lead
 SKYFR-000782	2110–2170	0.12	23	70	2 x 4 W CW Tones, 5 MHz Spacing	CW	0.75/19.0	Drop-in
 MAFR-000575-000001	2300–2400	0.30	21	65	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000662-000001	2300–2400	0.30	20	60	2 x 25 W CW Tones, 5 MHz Spacing	CCW	0.61/15.5	SMT – Robust Lead
 SKYFR-000742	2300–2400	0.30	20/20	-60	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.59/15	SMT – Robust Lead
 SKYFR-000827	2300–2400	0.15	20	60	2 x 40 W CW Tones, 5 MHz Spacing	CW	1.04/26.6	SMT – Robust Lead
 SKYFR-000848	2300–2400	0.25	23/23	-65	2 x 60 W CW Tones, 5 MHz Spacing	CCW	0.75/20.0	SMT – Robust Lead
 SKYFR-000788	2490–2710	0.30	23/21	-66	2 x 44.8 W CW Tones, 5 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000583-000001	2500–2630	0.30	21	60	2 x 25 W CW Tones, 5 MHz Spacing	CCW	0.61/15.5	SMT – Robust Lead
 MAFR-000633-000001	2500–2630	0.30	21	60	2 x 25 W CW Tones, 5 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000589-000001	2620–2690	0.28	20	65	2 x 15 W CW Tones, 1 MHz Spacing	CW	0.61/15.5	SMT – Robust Lead
 MAFR-000657-000001	2620–2690	0.30	20	65	2 x 15 W CW Tones, 1 MHz Spacing	CCW	0.61/15.5	SMT – Robust Lead

Isolators

Part Number	Frequency (MHz)	Insertion Loss (dB)	Isolation/Return Loss (dB)	IMD (dBc)	IMD Conditions	Rotation	Case Size (Inch/mm)	Package
 SKYFR-000855	1930–1995	0.30	20/20	-60	2 x 15 W CW Tones, 1 MHz Spacing	CW	0.43/11	SMT – Robust Lead
 SKYFR-000748	2070–2210	0.50	18/20	-76	2 x 4 W CW Tones, 5 MHz Spacing	CW	0.72/18.4	SMT – Robust Lead
 SKYFR-000812	2095–2185	0.35	17/16.8	-60	2 x 2 W CW Tones, 5 MHz Spacing	CW	0.43/11	SMT – Robust Lead
 SKYFR-000733	2095–2185	0.25	23/23	-74	2 x 55 W CW Tones, 5 MHz Spacing	CW	1.04/25.4	SMT – Robust Lead
 SKYFR-000727	2110–2170	0.30	23/21	60	2 x 15 W CW Tones, 1 MHz Spacing	CW	0.43/11	SMT – Robust Lead
 SKYFR-000779	2110–2170	0.25	25/21	-70	2 x 25 W CW Tones, 1 MHz Spacing	CCW	0.73/18.6	SMT – Robust Lead
 SKYFR-000781	2620–2690	0.25	25/21	-70	2 x 25 W CW Tones, 1 MHz Spacing	CCW	0.73/18.6	SMT – Robust Lead

DIODES

Building on a proven legacy (including products developed at Alpha Industries prior to its merger with Conexant), our diode product offering includes PIN, limiter, Schottky, and varactor diodes for a wide variety of microwave applications including WLAN, infrastructure, handset, Satcom (LNB/DBS-CATV), automotive, military, test & measurement, metering, medical, and RFID. Our discrete silicon and GaAs semiconductors are available as die, plastic packaged, surface mount (SMT), and ceramic hermetic packaged devices. Frequency ranges include low frequency, HF, VHF, UHF, L band, S band, C band, X band, KU band, K band, and Ka band. Skyworks' diode products are manufactured using the most advanced processes and leadership technology.

Select PIN, Limiter, Schottky, Varactor Diodes

Select Diodes Available from Stock for Prototype or High Volume Production

Skyworks Solutions offers a select group diodes from our diverse RF diode offering in stock and ready for immediate design into your demanding applications.

Select diodes include the most popular PIN, limiter, Schottky and tuning varactor diodes, readily available to ship in 3k reels from stock. These devices provide excellent performance and even better value for applications including low noise block converters (LNB), multiswitches, wireless local area networks (WLAN), cellular telephone networks, cable television (CATV), automotive, test and measurement equipment, land mobile radio, and more.

PIN Diodes for Switch and Attenuator Applications

Part Number	Description	Markets
Switching PIN Diodes		
SMP1345-040LF	High isolation, fast switching, CT 0.12 pF	WLAN, infrastructure, general
SMP1320-040LF	Fast switching, high isolation, low insertion loss	WLAN, infrastructure, general
SMP1352-079LF	Large signal	Infrastructure, general
SMP1302-085LF	High power (50 W) handling, shunt	Land mobile radio, LTE base station, and more
SMP1325-087LF	High Power (35 W) handling, series	Land mobile radio, LTE base station, and more
Attenuator PIN Diodes		
SMP1307-004LF	Low distortion / high IP3, dual	CATV, PON, base station, and more
SMP1307-027LF	Low distortion / high IP3, quad PI	CATV, PON, base station, and more

Select PIN, Limiter, Schottky, Varactor Diodes

Limiter Diodes for Receiver Protection Applications

Part Number	Description	Markets
Limiter Diodes		
SMP1330-005LF	Clean-up limiter, +30 dBm input power, +13 dBm flat leakage power, up to 2.5 GHz	Land mobile radio, military, infrastructure, and more
SMP1330-085LF	Low loss, high power, +30 dBm input power, +13 dBm flat leakage power, up to 4 GHz	Land mobile radio, military, infrastructure, and more
CLA4603-085LF	Medium power, low loss, +33 dBm input power, +13 dBm flat leakage power, up to 10 GHz	Land mobile radio, military, infrastructure, and more
CLA4606-085LF	Medium power, low loss, +35 dBm input power, +18 dBm flat leakage power, up to 10 GHz	Land mobile radio, military, infrastructure, and more
CLA4609-086LF	Course limiter, high power handling, +43 dBm input power, +41 dBm flat leakage power, up to 6 GHz	Land mobile radio, military, infrastructure, and more

Schottky Diodes for Detector and Mixer Applications

Detector Diodes		
SMS7621-060	Excellent sensitivity, low capacitance, 0201	WLAN, military, infrastructure, and more
SMS7621-040LF	Excellent sensitivity, low capacitance, 0402	WLAN, military, infrastructure, and more
SMS7621-005LF	Excellent sensitivity, low capacitance, series pair	Infrastructure, smart energy, infrastructure, and more
SMS7630-061	Best sensitivity, zero bias, 0201	WLAN, military, infrastructure, and more
SMS7630-040LF	Best sensitivity, zero bias, 0402	WLAN, military, infrastructure, and more
SMS3922-079LF	Medium barrier, high breakdown voltage	Infrastructure and more

Tuning Varactor Diodes for VCO, Voltage Tuned Filters, and Phase Shifter Applications

Hyperabrupt Diodes		
SMV1234-040LF	Low capacitance (6.5 pF @ 1 V, 2 pF @ 6 V), low resistance (0.8 Ω)	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more
SMV1232-040LF	High capacitance ratio at low reverse voltage: $C_{T1}/C_{T3} = 1.7$ typical	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more
SMV1247-040LF	Low capacitance (7 pF @ 0.3 V, 0.7 pF @ 4.7 V), high Q (1500)	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more
SMV1249-079LF	Medium capacitance (31 pF @ 0.3 V, 2.6 pF @ 4.7 V)	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more
SMV1255-079LF	High capacitance (64 pF @ 0.3 V, 5.2 pF @ 4.7 V)	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more
Abrupt Diodes		
SMV1405-040LF	Ultra high Q (3200)	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more
SMV1413-079LF	Low resistance, high Q	Automotive, smart energy, WLAN, test and measurement, infrastructure, and more

LIMITER DIODES

Core Components for Receiver Protection Applications

Plastic Surface Mount (SMT) Limiter Diodes—Low Frequency to 6 GHz

Part Number	V_B $I_R = 10 \mu A$ (V)	Nominal I-Region Thickness (μm)	C_T 0 V, F = 1 MHz (pF)	C_T 0 V F = 1 GHz (pF)	R_S $I_F = 10$ mA F = 100 MHz (Ω)	Carrier Lifetime T_L $I_F = 10$ mA (ns)	Package
SMP1330 Series	20–50	3	0.7 Typ., 1.0 Max.	0.7 Typ.	1.25 Typ., 1.5 Max.	4 Typ.	SOT-23, 0402, QFN

			
Series Pair SOT-23	Low Inductance SOT-23	Single 0402 Green™	Single QFN 2 x 2 Green™
SMP1330-005LF Marking: RQ2	SMP1330-007LF Marking: RQB	SMP1330-040LF Marking: F	SMP1330-085LF Marking: RQ

High Power Limiter Diodes

Part Number	Min. V_B @ 10 μA (V)	Nominal I-Region Thickness (μm)	Max. C_T @ 6 V (pF)	Max. C_T @ 30 V (pF)	Max. R_S @ 10 mA (Ω)	Typ. T_L @ 10 mA (μs)
CLA4603-085LF	20–45	1.5	0.40	—	2.0	10
CLA4605-085LF	30–60	2.0	0.45	—	2.0	7
CLA4606-085LF	45–75	2.5	0.38	—	2.0	10
CLA4607-085LF	120	7.0	0.35	—	2.0	50
CLA4608-085LF	120	7.0	—	0.65	1.2	100
CLA4609-086LF	250	28.0	—	0.26	1.2	1.1
CLA4610-085LF	80–120	4.5	—	0.60	1.5	20


Single QFN 2 x 2 Green™
CLA4603-085LF Marking: EQ
CLA4605-085LF Marking: CQ
CLA4606-085LF Marking: FQ
CLA4607-085LF Marking: DQ


Single QFN 2 x 2 Green™
CLA4608-085LF Marking: GQ
CLA4609-086LF Marking: BQ
CLA4610-085LF Marking: JQ

Silicon Limiter Diode Chips—Low Frequency to 20 GHz

Part Number	V_B @ 10 μ A (V)	Nominal I-Region Thickness (μ m)	Typ. C_J @ 0 V (pF)	Max. C_J @ 6 V (pF)	Max. R_S @ 10 mA (Ω)	Typ. T_L @ 10 mA (ns)	Thermal Impedance	
							Max. Average (C/W)	Typ. 1 μ s Pulse (C/W)
 CLA4601-000	15–30	1.0	0.12	0.10	2.5	5	120	15
 CLA4602-000	15–30	1.0	0.20	0.15	2.0	5	80	10
 CLA4603-000	20–45	1.5	0.20	0.15	2.0	5	100	10
 CLA4604-000	30–60	2.0	0.12	0.10	2.5	7	100	10
 CLA4605-000	30–60	2.0	0.20	0.15	2.0	7	70	7.0
 CLA4606-000	45–75	2.5	0.20	0.15	2.0	10	80	7.0
 CLA4607-000	120–180	7.0	0.20	0.15 @ 50 V	2.0	50	40	1.2
 CLA4608-000	120–180	7.0	0.80	0.5 @ 50 V	1.2	100	15	0.3
 CLA4609-000	250 (Min.)	28.0	0.26	0.14	1.5	1175	15	0.3
 CLA4610-000	80–120	4.5	0.13	0.12	2.2	20	72	72

Hermetic Packaged Silicon Limiter Diodes

Hermetic Stripline 240	Hermetic Pill 203	Hermetic Pill 219	Hermetic Pill 210
 CLA4601-240	 CLA4601-203	 CLA4601-219	 CLA4601-210
 CLA4602-240	 CLA4602-203	 CLA4602-219	 CLA4602-210
 CLA4603-240	 CLA4603-203	 CLA4603-219	 CLA4603-210
 CLA4604-240	 CLA4604-203	 CLA4604-219	 CLA4604-210
 CLA4605-240	 CLA4605-203	 CLA4605-219	 CLA4605-210
 CLA4606-240	 CLA4606-203	 CLA4606-219	 CLA4606-210
 CLA4607-240	 CLA4607-203	 CLA4607-219	 CLA4607-210
 CLA4608-240	 CLA4608-203	 CLA4608-219	 CLA4608-210
 CLA4609-240	 CLA4609-203	 CLA4609-219	 CLA4609-210
 CLA4610-240	 CLA4610-203	 CLA4610-219	 CLA4610-210

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Limiter Modules

Integrated Single-Stage PIN Diode Limiter Module 0.5 to 6 GHz

Part Number	Typical Insertion Loss (dB) $P_{IN} = 0$ dBm	Typical Threshold Level (dBm)	Max. Saturated Power (W)	Typical Flat Leakage Power (dBm) $(P_{IN} = 20 \text{ dBm})$	Min. V_B $I_R = 10 \mu$ A (V)	I Region Thickness (μ m) Nominal	Typ. C_T (pF) 0 V, $F = 1$ MHz	Typ. Carrier Lifetime T_L (ns) $I_F = 10$ mA	Package
 SKY16601-555LF	0.1	11	29	13 $(P_{IN} = 20 \text{ dBm})$	20–45	1.5	0.36 @ 2.5 GHz	10 @ 2.5 GHz	2-pin MLP 2.5 x 2.5 x 0.75
 SKY16602-632LF	0.3 0.5	6 5	30 23	6 (Pin = 10 dBm) 4 (Pin = 10 dBm)	—	—	—	—	2.3 x 2.3 MLP 2.3 x 2.3 MLP

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

PIN DIODES

Superior Building Blocks for Switch and Attenuator Applications

Switching Silicon PIN Diodes

PIN Diodes—High Power (>20 W) for Large Signal Switch and Attenuator Applications

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 20 V$ $F = 1 MHz$ (pF)	Typ. C_T $V_R = 30 V$ $F = 1 MHz$ (pF)	Max. V_F $@ I_F = 50 mA$ (V)	Max. R_S $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)	Package (mm)
SMP1302-085LF	200	–	0.30	0.8 @ 10 mA	3 @ 10 mA	700	50	QFN 3L 2 x 2 x 1
SMP1302-087LF	200	–	0.25	0.8 @ 10 mA Typ.	3 @ 10 mA	700	50	QFN 2L 2 x 2 x 0.9
SMP1304-085LF	200	–	0.20	1.0	7 @ 10 mA	1000	100	QFN 3L 2 x 2 x 0.9
SMP1304-087LF	200	–	0.20	1.0	7 @ 10 mA	1000	100	QFN 2L 2 x 2 x 0.9
SMP1324-087LF	200	–	0.90	0.9 Typ.	0.4 Typ. @ 50 mA	6000	100	QFN 2L 2 x 2 x 0.9
SMP1325-085LF	200	0.65	–	0.86 Typ.	1.3 Typ. @ 10 mA	5000	100	QFN 3L 2 x 2 x 1
SMP1325-087LF	200	0.6	–	0.8 Typ.	1.3 Typ. @ 10 mA	5000	100	QFN 2L 2 x 2 x 0.9
SMP1334-084LF	200		0.45 Max.	0.75 @ 10 mA Typ.	2.5 @ 10 mA	700	50	QFN 2 x 2 x 0.9
SMP1345-087LF	50	0.2 @ 5 V	–	0.89	2 @ 10 mA	100	10	QFN 2L 2 x 2 x 0.9
SMP1371-087LF	35	1.2	–	1.0	0.5 @ 10 mA	200	12	QFN 2L 2 x 2 x 0.9

	
Single (Shunt) QFN 2 x 2 <i>Green™</i>	Single (Series) QFN 2 x 2 <i>Green™</i>
SMP1302-085LF Marking: RF1	SMP1302-087LF Marking: RF
SMP1304-085LF Marking: RG	SMP1304-087LF Marking: PG
	SMP1324-087LF Marking: PW
SMP1325-085LF Marking: RH	SMP1325-087LF Marking: PH
	SMP1334-084LF Marking: MG
	SMP1345-087LF Marking: RU
	SMP1371-087LF Marking: RY

Switching Silicon PIN Diodes

Plastic Surface Mount (SMT) PIN Diodes—Low Frequency to 6 GHz

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 30 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Typ. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1320 Series	50	0.3	0.85	2	0.9	400	8
							
Single SOT-23 Green™	Common Anode SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Low Inductance SOT-23 Green™	Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™
SMP1320-001LF Marking: RL1	SMP1320-003LF Marking: RL9	SMP1320-004LF Marking: RL3	SMP1320-005LF Marking: RL2	SMP1320-007LF Marking: RLB	SMP1320-011LF Marking: RL	SMP1320-079LF Marking: Cathode	SMP1320-040LF Marking: N
		SC-70	SC-70	SC-70			
		SMP1320-074LF Marking: RL3	SMP1320-075LF Marking: RL2	SMP1320-077LF Marking: RLB			

Low Capacitance Switching PIN Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 30 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Typ. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1321 Series	100	0.25	0.85	3	2	400	15
							
Single SOT-23 Green™	Common Anode SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Low Inductance SOT-23 Green™	Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™
SMP1321-001LF Marking: RM1	SMP1321-003LF Marking: RM9	SMP1321-004LF Marking: RM3	SMP1321-005LF Marking: RM2	SMP1321-007LF Marking: RMB	SMP1321-011LF Marking: RM	SMP1321-079LF Marking: Cathode	SMP1321-040LF Marking: C
	SC-70	SC-70	SC-70				
	SMP1321-073LF Marking: RM3	SMP1321-074LF Marking: RM3	SMP1321-075LF Marking: RM2				

Switching Silicon PIN Diodes

Lowest Series Resistance Switching PIN Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 30 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Max. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Typ. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1322 Series	50	1	0.825	1.5	0.5	400	8
							
Single SOT-23 Green™	Common Anode SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Single SOD-323 Green™	T/R Switch SOT-143	Single SC-79 Green™	Single 0402 Green™
SMP1322-001LF Marking: RN1	SMP1322-003LF Marking: RN9	SMP1322-004LF Marking: RN3	SMP1322-005LF Marking: RN2	SMP1322-011LF Marking: RN	SMP1322-016LF Marking: RN6	SMP1322-079LF Marking: Cathode	SMP1322-040LF Marking: T
		SC-70					
		SMP1322-074LF Marking: RN3					

Low Capacitance, Fast Switching PIN Diodes

Part Number	Min. V_B $I_R = 10\ \mu A$ (V)	Max. C_T $V_R = 5\ V$ $F = 1\ MHz$ (pF)	Typ. V_F @ $I_F = 10\ mA$ (V)	Typ. R_S $I_F = 1\ mA$ $F = 100\ MHz$ (Ω)	Max. R_S $I_F = 10\ mA$ $F = 100\ MHz$ (Ω)	Typ. T_L $I_F = 10\ mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1340 Series	50	0.3	0.88	1.7	1.2	100	7
							
Common Anode SOT-23 <i>Green™</i>	Common Cathode SOT-23 <i>Green™</i>	Series Pair SOT-23 <i>Green™</i>	Low Inductance SOT-23 <i>Green™</i>	Single SOD-323 <i>Green™</i>	Single SC-79 <i>Green™</i>	Single 0402 <i>Green™</i>	
SMP1340-003LF Marking: RS9	SMP1340-004LF Marking: RS3	SMP1340-005LF Marking: RS2	SMP1340-007LF Marking: RSB	SMP1340-011LF Marking: RS	SMP1340-079LF Marking: Cathode	SMP1340-040LF Marking: D	
	SC-70	SC-70					
	SMP1340-074LF Marking: RS3	SMP1340-075LF Marking: RS2					

Switching Silicon PIN Diodes

Lowest Capacitance Switching PIN Diodes for High Isolation


Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 20 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Typ. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1345 Series	50	0.2	0.89	3.5	2	100	10
							
Common Anode SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Single SC-79 Green™	Ring MIS Green™	Single 0402 Green™		
SMP1345-003LF Marking: RU9	SMP1345-004LF Marking: RU3	SMP1345-005LF Marking: RU2	SMP1345-079LF Marking: Cathode	SMP1345-518 Marking: 0	SMP1345-040LF Marking: U		
		SC-70					
		SMP1345-075LF Marking: RU2					

Large Signal Switching PIN Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 20 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Max. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1352 Series	200	0.35	0.8	15	2.8	1000	50

			
Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™	Series Pair SOT-23 Green™
SMP1352-011LF Marking: RR	SMP1352-079LF Marking: Cathode	SMP1352-040LF Marking: S	SMP1352-005LF Marking: RR2

Typical Performance Characteristics

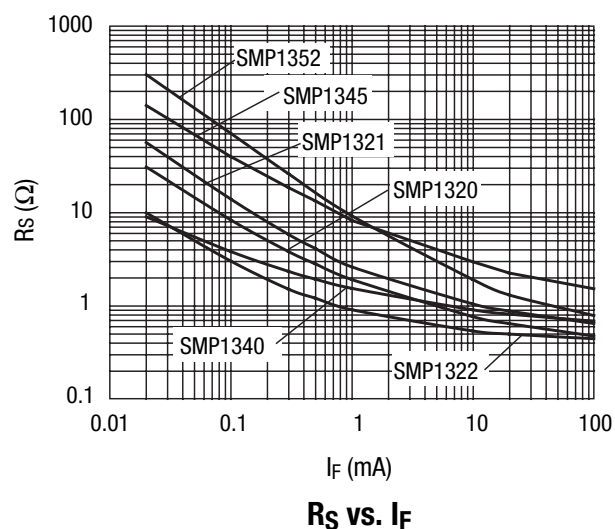

Switching Silicon PIN Diodes

PIN Diode Chips—Low Frequency to 20 GHz

Part Number	V_B @ 10 μ A (V)	Nominal I-Region (μ m)	Typ. C_J @ 0 V (pF)	Max. C_J @ 50 V (pF)	Max. R_S @ 10 mA (Ω)	Max. T_I @ 10 mA (ns)	Max. Thermal Resistance (C/W)
APD0505-000	50	5	0.10	0.05	2.0	20	100
APD0510-000	50	5	0.20	0.10	1.5	40	80
APD0520-000	50	5	0.25	0.20	1.0	50	80
APD0805-000	100	8	0.10	0.05	2.0	100	80
APD0810-000	100	8	0.15	0.10	1.5	160	60
APD1505 Series	200	4.5	0.12	0.06 @ 10 V	2.5	350	70
APD1510-000	200	15	0.20	0.10	2.0	300	60
APD1520-000	200	15	0.25	0.20	1.2	900	30

Ceramic Hermetic Packaged General-purpose PIN Diodes for Switching and Attenuator Applications

Hermetic Stripline 240	Hermetic Pill 203	Hermetic Pill 210	Hermetic Pill 219
APD0505-240	APD0505-203	APD0505-210	APD0505-219
APD0510-240	APD0510-203	APD0510-210	APD0510-219
APD0520-240	APD0520-203	APD0520-210	APD0520-219
APD0805-240	APD0805-203	APD0805-210	APD0805-219
APD0810-240	APD0810-203	APD0810-210	APD0810-219
APD1505-240	APD1505-203	APD1505-210	APD1505-219
APD1510-240	APD1510-203	APD1510-210	APD1510-219
APD1520-240	APD1520-203	APD1520-210	APD1520-219

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

PIN Diode Wafer on Film Frame—Low Frequency to 20 GHz

Part Number	V_B @ 10 μ A (V)	Typ. C_J @ 0 V (pF)	Max. C_J @ 30 V (pF)	Typ. V_F @ 10 mA (mV)	Max. R_S @ 1 mA (Ω)	Max. R_S @ 10 mA (Ω)	Max. T_I @ 10 mA (ns)	Nominal Chip Size (mils)	Nominal Contact Diameter (mils)
SMP1320-099	50	0.23	0.175	850	2 Typ.	0.9	400	13.5	3.0
SMP1321-099	100	0.18	0.15	860	3 Typ.	2.0	400	13.5	3.0
SMP1322-099	50	1.10	0.85	825	1.5	0.45 Typ.	400	13.5	7.5
SMP1340-099	50	0.20	0.15 @ 10 V	880	1.7 Typ.	1.2	100	11.0	3.0
SMP1353-099	200	0.35	0.13 @ 20 V	825	15	2.8	1000	11.0	7.0

Switching Silicon PIN Diodes

Beam-Lead PIN Diodes—Low Frequency to 40 GHz

Part Number	V_B @ 10 μ A (V)	Max. C_J @ 10 V (pF)	Max. C_J @ 50 V (pF)	Max. R_S @ 10 mA (Ω)	Typ. T_L @ 10 mA (ns)
DSM8100-000	60	0.025	—	3.5	25
DSG9500-000	100	—	0.025	4.0 @ 50 mA	250

Switching Silicon PIN Diodes—AEC-Q101 Qualified

Part Number	Min. V_B $I_R = 10 \mu$ A (V)	Max. C_T $V_R = 30$ V $F = 1$ MHz (pF)	Typ. V_F @ $I_F = 10$ mA (V)	Max. R_S $I_F = 1$ mA $F = 100$ MHz (Ω)	Max. R_S $I_F = 10$ mA $F = 100$ MHz (Ω)	Max. R_S $I_F = 100$ mA $F = 100$ MHz (Ω)	Typ. Carrier Lifetime $I_F = 10$ mA (ns)
SMPA1302-079LF	200	0.30	0.80	20	3	1.5	700
SMPA1320-079LF	50	0.3	0.85	2 Typ.	0.9	—	400

Attenuator PIN Diodes

Plastic Surface Mount (SMT) PIN Diodes—Low Frequency to 6 GHz

Part Number	Min. V_B $I_R = 10 \mu$ A (V)	Max. C_T $V_R = 30$ V $F = 1$ MHz (pF)	Typ. V_F @ $I_F = 10$ mA (V)	Max. R_S $I_F = 1$ mA $F = 100$ MHz (Ω)	Max. R_S $I_F = 10$ mA $F = 100$ MHz (Ω)	Max. R_S $I_F = 100$ mA $F = 100$ MHz (Ω)	Typ. T_L $I_F = 10$ mA (ns)	Nominal I-Region Thickness (μ m)
SMP1302 Series	200	0.3	0.8	20	3	1.5	700	50

				
Single SOT-23 Green™	Common Anode SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Reverse Series Pair SOT-23 Green™
SMP1302-001LF Marking: RF1	SMP1302-003LF Marking: RF9	SMP1302-004LF Marking: RF3	SMP1302-005LF Marking: RF2	SMP1302-006LF Marking: RF8
		SC-70	SC-70	
		SMP1302-074LF Marking: RF3	SMP1302-075LF Marking: RF2	

					
Single SOD-323 Green™	PI SOT-5	Single 0402 Green™	Single SC-79 Green™	Single QFN 2 x 2 Green™	Single (Series) QFN 2 x 2 Green™
SMP1302-011LF Marking: RF	SMP1302-027LF Marking: RFM	SMP1302-040LF Marking: W	SMP1302-079LF Marking: Cathode	SMP1302-085LF Marking: RF1	SMP1302-087LF Marking: RF

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Attenuator PIN Diodes

Low-Distortion Attenuator PIN Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 30 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Max. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 100 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1304 Series	200	0.3	0.8	50	7	2	1000	100

Single SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Reverse Series Pair SOT-23 Green™	Low Inductance SOT-23 Green™
SMP1304-001LF Marking: RG1	SMP1304-004LF Marking: RG3	SMP1304-005LF Marking: RG2	SMP1304-006LF Marking: RG8	SMP1304-007LF Marking: RG8

Single SOD-323 Green™	PI SOT-143	PI SOT-5	Single SC-79 Green™	Single (Series) QFN 2 x 2 Green™
SMP1304-011LF Marking: RGJ	SMP1304-019LF Marking: RGJ	SMP1304-027LF Marking: RGM	SMP1304-079LF Marking: Cathode	SMP1334-084LF Marking: MG


Attenuator PIN Diodes

Lowest Distortion, High IP3 Attenuator PIN Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. C_T $V_R = 30 V$ $F = 1 MHz$ (pF)	Typ. V_F @ $I_F = 10 mA$ (V)	Max. R_S $I_F = 1 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 10 mA$ $F = 100 MHz$ (Ω)	Max. R_S $I_F = 100 mA$ $F = 100 MHz$ (Ω)	Typ. T_L $I_F = 10 mA$ (ns)	Nominal I-Region Thickness (μm)
SMP1307 Series	200	0.3	0.85	100	15	3	1500	175

						
Single SOT-23 Green™	Common Anode SOT-23 Green™	Common Cathode SOT-23	Series Pair SOT-23 Green™	Reverse Series Pair SOT-23 Green™	Single SOD-323 Green™	PI SOT-5
SMP1307-001LF Marking: RJ1	SMP1307-003LF Marking: RJ9	SMP1307-004LF Marking: RJ3	SMP1307-005LF Marking: RJ2	SMP1307-006LF Marking: RJ8	SMP1307-011LF Marking: RJ	SMP1307-027LF Marking: RJM

Typical Performance Characteristics

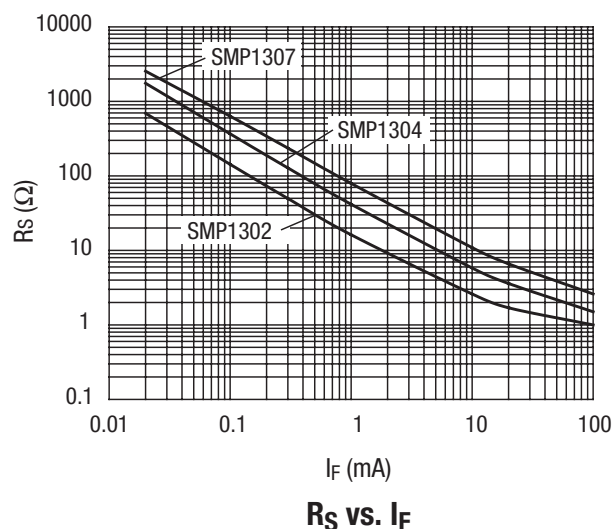

General-purpose PIN Diode Chip for Attenuator Applications

Part Number	V_B @ $10 \mu A$ (V)	Nominal I-Region (μm)	Typ. C_J @ 0 V (pF)	Max. C_J @ 50 V (pF)	Max. R_S @ $10 mA$ (Ω)	Max. T_L @ $10 mA$ (ns)	Max. Thermal Resistance (C/W)
APD2220-000	100	50	0.2	0.2	4	700	80

Ceramic Hermetic Packaged General-purpose PIN Diodes for Switching and Attenuator Applications

Hermetic Stripline 240	Hermetic Pill 203	Hermetic Pill 210	Hermetic Pill 219
APD2220-240	APD2220-203	APD2220-210	APD2220-219


Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Attenuator PIN Diodes

PIN Diode Chips Supplied On Film Frame for Attenuator Applications—Low Frequency to 10 GHz

Part Number	V_B @ 10 μ A (V)	Typ. C_J @ 0 V (pF)	Max. C_J @ 30 V (pF)	Typ. V_F @ 10 mA (mV)	Max. R_S @ 1 mA (Ω)	Max. R_S @ 10 mA (Ω)	Typ. T_L @ 10 mA (ns)	Nominal Chip Size (mils)	Nominal Contact Diameter (mils)
SMP1302-099	200	0.27	0.15	800	20	3	700	13.5	8.5
SMP1304-099	200	0.18	0.15	800	50	7	1000	13.5	8.5
SMP1307-099	200	0.45	0.20	850	75 Typ.	1.5	1500	18.5	11.0

The above PIN diode chips are processed on 100 mm silicon wafers, 100% DC tested, sawn and shipped on 6" film frame hoops. Electrical rejects are identified with black ink.

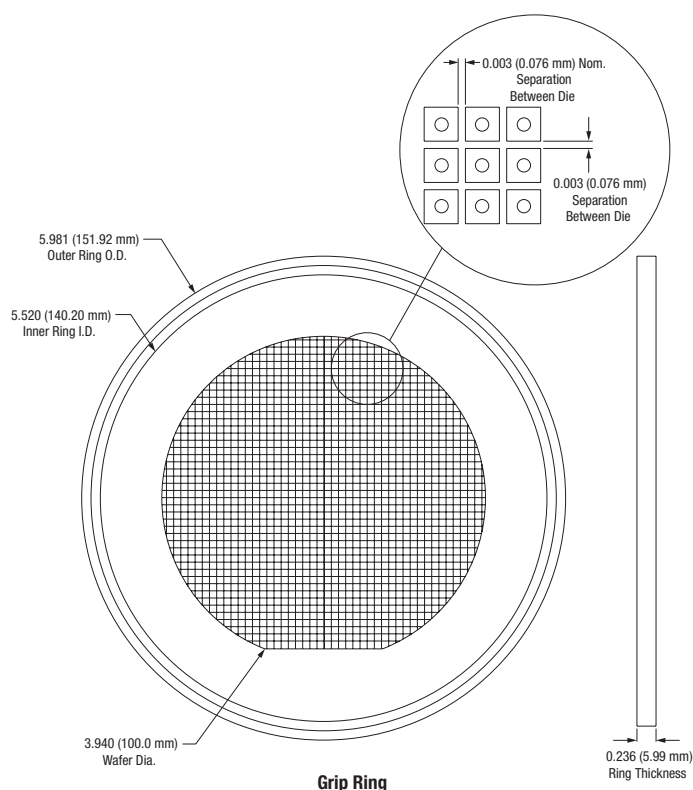

Attenuator PIN Diodes—AEC-Q101 Qualified

Part Number	Min. V_B $I_R = 10 \mu$ A (V)	Max. C_T $V_R = 30$ V (pF)	Typ. V_F $I_F = 10$ mA (V)	Max. R_S $I_F = 1$ mA $F = 100$ MHz (Ω)	Max. R_S $I_F = 10$ mA $F = 100$ MHz (Ω)	Max. R_S $I_F = 100$ mA $F = 100$ MHz (Ω)	Typical Carrier Lifetime $I_F = 10$ mA (ns)
SMPA1302-079LF	200	0.30	0.80	20	3	1.5	700
SMPA1304-011LF	200	0.30	0.80	50	7	2.0	1000
SMPA1304-019LF	200	0.45	0.80	50	7	2.0	1000

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

SCHOTTKY DIODES

Designed for High Performance, High Volume and Cost Sensitive Mixer and Detector Applications

Plastic Surface Mount Technology (SMT) Packaged

Plastic Surface Mount (SMT) Schottky Diodes—Low Frequency to 24 GHz

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Typ. I_R $V_R = 1 V$ (nA)	Min. V_F $I_F = 1 mA$ (mV)	Max. C_T $V_R = 0 V$ (pF)	Max. R_T $I_F = 10 mA$ (Ω)
SMS1546-005LF	2	300	270	0.63	8
SMS7621 Series	2	80	320	0.25	18

Delta V_F for pairs and quads is 10 mV maximum at 1 mA.

Breakdown voltage and reverse leakage cannot be measured directly on ring configurations.

								
Single SC-79 <i>Green™</i>	Single SOT-23 <i>Green™</i>	Common Cathode SOT-23 <i>Green™</i>	Series Pair SOT-23 <i>Green™</i>	Reverse Series Pair SOT-23 <i>Green™</i>	Unconnected Pair SOT-143	Dual Series Pair SC-88	Unconnected Pair MIS	Single 0402 <i>Green™</i>
			SMS1546-005LF Marking: SG2					
SMS7621-079LF Marking: Cathode	SMS7621-001LF Marking: XH1		SMS7621-005LF Marking: XH2	SMS7621-006LF Marking: XH8	SMS7621-015LF Marking: XH7	SMS7621-081LF Marking: XHQ	SMS7621-517 Marking: H	SMS7621-040LF Marking: E
		SC-70	SC-70					
		SMS7621-074LF Marking: XH3	SMS7621-075LF Marking: XH2					

Part Number	Min. V_B $I_R = 100 \mu A$ (V)	Typ. I_R $V_R = 1 mA$ (mV)	Max. C_T $V_R = 0 V$ (pF)	Typ. R_T $I_F = 10 mA$ (Ω)
SMS7630 Series	1	240	0.35	22

V_B is measured at 100 μA (avalanche breakdown is typically 6 V).

Delta V_F for pairs and quads is 10 mV maximum at 1 mA.

Breakdown voltage and reverse leakage cannot be measured directly on ring configurations.

							
Single SC-79 <i>Green™</i>	Single SOT-323 <i>Green™</i>	Single SOT-23 <i>Green™</i>	Series Pair SOT-23 <i>Green™</i>	Reverse Series Pair SOT-23 <i>Green™</i>	Reverse Unconnected Pair SOT-143	Unconnected Pair MIS	Single 0402 <i>Green™</i>
SMS7630-079LF Marking: Anode	SMS7630-011LF Marking: XD	SMS7630-001LF Marking: XD1	SMS7630-005LF Marking: XD2	SMS7630-006LF Marking: XD8	SMS7630-020LF Marking: XD0	SMS7630-517 Marking: D	SMS7630-040LF Marking: P

Plastic Surface Mount Technology (SMT) Packaged

General-purpose Plastic Packaged Schottky Diodes—Low Frequency to 10 GHz

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Max. I_R $V_R = 1 V$ (nA)	Max. V_F $I_F = 1 mA$ (mV)	Min. V_F @ Spec. I_F (mV)	Max. C_T $V_R = 0 V$ (pF)	Typ. R_T $I_F = 10 mA$ (Ω)
SMS3922 Series	8	100	340	450 @ 10 mA	1.03	7
SMS3923 Series	20	500 @ 15 V	370	1000 @ 35 mA	1.23	11
SMS3924 Series	70	200 @ 50 V	550	1000 @ 15 mA	1.83	7
SMS325-079LF	40	—	670	—	0.60	10

Delta V_F for pairs and quads is 10 mV maximum at 1 mA.

Breakdown voltage and reverse leakage cannot be measured directly on ring configurations.

								
Single SC-79 Green™	Single SOD-323 Green™	Single SOT-23 Green™	Common Cathode SOT-23 Green™	Series Pair SOT-23 Green™	Unconnected Pair SOT-143	Dual Series Pair SC-88	Unconnected Pair MIS Green™	Single 0402 Green™
SMS3922-079LF Marking: Cathode	SMS3922-011LF Marking: XA	SMS3922-001LF Marking: XA1	SMS3922-004LF Marking: XA3	SMS3922-005LF Marking: XA2	SMS3922-015LF Marking: XA7			SMS3922-040LF Marking: V
SMS3923-079LF Marking: Cathode	SMS3923-011LF Marking: XB	SMS3923-001LF Marking: XB1		SMS3923-005LF Marking: XB2	SMS3923-015LF Marking: XB7	SMS3923-081LF Marking: XBQ	SMS3923-517 Marking: B	SMS3923-040LF Marking: X
SMS3924-079LF Marking: Cathode				SMS3924-005LF Marking: XC2	SMS3924-015LF Marking: XC7			SMS3924-040LF Marking: 1
				SC-70				
				SMS3924-075LF Marking: XC2				
SMS3925-079LF Marking: Cathode								SMS3925-040LF Marking: 2

Plastic Surface Mount Technology (SMT) Packaged

Silicon Schottky Mixer Quad Diodes—Low Frequency to 12 GHz

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Typ. I_R $V_R = 1 V$ (nA)	Max. V_F $I_F = 1 mA$ (mV)	Max. C_T $V_R = 0 V$ (pF)	Typ. R_T $I_F = 10 mA$ (Ω)
SMS3926 Series	2	300	270	0.5	8
SMS3927 Series/SMS3930-021LF	2	50	370	0.5	8
SMS3928-023LF/SMS3931-021LF	4	5	580	0.5	8

		
Ring Quad SOT-143	Crossover Quad SOT-143	Bridge Quad SOT-143
SMS3926-022LF Marking: XE4	SMS3926-023LF Marking: XE5	
	SMS3927-023LF Marking: XJ5	SMS3930-021LF Marking: XRE
	SMS3928-023LF Marking: XK5	SMS3931-021LF Marking: XSE

Surface Mount Silicon Schottky Mixer and Detector Diodes—Low Frequency to 100 GHz

Part Number	Min. $V_B @ 10 \mu A$ (V)	Max. $C_T @ 0 V$ (pF)	Typ. $C_T @ 0.15 V$ (pF)	$V_F @ 0.1 mA$ (mV)	$V_F @ 1 mA$ (mV)	Max. Series Resistance (Ω)	Video Resistance @ 0 V (Ω)	Package	Configuration
 SMS7621-060	2	0.18	—	—	260–320	12	—	0201	Single
 SMS7630-061	1	—	0.3	60–120	135–240	—	3000–7000	0201	Single
 SMS7621-092	2	0.18	—	—	260–320	12	—	0201	Anti-parallel

Ceramic

Ceramic Packaged Schottky Diodes—Low Frequency to 20 GHz

—▶— Hermetic Ceramic Packaged Detector Schottky Diodes

Hermetic Ceramic Pill 207	Hermetic Ceramic Pill 203
 CDB7620-207	 CDB7620-203
 CDB7619-207	 CDB7619-203
 CDF7623-207	 CDF7623-203
 CDF7621-207	 CDF7621-203
 CME7660-207	 CME7660-203
 CDE7618-207	 CDE7618-203
 CDP7624-207	 CDP7624-203
 CDC7630-207	 CDC7630-203
 CDC7631-207	 CDC7631-203

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

—▶— Epoxy and Hermetic Ceramic Packaged Single, N-Type, Low, Medium, High Drive Schottky Diodes

Epoxy Stripline 250	Epoxy Stripline 230	Hermetic Stripline 220
 DMF2820-250		 DMF2820-220
 DME2127-250		 DME2127-220
 DMJ2823-250		 DMJ2823-220
 DMF2821-250		 DMF2821-220
 DME2957-250		 DME2957-220
 DMJ2777-250		 DMJ2777-220
 DMF2344-250	 DMF2344-230	 DMF2344-220
 DME2333-250	 DME2333-230	 DME2333-220
 DMJ2824-250	 DMJ2824-230	 DMJ2824-220
	 DMF2822-230	 DMF2822-220
	 DME2458-230	 DME2458-220
	 DMJ2825-230	 DMJ2825-220

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Ceramic

Ceramic Packaged Schottky Diodes—Low Frequency to 20 GHz

 Epoxy and Hermetic Ceramic Packaged Series Pair, N-Type, Low, Medium, High Drive Schottky Diodes

Epoxy Stripline 252	Epoxy Stripline 232	Hermetic Stripline 222
 DMF2835-252		 DMF2835-222
 DME2050-252		 DME2050-222
 DMJ2092-252		 DMJ2092-222
 DMF2826-252		 DMF2826-222
 DME2829-252		 DME2829-222
 DMJ2093-252		 DMJ2093-222
 DMF2827-252	 DMF2827-232	 DMF2827-222
 DME2830-252	 DME2830-232	 DME2830-222
 DMJ2832-252	 DMJ2832-232	 DMJ2832-222
	 DMF2828-232	 DMF2828-222
	 DME2831-232	 DME2831-222
	 DMJ2833-232	 DMJ2833-222

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)


 Epoxy and Hermetic Ceramic Packaged Common Cathode, N-Type, Low, Medium, High Drive Schottky Diodes

Epoxy Stripline 253	Hermetic Stripline 223
 DMF2182-253	 DMF2182-223
 DME2205-253	 DME2205-223
 DMJ2208-253	 DMJ2208-223
 DMF2183-253	 DMF2183-223
 DME2206-253	 DME2206-223
 DMJ2209-253	 DMJ2209-223
 DMF2184-253	 DMF2184-223
 DME2207-253	 DME2207-223
 DMJ2210-253	 DMJ2210-223
	 DMF2834-223
	 DME2864-223
	 DMJ2836-223

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Ceramic

Ceramic Packaged Schottky Diodes—Low Frequency to 20 GHz



Epoxy and Hermetic Ceramic Packaged Anti-parallel, N-Type, Low, Medium, High Drive Schottky Diodes

Epoxy Stripline 251	Hermetic Stripline 221
DMF2185-251	DMF2185-221
DME2282-251	DME2282-221
DMJ2303-251	DMJ2303-221
DMF2186-251	DMF2186-221
DME2283-251	DME2283-221
DMJ2304-251	DMJ2304-221
DMF2187-251	DMF2187-221
DME2284-251	DME2284-221
DMJ2246-251	DMJ2246-221
	DMF2837-221
	DME2838-221
	DMJ2839-221

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)



Epoxy and Hermetic Ceramic Packaged Ring Quad, N-Type, Low, Medium, High Drive Schottky Diodes

Epoxy Stripline 254	Epoxy Stripline 234	Hermetic Stripline 224
DMF2865-254		DMF2865-224
DME2857-254		DME2857-224
DMJ2502-254		DMJ2502-224
DMF2011-254	DMF2011-234	DMF2011-224
DME2858-254		DME2858-224
DMJ2990-254		DMJ2990-224
DMF2012-254	DMF2012-234	DMF2012-224
DME2859-254	DME2859-234	DME2859-224
DMJ2667-254	DMJ2667-234	DMJ2667-224
	DMF2454-234	DMF2454-224
	DME2459-234	DME2459-224
	DMJ2455-234	DMJ2455-224

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Ceramic

Ceramic Packaged Schottky Diodes—Low Frequency to 20 GHz



Epoxy and Hermetic Ceramic Packaged Bridge Quad, N-Type, Low, Medium, High Drive Schottky Diodes

Epoxy Stripline 255	Epoxy Stripline 235	Hermetic Stripline 225
DMF2076-255		DMF2076-225
DME2029-255		DME2029-225
DMJ2312-255		DMJ2312-225
DMF2077-255		DMF2077-225
DME2850-255		DME2850-225
DMJ2088-255		DMJ2088-225
DMF2078-255	DMF2078-235	DMF2078-225
DME2031-255	DME2031-235	DME2031-225
DMJ2768-255	DMJ2768-235	DMJ2768-225
	DMF2848-235	DMF2848-225
	DME2851-235	DME2851-225
	DMJ2852-235	DMJ2852-225

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)



Epoxy Packaged Octo Quad Ring, N-Type, Low, Medium, High Drive Schottky Diodes

Part Number	Frequency Band	C_j 0 V, 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
DMF3938-257	S-X	0.15–0.30	16	4	400–520	Low
DME3939-257	S-X	0.15–0.30	16	6	600–800	Medium
DMJ3940-257	S-X	0.15–0.30	16	8	1000–1200	High

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

—▶— Epoxy and Hermetic Ceramic Packaged P-Type Zero Bias Detector Schottky Diodes

Epoxy Stripline 250	Hermetic 220
DDC2353-250	DDC2353-220
DDC2354-250	DDC2354-220

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

—▶— Epoxy and Hermetic Ceramic Packaged P-Type Detector Schottky Diodes

Epoxy Stripline 250	Epoxy Stripline 230	Hermetic Stripline 220
DDB2503-250	DDB2503-230	DDB2503-220
DDB2504-250	DDB2504-230	DDB2504-220
DDB2265-250	DDB2265-230	DDB2265-220

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Beam-Lead**Beam-Lead Schottky Diodes—Low Frequency to 40 GHz**
 **Single, N-Type, Low, Medium, High Drive Schottky Diodes**

Part Number	Frequency Band	C_J 0 V @ 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
 DMF2820-000	S	0.30–0.50	5	2	200–260	Low
 DME2127-000	S	0.30–0.50	5	3	300–400	Med
 DMJ2823-000	S	0.30–0.50	5	4	500–600	High
 DMF2821-000	X	0.15–0.30	8	2	250–310	Low
 DME2957-000	X	0.15–0.30	8	3	325–425	Med
 DMJ2777-000	X	0.15–0.30	8	4	550–650	High
 DMF2344-000	Ku	0.05–0.15	13	2	260–330	Low
 DME2333-000	Ku	0.05–0.15	13	3	350–450	Med
 DMJ2824-000	Ku	0.05–0.15	13	4	500–680	High
 DMF2822-000	K	0.1 Max.	18	2	270–350	Low
 DME2458-000	K	0.1 Max.	18	3	375–550	Med
 DMJ2825-000	K	0.1 Max.	18	4	600–700	High

 **Series Pair, N-Type, Low, Medium, High Drive Schottky Diodes**

Part Number	Frequency Band	C_J 0 V, 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
 DMF2835-000	S	0.30–0.50	5	2	200–260	Low
 DME2050-000	S	0.30–0.50	5	3	300–400	Med
 DMJ2092-000	S	0.30–0.50	5	4	500–600	High
 DMF2826-000	X	0.15–0.30	8	2	250–310	Low
 DME2829-000	X	0.15–0.30	8	3	325–425	Med
 DMJ2093-000	X	0.15–0.30	8	4	550–650	High
 DMF2827-000	Ku	0.05–0.15	13	2	260–330	Low
 DME2830-000	Ku	0.05–0.15	13	3	350–450	Med
 DMJ2832-000	Ku	0.05–0.15	13	4	500–680	High
 DMF2828-000	K	0.1 Max.	18	2	270–350	Low
 DME2831-000	K	0.1 Max.	18	3	375–550	Med
 DMJ2833-000	K	0.1 Max.	18	4	600–700	High

Beam-Lead

Beam-Lead Schottky Diodes—Low Frequency to 40 GHz



Common Cathode, N-Type, Low, Medium, High Drive Schottky Diodes

Part Number	Frequency Band	C_j 0 V, 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
DMF2182-000	S	0.30–0.50	5	2	200–260	Low
DME2205-000	S	0.30–0.50	5	3	300–400	Med
DMJ2208-000	S	0.30–0.50	5	4	500–600	High
DMF2183-000	X	0.15–0.30	8	2	250–310	Low
DME2206-000	X	0.15–0.30	8	3	325–425	Med
DMJ2209-000	X	0.15–0.30	8	4	550–650	High
DMF2184-000	Ku	0.05–0.15	13	2	260–330	Low
DME2207-000	Ku	0.05–0.15	13	3	350–450	Med
DMJ2210-000	Ku	0.05–0.15	13	4	500–680	High
DMF2834-000	K	0.1 Max.	18	2	270–350	Low
DME2864-000	K	0.1 Max.	18	3	375–550	Med
DMJ2836-000	K	0.1 Max.	18	4	600–700	High



Anti-parallel, N-Type, Low, Medium, High Drive Schottky Diodes

Part Number	Frequency Band	C_j 0 V, 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
DMF2185-000	S	0.30–0.50	5	2	200–260	Low
DME2282-000	S	0.30–0.50	5	3	300–400	Med
DMJ2303-000	S	0.30–0.50	5	4	500–600	High
DMF2186-000	X	0.15–0.30	8	2	250–310	Low
DME2283-000	X	0.15–0.30	8	3	325–425	Med
DMJ2304-000	X	0.15–0.30	8	4	550–650	High
DMF2187-000	Ku	0.05–0.15	13	2	260–330	Low
DME2284-000	Ku	0.05–0.15	13	3	350–450	Med
DMJ2246-000	Ku	0.05–0.15	13	4	500–680	High
DMF2837-000	K	0.1 Max.	18	2	270–350	Low
DME2838-000	K	0.1 Max.	18	3	375–550	Med
DMJ2839-000	K	0.1 Max.	18	4	600–700	High

Beam-Lead**Beam-Lead Schottky Diodes—Low Frequency to 40 GHz****Ring Quad, N-Type, Low, Medium, High Drive Schottky Diodes**

Part Number	Frequency Band	C_J 0 V, 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
DMF2865-000	S	0.30–0.50	5	2	200–260	Low
DME2857-000	S	0.30–0.50	5	3	300–400	Med
DMJ2502-000	S	0.30–0.50	5	4	500–600	High
DMF2011-000	X	0.15–0.30	8	2	250–310	Low
DME2858-000	X	0.15–0.30	8	3	325–425	Med
DMJ2990-000	X	0.15–0.30	8	4	550–650	High
DMF2012-000	Ku	0.05–0.15	13	2	260–330	Low
DME2859-000	Ku	0.05–0.15	13	3	350–450	Med
DMJ2667-000	Ku	0.05–0.15	13	4	500–680	High
DMF2454-000	K	0.1 Max.	18	2	270–350	Low
DME2459-000	K	0.1 Max.	18	3	375–550	Med
DMJ2455-000	K	0.1 Max.	18	4	600–700	High

**Bridge Quad, N-Type, Low, Medium, High Drive Schottky Diodes**

Part Number	Frequency Band	C_J 0 V, 1 MHz (pF)	Max. R_S @ 5 mA (Ω)	Min. V_B @ 10 μ A (V)	V_F @ 1 mA (mV)	Drive Level
DMF2076-000	S	0.30–0.50	5	2	200–260	Low
DME2029-000	S	0.30–0.50	5	3	300–400	Med
DMJ2312-000	S	0.30–0.50	5	4	500–600	High
DMF2077-000	X	0.15–0.30	8	2	250–310	Low
DME2850-000	X	0.15–0.30	8	3	325–425	Med
DMJ2088-000	X	0.15–0.30	8	4	550–650	High
DMF2078-000	Ku	0.05–0.15	13	2	260–330	Low
DME2031-000	Ku	0.05–0.15	13	3	350–450	Med
DMJ2768-000	Ku	0.05–0.15	13	4	500–680	High
DMF2848-000	K	0.1 Max.	18	2	270–350	Low
DME2851-000	K	0.1 Max.	18	3	375–550	Med
DMJ2852-000	K	0.1 Max.	18	4	600–700	High

Beam-Lead

Beam-Lead Schottky Diodes—Low Frequency to 40 GHz

Single, P-Type, Zero Bias Detector Schottky Diodes

Part Number	Min. E0 (mV)	Z _V (Ω)	Min. T _{SS} (dBm)
 DDC2353-000	8	2000–5000	-52
 DDC2354-000	15	5000–15000	-56

Single, P-Type, Low and Medium Drive Detector Schottky Diodes

Part Number	Frequency Band	Min. T _{SS} (dBm)	Z _{IF} (Ω)	Max. C _J @ 0 V (pF)	V _F @ 1 mA (mV)	Min. V _B @ 10 μA (V)
 DDB2503-000	X	50	500–700	0.15	200–350	2
 DDB2504-000	Ku	48	500–700	0.10	200–350	2
 DDB2265-000	K	50	800–1200	0.10	300–450	3

Chip

Schottky Diode Chips—Low Frequency to 40 GHz

Single N-Type and P-Type Schottky Diode Chips

Part Number	Barrier Height	Junction Type	Max. C _J (pF)	Max. R _T (Ω)	V _F @ 1 mA (mV)	Min. V _B (V)	Typ. R _V @ 0 Bias (Ω)
 CDB7619-000	Low	P	0.1	40	275–375	2	735
 CDB7620-000	Low	P	0.15	30	250–350	2	537
 CDC7630-000	ZBD	P	0.25	30	135–240	1	5,500
 CDC7631-000	ZBD	P	0.15	80	150–300	2	7,200
 CDF7621-000	Low	N	0.1	20	270–350	2	680
 CDF7623-000	Low	N	0.3	10	240–300	2	245
 CME7660-000	Med.	N	0.15	10	350–450	3	–
 CDE7618-000	Med.	N	0.1	20	375–500	3	–
 CDP7624-000	Med-High	N	0.15	15	450–575	3	–

Chip

Schottky Diode Chips—Low Frequency to 40 GHz



N-Type, Low, Medium, High Drive Ring Quad Schottky Diodes

Part Number	Frequency Band	Barrier	V_F $I_F = 1 \text{ mA}$ (mV)	ΔV_F $I_F = 1 \text{ mA}$ (mV)	C_J $V_R = 0 \text{ V},$ $F = 1 \text{ MHz}$ (pF)	R_S $I_F = 5 \text{ mA}$ (Ω)
DMF3926-000	S	Low	200–260	10	0.30–0.50	5
DME3927-000	S	Medium	300–400	10	0.30–0.50	5
DMJ3928-000	S	High	500–600	10	0.30–0.50	5
DMF3942-000	X	Low	250–310	10	0.15–0.30	8
DME3943-000	X	Medium	325–425	10	0.15–0.30	8
DMJ3944-000	X	High	550–650	10	0.15–0.30	8



N-Type, Low, Medium, High Drive Bridge Quad Schottky Diodes

Part Number	Frequency Band	Barrier	V_F $I_F = 1 \text{ mA}$ (mV)	ΔV_F $I_F = 1 \text{ mA}$ (mV)	C_J $V_R = 0 \text{ V},$ $F = 1 \text{ MHz}$ (pF)	R_S $I_F = 5 \text{ mA}$ (Ω)
DMF3929-000	S	Low	200–260	10	0.3–0.5	5
DME3930-000	S	Medium	300–400	10	0.3–0.5	5
DMJ3931-000	S	High	500–600	10	0.3–0.5	5



N-Type, Low, Medium, High Drive Series Pair Schottky Diodes

Part Number	Frequency Band	Barrier	V_F $I_F = 1 \text{ mA}$ (mV)	ΔV_F $I_F = 1 \text{ mA}$ (mV)	C_J $V_R = 0 \text{ V},$ $F = 1 \text{ MHz}$ (pF)	R_S $I_F = 5 \text{ mA}$ (Ω)
DMF3932-000	S	Low	200–260	10	0.3–0.5	5
DME3933-000	S	Medium	300–400	10	0.3–0.5	5
DMJ3934-000	S	High	500–600	10	0.3–0.5	5



N-Type, Low, Medium, High Drive Back-to-Back Ring Series Pair Schottky Diodes

Part Number	Frequency Band	Barrier	V_F $I_F = 1 \text{ mA}$ (mV)	ΔV_F $I_F = 1 \text{ mA}$ (mV)	C_J $V_R = 0 \text{ V},$ $F = 1 \text{ MHz}$ (pF)	R_S $I_F = 5 \text{ mA}$ (Ω)
DMF3935-000	S	Low	200–260	10	0.3–0.5	5
DME3936-000	S	Medium	300–400	10	0.3–0.5	5
DMJ3937-000	S	High	500–600	10	0.3–0.5	5

Chip

Schottky Diode Chips—Low Frequency to 40 GHz



N-Type, Low, Medium, High Drive Octo Quad Ring Schottky Diodes

Part Number	Frequency Band	Barrier	V_F $I_F = 1 \text{ mA}$ (mV)	ΔV_F $I_F = 1 \text{ mA}$ (mV)	C_J $V_R = 0 \text{ V}$, $F = 1 \text{ MHz}$ (pF)	R_S $I_F = 5 \text{ mA}$ (Ω)
 DMF3938-000	S-X	Low	400–520	15	0.15–0.30	16
 DME3939-000	S-X	Medium	600–800	15	0.15–0.30	16
 DMJ3940-000	S-X	High	1000–1200	15	0.15–0.30	16



N-Type, Low, Medium, High Drive Back-to-Back Crossover Quad Schottky Diodes

Part Number	Frequency Band	Barrier	V_F $I_F = 1 \text{ mA}$ (mV)	ΔV_F $I_F = 1 \text{ mA}$ (mV)	C_J $V_R = 0 \text{ V}$, $F = 1 \text{ MHz}$ (pF)	R_S $I_F = 5 \text{ mA}$ (Ω)
 DMF3945-000	S	Low	200–260	15	0.3–0.5	5
 DME3946-000	S	Medium	300–400	15	0.3–0.5	5
 DMJ3947-000	S	High	525–625	15	0.3–0.5	5

GaAs Flip Chip

GaAs Schottky Flip Chip Diodes—Low Frequency to 77 GHz

GaAs Flip Chip Schottky Diodes


Part Number	V_B @ 10 μA (V)	C_J @ 0 V, 1 MHz (pF)	Max. R_S (Ω)	V_F @ 1 mA (mV)	Recommended Frequency (GHz)	Configuration
 DMK2308-000	—	0.04–0.07	7	650–750	24–77	Anti-parallel
 DMK2790-000	3	0.04–0.07	7	650–750	24–77	Single

Wafer

Silicon Schottky Mixer Diode Chips (Wafer on Film Frame)—Low Frequency to 24 GHz

Silicon Schottky Mixer Diode Chips

Part Number	Min. V_B @ 10 μA (V)	C_J $V_R = 0 V, F = 1 MHz$ (pF)	V_F $I_F = 1 mA$ (mV)	Max. ΔV_F @ 1 mA (mV)	Max. R_T $I_F = 10 mA$ (Ω)
SMS3926-099	2	0.3–0.5	200–260	10	8
SMS3927-099	3	0.3–0.5	300–400	10	8
SMS3928-099	4	0.3–0.5	500–600	10	8

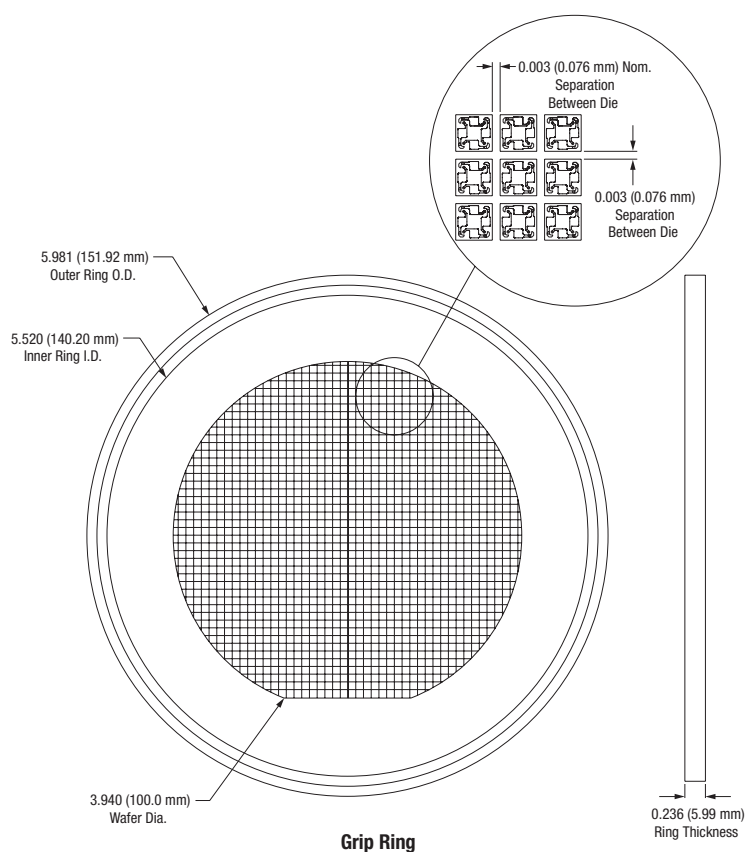

AEC-Q101 Qualified

Part Number	Min. V_B @ 10 μA (V)	Max. C_T @ 0 V (pF)	Max. IR $V_R = 1 V$ (nA)	Typ. C_T @ 0.15 V (pF)	V_F $I_F = 1 mA$ (mV)	V_F $I_F = 0.1 mA$ (mV)	Max. V_F @ Spec. I_F (mV)	Series Resistance (Ω)	Video Resistance @ 0 V (Ω)
SMSA3923-011LF	20	1.23	500 @ 15 V	—	370	—	1000 @ 35 mA	11	—
SMSA7621-060	2	0.18	—	—	260–320	—	—	12	—
SMSA7630-061	1	—	—	0.3	135–240	60–120	—	—	3000–7000

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

VARACTOR DIODES

Ideal for VCO, VCXO, Tunable Filters, and Phase Shifter Products

High Quality Factor (Abrupt) Varactor Diodes



Plastic Surface Mount (SMT) Abrupt Varactor Diodes—Low Frequency to 6 GHz

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 10 V$ (pF)	Typ. C_T $V_R = 30 V$ (pF)	Min. Total $C_T = 0 V /$ $C_T = 30 V$	Max. R_S 500 MHz (Ω)	Min. Q $V_R = 4 V$ @ 50 MHz
SMV1405 Series	30	1.84	1.25	0.95	0.63	4.1	0.80	3200
SMV1408 Series	30	2.94	1.88	1.28	0.95	4.1	0.60	2900
SMV1413 Series	30	6.37	4.10	2.85	1.77	4.2	0.35	2400
SMV1430 Series	30	0.88	0.60	0.44	0.31	3.8	1.60	3500
SMV1493 Series	12	19.00	11.20	7.10	—	—	0.50	—
SMV1494 Series	12	38.40	23.10	14.7	—	—	0.45	—

				
Single SOT-23 Green™	Common Cathode SOT-23 Green™	Common Cathode SC-70	Single SC-79 Green™	Single 0402 Green™
		SMV1405-074LF Marking: GE3	SMV1405-079LF Marking: Cathode	SMV1405-040LF Marking: 5
SMV1408-001LF Marking: DV1				SMV1408-040LF Marking: DV
SMV1413-001LF Marking: ER1	SMV1413-004LF Marking: ER3	SMV1413-074LF Marking: ER3	SMV1413-079LF Marking: Cathode	
			SMV1430-079LF Marking: Cathode	SMV1430-040LF Marking: 7
			SMV1493-079LF Marking: Cathode	
			SMV1494-079LF Marking: Cathode	

High Quality Factor (Abrupt) Varactor Diodes

Typical Performance Characteristics

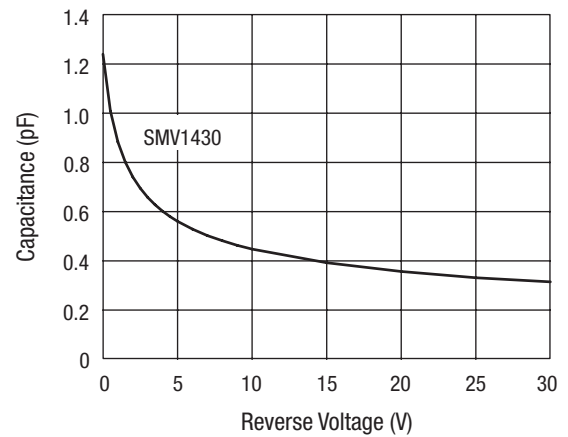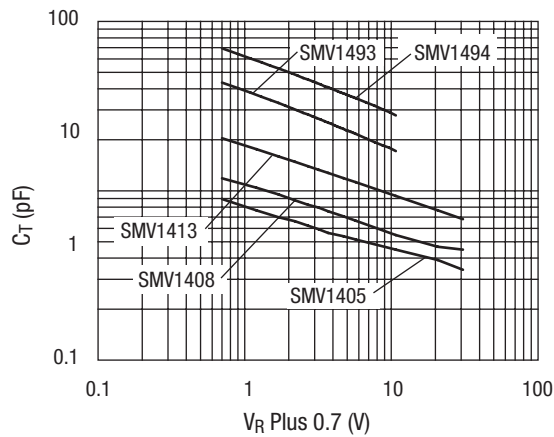

Silicon Abrupt Varactor Diode Chips—Low Frequency to 12 GHz

Part Number	Die Sizes (mils)	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 10 V$ (pF)	Typ. C_T $V_R = 30 V$ (pF)	Min. Total $C_T = 0 V$ / $C_T = 30 V$	Max. R_S 500 MHz (Ω)	Min. Q $V_R = 4 V$ @ 50 MHz
SMV1405-000	0.014±0.001	30	1.84	1.25	0.95	0.63	4.1	0.80	3200
SMV1408-000	0.014±0.001	30	2.94	1.88	1.28	0.95	4.1	0.60	2900
SMV1413-000	0.014±0.001	30	6.37	4.10	2.85	1.77	4.2	0.35	2400
SMV1493-000	0.018±0.002	12	19.00	11.20	7.10	—	—	0.50	—
SMV1494-000	0.018±0.002	12	38.40	23.10	14.70	—	—	0.45	—

Hermetic Packaged Abrupt Junction Varactor Diodes—Low Frequency to 12 GHz


Hermetic Stripline 240	Hermetic Pill 203	Hermetic Pill 219	Hermetic Pill 210
SMV1405-240	SMV1405-203	SMV1405-219	SMV1405-210
SMV1408-240	SMV1408-203	SMV1408-219	SMV1408-210
SMV1413-240	SMV1413-203	SMV1413-219	SMV1413-210
SMV1493-240	SMV1493-203	SMV1493-219	SMV1493-210
SMV1494-240	SMV1494-203	SMV1494-219	SMV1494-210

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 20 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1130 Series	26	18.50	2.00	1.47	1 to 3	0.8
SMV1135 Series	28	8.69	1.17	1.47	1 to 3	1.2

				
Common Cathode SOT-23 Green™	Single SC-79 Green™	Single SOT-23 Green™	Single SOD-323 Green™	Single 0402 Green™
	SMV1130-079LF Marking: Cathode	SMV1130-001LF Marking: HW1	SMV1130-011LF Marking: HW	SMV1130-040LF Marking: HZ1
SMV1135-004LF Marking: EG3				

Typical Performance Characteristics

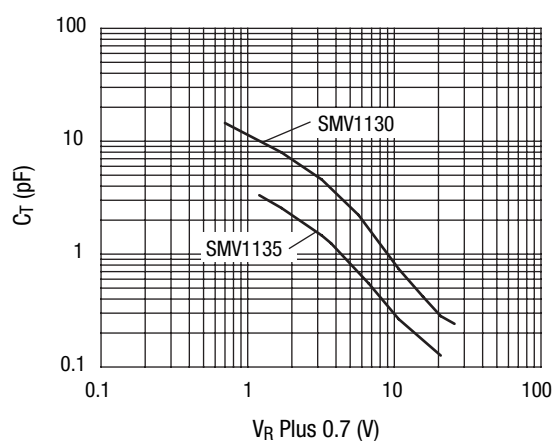


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Typ. C_T $V_R = 1\text{ V}$ (pF)	Typ. C_T $V_R = 4\text{ V}$ (pF)	Typ. C_T $V_R = 8\text{ V}$ (pF)	Typ. C_T $V_R = 12\text{ V}$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1129 Series	18.9	10.7	6.3	4.7	1.4	1 to 3	0.4
SMV1139 Series	5.5	3.1	2.2	1.9	1.4	1 to 3	0.6

	
Single SOD-323 Green™	Single SC-79 Green™
	SMV1129-079LF Marking: Cathode
SMV1139-011LF Marking: HG	


Typical Performance Characteristics

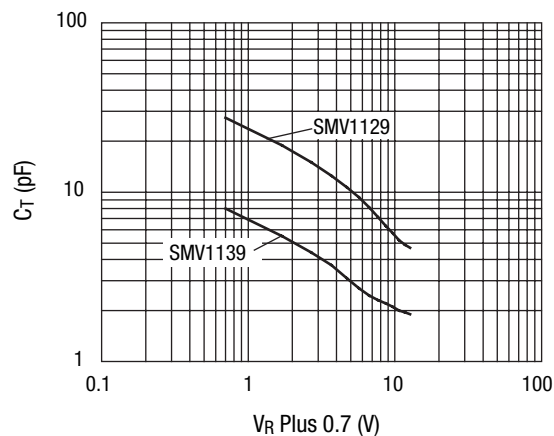

Part Number	Min. V_R $I_R = 10\text{ }\mu\text{A}$ (V)	Typ. C_T $V_R = 1\text{ V}$ (pF)	Typ. C_T $V_R = 4\text{ V}$ (pF)	Typ. C_T $V_R = 8\text{ V}$ (pF)	Typ. C_T $V_R = 12\text{ V}$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1142 Series	12	9.1	4.86	2.72	2.32	1.5	1 to 3	0.7
SMV1143 Series	12	12.9	6.87	3.82	3.25	1.5	1 to 3	0.65
SMV1144 Series	12	16.3	8.66	4.8	4.08	1.5	1 to 3	0.65
SMV1145 Series	12	28.35	15.02	8.29	7.02	1.5	1 to 3	0.6
SMV1147 Series	12	60.65	32.06	17.63	14.9	1.5	1 to 3	0.55
SMV1148 Series	12	70.48	36.29	20.22	17.43	1.5	1 to 3	0.5

	
Single SOD-323 Green™	Single SC-79 Green™
SMV1142-011LF Marking: GU	
SMV1143-011LF Marking: GV	
SMV1144-011LF Marking: GW	
SMV1145-011LF Marking: GA	SMV1145-079LF Marking: Cathode
SMV1147-011LF Marking: GY	SMV1147-079LF Marking: Cathode
SMV1148-011LF Marking: GZ	

Typical Performance Characteristics

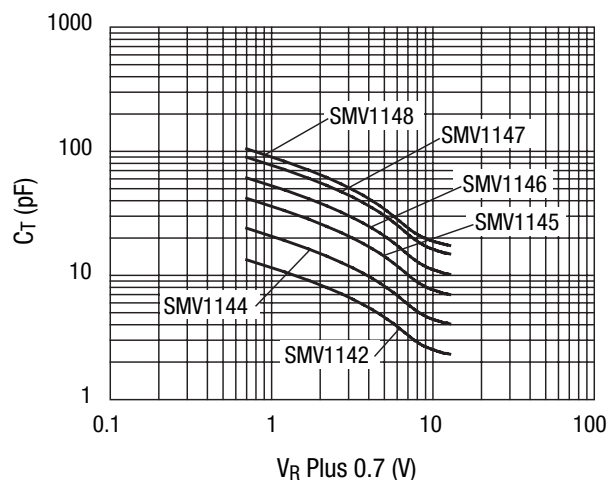


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 8 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1211 Series	12	98.6	19.4	10.5	5	1 to 4	0.4
SMV1212 Series	12	44.9	9.3	5.1	5	1 to 4	0.8
SMV1213 Series	12	18.1	3.5	1.9	5	1 to 4	1.4
SMV1214 Series	12	15.6	2.9	1.7	5	1 to 4	1.7
SMV1215 Series	12	9.1	1.9	1.2	5	1 to 4	2.8

					
Single SOT-23 Green™	Common Cathode SOT-23 Green™	Common Cathode SC-70	Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™
SMV1211-001LF Marking: EA1					
SMV1212-001LF Marking: EB1	SMV1212-004LF Marking: EB3	SMV1212-074LF Marking: EB3		SMV1212-079LF Marking: Cathode	
SMV1213-001LF Marking: D86	SMV1213-004LF Marking: GD3	SMV1213-074LF Marking: GD3	SMV1213-011LF Marking: GD	SMV1213-079LF Marking: Cathode	SMV1213-040LF Marking: J
SMV1214-001LF Marking: DL1					
SMV1215-001LF Marking: DM1			SMV1215-011LF Marking: DM		

Typical Performance Characteristics

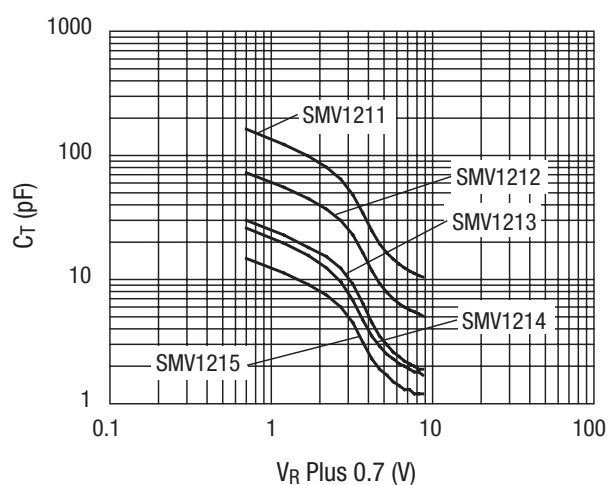


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 8 V$ (pF)	Typ. C_T $V_R = 12 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1231 Series	15	1.58	0.794	0.534	0.487	1.5	1 to 3	2.9
SMV1232 Series	15	2.67	1.22	0.81	0.74	1.5	1 to 3	1.5
SMV1233 Series	15	3.28	1.45	0.96	0.87	1.5	1 to 3	1.2
SMV1234 Series	15	6.28	2.81	1.65	1.38	1.6	1 to 3	0.8
SMV1235 Series	15	11.67	4.99	2.91	2.47	1.6	1 to 3	0.6
SMV1236 Series	15	17.02	7.19	4.49	3.95	1.6	1 to 3	0.5
SMV1237 Series	15	46.89	20.83	11.61	9.84	1.6	1 to 3	0.25

						
Single SOT-23 Green™	Common Cathode SOT-23 Green™	Common Cathode SC-70	Common Anode SC-70	Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™
		SMV1231-074LF Marking: KA3		SMV1231-011LF Marking: KA	SMV1231-079LF Marking: Cathode	SMV1231-040LF Marking: A
		SMV1232-074LF Marking: HC3		SMV1232-011LF Marking: HC	SMV1232-079LF Marking: Cathode	SMV1232-040LF Marking: Y
SMV1233-001LF Marking: DP1	SMV1233-004LF Marking: DP3	SMV1233-074LF Marking: DP3		SMV1233-011LF Marking: DP	SMV1233-079LF Marking: Cathode	SMV1233-040LF Marking: B
SMV1234-001LF Marking: DQ1	SMV1234-004LF Marking: DQ3		SMV1234-073LF Marking: DQ9	SMV1234-011LF Marking: DQ	SMV1234-079LF Marking: Cathode	SMV1234-040LF Marking: G
SMV1235-001LF Marking: DR1	SMV1235-004LF Marking: DR3	SMV1235-074LF Marking: DR3		SMV1235-011LF Marking: DR	SMV1235-079LF Marking: Cathode	SMV1235-040LF Marking: M
SMV1236-001LF Marking: EQ1	SMV1236-004LF Marking: EQ3	SMV1236-074LF Marking: EQ3		SMV1236-011LF Marking: EQ1	SMV1236-079LF Marking: Cathode	SMV1236-040LF Marking: R
SMV1237-001LF Marking: DT1						

Typical Performance Characteristics

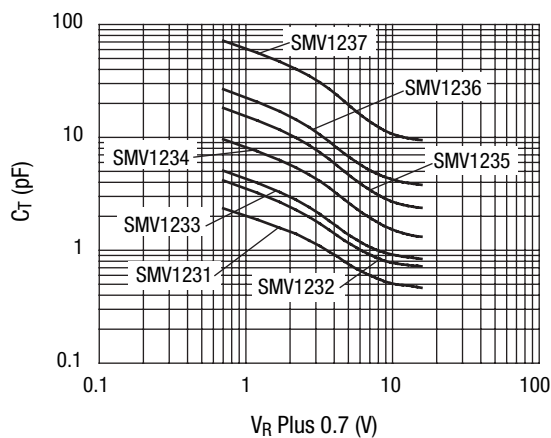


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 8 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1247 Series	15	4.37	0.77	0.64	9.5	0.3 to 4.7	6.0
SMV1248 Series	15	12.33	1.71	1.3	10.8	0.3 to 4.7	3.3
SMV1249 Series	15	18.18	2.72	2.03	11.0	0.3 to 4.7	2.2
SMV1251 Series	15	28.09	3.95	2.79	11.0	0.3 to 4.7	1.6
SMV1253 Series	15	37.07	4.86	3.28	11.0	0.3 to 4.7	1.4
SMV1255 Series	15	43.27	5.58	4.26	11.0	0.3 to 4.7	1.3

						
Single SOT-23 Green™	Common Anode SOT-23 Green™	Common Cathode SOT-23 Green™	Common Cathode SC-70	Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™
			SMV1247-074LF Marking: GF3	SMV1247-011LF Marking: GF	SMV1247-079LF Marking: Cathode	SMV1247-040LF Marking: H
SMV1248-001LF Marking: GG1			SMV1248-074LF Marking: GG3		SMV1248-079LF Marking: Cathode	SMV1248-040LF Marking: 8
SMV1249-001LF Marking: EF1	SMV1249-003LF Marking: EF9	SMV1249-004LF Marking: EF3	SMV1249-074LF Marking: EF3	SMV1249-011LF Marking: EF	SMV1249-079LF Marking: Cathode	SMV1249-040LF Marking: K
SMV1251-001LF Marking: EH		SMV1251-004LF Marking: EH3	SMV1251-074LF Marking: EH3	SMV1251-011LF Marking: EK	SMV1251-079LF Marking: Cathode	SMV1251-040LF Marking: EH1
		SMV1253-004LF Marking: EJ3		SMV1253-011LF Marking: EJ	SMV1253-079LF Marking: Cathode	SMV1253-040LF Marking: 3
SMV1255-001LF Marking: EK1		SMV1255-004LF Marking: EK3		SMV1255-011LF Marking: EK	SMV1255-079LF Marking: Cathode	SMV1255-040LF Marking: 4

Typical Performance Characteristics

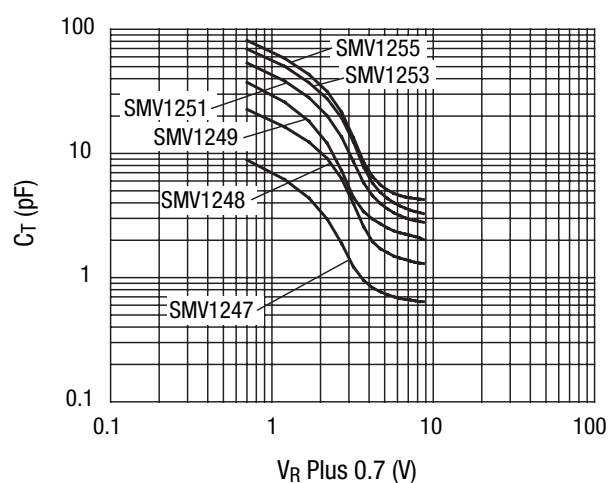



Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 8 V$ (pF)	Typ. C_T $V_R = 12 V$ (pF)	Typ. C_T $V_R = 20 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1245 Series	26	4.93	2.51	1.380	1.020	—	1.47	1 to 3	2.0
SMV1265 Series	28	14.26	5.15	1.610	1.120	0.830	17.70	1 to 26	2.4 Typ.
SMV1273-079LF	29	20.35	9.34	4.80	3.42	2.45	6.20	2 to 25	0.8 Typ.
SMV1275-079LF	10	3.06	1.58	1.05	0.89	—	1.8	1 to 4	0.7
SMV1276-079LF	10	4.32	2.03	1.37	1.26	—	2.0	1 to 4	0.7
SMV1281 Series	24	8.60	3.60	1.400	0.940	0.690	12 Typ.	1 to 20	1.7 Typ.
SMV1283-Series	28	9.13	3.64	1.16	0.815	0.589	14.00	1 to 26	2.4 Typ.
SMV1470-004LF	10	71.30	16.30	7.900	—	—	5.00	1 to 5	0.8







			
Single SOD-323 Green™	Single SC-79 Green™	Common Cathode SOT-23 Green™	Single 0402 Green™
SMV1245-011LF Marking: HL	SMV1245-079LF Marking: Cathode		
SMV1265-011LF Marking: HM			SMV1265-040LF Marking: HD1
	SMV1273-079LF Marking: Cathode		
	SMV1275-079LF Marking: Cathode		
	SMV1276-079LF Marking: Cathode		
SMV1281-011LF Marking: HP	SMV1281-079LF Marking: Cathode		
SMV1283-011LF Marking: HQ			SMV1283-040LF Marking: HC1
		SMV1470-007LF Marking: ET3	

Typical Performance Characteristics

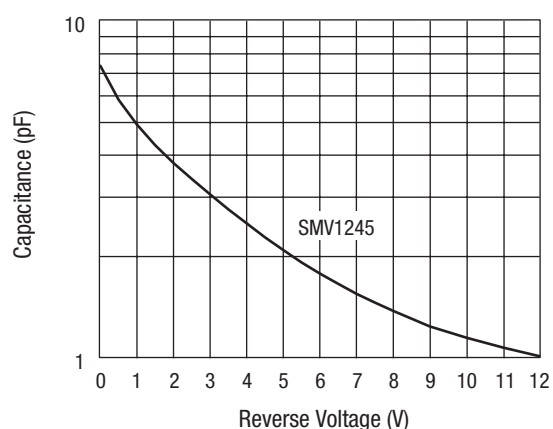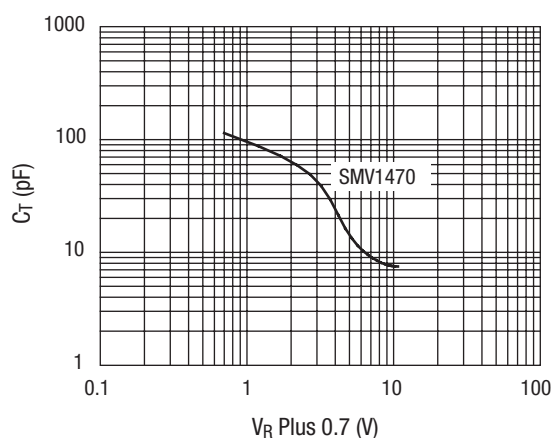

Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Typical Performance Characteristics (Continued)

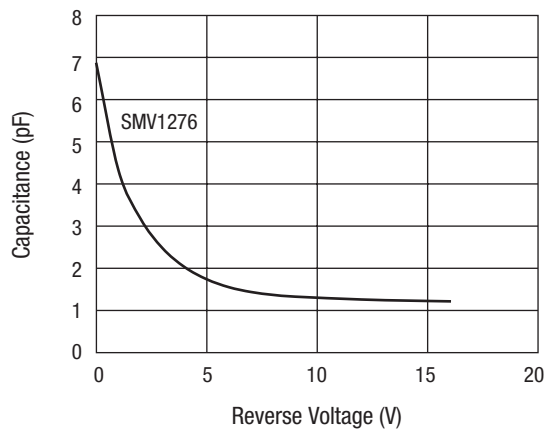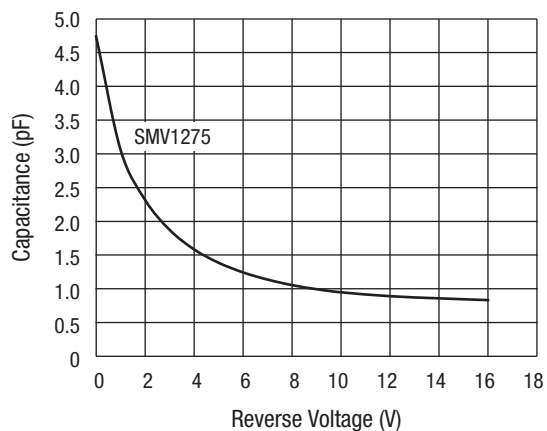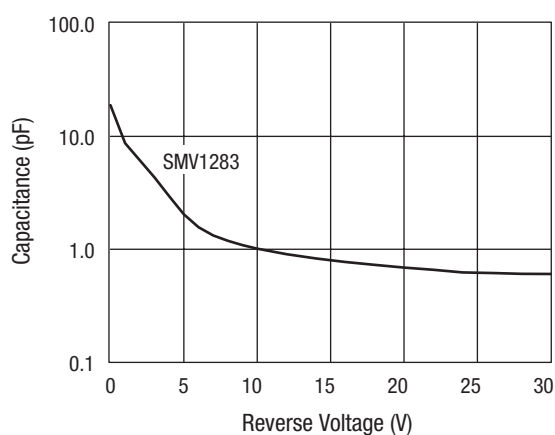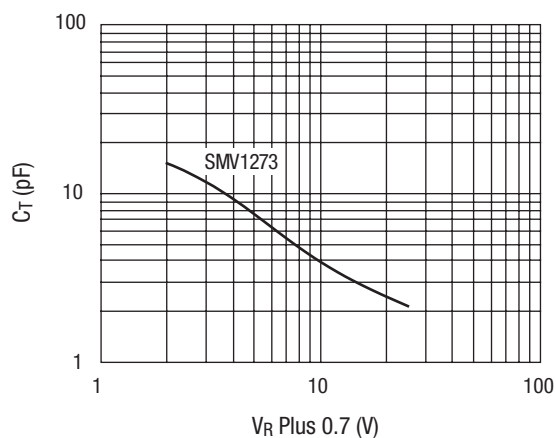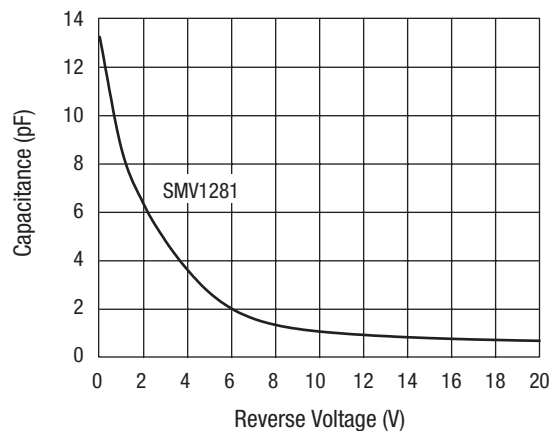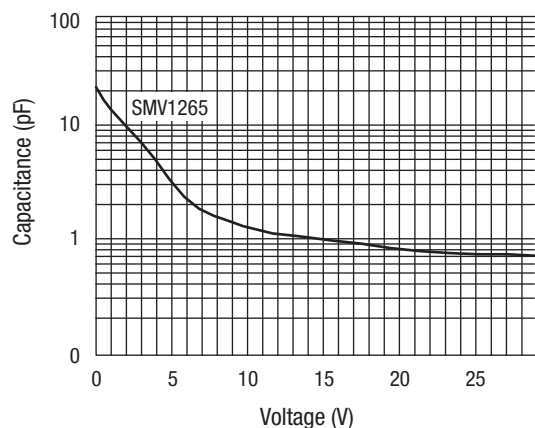


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10\ \mu\text{A}$ (V)	Typ. C_T $V_R = 1\ \text{V}$ (pF)	Typ. C_T $V_R = 4\ \text{V}$ (pF)	Typ. C_T $V_R = 8\ \text{V}$ (pF)	Typ. C_T $V_R = 20\ \text{V}$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1801 Series	32	58.00	26.90	8.00	3.20	20.6	1.0 to 28	1.2


Single SC-79 Green™
SMV1801-079LF Marking: Cathode


Typical Performance Characteristics

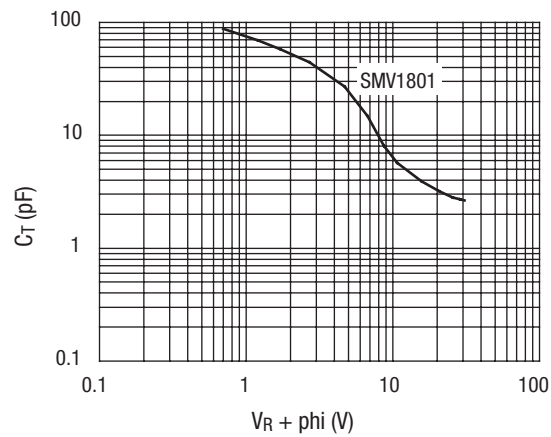

Part Number	Min. V_R $I_R = 10\ \mu\text{A}$ (V)	Typ. C_T $V_R = 1\ \text{V}$ (pF)	Typ. C_T $V_R = 4\ \text{V}$ (pF)	Typ. C_T $V_R = 8\ \text{V}$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1702-011LF	10	65.1	24.2	13.21	3.6	0.1 to 4	1.25


Single SOD-323 Green™
SMV1702-011LF Marking: HJ

Typical Performance Characteristics

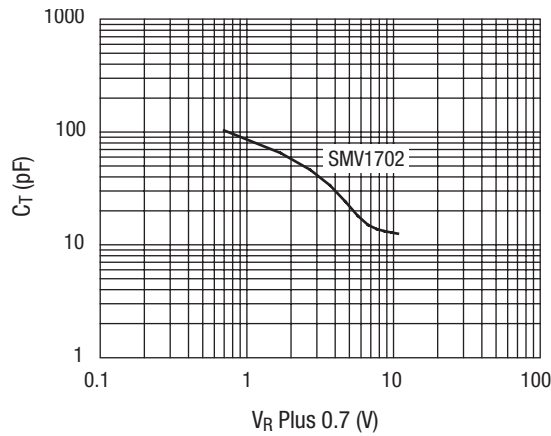


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 3 V$ (pF)	Typ. C_T $V_R = 20 V$ (pF)	Min. C_T (Ratio)
SMV1206-079LF	22	11.55	2.34	2 to 20


Single SC-79 Green™
SMV1206-079LF Marking: Cathode

Typical Performance Characteristics

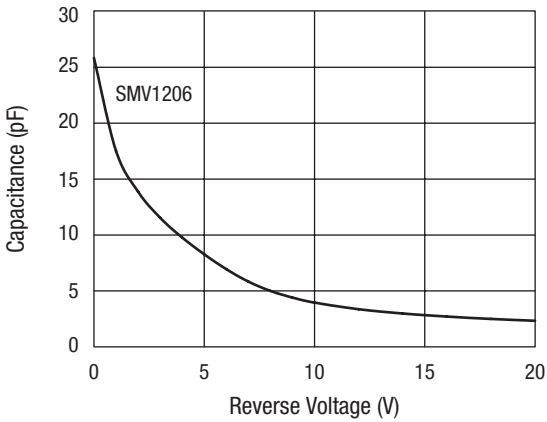



Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 8 V$ (pF)	Typ. C_T $V_R = 12 V$ (pF)	Typ. C_T $V_R = 20 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)
SMV2019 Series	22	1.51	0.81	0.44	0.35	0.30	2.3	4 to 20
SMV2020 Series	22	2.25	1.36	0.75	0.48	0.35	2.8	4 to 20
SMV2022 Series	22	5.14	3.01	1.50	0.96	0.73	3.0	4 to 20
SMV2023 Series	22	8.60	5.09	2.63	1.54	1.09	4.2	4 to 20

				
Single SOT-23 Green™	Common Cathode SOT-23 Green™	Single SOD-323 Green™	Single SC-79 Green™	Single 0402 Green™
			SMV2019-079LF Marking: Cathode	SMV2019-040LF Marking: Z
			SMV2020-079LF Marking: Cathode	
	SMV2022-004LF Marking: DJ3			
SMV2023-001LF Marking: DK1	SMV2023-004LF Marking: DK3	SMV2023-011LF Marking: DK1		

Typical Performance Characteristics

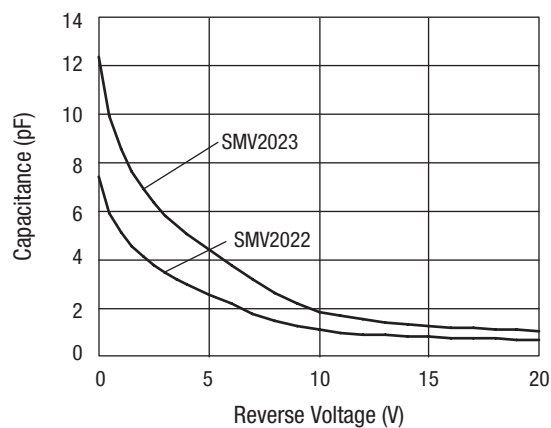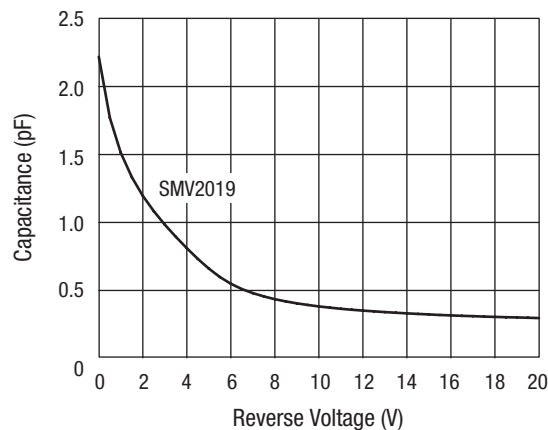



Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth Silicon Hyperabrupt Varactor Diodes (Continued)

Part Number	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 1 V$ (pF)	Typ. C_T $V_R = 4 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)	Max. R_S (Ω)
SMV1220-079LF	20	4.00	6.92	3.0	1 to 4	0.65
SMV1263 Series	20	5.11	1.54	2.3	0.5 to 2.5	1.2
SMV1270 Series	20	17.81	5.00	2.3	0.5 to 2.5	0.7
SMV1272-079LF	15	16.21	5.60	2.8	1 to 4	0.5
SMV1705 Series	12	18.30	6.10	2.8	1 to 4	0.32
SMV1763-079LF	10	5.20	1.90	2.3	0.5 to 2.5	0.7
SMV1770 Series	12	17.80	5.50	2.3	0.5 to 2.5	0.5
SMV1771 Series	12	22.90	6.90	2.3	0.5 to 2.5	0.5

			
Common Cathode SOT-23 Green™	Common Cathode SC-70	Single SC-79 Green™	Single 0402 Green™
		SMV1220-079LF Marking: Cathode	
	SMV1263-074LF Marking: EN3	SMV1263-079LF Marking: Cathode	SMV1263-040LF Marking: EN1
		SMV1270-079LF Marking: Cathode	SMV1270-040LF Marking: HN1
		SMV1272-079LF Marking: Cathode	
SMV1705-004LF Marking: HY3		SMV1705-079LF Marking: Cathode	SMV1705-040LF Marking: 0
		SMV1763-079LF Marking: Cathode	SMV1763-040LF Marking: L
		SMV1770-079LF Marking: Cathode	SMV1770-040LF Marking: ED1
		SMV1771-079LF Marking: Cathode	SMV1771-040LF Marking: EL1

Typical Performance Characteristics

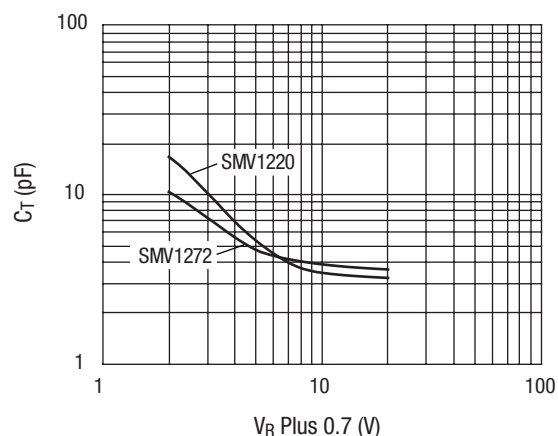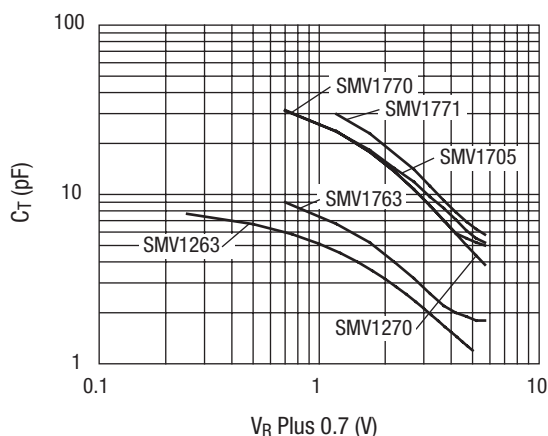



Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth and Low Phase Noise Silicon Hyperabrupt Varactor Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 2 V$ (pF)	Typ. C_T $V_R = 10 V$ (pF)	Typ. C_T $V_R = 18 V$ (pF)	Min. C_T (Ratio)	Capacitance Ratio Range (V)
SMV2025 Series	20	4.67	1.83	1.17	2.2	2 to 10
SMV2026 Series	15	14.27	5.69	3.10	2.0	2 to 10

	
Single SC-79 Green™	Single 0402 Green™
SMV2025-079LF Marking: Cathode	SMV2025-040LF Marking: DK1
SMV2026-079LF Marking: Cathode	SMV2026-040LF Marking: EC1

Typical Performance Characteristics

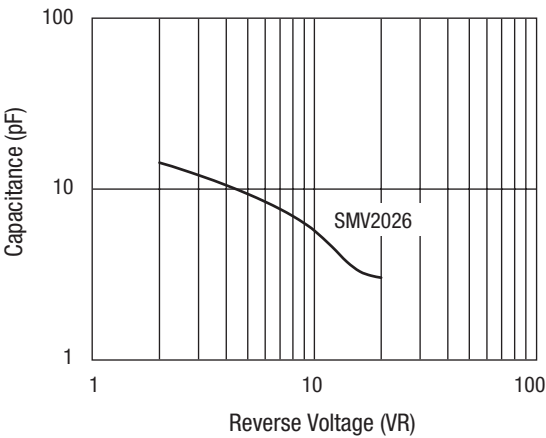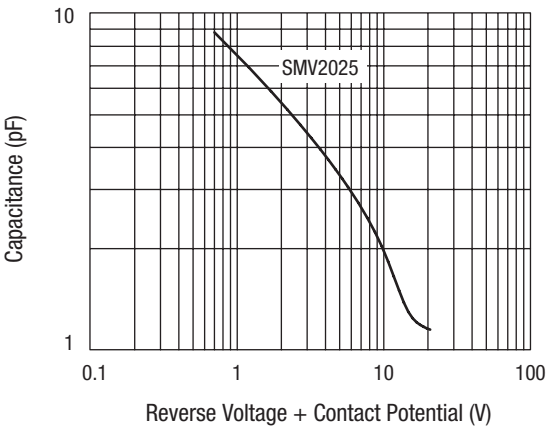


Plastic Surface Mount (SMT) Hyperabrupt Varactor Diodes—Low Frequency to 6 GHz

Large Bandwidth and Low Phase Noise Silicon Hyperabrupt Varactor Diodes

Part Number	Min. V_B $I_R = 10 \mu A$ (V)	Typ. C_T $V_R = 4 V$ (pF)	Typ. C_T $V_R = 20 V$ (pF)	Q $V_R = 4 V$ $f = 50 MHz$
SMV2201-040LF	22	0.85	0.25	500
SMV2202-040LF	22	1.35	0.35	500
SMV2203-040LF	22	1.85	0.45	400
SMV2204-040LF	22	2.85	0.65	400
SMV2205-040LF	22	4.85	1.00	400


Single 0402 Green™
SMV2201-040LF Marking: DC1
SMV2202-040LF Marking: DD1
SMV2203-040LF Marking: DE1
SMV2204-040LF Marking: DF1
SMV2205-040LF Marking: DH1

Typical Performance Characteristics

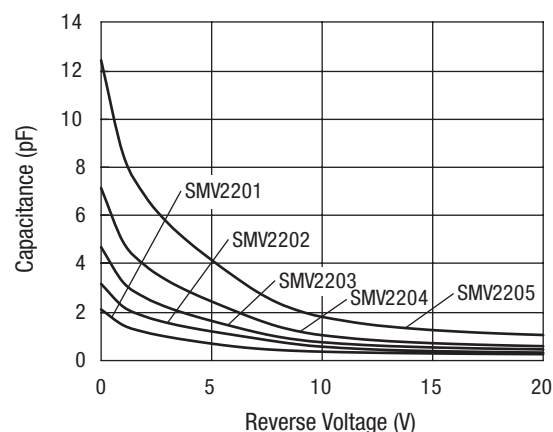

Large Bandwidth Silicon Hyperabrupt Varactor Diode Chips—Low Frequency to 12 GHz



Part Number	Die Size (mils)	Min. V_R $I_R = 10 \mu A$ (V)	Typ. C_J $V_R = 1 V$ (pF)	Typ. C_J $V_R = 4 V$ (pF)	Typ. C_J $V_R = 8 V$ (pF)	Typ. C_J $V_R = 12 V$ (pF)	Typ. C_J $V_R = 20 V$ (pF)	Min. Q $V_R = 4 V$ @ 50 MHz	Typ. R_S 1000 MHz (Ω)
SMV1705-000	0.012 ± 0.002	12	18.3	6.1	—	—	—	—	0.32
SMV2019-000	0.012 ± 0.002	22	1.53	0.84	0.38	0.24	0.16	500	4.8
SMV2020-000	0.012 ± 0.002	22	2.16	1.24	0.61	0.38	0.26	500	4.1
SMV2021-000	0.012 ± 0.002	22	3.09	1.83	0.97	0.56	0.36	500	2.8
SMV2022-000	0.012 ± 0.002	22	4.88	2.71	1.25	0.78	0.54	400	2.2
SMV2023-000	0.012 ± 0.002	22	7.67	4.75	2.68	1.49	0.91	400	1.4

Hermetic Packaged Large Bandwidth Silicon Hyperabrupt Varactor Diodes— Low Frequency to 12 GHz

Hermetic Stripline 240	Hermetic Pill 203	Hermetic Pill 219	Hermetic Pill 210
 SMV2019-240	 SMV2019-203	 SMV2019-219	 SMV2019-210
 SMV2020-240	 SMV2020-203	 SMV2020-219	 SMV2020-210
 SMV2021-240	 SMV2021-203	 SMV2021-219	 SMV2021-210
 SMV2022-240	 SMV2022-203	 SMV2022-219	 SMV2022-210
 SMV2023-240	 SMV2023-203	 SMV2023-219	 SMV2023-210

Epoxy and ceramic hermetic packaged diode products are available through Isolink (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Typical Performance Characteristics

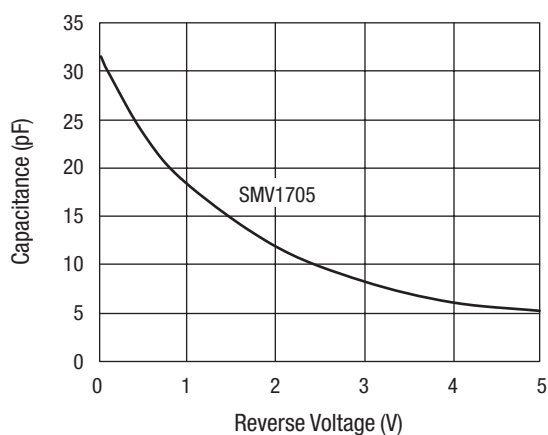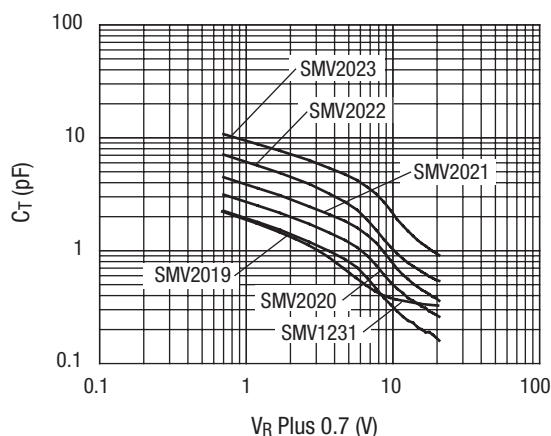

Wide Tuning Range (Hyperabrupt) Varactor Diodes—AEC-Q101 Qualified

Part Number	Package Type	V_R Reverse Breakdown Voltage $I_r = 10 \mu A$ (V) Min.	Typ. C_T Total Capacitance ³ $V_R = 1 V$ (pF)	Typ. C_T Total Capacitance ³ $V_R = 4 V$ (pF)	Typ. C_T Total Capacitance ³ $V_R = 8 V$ (pF)	Min. ¹ Total Capacitance Ratio	Capacitance Ratio Range (V)	R_s Series Resistance Max ² (Ω)
 SMVA1211-001LF	SOT-23	12	98.60	19.40	10.50	5.0	1 to 4	0.40
 SMVA1248-079LF	SC-79	15	12.33	1.71	1.30	10.8	0.3 to 4.7	3.30
 SMVA1253-079LF	SC-79	15	37.07	4.86	3.28	11.0	0.3 to 4.7	1.40
 SMVA1470-004LF	SOT-23	10	71.30	16.30	7.90	5.0	1 to 5	0.80
 SMVA1705-004LF	SOT-23	12	18.30	6.10	—	2.8	1 to 4	0.32

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

FRONT-END MODULES

RF Solutions

Designed with cost and space savings in mind, Skyworks' front-end modules (FEMs) combine the company's industry-leading power amplifier (PA), low noise amplifier (LNA), and switch functions into single low-cost, laminate-based multi-chip modules (MCMs). Key features of the transmit FEMs include multiband/multimode power amplifiers, current sensing power control, high-linearity transmit/receive switches, and all associated filtering, duplexing, and control functions. Further, the new module requires no external matching components, accelerating time-to-market.

Manufactured using Skyworks' proprietary hetero-junction bipolar transistor (HBT) power amplifier process and low-loss pseudomorphic high electron mobility transistor (pHEMT) switch technologies, FEMs deliver superior handset talk and standby time.

Front-end Modules Features:

- Multimode/Multiband (MMMB) power amplifiers
- High linearity Tx/Rx switches
- Single multi-chip module design
- Reduced handset design time
- Superior handset talk and standby times

Front-end Modules for Cellular

WCDMA / CDMA Front-end Modules

Band 1 (Tx = 1920–1980 MHz) (Rx = 2110–2170 MHz)

Part Number	Description	Typical PAE (%)	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
 SKY77433	FEM for WCDMA/HSDPA/HSUPA	–	–	3.5–4.45	16-pin MCM 4 x 7 x 1.2
 SKY77437	FEM for WCDMA/HSDPA/HSUPA	25	24	3.2–4.2	20-pin MCM 4 x 7 x 1.2

Band 5 & 6 (Tx = 824–849 MHz) (Rx = 869–894 MHz)

Part Number	Description	Typical Gain (dB)	Supply Voltage (V)	Package (mm)
SKY77413	FEM for WCDMA	25	3.2–4.2	22-pin MCM 5 x 8 x 1.5
 SKY77425	Tx FEM for CDMA	26	3.4–4.2	22-pin MCM 4 x 7 x 1.1
 SKY77436	FEM for WCDMA/HSDPA/HSUPA	–	3.4–4.45	16-pin MCM 4 x 7 x 1.2

Front-end Modules for Cellular

EDGE Front-end Modules

Part Number	Frequency (MHz)	Description	Typical Output Power (dBm) GSM/EDGE	Typical PAE (%) GSM	Supply Voltage (V)	Package (mm)
 SKY77521		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE–Triple-band WCDMA Antenna Switch Support			3.0–4.6	30-pin MCM 7 x 6 x 1.0
	824–849	GSM850	33.5	40		
	880–915	GSM900	33.5	40		
	1710–1785	DCS1800	31.0	34		
	1850–1910	PCS1900	31.0	34		
SKY77526		Tx FEM for Quad-band GSM/EDGE			2.9–4.8	34-pin MCM 8 x 8 x 1.2
	824–849	GSM850	33.3	41		
	880–915	GSM900	33.3	43		
	1710–1785	DCS1800	33.5	38		
	1850–1910	PCS1900	34.5	40		
 SKY77527		Tx FEM for Quad-band GSM/EDGE	–	–	2.9–4.4 (GSM) 3.0–4.4 (EDGE)	34-pad MCM 8 x 6 x 1.12
	824–849	GSM850				
	880–915	GSM900				
	1710–1785	DCS1800				
	1850–1910	PCS1900				
 SKY77529		Tx FEM for Quad-band GSM/EDGE	–	–	2.9–5.0 (GSM) 3.0–5.0 (EDGE)	26-pad MCM 7.5 x 7 x 0.9
	824–849	GSM850				
	880–915	GSM900				
	1710–1785	DCS1800				
	1850–1910	PCS1900				
 SKY77544		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE–Triple-band WCDMA Antenna Switch Support			3.0–4.6	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	34.0	41		
	880–915	GSM900	34.0	41		
	1710–1785	DCS1800	40.0	40		
	1850–1910	PCS1900	40.0	40		
 SKY77546		Tx-Rx FEM for Dual-band GSM/GPRS/EDGE			3.2–4.6 (GSM) 3.2–4.6 (EDGE)	30-pad MCM 7 x 6 x 1
	880–915	GSM900	34.0/–	45/18.5		
	1710–1785	DCS1800	24.0/–	21/21		
 SKY77549		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE–Quad-band WCDMA Antenna Switch Support			3.0–4.6	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	34.0	41		
	880–915	GSM900	34.0	41		
	1710–1785	DCS1800	31.2	39		
	1850–1910	PCS1900	31.2	39		
 SKY77558		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE–6-band Antenna Switch Support			3.0–4.8	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	34.0	47		
	880–915	GSM900	34.0	47		
	1710–1785	DCS1800	34.0	47		
	1850–1910	PCS1900	34.0	47		
 SKY77570		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE 6-band Antenna Switch Support			3.0–4.8	42-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		
 SKY77573-12		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with 4-band Antenna Switch Support			3.0–4.8	42-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		

Front-end Modules for Cellular

EDGE Front-end Modules (Continued)

Part Number	Frequency (MHz)	Description	Typical Output Power (dBm) GSM/EDGE	Typical PAE (%) GSM	Supply Voltage (V)	Package (mm)
 SKY77573-21		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with 4-band Antenna Switch Support			3.0–4.8	42-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		
 SKY77573-31		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE and TD-SCDMA with 4-band Antenna Switch Support			3.0–4.8	42-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		
	2010–2025	TD-SCDMA Band 34	TBD	TBD		
	1880–1920	TD-SCDMA Band 39	TBD	TBD		
 SKY77577-11		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with 4-band Antenna Switch Support and HB PA Output for SGLTE Applications			TBD	42-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		
 SKY77590-11		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with Six Linear TRx Switch Ports			3.0–4.6	28-pad MCM 6 x 6 x 0.85
	824–849	GSM850	34.0	40/20		
	880–915	GSM900	34.0	40/20		
	1710–1785	DCS1800	31.4	35/22		
	1850–1910	PCS1900	31.4	35/22		
 SKY77590-21		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with Six Linear TRx Switch Ports			3.0–4.6	28-pad MCM 6 x 6 x 0.85
	824–849	GSM850	34.0	40/20		
	880–915	GSM900	34.0	40/20		
	1710–1785	DCS1800	31.4	35/22		
	1850–1910	PCS1900	31.4	35/22		

GSM / GPRS Front-end Modules

Part Number	Frequency (MHz)	Description	Typical Output Power (dBm) GSM	Typical PAE (%)	Supply Voltage (V)	Package (mm)
SKY77517		Tx-Rx iPAC™ FEM for Dual-band GSM/GPRS			2.7–4.8	20-pin MCM 6 x 8 x 1.1
	824–849	GSM850	33.7	48		
	1850–1910	PCS1900	32.0	41		
 SKY77552		Quad-band Tx/Dual-band Rx iPAC™ FEM for GSM/GPRS			3.1–4.8	30-pin MCM 7 x 6 x 0.9
	824–849	GSM850	33.7	43.5		
	880–915	GSM900	33.7	43.5		
	1710–1785	DCS1800	32.0	37.5		
	1850–1910	PCS1900	32.0	37.5		

Front-end Modules for Cellular

GSM / GPRS Front-end Modules (Continued)

Part Number	Frequency (MHz)	Description	Typical Output Power (dBm) GSM	Typical PAE (%)	Supply Voltage (V)	Package (mm)
 SKY77554-21		Tx Quad-band/Rx Dual-band BiFET iPAC™ FEM for GSM/GPRS w/Dual WCDMA TRx Switch			3.1–4.8	28-pin MCM 6 x 6 x 0.9
	824–849	GSM850	34.5	42		
	880–915	GSM900	34.5	42		
	1710–1785	DCS1800	32.5	41		
	1850–1910	PCS1900	32.5	42		
 SKY77559		Tx Quad-band/Rx Dual-band BiFET iPAC™ FEM for GSM/GPRS w/Triple WCDMA TRx Switch			3.1–4.8	28-pin MCM 6 x 6 x 0.9
	824–849	GSM850	34.5	42		
	880–915	GSM900	34.5	42		
	1710–1785	DCS1800	32.5	41		
	1850–1910	PCS1900	32.5	42		
 SKY77562		Tx-Rx FEM for Quad-band GSM/GPRS 3-band Antenna Switch Support			3.0–4.8	28-pin MCM 6 x 6 x 0.9
	824–849	GSM850	34.0	47		
	880–915	GSM900	34.0	47		
	1710–1785	DCS1800	31.2	44		
	1850–1910	PCS1900	31.2	44		
 SKY77576-11	824–849	Tx-Rx FEM for Quad-band GSM/GPRS 4-band Antenna Switch Support			TBD	42-pad MCM 6 x 6 x 0.9
	880–915	GSM850	TBD	TBD		
	1710–1785	GSM900	TBD	TBD		
	1850–1910	DCS1800	TBD	TBD		
		PCS1900	TBD	TBD		
 SKY77580		Tx Quad-band/Rx Dual-band FEM for GSM/GPRS			3.1–4.3	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	34.7	44		
	880–915	GSM900	34.5	45		
	1710–1785	DCS1800	32.7	42		
	1850–1910	PCS1900	32.8	39		
 SKY77582		Tx Quad-band/Rx Dual-band FEM for GSM/GPRS			3.0–4.5	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		
 SKY77584		Tx-Rx Quad-band FEM for GSM/GPRS with Four Linear TRx Switch Ports			3.1–4.3	28-pad MCM 6 x 6 x 0.9
	824–849		34.4	42		
	880–915		34.3	45		
	1710–1785		32.0	39		
	1850–1910		32.0	39		
 SKY77585		Tx-Rx Quad-Band Front-End Module for GSM/GPRS w/Four Linear TRx Switch Ports			3.0–4.5	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	TBD	TBD		
	880–915	GSM900	TBD	TBD		
	1710–1785	DCS1800	TBD	TBD		
	1850–1910	PCS1900	TBD	TBD		
 SKY77589		Tx-Rx Quad-band FEM for GSM/GPRS with Six Linear TRx Switch Ports			3.1–4.3	28-pad MCM 6 x 6 x 0.9
	824–849		34.4	42		
	880–915		34.3	45		
	1710–1785		32.0	39		
	1850–1910		32.0	39		

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Front-end Modules for Cellular

LTE Front-end Modules

Part Number	Frequency (MHz)	Description	Typical Linear LTE Power (dBm)	Supply Voltage (V)	Package (mm)
 SKY77455	1920–2170	FEM for LTE/E-UTRA Band 1 (Tx 1920–1980 MHz), (Rx 2110–2170 MHz)	24.5	3.0–4.6	16-pad MCM 4 x 7 x 1.1
 SKY77456	1710–2170	FEM for LTE/E-UTRA Band 4/10 (Tx 1710–1770 MHz), (Rx 2110–2170 MHz)	24.5	3.0–4.6	16-pad MCM 4 x 7 x 0.5
 SKY77457	824–894	FEM for LTE/E-UTRA Band 5 (Tx 824–849 MHz), (Rx 869–894 MHz)	24.5	3.0–4.6	16-pad MCM 4 x 7 x 0.5
 SKY77458	880–960	FEM for LTE/E-UTRA Band 8 (Tx 880–915 MHz), (Rx 925–960 MHz)	24.5	3.0–4.6	16-pad MCM 4 x 7 x 1.1
 SKY77806	TBD	FEM for LTE Bands 12/17, 13	TBD	TBD	34-pad MCM 4.6 x 5.2 x 0.8

SkyOne® Modules

SkyOne® solutions leverage the SKY77619, Skyworks' high efficiency, multimode power amplifier module already in volume production with multiple customers. The highly flexible solution contains a common footprint that can be utilized by all of the world's carriers and in various regions. SkyOne® devices are compatible with all Qualcomm WCDMA/LTE smartphone platforms with general purpose input/output (GPIO) interface.

Part Number	Band	Frequency (MHz)	Package (mm)
 SKY78010	1	1920–1980	60-pad MCM 7.0 x 9.8 x 1.05
	2	1850–1910	
	4	1710–1755	
	5	824–849	
	8	880–915	
 SKY78011	1	1920–1980	60-pad MCM 7.0 x 9.8 x 1.05
	2	1850–1910	
	4	1710–1755	
	5	824–849	
	8	880–915	
 SKY78013	GSM850	824–849	60-pad MCM 7.0 x 9.8 x 0.9
	GSM900	880–915	
	DCS1800	1710–1785	
	PCS1900	1850–1910	
	1	1920–1980	
	3	1710–1785	
	5	824–849	
	8	880–915	
	20	832–862	

Front-end Modules for Cellular

SkyOne® Modules (Continued)

Part Number	Band	Frequency (MHz)	Package (mm)
 SKY78015	1	1920–1980	60-pad MCM 7.0 x 9.8 x 1.05
	2	1850–1910	
	3	1710–1785	
	5	824–849	
	8	880–915	
	20	832–862	
 SKY78021	GSM850	824–849	60-pad MCM 7.0 x 9.0 x 0.9
	GSM900	880–915	
	DCS1800	1710–1785	
	PCS1900	1850–1910	
	1	1920–1980	
	2/25	1850–1915	
	3	1710–1785	
	3	1710–1755	
	5/18/19/26	814–849	
	8	880–915	
	20	832–862	
	Rx only band	717–728	
 SKY78022	GSM850	824–849	60-pad MCM 8.0 x 9.0 x 0.9
	EGSM900	880–915	
	DCS1800	1710–1785	
	PCS1900	1850–1910	
	1	1920–1980	
	3	1710–1785	
	25	1850–1910	
	5/18	824–849	
	8	880–915	
	34	2010–2025	
	39	1880–1920	
 SKY78025	GSM850	824–849	60-pad MCM 8.0 x 9.0 x 0.9
	EGSM900	880–915	
	DCS1800	1710–1785	
	PCS1900	1850–1910	
	1	1920–1980	
	2	1850–1910	
	4	1710–1755	
	5	824–849	
	8	880–915	
 SKY78026	GSM850	824–849	60-pad MCM 8.0 x 9.0 x 0.9
	EGSM900	880–915	
	DCS1800	1710–1785	
	PCS1900	1850–1910	
	1	1920–1980	
	2	1850–1910	
	5	824–849	
	8	880–915	
	20	832–862	
 SKY78027-12	GSM850	824–849	60-pad MCM 8.0 x 9.0 x 0.9
	EGSM900	880–915	
	DCS1800	1710–1785	
	PCS1900	1850–1910	
	I	1920–1980	
	II	1850–1910	
	III	1710–1785	
	V	824–849	
	VIII	880–915	
	XX	832–862	

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Front-end Modules for Cellular

TD-SCDMA Front-end Modules

Part Number	Frequency (MHz)	Description	Package (mm)
 SKY77570-12		Tx-Rx FEM for Quad-Band GSM/ GPRS/ EDGE with Six Linear TRx Switch Ports and Dual-Band TD-SCDMA	42-pad MCM 6 x 6 x 0.9
	824-849	GSM850	
	880-915	GSM900	
	1710-1785	DCS1800	
	1850-1910	PCS1900	
	824-849	EDGE850	
	880-915	EDGE900	
	1710-1785	EDGE1800	
	1850-1910	EDGE1900	
	2010-2025	TD-SCDMA Bands 34	
	1880-1920	TD-SCDMA Bands 39	
 SKY77590-51		Tx-Rx FEM for Quad-band GSM/ GPRS/EDGE with Six Linear TRx Switch Ports and Dual-band TD-SCDMA	28-pad MCM 6 x 6 x 0.9
	824-849	GSM850	
	880-915	GSM900	
	1710-1785	DCS1800	
	1850-1910	PCS1900	
	880-915	EDGE850	
	880-915	EDGE900	
	1710-1785	EDGE1800	
	1850-1910	EDGE1900	
	2010-2025	TD-SCDMA Band 34	
	1880-1920	TD-SCDMA Band 39	
 SKY77590-61		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with Six Linear TRx Switch Ports and Dual-band TD-SCDMA	28-pad MCM 6 x 6 x 0.9
	824-849	GSM850	
	880-915	GSM900	
	1710-1785	DCS1800	
	1850-1910	PCS1900	
	880-915	EDGE850	
	880-915	EDGE900	
	1710-1785	EDGE1800	
	1850-1910	EDGE1900	
	2010-2025	TD-SCDMA Band 34	
	1880-1920	TD-SCDMA Band 39	
 SKY77592		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with Six Linear TRx Switch Ports and Dual-band TD-SCDMA	28-pad MCM 6 x 6 x 0.9
	824-849	GSM850	
	880-915	GSM900	
	1710-1785	DCS1800	
	1850-1910	PCS1900	
	824-849	EDGE850	
	880-915	EDGE900	
	1710-1785	EDGE1800	
	1850-1910	EDGE1900	
	2010-2025	TD-SCDMA Band 34	
	1880-1920	TD-SCDMA Band 39	

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Front-end Modules for Cellular

TD-SCDMA Front-end Modules (Continued)

Part Number	Frequency (MHz)	Description	Package (mm)
 SKY77593		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with Four Linear TRx Switch Ports and Dual-band TD-SCDMA	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	
	880–915	GSM900	
	1710–1785	DCS1800	
	1850–1910	PCS1900	
	824–849	EDGE850	
	880–915	EDGE900	
	1710–1785	EDGE1800	
	1850–1910	EDGE1900	
	2010–2025	TD-SCDMA Band 34	
	1880–1920	TD-SCDMA Band 39	
 SKY77594		Tx-Rx FEM for Quad-band GSM/GPRS/EDGE with Two Rx Switch Ports and Dual-band TD-SCDMA	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	
	880–915	GSM900	
	1710–1785	DCS1800	
	1850–1910	PCS1900	
	824–849	EDGE850	
	880–915	EDGE900	
	1710–1785	EDGE1800	
	1850–1910	EDGE1900	
	2010–2025	TD-SCDMA Band 34	
	1880–1920	TD-SCDMA Band 39	
 SKY77597-11		Tx-Rx Front-End Module for Quad-Band GSM/GPRS/EDGE, and Dual-Band TD-SCDMA with Six Linear TRx Switch Ports, and High Band Power Amplifier Output for SVLTE Applications with SP2T Switch	28-pad MCM 6 x 6 x 0.9
	824–849	GSM850	
	880–915	GSM900	
	1710–1785	DCS1800	
	1850–1910	PCS1900	
	824–849	EDGE850	
	880–915	EDGE900	
	1710–1785	EDGE1800	
	1850–1910	EDGE1900	
	2010–2025	TD-SCDMA Bands 34	
	1880–1920	TD-SCDMA Bands 39	

Diversity Receive Modules

Part Number	Package (mm)
 SKY13529-11	17-lead MCM 4 x 3 x 0.8
 SKY13568-11	17-lead MCM 4 x 3 x 0.8
 SKY13569-11	17-lead MCM 4 x 3 x 0.8

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

Front-end Modules for Cellular

Antenna Switch Modules

High Throw Count (>4T) Switches / Antenna Switch Modules

Skyworks Solutions is pleased to offer a broad selection of high throw count antenna switch modules (ASMs) leveraging both GaAs and SOI technology to respond to all cellular standards specific requirements (GSM, GPRS, EDGE, WCDMA, TD-SCDMA, and LTE). Using either multi-chip module (MCM) or quad flat no-lead (QFN) packaging allows the integration of filtering functions such as Tx harmonic filters and ESD protection, and respond to a wide range of cellular front-end switching requirements such as antenna switching, Rx diversity switching or WCDMA band-mode switching. Any cellular RF front-end that requires high performance, reduced current consumption, and low insertion loss in a compact footprint would benefit from our portfolio of antenna switch module solutions.

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IMD3 (dBm)	Package (mm)
 SKY13362-389LF	SP10T (R)	0.4–2.7	0.5–1.35	21–38	-105	26-pin QFN 3.0 x 3.8 x 0.85
 SKY13364-389LF	SP10T (R)	0.4–2.7	0.5–1.1	30	-105	26-pin QFN 3.0 x 3.8 x 0.85
 SKY13404-466LF	SP10T (R)	0.4–2.7	0.5–1.35	45–24	-110	26-pin QFN 2.6 x 3.4 x 0.55
 SKY13406-389LF	SP10T (R)	0.4–2.7	0.5–1.35	45–24	-110	26-pin QFN 2.6 x 3.4 x 0.55
 SKY18106-455LF	SP8T (R)	0.4–2.2	0.4–0.8	25	-102	26-pin QFN 3.0 x 3.8 x 0.75
 SKY18108-11	SP9T (R)	0.4–2.7	0.8–0.9	>35	-110	20-pin MCM 3.2 x 3.5 x 0.9
 SKY13412-487LF	SP12T (R)	0.4–2.7	0.4–1.1	35–23	-110	30-pin QFN 3.0 x 3.8 x 0.75
SKY18120-11	SP9T (R)	0.4–2.7	0.5–1.1	24–44	-105	20-pin MCM 2.5 x 2.5 x 0.9

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 SKY13418-485LF	SP8T (R)	0.1–3.0	0.35–0.6	35–25	69	38	14-pin QFN 2.0 x 2.0 x 0.5
 SKY13455-31	SP12T (R)	0.4–2.7	0.6–1.25	22–43	–	–	22-pin MCM 3.2 x 2.5 x 0.8

WiFi Connectivity

2.5 GHz Front-end Modules

Part Number	Frequency (GHz)	802.11 WLAN Standard	Antenna Ports	Architecture	Typ. Current @ V _{CC} = 3.3 V (mA)	Typ. P _{OUT} @ 2.5% EVM (dBm)	Typ. P _{OUT} @ 3.0% EVM (dBm)	Typ. Tx Gain (dB)	Package (mm)
SE2521A60	2.4–2.5	b g	2	2.4 GHz WLAN Front End	205 180	–	23 (@ 2%) 18 (@ 2%)	29 29	24-pin LGA 8 x 7 x 1.1
SE2521A80	2.4–2.5	b g	2	2.4 GHz WLAN Front End	300 275	–	20 20	30 30	24-pin LGA 8 x 7 x 1.2
SE2564L	2.4–2.5	b g	2	2.4 GHz High Efficiency WLAN Front End	160 130	–	17 17	27 27	24-pin QFN 3 x 4 x 0.9
SE2603L	2.4–2.5	b g	2	2.4 GHz High Efficiency WLAN Front End	180 145	–	17 17	27 27	24-pin QFN 3 x 4 x 0.9

WiFi Connectivity

2.5 GHz Front-end Modules (Continued)

Part Number	Frequency (GHz)	802.11 WLAN Standard	Antenna Ports	Architecture	Typ. Current @ $V_{CC} = 3.3\text{ V}$ (mA)	Typ. P_{OUT} @ 2.5% EVM (dBm)	Typ. P_{OUT} @ 3.0% EVM (dBm)	Typ. Tx Gain (dB)	Package (mm)
SE2611T	2.4–2.5	b g	1	2.4 GHz High Efficiency WLAN/Bluetooth® Front End	215 185	–	20 (@ 4%) 19 (@ 4%)	27 27	20-pin QFN 3 x 3 x 0.6
SE2613T	2.4–2.5	b g	1	2.4 GHz WLAN/Bluetooth® Front End	160 140	–	20 (@ 4%) 17.5 (@ 4%)	26 26	16-pin QFN 3 x 3 x 0.6
SE2614BT	2.4–2.5	b g	1	2.4 GHz High Efficiency WLAN Front End	190 160	–	18 18	30 30	20-pin QFN 3 x 3 x 0.6
SE2620T	2.4–2.5	b g n	1	802.11b/g/n WLAN FEM with Bluetooth Port	160 140 TBD	20 (@ 3% EVM) 18 (@ 3% EVM) TBD	–	26	16-pin QFN 3 x 3 x 0.6
SE2621L	2.4–2.5	b g n	2	802.11b/g/n WLAN FEM with Diversity	160 130 130	–	19 17 17	27	24-pin QFN 3 x 4 x 0.9
SKY65249-11	2.4–2.5	b g	2	One Single-band Tx/Rx Chain	210 180	21 18	–	26 26	Laminate 4 x 4 x 0.9
SKY65534-11	2.4–2.5	b g n	1	Integrated High-performance 2.4 GHz PA, Harmonic Filter, LNA with Bypass, and T/R Switch	190 (@ 20 dBm)	20 18	19 (@ 3% EVM)	26	16-pin QFN 2.5 x 2.5 x 0.45
SKY85302-11	2.4–2.5	b g n ac	1	2.4 GHz, 256 QAM WLAN/Bluetooth® FEM	180 (@ 19 dBm @ 3.6 V)	–	19	26	16-pin QFN 2.5 x 2.5 x 0.45
SKY85303-11	2.4–2.5	b g n ac	1	2.4 GHz, 256 QAM WLAN/Bluetooth® FEM	180 (@ 19 dBm @ 3.6 V)	–	19	26	16-pin QFN 2.5 x 2.5 x 0.45
 SKY85309-11	2.4–2.5	802.11ac	1	WLAN Front-End Module	TBD	–	TBD	TBD	24-pin QFN 3 x 5 x 0.85

5 GHz Front-end Modules

Part Number	Frequency (GHz)	802.11 WLAN Standard	Antenna Ports	Architecture	Typ. Current @ $V_{CC} = 3.3\text{ V}$ (mA)	Typ. Current @ $V_{CC} = 5\text{ V}$ (mA)	Typ. P_{OUT} @ 3.0% EVM (dBm)	Typ. Tx Gain (dB)	V_{CC} (V)	Package (mm)
SE5006L	4.9–5.85	a	1	5 GHz Front-end Module with Power Detector	195	–	17	31	–	16-pin QFN 3 x 3 x 0.9
SE5007BT	4.9–5.85	a g n	1	5 GHz Front-end Module with Power Detector	195	–	17	31	–	16-pin QFN 3 x 3 x 0.9
SE5007T	4.9–5.85	a	1	5 GHz Front-end Module with Power Detector	195	–	17	30	–	16-pin QFN 3 x 3 x 0.6

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

WiFi Connectivity

5 GHz Front-end Modules (Continued)

Part Number	Frequency (GHz)	802.11 WLAN Standard	Antenna Ports	Architecture	Typ. Current @ $V_{CC} = 3.3\text{ V}$ (mA)	Typ. Current @ $V_{CC} = 5\text{ V}$ (mA)	Typ. P_{OUT} @ 3.0% EVM (dBm)	Typ. Tx Gain (dB)	V_{CC} (V)	Package (mm)
SE5012T	4.9–5.85	a	1	5 GHz Front-end Module with Power Detector	195	-270	17 21	TBD	3.3 5	16-pin QFN 3 x 3 x 0.6
SKY65535-11	5.15–5.95	a	1	Integrated High Performance 5 GHz PA with Harmonic Filter, LNA with Bypass, and SPDT Switch	175 (@ 17.5 dBm)	–	17.5 (@ 3 EVM)	29	–	16-pin QFN 2.5 x 2.5 x 0.45
 SKY85601-11	4.9–5.9	a/n	1	5 GHz Front-end Module	TBD	–	TBD	TBD	3.0–3.6	16-pin QFN 2.5 x 2.5 x .045
SKY85702-11	4.9–5.85	n ac	1	5 GHz Front-end Module	250 (@ 19 dBm @ 3.6 V)	–	18 (802.11n) 16 (1.8% EVM, 11ac)	28	3.0–4.2	16-pin QFN 2.5 x 2.5 x .045
SKY85703-11	5.15–5.85	ac	1	5 GHz Front-end Module	TBD	TBD	TBD	28	3.0–3.6	16-pin QFN 3 x 3 x 0.55
 SKY85706-11	5.15–5.85	n ac	1	5 GHz Front-end Module	220 (@ 15.5 dBm @ 3.6 V)	–	18 (802.11n) 15.5 (1.8% EVM, 11ac)	30	3.0–4.6	16-pin QFN 2.5 x 2.5 x .045
SKY85707-21	4.9–5.85	n ac	1	5 GHz Front-end Module	240 (@ 17 dBm @ 3.6 V)	–	17 (802.11n) 15 (1.8% EVM, 11ac)	28	3.2–4.6	16-pin QFN 2.5 x 2.5 x .040
 SKY85709-11	4.9–5.25	n ac	1	5 GHz Front-end Module with Integrated PA, LNA with Bypass and SPDT	260 (@ 19 dBm @ 3.6 V)	–	18 (802.11n) 16 (1.5% EVM, 11ac)	30	3.0–4.8	16-pin QFN 2.5 x 2.5 x .045
 SKY85710-11	5.15–5.85	802.11ac	1	WLAN Front-End Module		TBD		TBD	5	24-pin QFN 3 x 5 x 0.85
 SKY85712-11	5.15–5.85	802.11ac	1	5 GHz WLAN Front-End Module	220 (11ac, 17 dBm)		18 (3% EVM)	27	3.3	16-pin QFN 3.0 x 3.0 x 0.55
 SKY85712-21	5.15–5.85	802.11ac	1	5 GHz WLAN Front-End Module		275 (11ac, 19 dBm)	20 (3% EVM)	27	5	16-pin QFN 3.0 x 3.0 x 0.55

NEW New products (indicated in blue, bold) are continually being introduced at Skyworks. For the latest information, please visit the new products section of our Web site at www.skyworksinc.com.

WiFi Connectivity

Dual-band Front-end Modules

Part Number	Frequency (GHz)	802.11 WLAN Standard	Antenna Ports	Architecture	Typ. Current @ $V_{CC} = 3.3\text{ V}$ (mA)	Typ. P_{OUT} @ 2.5% EVM (dBm)	Typ. P_{OUT} @ 3.0% EVM (dBm)	Typ. Tx Gain (dB)	Package (mm)
SE2547A	4.9–5.875 2.4–2.5	a	2	Dual-band 802.11a/b/g/n WLAN Front End	170	–	16.5	24	32-pin LGA 5 x 5 x 1
		b			250		21.0	26	
		g			170		18.0	26	
SE2548A	4.9–5.875 2.4–2.5	a	1	Dual-band 802.11a/b/g/n WLAN Front End	175	–	16.5	24	32-pin LGA 5 x 5 x 1
		b			250		21.0	26	
		g			170		18.0	26	
 SE2577L	4.9–5.875 2.4–2.5	a b g n	1	Dual Band 802.11a/b/g/n WLAN Front End	–	–	–	–	20-pin QFN 3 x 3 x 0.9
SE2593A20	4.9–5.85 2.4–2.5	a	1	Dual-band 802.11n WLAN Front End	180	–	16.0	28	30-pin LGA 5 x 6 x 1
		b			–		20.0	30	
		g			180		18.0	30	
SE2594L	4.9–5.875 2.4–2.5	a	1	Dual-band 802.11a/b/g/n WLAN Front End	220	–	16.5	24	32-pin QFN 5 x 5 x 0.9
		b			180		21.0	27	
		g			150		18.0	27	
SE2595L	4.9–5.85 2.4–2.485	a	1	Dual-band 802.11n WLAN Front End	230	–	16.0	23	32-pin QFN 5 x 5 x 0.9
		b			TBD		20.0	26	
		g			180		18.0	26	
SE5501L	5.15–5.85 2.4–2.485	a	2	Dual-band 802.11n WLAN/BT Front End	190	–	18.0	18	30-pin QFN 3 x 5 x 0.9
		g			130		20.0	22	
SE5502L	4.9–5.875 2.4–2.5	a	1	Dual-band 802.11a/b/g/n WLAN Front End	210	–	16.0	26	24-pin QFN 4 x 4 x 0.9
		b			175		21.0	28	
		g			150		18.0	28	
SE5503A	4.9–5.9 2.4–2.5	a	1	Dual-band 802.11a/b/g/n WLAN Front End	220	–	16.0	24	24-pin LGA 4 x 4 x 1.0
		b			190		21.0	27	
		g			150		18.0	27	
SE5510T	4.9–5.9 2.4–2.5	a	2	Dual-band 802.11n WLAN/BT Front End	205	–	18.0	26	28-pin QFN 3 x 4 x 0.6
		g			190		20.0	26	
SE5511T	4.9–5.9 2.4–2.5	a	2	Dual-band 802.11n WLAN/BT Front End	205	–	18.0	26	28-pin QFN 3 x 4 x 0.6
		g			190		20.0	26	
SE5512L	4.9–5.85 2.4–2.5	a	1	Dual-band 802.11a/b/g/n WLAN Front End	210	–	16.0	–	24-pin QFN 4 x 4 x 0.9
		b			175		19.0		
		g			150		18.0		
SE5516A	2.4–2.5 4.9–5.9	a	1	802.11a/g/n/ac Wireless LAN Front End	220	16 21 18 18 (@ 3.0% EVM) 16 (@ 3.0% EVM) 16 (@ 1.8% EVM) 13 (@ 1.8% EVM)	–	25–30	24-pin LGA 4 x 4 x 1.0
		b			205				
		g			185				
		n (2G)			TBD				
		n (5G)			TBD				
		ac (2G)			155				
SKY85803	2.4–2.5 4.9–5.9	a	1	802.11a/b/g/n/ac WLAN Front End	TBD	TBD	–	TBD	24-pin LGA 4 x 4 x 1.0
		b							
		g							
		n ac							

Smart Energy—Connected Home and Automation 802.15.4, ISM, and ZigBee®

Part Number	RF Frequency (MHz)	Typ. Rx Insertion Loss (dB)	Typ. Rx Gain (dB)	Typ. Rx NF (dB)	Tx Gain (dB)	Typ. Saturated Output Power (dBm)	Supply Voltage (V)	Package (mm)
SE2431L	2400–2500	2.0	12.5	2.0	23.0	24.0	2.0–3.6	24-pin QFN 3 x 4 x 0.9
SE2432L	2400–2500	3.0	11.5	2.0	22.0	24.0	2.0–3.6	24-pin QFN 3 x 4 x 0.9
SE2435L	860–930	2.0	16.0	2.0	28.0	31.5	2.0–4.8	24-pin QFN 4 x 4 x 0.9
SE2436L	2400–2500	3.0	11.5	2.5	28.0	27.0	2.0–4.8	24-pin QFN 4 x 4 x 0.9
SE2438T	2400–2500	3.5	10.5	3.5	16.0	16.0	2.0–3.6	20-pin QFN 3 x 3 x 0.55
SE2442L	902–928	0.7	-0.7	0.7	28.0	31.5	2.0–4.8	24-pin QFN 4 x 4 x 0.9
 SKY65313-21	860–900	–	16.1	1.9	20.5	30.5	3.3	28-pin MCM 6 x 6 x 0.9
SKY65326-11	380–500	0.5	–	–	34.0	30.7	3.6	12-pin MCM 8 x 8 x 1.35
SKY65336-11	2400–2500	–	10.5	2.0	17/7	20/10	3	28-pin MCM 8 x 8 x 1.3
SKY65337-11	2400–2500	1.6	–	–	17/7	20.1/10.5	3	28-pin MCM 8 x 8 x 1.3
SKY65338-21	450–470	0.6	–	–	32.0	27.0	3.6	12-pin MCM 8 x 8 x 1.35
SKY65342-11	450–470	0.6	–	–	34.6	29.1	3.6	12-pin MCM 8 x 8 x 1.35
SKY65343-11	2400–2500	1.6	–	–	17.0	20.0	3.3	20-pin MCM 6 x 6 x 1.3
SKY65344-21	2400–2500	–	10.0	2.2	17.0	20.0	3.3	20-pin MCM 6 x 6 x 1.3
SKY65352-11	2400–2500	–	8.2	2.2	17.0	20.0	3.3	20-pin MCM 6 x 6 x 1.3
 SKY65364-11	890–960	0.9	15.0	1.7	22.0	30.5	3.0–3.8	28-pin MCM 6 x 6 x 0.9
 SKY65366-11	400–500	0.3	22.5	1.5	22.0	30.2	3.0–3.8	28-pin MCM 6 x 6 x 0.9
 SKY65367-11	169–170	0.7	-0.7	-0.7	35.0	30.0	3.3	16-pin MCM 4 x 4 x 0.9
 SKY65378-11	860–930	-1.5	17.0	2.0	-1.5	N/A	2.0–4.8	24-pin QFN 4 x 4 x 0.9
 SKY66100-11	169–170	0.4	-0.5	–	30.0	24.0	2.0–3.6	16-pin MCM 4 x 4 x 0.9
 SKY66101-11	902–928	–	16	2.5	33	30	2.0–4.8	36-pin MCM 6 x 6 x 0.9
 SKY66104-11	1787–1930	0.7	–	–	29	25	3.0–4.5	24-pin MCM 4 x 4 x 0.9
 SKY66108	2400–2500	3.5	10.5	3.5	16	16	2.0–3–6	20-pin QFN 3 x 3 x 0.55
 SKY66109-11	2400–2483	–	11.5	2.0	22	21	2.0–3.6	20-pin MCM 3 x 4 x 0.9

BDS / GPS / GNSS Front-end Modules

Part Number	Frequency (MHz)	Test Frequency (MHz)	Description	Gain (dB)	V _{DD} (V)	IP ₁ dB (dBm)	NF (dB)	Package (mm)
 SKY65702-11	1565–1606	1575	GPS/GNSS Pre-filter + LNA Front-end Module	13.5	2.85	-5.6	1.8	8-pin MCM 2.0 x 2.5 x 1.0
 SKY65704-22	1565–1606	1575	GPS/GNSS Pre-filter + LNA Front-end Module with B13 Notch	14.0	1.8	-7	2.5	10-pin MCM 2.8 x 2.5 x 0.7
 SKY65708-11	1565–1606	1575	GPS/GNSS Pre-filter + LNA Front-end Module with B13 Notch	13.9	2.85	-7	1.95	6-pin MCM 1.7 x 2.3 x 0.7
 SKY65708-51	1565–1606	1575	GPS/GNSS Pre-filter + LNA Front-end Module	14.4	2.85	-4.5	1.75	6-pin MCM 1.7 x 2.3 x 0.8
 SKY65709-51	1565–1606	1575	GPS/GNSS Pre-filter + LNA Front-end Module	14.5	2.85	-10	2.0	6-pin MCM 1.7 x 2.3 x 0.7
 SKY65709-81	1561–1606	1575	BDS/GPS/GNSS Pre-filter + LNA Front-end Module	14.5	2.85	-10	1.9	6-pin MCM 1.7 x 2.3 x 0.7

MIXERS**Single Channel Mixers**

Part Number	RF Frequency (MHz)	IF Frequency (MHz)	Gain (dB)	IIP3 (dBm)	OIP3 (dBm)	IP ₁ dB (dBm)	NF (dB)	Package (mm)
SKY42068-355LF	400–1000	50–250	3.0	34.5	38.3	18.6	10.0	20-pin QFN 5 x 5 x 0.9
SKY73032	700–1000	40–300	9.5	27.0	36.5	13.3	8.3	20-pin MCM 5 x 5 x 1.1
SKY73033-11	1700–2200	40–300	8.9	24.0	32.9	13.5	9.4	20-pin MCM 5 x 5 x 1.1
SKY73035-11	2300–2700	50–500	7.6	25.0	32.6	13.5	9.8	20-pin MCM 5 x 5 x 1.1
SKY73049-350LF	200–5000	50–500	–	27.0	–	7.0	14.0	16-pin QFN 3 x 3 x 0.75
SKY73070	700–1000	40–300	9.5	27.0	36.5	13.3	8.3	20-pin MCM 5 x 5 x 1.1

Diversity Downconverter Mixers

Part Number	RF Frequency (MHz)	IF Frequency (MHz)	Gain (dB)	IIP3 (dBm)	OIP3 (dBm)	IP ₁ dB (dBm)	NF (dB)	Package (mm)
SKY73020-11	700–1000	50–250	7.0	27.0	34.0	16.5	10.2	36-pin MCM 6 x 6 x 1.45
SKY73021	1700–2200	50–500	8.6	23.5	32.1	12.3	9.8	36-pin MCM 6 x 6 x 1.1
SKY73022-11	700–1000	40–300	9.4	25.3	34.7	13.3	9.0	36-pin MCM 6 x 6 x 1.1
SKY73023-11	1700–2200	40–300	9.7	25.7	35.4	13.6	9.9	36-pin MCM 6 x 6 x 1.1
SKY73025-11	2300–2700	40–300	9.4	25.3	34.7	13.3	9.0	36-pin MCM 6 x 6 x 1.1
 SKY73075-21	2300–2400	50–500	8.9	25.3	34.2	13.3	8.8	20-pin MCM 5 x 5 x 1.05
 SKY73084-11	300–500	50–250	9.8	25.2	35.0	13.2	9.4	36-pin MCM 6 x 6 x 1.1
 SKY73085-11	390–500	40–250	9.3	24.9	35.2	12.9	9.3	36-pin MCM 6 x 6 x 1.1
 SKY73086	650–900	100–500	8.7	24.4	33.1	12.0	11.0	36-pin MCM 6 x 6 x 1.1
 SKY73087-11	700–1000	100–500	8.8	25.3	34.1	12.7	10.7	36-pin MCM 6 x 6 x 1.05
 SKY73089-11	1200–1700	50–500	9.3	26.8	36.1	13.9	9.3	36-pin MCM 6 x 6 x 1.1
 SKY73090-21	1700–2200	50–500	8.7	24.2	32.8	13.3	9.4	36-pin MCM 6 x 6 x 1.05
 SKY73420-11	650–950	150–400	8.1	25.6	33.7	13.0	9.3	36-pin QFN 6 x 6 x 0.85
 SKY73421-11	1400–2000	150–320	9.0	29.5	38.5	12.6	9.0	36-pin QFN 6 x 6 x 0.85
 SKY73422-11	1700–2200	100–400	9.0	28.0	37.0	13.0	8.9	36-pin QFN 6 x 6 x 0.85

Upconversion / Downconversion Mixers

Part Number	IF Frequency (MHz)	RF Frequency (MHz)	IIP3 (dBm)	IP ₁ dB (dBm)	NF (dB)	Package (mm)
SKY73049-350LF	50–500	200–5000	27.0	7.0	14.0	16-pin QFN 3 x 3 x 0.75
SKY73062-11	50–300	700–1000	32.6	20.0	7.5	20-pin MCM 5 x 5 x 1.05
SKY73063	100–200	1700–2100	30.7	19.0	6.8	20-pin MCM 5 x 5 x 1.05
SKY73069-11	50–300	700–1000	31.5	20.9	6.8	20-pin MCM 5 x 5 x 1.05

MODULATORS / DEMODULATORS***Broadband Direct Quadrature Modulators***

Part Number	RF Frequency Range (MHz)	Broadband Noise Floor (dBm/Hz)	Package (mm)
SKY73077-459LF	1500–2700	-158	QFN 24L 4 x 4 x 0.9
SKY73078-459LF	500–1500	-158	QFN 24L 4 x 4 x 0.9
SKY73092-459LF	400–6000	-161	QFN 24L 4 x 4 x 0.9

Broadband Direct Quadrature Demodulator

Part Number	RF Input Frequency Range (MHz)	IF Input Frequency Range (MHz)	Voltage (V)	IIP2 (dBm)	IIP3 (dBm)	Voltage Conversion Gain (dB)	Package (mm)
SKY73012	400–3900	DC–250	3.0	60 @ 900 MHz	29 @ 900 MHz	1 @ 900 MHz	32-pin RFLGA 5 x 5 x 1

Mixer Modules with Built-in Voltage Controlled Oscillators (VCOs)

Part Number	Operating Frequency (MHz)	IF Frequency (MHz)	Architecture	Power Down	Built-In LO Drivers	Built-In PLL/VCO	Conversion Gain	IIP3 (dBm)	V _{CC} (V)	NF (dB)	Package (mm)
SKY73208-11	350–5000	50–500	Single	Yes	Yes	Integer-N	6	26	5	14	36-pin MCM 6 x 6 x 1.35
SKY73212-11	1700–2000	40–300	Diversity	Yes	Yes	Integer-N	9	24	5	11	44-pin MCM 10 x 6 x 1.05

OPTOCOUPERS AND OPTOISOLATORS



Isolink, Inc., a subsidiary of Skyworks Solutions, Inc., is the leading supplier of high performance and high quality optoelectronic radiation tolerant components worldwide. Isolink's mission is to provide products and services to the high-reliability, military, aerospace, hybrid, industrial, medical, and telecommunications markets. The company specializes in the manufacture of high-performance miniature hybrids and hermetically sealed devices. Isolink pioneered the miniaturization of some of the most advanced optoelectronic components. Our expertise in optoelectronic components enables us to make products of high quality, achieving high isolation voltages. A hallmark of Isolink's products is high common mode rejection and radiation tolerance for high demand environments.

Isolink is committed to providing excellent products and services to its customers, and to serving as an extension of the customer's engineering and manufacturing resources. Isolink strives for a customer/vendor relationship aimed at optimizing product performance, quality, and cost. We meet and exceed customer expectations, and are committed to delivering excellence.

Isolink works with customers from program inception to the final implementation of the most demanding design and application challenges. We are proud to provide innovative products and custom solutions with uncompromising quality and on-time delivery.

Founded by veterans in the optoelectronics industry, Isolink is headquartered in Milpitas, California.

For more information, or for customer support, please visit the Isolink Web site at www.isolink.com

PLLs / SYNTHESIZERS / VCOs**High Performance VCOs / Synthesizers**

Part Number	RF Output Frequency Range (MHz)	Output Power (dBm)	Phase Noise @ 200 kHz (dBc/Hz)	Phase Noise @ 800 kHz (dBc/Hz)	Phase Settling Time (μs)	Current Consumption (mA)	Supply Voltage (V)	Package (mm)
SKY73100	865–960	-0.3	-125	-147	340	110	5.0	38-pin MCM 9 x 12 x 1.7
SKY73101-11	1930–1990	-10.0	-112	-139	300	120	5.0	38-pin MCM 9 x 12 x 1.7
SKY73103-11	1460–1665	-10.8	-126	-143	300	114	5.0	38-pin MCM 9 x 12 x 1.7
SKY73112-11	750–850	0	-128	-151	300	110	5.0	38-pin MCM 9 x 12 x 1.7
SKY73120	890–960	0	-124	-144	–	26	3.0	28-pin MCM 6 x 6 x 0.9
SKY73121-11	1805–1890	-10.0	-126	-142	227	114	5.0	38-pin MCM 9 x 12 x 1.7
SKY73126-31	160–165	10.0	-141.9	-153.1	5000 Max.	72	5.0	16-pin MCM 11.4 x 15 x 2.7
SKY73134-11	350–6000	–	-108 @ 2.7 GHz	-134 @ 2.7 GHz	–	120	3.3	32-pin RFLGA 5 x 5 x 1

Single Fractional-N Synthesizer

Part Number	Main Synthesizer Frequency (MHz)	Main Synthesizer Phase Noise (dBc/Hz)	Supply Voltage (V)	Package (mm)
SKY72310-362LF	100–2100	-91 @ 1800 MHz	2.7–3.3	24-pin QFN 4 x 4 x 0.9

Dual Fractional-N Synthesizers

Part Number	Main Synthesizer Frequency (MHz)	Auxiliary Synthesizer Frequency (MHz)	Main Synthesizer Phase Noise (dBc/Hz)	Supply Voltage (V)	Package (mm)
SKY72300-21	100–2100	100–500	-91 @ 1800 MHz	2.7–3.3	28-pin EP-TSSOP 9.7 x 6.4 x 1.1
SKY72300-362	100–2100	100–500	-91 @ 1800 MHz	2.7–3.3	24-pin QFN 4 x 4 x 0.9
SKY72301-22	100–1000	100–500	-96 @ 950 MHz	2.7–3.3	28-pin EP-TSSOP 9.7 x 6.4 x 1.1
SKY74038-21	100–2600	1–800	-85 @ 2500 MHz	2.6–3.6	20-pin TSSOP 6.5 x 4.4 x 1.1

POWER MANAGEMENT

In January 2012, Skyworks completed its acquisition of Advanced Analogic Technologies, Inc. (AATI), an analog semiconductor company focused on enabling energy-efficient devices for consumer electronics, computing, and communications markets. This acquisition expands Skyworks' portfolio with highly complementary analog semiconductor products including battery chargers, DC/DC converters, voltage regulators, and LED drivers. It also enables Skyworks to further capitalize on its strong smartphone, tablet, set-top box, and infrastructure positions with an expanded and differentiated product portfolio while accelerating entry into new vertical markets.

Skyworks is committed to developing and delivering products of unprecedented integration that improves our customers' performance in the increasingly connected wireless world.

Audio

Part Number	Number of Channels	Output Power (W)	Half Power THD+N @ 1 kHz (%) (kHz)	Min. Load (Ω)	Typ. IQ per Channel (mA)	I _{SD} (μ A)	PSRR (dB)	V _{IN} (V)	Package (mm)
AAT5101	N/A	N/A	N/A	N/A	N/A	N/A	-60	-0.3–28	—
AAT5102	2	2.5	0.03%	4	4.28	0.1	-60	2.5–5.5	WLCSP-16 16L 1.645 x 1.645 x 0.595, QFN3316 16L 3 x 3 x 0.9

Battery Chargers

Charging FET

Part Number	BV _{DSS} (V)	Configuration	Max. I _D (A)	P _D (W)	R _{DS(ON)} @ V _{GS} = -2.5 V (m Ω)	R _{DS(ON)} @ V _{GS} = -4.5 V (m Ω)	Typical Gate Charge Q _G (nC)	Package (mm)
AAT4681	-20	Single P	±7.0	2	N/A	18	-13.6	TDFN33 10L 3 x 3 x 0.75

Linear Chargers

Part Number	Number of Cells	Max. Protected V _{IN} (V)	Max. Charging V _{IN} (V)	Max. Charge Current (mA)	Number of Input Channels	Dynamic Power Mgmt	Automatic Charge Reduction	Active Digital Thermal Loop Control	Charge Rate Control	Package (mm)
AAT3663	1/2	N/A	13.20	1000	USB or AC Adaptor	No	No	Yes	External Resistor	TDFN 14L 3 x 3 x 0.75
AAT3670	1	N/A	5.50	1600	USB and AC Adaptor	Yes	Yes	Yes	External Resistor	QFN 24L 4 x 4 x 0.90
AAT3672	1	N/A	6.50	1600	USB or AC Adaptor	Yes	Yes	Yes	External Resistor	TDFN 14L 3 x 3 x 0.75
AAT3673	1	N/A	6.50	1600	USB or AC Adaptor	Yes	Yes	Yes	External Resistor	TDFN 16L 4 x 4 x 0.8

Battery Chargers

Linear Chargers (Continued)

Part Number	Number of Cells	Max. Protected V_{IN} (V)	Max. Charging V_{IN} (V)	Max. Charge Current (mA)	Number of Input Channels	Dynamic Power Mgmt	Automatic Charge Reduction	Active Digital Thermal Loop Control	Charge Rate Control	Package (mm)
 AAT3681	1	N/A	7.50	300	USB or AC Adaptor	No	No	No	External Resistor	SC70JW 8L 2.0 x 2.1 x 1.05
 AAT3681A	1	N/A	7.50	500	USB or AC Adaptor	No	No	No	External Resistor	SC70JW 8L 2.2 x 2.0 x 1.05
 AAT3682	1	N/A	6.00	1000	AC Adaptor	No	No	No	External Resistor	QFN44 16L 4 x 4 x 0.93
 AAT3683	1	N/A	7.50	1000	USB or AC Adaptor	No	No	Yes	External Resistor	STDFN 10L 2.2 x 2.2 x 0.55 (AAT3683-2), QFN33 16L 3 x 3 x 0.93 (AAT3683-4)
 AAT3685	1	N/A	5.50	1000	USB or AC Adaptor	No	Yes	No	External Resistors	TDFN 12L 3 x 3 x 0.75
 AAT3686	1	N/A	5.50	1500	USB and AC Adaptor	No	Yes	Yes	External Resistors	TDFN34 16L 3 x 4 x 0.75
 AAT3687	1	N/A	5.50	1500	USB or AC Adaptor	No	Yes	No	External Resistor	TDFN 12L 3 x 3 x 0.75
 AAT3688	1	N/A	5.50	500	USB or AC Adaptor	No	Yes	No	External Resistor	TDFN 12L 3 x 3 x 0.75
 AAT3689	1	N/A	5.50	1000	USB and AC Adaptor	No	No	No	External Resistor	TDFN 12L 3 x 3 x 0.75
 AAT3690	1	N/A	5.50	1000	USB and AC Adaptor	No	Yes	Yes	External Resistor	TDFN 12L 3 x 3 x 0.75
 AAT3691	1	28	6.75	1600	USB or AC Adaptor	No	Yes	Yes	External Resistors	TDFN 12L 3 x 3 x 0.75
 AAT3692	1	28	7.20	1600	USB or AC Adaptor	No	Yes	Yes	External Resistors	TDFN 16L 3 x 4 x 0.75
 AAT3693	1	N/A	7.50	1600	USB or AC Adaptor	No	No	Yes	External Resistors	TDFN 10L 2.2 x 2.2 x 0.75
 AAT3696	1	28	6.80	1600	USB or AC Adaptor	No	No	No	External Resistors	TDFN33 12L 3 x 3 x 0.75
 AAT3697	1	N/A	5.50	2000	USB or AC Adaptor	No	Yes	Yes	External Resistor	TDFN 12L 3 x 3 x 0.75
 AAT3698	1	28	7.00	1600	USB or AC Adaptor	No	No	Yes	External Resistor	TDFN33 14L 3 x 3 x 0.75
 AAT3783	1	28	7.50	1000	USB or AC Adaptor	No	No	Yes	External Resistor	TDFN 16L 3 x 4 x 0.75

Battery Chargers

Switching Chargers

Part Number	Number of Cells	Max. Protected V_{IN} (V)	Max. Charging V_{IN} (V)	Max. Charge Current (mA)	Number of Input Channels	Dynamic Power Mgmt.	Automatic Charge Reduction	Active Digital Thermal Loop Control	Charge Rate Control	Max. Switching Frequency (kHz)	Package (mm)
 AAT3620	1	N/A	6	2000	USB or AC Adaptor	No	No	No	External Resistor	1500	TDFN 14L 3 x 3 x 0.75

Supercap Chargers

Part Number	Number of Channels	Enable	Fault Flag	I_{LIM}	Typ. I_Q (μA)	Typ. $R_{DS(ON)}$ (m Ω)	V_{IN} (V)	Package (mm)
 AAT4620	1	Yes	Yes	Adj 1.2 A	40	65	3.0–5.5	TSOPJW 12L 3 x 2.85 x 1.02
 AAT4621	1	Yes	Yes	Adj 1.2 A	40	65	3.0–5.5	TDFN 14L 3 x 3 x 0.75
 AAT4710	1	No	RDY	0.75–1.2 A	70	50	2.5–5.5	TDFN 16L 3 x 4 x 0.75
 AAT4712	1	Yes	POK; RDY	0.15–2.4 A	70	50	2.5–5.5	TDFN34 16L 3 x 4 x 0.75

Voltage Regulation

DC/DC Converters (Switching Regulators)

Step Up Converters

Part Number	Min. V_{IN} (V)	Max. V_{IN} (V)	Min. V_{OUT} (V)	Max. V_{OUT} (V)	I_{OUT} (mA)	f_{osc} (kHz)	Typ. I_Q (μ A)	Package (mm)
 AAT1210	2.7	5.50	V_{IN}	18.0	900	2000	250	TDFN34 16L 3 x 4 x 0.75
 AAT1217	0.5	V_{OUT}	2.5	5.5	600	1200	300	TSOT-23 6L 2.9 x 2.8 x 1 SOT23 6L 2.85 x 2.8 x 1.2
 AAT1218	0.5	6.00	2.5	5.5	1000	1200	300	TDFN33 12L 3 x 3 x 0.75
 AAT1219	2.4	$V_{OUT} + 0.25$	3.0	5.0	2000 1200	1200	58	TDFN33 12L 3 x 3 x 0.75
 AAT1230	2.7	5.50	18	18.0	100	2000	40	TSOPJW 12L 3 x 2.85 x 1.02 TDFN34 16L 4 x 3 x 0.75
 AAT1232	2.7	5.50	N/A	24.0	100	2000	40	TSOPJW 12L 3 x 2.85 x 1.02 TDFN34 16L 4 x 3 x 0.75
 AAT1275	2.7	5.00	V_{IN}	5.5	500	2000	100	TSOPJW 12L 3 x 2.85 x 1.02 TDFN34 16L 4 x 3 x 0.75
 AAT1275A	2.7	V_{OUT}	V_{IN}	5.5	500	2000	100	TSOPJW 12L 3 x 2.85 x 1.02 TDFN34 16L 4 x 3 x 0.75
 AAT1276	2.7	5.00	V_{IN}	5.5	500	2000	100	TSOPJW 12L 3 x 2.85 x 1.02 TDFN34 16L 4 x 3 x 0.75
 AAT2215	2.4	5.25	3.0	5.5	3000	600	55	TDFN33 12L 3 x 3 x 0.75
 AAT2404	10.8	24.00	$V_{IN} + 3$	100	5000	400	1000	TQFN34-24L 3 x 4 x 0.75
 AAT3125	2.7	5.50	4.6	5.25	100	750	60	QFN44 16L 4 x 4 x 0.93

Step Down Converters

Part Number	Min. V_{IN} (V)	Max. V_{IN} (V)	Min. V_{OUT} (V)	Max. V_{OUT} (V)	I_{OUT} (mA)	f_{osc} (kHz)	Typ. I_Q (μ A)	Package (mm)
 AAT1106	2.5	5.5	0.6	V_{IN}	600	1500	270	TSOT23 5L 2.8 x 2.9 x 0.95
 AAT1110	2.7	5.5	0.6	V_{IN}	800	1400	27	SC70JW-8 2 x 2.1 x 1.1
 AAT1112	2.7	5.5	0.6	V_{IN}	1500	1400	42	TDFN33 12L 3 x 3 x 0.75 TSOPJW 12L 3 x 2.85 x 1
 AAT1120	2.7	5.5	0.6	V_{IN}	500	1500	30	STDFN 8L 2 x 2 x 0.55
 AAT1121	2.7	5.5	0.6	V_{IN}	250	1500	30	TDFN 8L 2 x 2 x 0.85 STDFN22 8L 2 x 2 x 0.55
 AAT1123	2.7	5.5	0.6	0.6	600	1000	25	SC70JW 8L 2 x 2.1 x 1.1
 AAT1126	2.7	5.5	0.6	0.6	600	1000	25	SOT-23 5L 2.85 x 2.8 x 1.2
 AAT1130	2.7	5.5	0.6	1.8	400	2500	60	SC70JW 10L 2 x 2.2 x 1.1
 AAT1138	2.5	5.5	0.6	V_{IN}	2000	1200	300	TDFN 16L 3 x 4 x 0.75
 AAT1141	2.7	5.5	0.6	V_{IN}	600	2000	35	SOT-23 5L 2.85 x 2.8 x 1.2 TSOT23 5L 2.9 x 2.8 x 0.95
 AAT1142	2.7	5.5	0.6	2.0	800	2200	35	TSOPJW 12L 3 x 2.85 x 1 TDFN33 12L 3 x 3 x 0.75
 AAT1143	2.7	5.5	0.6	0.6	400	1000	25	SC70JW 8L 2 x 2.1 x 1.1

Voltage Regulation

DC/DC Converters (Switching Regulators)

Step Down Converters (Continued)

Part Number	Min. V_{IN} (V)	Max. V_{IN} (V)	Min. V_{OUT} (V)	Max. V_{OUT} (V)	I_{OUT} (mA)	f_{osc} (kHz)	Typ. I_Q (μ A)	Package (mm)
 AAT1145	2.5	5.5	0.6	V_{IN}	1500	1500	300	TDFN33 10L 3 x 3 x 0.75
 AAT1146	2.7	5.5	0.6	V_{IN}	400	1400	27	SC70JW-8 2.0 x 2.1 x 1.1 SOT-23 5L 2.85 x 2.8 x 1.2
 AAT1147	2.7	5.5	0.6	V_{IN}	400	1400	160	—
 AAT1149	2.7	5.5	1.000	V_{IN}	400	3000	45	SC70JW 8L 2 x 2.1 x 1.05 WLCSP 5L 1.235 x 0.91 x 0.58
 AAT1149A	2.2	5.5	1.875	1.875	400	2200	3000	WLCSP 5L 1.235 x 0.91 x 0.58
 AAT1149B	2.2	5.5	1.800	1.800	400	2200	45	WLCSP 5L 1.235 x 0.91 x 0.58
 AAT1150	2.7	5.5	1.000	4.200	1000	1000	160	MSOP 8L 4.9 x 3 x 0.95
 AAT1151	2.7	5.5	1.000	4.200	700	850	210	MSOP 8L 4.9 x 3 x 0.95 QFN33 16L 3 x 3 x 0.9
 AAT1153	2.5	5.5	0.600	V_{IN}	2000	1200	300	TDFN33 10L 3 x 3 x 0.75
 AAT1154	2.7	5.5	1.000	4.200	3000	1000	630	SOP 8L 4.9 x 6 x 1.55
 AAT1155	2.7	5.5	1.000	4.200	2500	1000	630	MSOP 8L 4.9 x 3 x 0.95
 AAT1157	2.7	5.5	0.800	0.800	1200	1000	160	QFN33 16L 3 x 3 x 0.85
 AAT1160	4.0	13.2	0.600	V_{IN}	3000	800	150	TDFN34 16L 3 x 4 x 0.75
 AAT1161	4.0	13.3	0.600	V_{IN}	3000	800	150	TDFN33 14L 3 x 3 x 0.75
 AAT1162	4.0	13.4	0.600	V_{IN}	1500	800	150	TDFN34 16L 3 x 4 x 0.75
 AAT1171	2.7	5.5	0.600	3.600	600	2000	420	TDFN33 12L 3 x 3 x 0.75 WLCSP 12L 2.235 x 1.535 x 0.645
 AAT1184	6.0	24.0	1.500	5.500	2500	490	600	TSOPJW 12L 3 x 2.85 x 1
 AAT1185	6.0	24.0	1.500	5.500	1000	490	1000	TSOPJW 14L 2.85 x 3.05 x 1.05
 AAT1189	6.0	24.0	1.500	5.500	2500	490	600	TDFN34 16L 3 x 4 x 0.85
 AAT2113B	2.7	5.5	1.000	2.500	1500	3300	55	FTDFN22 8L 2 x 2 x 0.75
 AAT2114A	2.7	5.5	1.000	V_{IN}	2500	3000	70	QFN33 16L 3 x 3 x 0.90
 AAT2120	2.7	5.5	0.600	V_{IN}	500	1800	45	STDFN22 8L 2 x 2 x 0.55
 AAT2138	2.7	5.5	3.000	V_{IN}	2500	2800	90	TDFN 14L 3 x 3 x 0.75
 AAT2146	2.7	5.5	0.6	V_{IN}	600	2000	37	SC70JW 8L 2.0 x 2.1 x 1.05
 AAT2146W	2.7	5.5	0.6	V_{IN}	600	2000	37	—
 AAT2148	2.7	5.5	0.600	V_{IN}	1000	2000	37	QFN33 16L 3 x 3 x 0.85
 AAT2153	2.7	5.5	0.600	V_{IN}	2500	1400	42	QFN33 16L 3 x 3 x 0.85
 AAT2158	2.4	5.5	0.600	V_{IN}	1500	1400	42	QFN33 16L 3 x 3 x 0.90
 AAT2500	2.7	5.5	0.6	V_{IN}	400; LDO 300	1000	25; LDO 70	TDFN33 12L 3 x 3 x 0.75
 AAT2500M	2.7	5.5	0.6	V_{IN}	400; LDO 300	1800	130	TSOPJW 12L 3 x 2.85 x 1.02
 AAT2503	2.7	5.5	0.6	V_{IN}	800; LDO 300	2000	85	QFN34 20L 3 x 4 x 0.93
 AAT2504	2.7	5.5	0.6	V_{IN}	800; LDO 300	2000	80	QFN34 20L 3 x 4 x 0.925

Voltage Regulation

DC/DC Converters (Switching Regulators)

Step Down Converters (Continued)

Part Number	Min. V_{IN} (V)	Max. V_{IN} (V)	Min. V_{OUT} (V)	Max. V_{OUT} (V)	I_{OUT} (mA)	f_{osc} (kHz)	Typ. I_Q (μ A)	Package (mm)
 AAT2505	2.7	5.5	0.6	V_{IN}	600; LDO 300	1400	27; LDO 70	TDFN33 12L 3 x 3 x 0.75
 AAT2506	2.7	5.5	0.6	V_{IN}	600; LDO 300	1000	25; LDO 70	TDFN33 12L 3 x 3 x 0.75
 AAT2510	2.7	5.5	0.60	V_{IN}	400/ch	1000	25/ch	TDFN33 12L 3 x 3 x 0.75
 AAT2511	2.7	5.5	0.60	V_{IN}	600/ch	1000	25/ch	TDFN33 12L 3 x 3 x 0.75
 AAT2512	2.7	5.5	0.60	V_{IN}	400/ch	1400	27/ch	TDFN33 12L 3 x 3 x 0.75
 AAT2513	2.7	5.5	0.60	V_{IN}	600/ch	1700	60	QFN33 16L 3 x 3 x 0.85
 AAT2514	2.5	5.5	0.60	V_{IN}	600/ch	1500	500	TDFN33 10L 3 x 3 x 0.75
 AAT2515	2.7	5.5	0.60	V_{IN}	600/ch	1400	27	TDFN33 12L 3 x 3 x 0.75
 AAT2522	2.7	5.5	0.60	V_{IN}	3000/ch	1400	90	TDFN34 16L 3 x 4 x 0.85
 AAT2687	6.0	24.0	1.50	5.5	4500; LDO 600	490	600	TQFN45 24L 4 x 5 x 0.75
 AAT2688	6.0	24.0	0.80	5.5	4500; LDO 600	490	600	TQFN45 24L 4 x 5 x 0.75
 AAT2689	6.0	24.0	1.50	5.5	2500; LDO 600	490	600	TDFN34 16L 3 x 4 x 0.75
 AAT2713	2.7	5.5	0.60	V_{IN}	600/ch	1700	70	QFN33 16L 3 x 3 x 0.85
 AAT2749	2.3	5.5	1.80	1.0	600; LDO 300	3000	100	WLCSP 9L 1.35 x 1.36 x 0.50 (205 μ m bump in 400 μ m pitch)
 AAT2782	2.7	5.5	0.60	V_{IN}	1200; 600; 400	1300	N/A	TDFN34 16L 3 x 4 x 0.85
 AAT2783	2.7	5.5	0.60	V_{IN}	1000; 400; LDO 400	1300	N/A	TDFN34 16L 3 x 4 x 0.85
 AAT2784	2.7	5.5	0.60	V_{IN}	1500; 300	1800	45–50	TDFN34 16L 3 x 4 x 0.85
 AAT2785	2.7	5.5	0.60	V_{IN}	1500; 600	1800	45–50	TDFN34 16L 3 x 4 x 0.85
 AAT2786	2.5	5.5	0.60	V_{IN}	1500; LDO 150	1500	40	TDFN34 16L 3 x 4 x 0.85
 AAT2789	2.7	5.5	0.60	V_{IN}	1700; 800	1400	42	TDFN34 16L 3 x 4 x 0.85
 AAT3183	2.7	5.5	1.34	1.5	300	2000	35	SC70JW 8L 2 x 2.1 x 1.1
 SKY87000-11	2.7	5.5	0.40	4.25	2500	2000	135	WLCSP 9B 1.42 x 1.49
 SKY87000-13	2.7	5.5	0.40	4.25	2000	2000	135	WLCSP 9B 1.42 x 1.49
 SKY87201-11	2.7	5.5	0.60	V_{IN}	600	2000	37	STDFN 8L 2.0 x 2.1 x 1.05
 SKY87202	2.7	6.0	0.60	3.3	3500	1200	40	QFN12L 2.0 x 2.0 x 0.85
 SKY87222	2.8	5.0	0.6	1.8 (V_{OUT1}), 3.3 (V_{OUT2})	500/1500	1200	80	QFN-17L 2.0 x 2.5 x 0.55
 SKY87250	2.7	5.5	0.60	V_{IN}	400	2000	40	DLN 8L 2.4 x 2.4 x 0.9
 SKY87608	4.5	28.0	0.90	0.8 x V_{IN}	3000	450	1600	SOP 8L 4.54 x 6 x 1.75
 SKY87609	4.5	28.0	0.90	0.8* V_{IN}	6000	450	1600	TSOPJW-12L 2.85 x 3.0 x 1.0

Voltage Regulation

Low Drop-Out (LDO) Linear Regulators

Part Number	Accuracy (%)	Typ. Dropout (mV)	Max. I _{OUT} (mA)	Typ. I _Q (μA)	Power Good	Shutdown	V _{IN} (V)	V _{OUT} (V)	V _{REF} Bypass	Package (mm)
 AAT3200	±2.0	200	150	20	No	No	V _{OUT} -5.5	Fixed 2–3.5	No	SC59 3L 2.85 x 2.80 x 1.20
 AAT3215	±1.5	140	150	95	No	Yes	V _{OUT} -5.5	Fixed 2.5–3.3	Yes	SOT-23 5L 2.85 x 2.80 x 1.20
 AAT3218	±1.5	200	150	70	No	Yes	V _{OUT} -5.5	Fixed 1.2–3.5	Yes	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.2 x 2.0 x 1.05
 AAT3220	±2.0	180	150	1.1	No	No	V _{OUT} -5.5	Fixed 1.8–3.3	No	SC59 3L 2.85 x 2.80 x 1.20
 AAT3221	±2.0	200	150	1.1	No	Yes	V _{OUT} -5.5	Fixed 1.6–3.5	No	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.2 x 2.0 x 1.05
 AAT3222	±2.0	200	150	1.1	No	Yes	V _{OUT} -5.5	Fixed 1.6–3.5	No	SOT-23 5L 2.85 x 2.80 x 1.20
 AAT3223	±2.0	190	250	1.1	Yes	Yes	V _{OUT} -5.5	Fixed 2.8–3.3	No	SOT-23 6L 2.85 x 2.80 x 1.20
 AAT3236	±1.5	300	300	100	No	Yes	V _{OUT} -5.5	Fixed 2.5–3.6	Yes	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.2 x 2.0 x 1.05
 AAT3237	±1.5	400	300	70	Yes	Yes	V _{OUT} -5.5	Fixed 1.2–3.5	No	SOT-23 6L 2.85 x 2.80 x 1.20, SC70JW 8L 2.2 x 2.0 x 1.05
 AAT3238	±1.5	400	300	70	No	Yes	V _{OUT} -5.5	Fixed 1.2–3.5	Yes	SOT-23 6L 2.85 x 2.80 x 1.20, SC70JW 8L 2.2 x 2.0 x 1.05
 AAT3242	±1.5	400	300, 150	70	Yes	Yes	V _{OUT} -5.5	Fixed 1.5–3.5	No	TSOPJW 12L 3 x 2.85 x 1.02, TDFN33 12L 3 x 3 x 0.75
 AAT3244	±1.5	200	300	85	Yes	Yes	1.8–5.5	0.6–3.6	No	TSOPJW 12L 3 x 2.85 x 1.02
 AAT3258	±2.0	400	300	71	μP Reset	Yes	V _{OUT} -5.5	Fixed 1.2–3.5	Yes	TSOPJW 8L 3 x 2.85 x 1.01

Display and Lighting

LED Camera Flash Drivers

Charge Pump™ Camera LED Flash Drivers

Part Number	Flash I _{OUT} Total (mA)	Movie Mode I _{OUT} Total (mA)	LED Channels	Min. V _{IN}	Max. V _{IN}	Max. V _{OUT}	Peak Efficiency (%)	Interface	Typ. I _Q (μA)	Max. Shutdown Current (μA)	Package (mm)
 AAT3175	300	N/A	4	2.7	5.5	N/A	95	S ² Cwire™	300	1	TDFN33 12L 3 x 3 x 0.75
 AAT3112	500	200	2	2.7	5.0	5.0	85	Enable	26	1	QFN33 16L 3 x 3 x 0.85
 AAT3176	500	100	1	2.7	5.5	5.5	93	S ² Cwire™	500	1	TDFN 10L 2.2 x 2.2 x 0.75
 AAT3176A	500	100	1	2.7	5.5	5.5	93	S ² Cwire™	500	1	TDFN 10L 2.2 x 2.2 x 0.75
 AAT3170	600	200	2	2.7	5.5	4.9	90	AS ² Cwire™	300	1	TDFN33 12L 3 x 3 x 0.75
 AAT3172	600	100	2	2.7	5.5	4.9	93	AS ² Cwire™	300	1	TDFN33 12L 3 x 3 x 0.75
 AAT3171	800	200	1	2.7	5.5	N/A	92	S ² Cwire™	300	1	TDFN33 12L 3 x 3 x 0.75
 AAT3174	800	200	1	2.7	5.5	N/A	92	S ² Cwire™	300	1	TDFN33 12L 3 x 3 x 0.75
 AAT3177	800	200	1	2.7	5.5	N/A	91	S ² Cwire™	300	1	TDFN 12L 3 x 3 x 0.75
 AAT3177A	800	200	1	2.7	5.5	N/A	91	S ² Cwire™	N/A	1	TDFN33 12L 3 x 3 x 0.75

Serial Boost Camera LED Flash Drivers

Part Number	Flash I _{OUT} Total (mA)	Movie Mode I _{OUT} Total (mA)	LED Channels	Min. V _{IN}	Max. V _{IN}	Max. V _{OUT}	Peak Efficiency (%)	Interface	Typ. I _Q (μA)	Max. Shutdown Current (μA)	Package (mm)
 AAT1270	1000	137	2	2.7	5.5	5.5	85	S ² Cwire™	230	1	STDFN33 14L 3 x 3 x 0.55
 AAT1271	1500	206	2	2.7	5.5	5.5	85	AS ² Cwire™	230	1	TDFN33 14L 3 x 3 x 0.75
 AAT1272	1500	206	2	2.7	5.5	5.5	85	I ² C	230	1	TDFN 14L 3 x 3 x 0.75
 AAT1274	1500	206	1	2.7	5.5	5.5	88	AS ² Cwire™	230	1	TDFN33 14L 3 x 3 x 0.75
 AAT1277	1500	100	2	2.7	5.5	5.5	85	Enable	230	1	WLCSP-18
 AAT1278	1500	206	1	2.7	5.5	5.5	88	AS ² Cwire™	230	1	WLCSP 12 2.235 x 1.535 x 0.63
 AAT1282	2000	274	2	2.7	5.5	N/A	80	I ² C	570	1	TDFN33 14L 3 x 3 x 0.75
 AAT1290	1500	206	1	2.7	5.5	5.5	85	AS ² Cwire™	230	1	TDFN33 14L 3 x 3 x 0.75
 SKY81279	1500	143	1	2.7	5.5	5.5	88	AS ² Cwire™	230	1	TDFN23 14L 2 x 3 x 0.75
 SKY81290	1500	143	1	2.7	5.5	5.5	88	AS ² Cwire™	230	1	TDFN 14L 3 x 3 x 0.75 TDFN 14L 3 x 2 x 0.75
 SKY81292	1800	200	1	2.5	5.5	5.5	90	I ² C	75	1	WLCSP 16B 2 x 2 x 0.445
 SKY81296	2400	250	2	2.5	5.5	5.5	93	I ² C	1	1	WLCSP 20B 1.75 x 2.3 x 0.4

Display and Lighting

Large Screen LCD LED Backlight with SPI Bus or SLIBus™ Digital Interface

Part Number	Number of LEDs	LED Channels	LED(s) per/Ch	Current Accuracy (%)	Current Matching (%)	Max. I _{OUT} per/Ch (mA)	Interface	DOT Correction (Bits)	Grey Scale (Bits)	Channel Phase Delay (Bits)	Min. V _{IN} (V)	Max. V _{IN} (V)	Package (mm)
 AAT2400 ¹	160	16	10	±2.5	±2.0	100	SPI	8	12	12	10.8	28	TQFN 36L 5 x 5 x 0.75
 AAT2401	160	16	10	±2.5	±2.0	100	SPI	8	12	12	10.8	28	TQFN 36L 5 x 5 x 0.75
 AAT2402M ¹	160	16	10	±2.5	±2.0	100	SPI	8	12	12	10.8	28	TQFN 36L 5 x 5 x 0.75
 AAT2402S	160	16	10	±2.5	±2.0	100	SPI	8	12	12	10.8	28	TQFN 36L 5 x 5 x 0.75
 AAT2403A	160	16	10	±1.5	±2.0	100	SPI	8	12	12	10.8	28	TQFN 42L 5 x 6 x 0.8 TQFN 48L 7 x 7 x 0.8
 AAT2428	160	16	10	±1.5	±2.0	100	SPI	8	12	12	10.8	28	TQFN 48L 7 x 7 x 0.8
 AAT2430A	720	16	<45 ⁴	±1.5	±1.5	250	SPI	8	12	12	10.8	32	LQFP 64L 14 x 14 x 1.6 QFN 64L 9 x 9 x 0.9
 AAT2430A-1 ²	720	16	<45 ⁴	±1.5	±1.5	250	SPI	8	12	12	10.8	28	LQFP 64L 14 x 14 x 1.6 QFN 64L 9 x 9 x 0.9
 AAT2430B	720	16	<45 ⁴	±1.5	±1.5	250	SPI	8	12	12	10.8	32	LQFP 64L 14 x 14 x 1.6 QFN 64L 9 x 9 x 0.9
 AAT2430C	720	16	<45 ⁴	±1.5	±1.5	250	SPI	8	12	12	10.8	32	LQFP 64L 14 x 14 x 1.6 QFN 64L 9 x 9 x 0.9
 AAT2469 ³	N/A	16	N/A	N/A	N/A	250	SPI	8	12	12	4.5	5.5	SOP 16L 10 x 6.2 x 1.7
 AAT2499	90	2	<45 ⁴	±1.5	±2.0	300	SLI	V _{REF}	12	12	4.5	5.5	SOP-EP 16L 10 x 6.2 x 1.7

Display and Lighting

Mid to Large Screen LCD LED Backlight with PWM Interface

Part Number	Number of LEDs	LED Channels	LED(s) per/Ch	Current Accuracy (%)	Current Matching (%)	Max. I_{OUT} per/Ch (mA)	Interface	Peak Efficiency (%)	Min. V_{IN} (V)	Max. V_{IN} (V)	Package (mm)
 AAT1405	44	4	11	±2	±2	30	PWM	92	4.5	26	TQFN34 24L 3 x 4 x 0.75
 AAT1407	66	6	11	±2	±2	30	PWM	92	4.5	26	TQFN34 24L 3 x 4 x 0.75
 AAT1409	88	8	11	±2	±2	45	PWM	92	4.5	26	TQFN34 24L 3 x 4 x 0.75
 AAT1451	48	4	12	±2	±2	30	PWM	93	5.0	26	TDFN 16L 3 x 4 x 0.75
 AAT2405	N/A	6	N/A	±1.5	±1.5	250	PWM	N/A	4.5	28	E-LQFP 44L 10 x 10 x 1.6

1 Actual number dependent on external MOSFET used.

Current Sense MOSFET with Cascode Clamp Protection

Part Number	Number of Channels	Cascode Clamp BV_{DSS} (V)	Cascode Clamp $r_{DS(ON)}$ (Ω)	Current Sink BV_{DSS} (V)	Current Sink $r_{DS(ON)}$ (Ω)	Max. I_{OUT} per/Ch (mA)	Temp Sense Diode V_F (V)	Temp Sense Diode Coefficient (mV/°C)	Package (mm)
 AAT2491	2	150	5	14	1.5	240	3.08	5.44	SOP-EP 16L 10 x 6.2 x 1.7

Display and Lighting

Lighting Management Units

Part Number	Backlight LEDs	Max. Backlight I _{OUT} per Channel (mA)	Flash LED Channel(s)	Max. Flash I _{OUT} per/ Ch (mA)	Max. Movie Mode I _{OUT} per/ Ch (mA)	LDO Output(s)	Min.–Max. LDO V _{OUT}	LDO Accuracy (%)	LDO Load Current (mA)	Min.–Max. V _{IN}	Interface	Package (mm)
 AAT2803	6	30.0	1	300	120	N/A	N/A	N/A	N/A	2.7–5.5	AS ² Cwire™	QFN44 24L 4 x 4 x 0.90
 AAT2842	4	30.0	4	150	48	2	1.2–V _{IN}	±2.5	200	2.7–5.5	S ² Cwire™	TQFN44 28L 4 x 4 x 0.75
 AAT2845	4	20.0	0	N/A	N/A	2	1.2–2.8	±2.5	200	2.7–5.5	S ² Cwire™	TQFN34 20L 3 x 4 x 0.75
 AAT2845A	4	20.0	0	N/A	N/A	2	1.17–1.23	±2.5	200	2.7–5.5	S ² Cwire™	TQFN34 20L 3 x 4 x 0.75
 AAT2846	6	30.0	2	300	N/A	2	1.2–V _{BAT}	±2.5%	200	2.7–5.5	AS ² Cwire™	TQFN44 28L 4 x 4 x 0.75
 AAT2847	4	20.0	0	N/A	N/A	2	1.2–2.8	±2.5	200	2.7–5.5	AS ² Cwire™	TQFN34 20L 3 x 4 x 0.75
 AAT2848	4	30.0	2	300	100	N/A	N/A	N/A	N/A	2.7–5.5	S ² Cwire™	TQFN33 20L 3 x 3 x 0.75
 AAT2856	6	30.0	0	N/A	N/A	2	1.2–V _{BAT}	±2.5%	200	2.7–5.5	AS ² Cwire™	TQFN44 28L 4 x 4 x 0.75
 AAT2861	6	31.0	2	300	120	3	1.2–3.3	±1.5	300	2.7–5.5	AS ² Cwire™	TQFN34 24L 3 x 4 x 0.75
 AAT2862	8	30.0	0	N/A	N/A	4	1.2–3.3	±1.5	200	2.7–5.5	I ² C	TQFN34 24L 3 x 4 x 0.75
 AAT2863	6	30.0	0	N/A	N/A	4	1.2–3.3	±1.5	300	2.7–5.5	I ² C PWM	TQFN34 24L 3 x 4 x 0.75
 AAT2866	7	31.0	2	300	60	3	1.2–3.3	N/A	300	2.7–5.5	I ² C	TQFN34 24L 3 x 4 x 0.75
 AAT2868	4	31.0	N/A	N/A	N/A	2	1.2–3.0	±3.0	150	2.7–5.5	AS ² Cwire™	TQFN 18L 3 x 2.2 x 0.75
 AAT2869	4	31.0	N/A	N/A	N/A	2	1.2–3.0	±3.0	150	2.7–5.5	AS ² Cwire™	TQFN 18L 3 x 2.2 x 0.75
 AAT2870	8	27.9	0	N/A	N/A	4	1.2–3.3	±2.0	300	2.7–5.5	I ² C	30-ball CSP 3.1 x 2.6 x 0.695
 AAT2893	10	N/A	0	28.6	N/A	4	1.2–3.3	±2.0	300	2.7–5.5	N/A	20-ball CSP 2 x 2.5 x 0.695

Display and Lighting

Panel Power

Part Number	Min. V_{IN}	Max. V_{IN}	Regulated Outputs (Number)	Max. V_{POS}	Max. V_{NEG}	V_{REF}	Max. I_{OUT} (mA)	Max. Switching Frequency (kHz)	Typ. I_Q (μ A)	Max. Shutdown Current (μ A)	Topology	Package (mm)
 AAT1230	2.7	5.5	1	18	N/A	N/A	100	2000	40	1	Inductive	TDFN34 16L 3 x 4 x 0.85, TSOPJW 12L 3 x 2.85 x 1
 AAT1232	2.7	5.5	1	24	N/A	N/A	100	2000	40	1	Inductive	TDFN34 16L 3 x 4 x 0.85, TSOPJW 12L 3 x 2.85 x 1
 AAT2822	2.7	5.5	4	30	-30	N/A	20	1300	1100	1	Inductive Charge Pump	TQFN44 24L 4 x 4 x 0.75
 AAT2823	2.7	5.5	4	30	-30	N/A	20	1300	1100	1	Inductive Charge Pump	TQFN44 24L 4 x 4 x 0.75
 AAT3190	2.7	5.5	2	25	-25	1.2	30	1000	400	1	Charge Pump	MSOP 8L 4.9 x 3 x 0.95, TSOPJW 12L 3 x 2.85 x 1.02

RGB LED Controllers

Part Number	Description	Number of Channels	Enable	RGB Control	Low Side Switches	Typ. I_Q (μ A)	V_{IN} (V)	Package (mm)
 AAT4295	3 Channel Single RGB Controller	3	S ² Cwire™	Single	3	3	1.8–5.5	SC70JW 8L 2.2 x 2.0 x 1.05
 AAT4297	6 Channel Dual RGB Controller	6	S ² Cwire™	Dual	6	3	1.8–5.5	TSOPJW 12L 3 x 2.85 x 1.02

RGB LED Drivers

Part Number	Min. V_{IN}	Max. V_{IN}	Number of RGB LED(s)	Number of Built-in Patterns	Color Space	Max. Switching Frequency (kHz)	Interface	Peak Efficiency (%)	Current Accuracy (%)	Max. I_{OUT} per Channel (mA)	Typ. I_Q (μ A)	Package (mm)
 AAT3128	2.7	5.5	2	16	64	1000	S ² Cwire™	93	±5	60	3	TSOPJW 14L 3.05 x 2.85 x 1.05
 AAT3129	2.7	5.5	1	0	4096	1000	AS ² Cwire™	93	±5	180	1	TSOPJW 12L 3 x 2.85 x 1

Display and Lighting

White LED Drivers

Serial Boost White LED Backlight Drivers

Part Number	Number of LEDs	LED Channels	LED(s) per/Ch	Min. V_{IN}	Max. V_{IN}	Interface	Peak Eff. (%)	Current Accuracy (%)	Current Matching (%)	Max. I_{OUT} per/Ch (mA)	Typ. I_Q (μ A)	Package (mm)
 AAT1231	12	1	6	2.7	5.5	S ² Cwire™	82	±6	N/A	50	40	TSOPJW 12L 3 x 2.85 x 1
 AAT1235	30	5	6	2.7	5.5	AS ² Cwire™	85	±10	±2	30	300	TDFN 16L 3 x 4 x 0.85
 AAT1236	30	5	6	2.7	5.5	I ² C	85	±10	±2	30	300	TDFN 16L 3 x 4 x 0.85
 AAT1239-1	10	1	10	2.7	5.5	S ² Cwire™	85	±3.5	N/A	30	70	TSOPJW 12L 3 x 2.85 x 1
 AAT1401	6	1	6	2.7	5.5	S ² Cwire™, Filtered PWM	85	±10	N/A	31	0.43	WLCSP 10L 1.545 x 1.145 x 0.65
 AAT1402	8	1	8	2.7	5.5	S ² Cwire™, Filtered PWM	83	±10	N/A	31	0.43	WLCSP 10L 1.545 x 1.145 x 0.65
 AAT1403	10	1	10	2.7	5.5	S ² Cwire™, Filtered PWM	81	±10	N/A	31	0.43	WLCSP 10L 1.545 x 1.145 x 0.65
 AAT1410	4	1	4	2.7	5.5	S ² Cwire™, Direct PWM,	86	±10	N/A	31	0.43	WLCSP 10L 1.545 x 1.145 x 0.65
AHK1421	6	1	6	2.7	5.5	S ² Cwire™	86	±5	N/A	31	600	SOT-23 6L 2.9 x 2.8 x 1
 SKY81452-13	48	6	8	2.5	5.5	I ² C, DPWM, FPWM	93%	±2%	±2%	60	4	WLCSP-25 2.44 x 2.44 x 0.73
 SKY81453-13	48	6	8	2.5	5.5	I ² C, FPWM	93%	±2%	±2%	60	4	WLCSP-25 2.44 x 2.44 x 0.73

Display and Lighting

White LED Drivers

Charge Pump Based White LED Backlight Drivers

Part Number	Number of LEDs	LED Channels	LED(s) per/Ch	Min. V _{IN}	Max. V _{IN}	Interface	Peak Efficiency (%)	Current Accuracy (%)	Current Matching (%)	Max. I _{OUT} per/Ch (mA)	Typ. I _Q (μA)	Package (mm)
 AAT3103-1	3	3	1	2.7	5.5	S ² Cwire™	90	±10	±3	30	1900	–
 AAT3103-2	3	3	1	2.7	5.5	S ² Cwire™	90	±10	±3	30	1900	–
 AAT3103-4	3	3	1	2.7	5.5	PWM	90	±10	±3	30	1900	SC70JW 10L 2.2 x 2 x 1.1
 AAT3104-1	4	4	1	2.7	5.5	S ² Cwire™	83	±10	±3	31	6000	SC70JW 10L 2.2 x 2 x 1.1
 AAT3104-2	4	4	1	2.7	5.5	S ² Cwire™	83	±10	±3	31	6000	SC70JW 10L 2.2 x 2 x 1.1
 AAT3105	4	4	1	2.7	5.5	PWM	87	±10	±3	30	3000	SC70JW 10L 2.2 x 2 x 1.1
 AAT3110	1	1	1	2.7	5.0	Enable	92	N/A	N/A	100	13	SOT-23 6L 2.85 x 2.8 x 1.2 SC70JW 8L 2 x 2.1 x 1.1
 AAT3111	1	1	1	1.8	3.6	Enable	90	N/A	N/A	100	20	SOT-23 6L 2.85 x 2.8 x 1.1 SC70JW 8L 2 x 2.1 x 1.05
 AAT3113	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.3	20	1000	TSOPJW 12L 3 x 2.85 x 1
 AAT3114	6	6	1	2.7	5.5	S ² Cwire™	93	±10	±0.3	20	1000	QFN44 16L 4 x 4 x 0.9
 AAT3119	1	1	1	2.7	5.5	Enable	91	N/A	N/A	250	2000	SC70JW 8L 2 x 2.1 x 1.1
 AAT3120	3	3	1	2.7	5.5	S ² Cwire™	86	±10	±0.5	20	1800	TSOPJW 12L 3 x 2.85 x 1
 AAT3121	6	1	6	2.7	5.5	S ² Cwire™	93	±10	N/A	132	1800	TSOPJW 12L 3 x 2.85 x 1
 AAT3122	6	1	6	2.7	5.5	S ² Cwire™	93	±10	N/A	132	1800	TSOPJW 12L 3 x 2.85 x 1
 AAT3123	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	20	1800	TSOPJW 14L 3.05 x 2.85 x 1.05
 AAT3124	6	6	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	20	1800	QFN44 16L 4 x 4 x 0.9 TSOPJW 14L 3.05 x 2.85 x 1.05
 AAT3131	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	30	1800	TSOPJW 12L 3 x 2.85 x 1
 AAT3132	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	30	1800	TSOPJW 12L 3 x 2.85 x 1
 AAT3134	6	6	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	20	1800	QFN 16L 3 x 3 x 0.9
 AAT3140	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	30	550	TSOPJW 12L 3 x 2.85 x 1
 AAT3141	4	4	1	2.7	5.5	AS ² Cwire™	93	±10	±0.5	30	550	TSOPJW 12L 3 x 2.85 x 1
 AAT3142	3	3	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	30	550	TSOPJW 12L 3 x 2.85 x 1
 AAT3143	4	4	1	2.7	5.5	PWM	93	±10	±0.5	20	550	TSOPJW 12L 3 x 2.85 x 1
 AAT3150	4	4	1	2.7	5.5	AS ² Cwire™	97	±10	±0.5	30	50	TDFN 12L 3 x 3 x 0.75
 AAT3151	4	4	1	2.7	5.5	AS ² Cwire™	97	±10	±0.5	30	50	STDFN33-12 TDFN33-12
 AAT3151B	4	4	1	2.7	5.5	AS ² Cwire™	97	±10	±0.5	30	50	TDFN33 12L 3 x 3 x 0.75
 AAT3152	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	20	50	TDFN33 12L 3 x 3 x 0.75
 AAT3155	4	4	1	2.7	5.5	S ² Cwire™	97	±10	±0.5	20	50	TSOPJW 12L 3 x 2.85 x 1

Display and Lighting

White LED Drivers

Charge Pump Based White LED Backlight Drivers (Continued)

Part Number	Number of LEDs	LED Channels	LED(s) per/Ch	Min. V_{IN}	Max. V_{IN}	Interface	Peak Efficiency (%)	Current Accuracy (%)	Current Matching (%)	Max. I_{OUT} per/Ch (mA)	Typ. I_Q (μ A)	Package (mm)
 AAT3156	6	6	1	2.7	5.5	AS ² Cwire™	93	±10	±0.5	30	50	QFN44 16L 4 x 4 x 0.9
 AAT3157	3	3	1	2.7	5.5	S ² Cwire™	97	±10	±0.5	20	50	TSOPJW 12L 3 x 2.85 x 1
 AAT3158	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	20	50	TSOPJW 12L 3 x 2.85 x 1
 AAT3159	4	4	1	2.7	5.5	S ² Cwire™	93	±10	±0.5	40	50	TSOPJW 14L 3.05 x 2.85 x 1.05
 AAT3164	6	6	1	2.7	5.5	S ² Cwire™	94	±7	±0.5	30	70	TDFN34 16L 3 x 4 x 0.75
 AAT3166	4	4	1	2.7	5.5	S ² Cwire™	94	±10	±0.5	27	50	TDFN33 12L 3 x 3 x 0.75
 AAT3167	5	5	1	2.7	5.5	S ² Cwire™	94	±10	±0.5	27	50	STDFN33 14L 3 x 3 x 0.55 QFN44 16L 4 x 4 x 0.9
 AAT3169	6	6	1	2.7	5.5	AS ² Cwire™	94	±10	±0.5	30	65	QFN44 16L 4 x 4 x 0.9 STDFN33 14L 3 x 3 x 0.55 TDFN33 14L 3 x 3 x 0.75 TSOPJW 14L 3.05 x 2.85 x 1.05
 AAT3192-1	2	2	1	2.7	5.5	S ² Cwire™	91	±10	±3	30	2500	SC70JW-10 10L 2.2 x 2 x 1.1
 AAT3193-1	3	3	1	2.7	5.5	S ² Cwire™	91	±10	±3	30	600	SC70JW 10L 2.2 x 2 x 1.1
 AAT3193-4	3	3	1	2.7	5.5	PWM	91	±10	±3	30	600	SC70JW 10L 2.2 x 2 x 1.1
 AAT3194	4	4	1	2.7	5.5	S ² Cwire™	93	±20	±0.3	20	3000	TSOPJW 12L 3 x 2.85 x 1
 AAT3195	4	4	1	2.7	5.5	S ² Cwire™	91	±10	±3	30	600	SC70JW 10L 2.2 x 2 x 1.1
 AAT3340	4	4	1	2.7	5.5	S ² Cwire™	86	±10	±3	20	1800	TSOPJW 12L 3 x 2.85 x 1 TDFN33 3 x 3 x 0.75
 AAT3351	4	4	1	2.7	5.5	S ² Cwire™	88	±10	±3	30	2000	TSOPJW 14L 2.85 x 3.05 x 1.05 TDFN33 12L 3 x 3 x 0.75
 AAT3369-1	6	6	1	2.7	5.5	S ² Cwire™	91	±10	±5	21	500	TQFN3x2.2 18L 3 x 2.2 x 0.75

Display and Lighting

White LED Drivers

Linear White LED Backlight Drivers

Part Number	Number of LEDs	LED Channels	LED(s) per/Ch	Min. V_{IN}	Max. V_{IN}	Interface	Peak Efficiency (%)	Current Accuracy (%)	Current Matching (%)	Max. I_{OUT} per/Ch (mA)	Typ. I_Q (μ A)	Package (mm)
AHK3292	2	2	1	2.7	5.5	S ² Cwire™	98	±10	±3	30.2	1800	SOT-23 6L 2.85 x 2.8 x 1.2
AHK3293	3	3	1	2.7	5.5	S ² Cwire™	98	±10	±3	30.2	1800	SOT-23 6L 2.85 x 2.8 x 1.2
AHK3294	4	4	1	2.7	5.5	S ² Cwire™	98	±10	±3	30.2	2500	SC70JW 8L 2 x 2.1 x 1.1
AHK3296	6	6	1	2.7	5.5	S ² Cwire™	98	±10	±3	20.6	2500	SC70JW 10L 2.0 x 2.2 x 0.55 TDFN 10L 2.2 x 2.2 x 0.75

Multi-function Power Management Integrated Circuit (PMIC / PMU)

Part Number	Number of LDO Reg.	Min. V_{IN} (V)	Max. Reg V_{IN} (V)	Max. Charger V_{IN} (V)	Max. Charge Current (mA)	Max. Single/Ch Output Current (mA)	Min. Single/Ch Output Voltage (V)	Max. Step-Up Output Voltage (V)	Output Voltages Control	Operating Frequency (kHz)	Package (mm)
 AAT2550	0	2.7	5.5	5.5	1000	600	0.6	V_{IN}	External Resistors	1400	QFN44 24L 4 x 4 x 0.93
 AAT2552	1	2.7	5.5	7.5	500	300	0.6	V_{IN}	External Resistors	1500	TDFN34 16L 3 x 4 x 0.75
 AAT2554	1	2.7	5.5	6.5	500	300	0.6	V_{IN}	External Resistors/ Fixed	1500	TDFN34 16L 3 x 4 x 0.75
 AAT2556	0	2.7	5.5	6.5	500	250	0.6	V_{IN}	External Resistors	1500	TDFN33 12L 3 x 3 x 0.75
 AAT2557	1	2.7	5.5	6.5	500	300	N/A	V_{IN}	Fixed	N/A	TSOPJW 14L 3.05 x 2.85 x 1.02
 AAT2601	5	4.5	6.0	6.0	1440	300	1.8	N/A	Fixed	1500	TQFN55 36L 5 x 5 x 0.8
 AAT2601A	5	4.5	6.0	6.0	1440	300	1.8	N/A	Fixed	1500	TQFN55 36L 5 x 5 x 0.8
 AAT2601B	5	4.5	6.0	6.0	1440	300	1.8	N/A	Fixed	1500	TQFN55 36L 5 x 5 x 0.8
 AAT2603	4	2.7	5.5	6.0	N/A	1200	0.6	V_{IN}	External Resistors	1500	TQFN44 28L 4 x 4 x 0.75
 AAT2605	5	2.7	5.5	N/A	N/A	300	0.6	N/A	Fixed	N/A	TDFN33 14L 3 x 3 x 0.75
 AAT2606	6	2.7	5.5	N/A	N/A	300	0.6	N/A	Fixed	N/A	TDFN33 14L 3 x 3 x 0.75
 AAT2608	8	2.7	5.5	N/A	N/A	800	0.6	N/A	Fixed	1500	TQFN44 28L 4 x 4 x 0.75
 AAT2608A	8	2.7	5.5	N/A	N/A	N/A	0.6	N/A	Fixed	1500	TQFN44 28L 4 x 4 x 0.75
 AAT2610	0	1.6	5.5	N/A	N/A	1500	0.6	30	External Resistors	1500	TQFN55 40L 5 x 5 x 0.75
 AAT2612	3	2.5	5.5	N/A	N/A	600/300	1.0/1.8	N/A	Enables	1500	TQFN33 20L 3 x 3 x 0.75

Multi-function Power Management Integrated Circuit (PMIC / PMU) (Continued)

Part Number	Number of LDO Reg.	Min. V_{IN} (V)	Max. Reg V_{IN} (V)	Max. Charger V_{IN} (V)	Max. Charge Current (mA)	Max. Single/Ch Output Current (mA)	Min. Single/Ch Output Voltage (V)	Max. Step-Up Output Voltage (V)	Output Voltages Control	Operating Frequency (kHz)	Package (mm)
AAT2614	1	2.5	5.5	N/A	N/A	600/300	1.0/1.8	N/A	Fixed	2000	TQFN33 20L 3 x 3 x 0.75 or 16-bump CSP-0.4 1.65 x 1.65
AAT2630	8	3.0	5.5	N/A	N/A	500	1.375	N/A	Fixed	1920	WLCSP 49B 3.0 x 3.0 x 0.65
AAT3601	5	4.5	6.0	6.0	1440	300	1.24	N/A	Fixed	1500	TQFN 36L 5 x 5 x 0.8
AAT3603	5	4.5	6.0	6.0	1440	300	1.8	N/A	I ² C/Fixed	1500	TQFN 36L 5 x 5 x 0.8
AAT3603A	5	4.5	6.0	6.0	1440	300	1.8	N/A	I ² C/Fixed	1500	TQFN 36L 5 x 5 x 0.8
AAT3604B	1	2.7	4.5	6.5	100	25	0.6	27	Enables	1600	QFN44 24L 4 x 4 x 0.9
AAT3608	5	2.7	N/A	5.5	1200	800/800/ 300/80/ 80/50/50	0.6	N/A	I ² C Enables/ GPIO	1500	TQFN 40L 5 x 5 x 0.75

Power Half Bridges

Part Number	Break Before Make Time (ns)	Max. I_{OUT} (mA)	Logic Input	Typ. $R_{DS(ON)}$ (m Ω) High Side Switch	Typ. $R_{DS(ON)}$ (m Ω) Low Side Switch	V_{IN} (V)	Package (mm)
AAT4900	5	1000	Yes	130	105	2.7–5.5	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.0 x 2.1 x 1.05
AAT4901	5	700	Yes	220	160	2.0–5.5	SC70JW 8L 2.0 x 2.1 x 1.05
AAT4902	100	400	Yes	350	350	2.5–5.5	CSP 9L 1.2 x 1.2 x 0.62
AAT4910	50	N/A	Yes	3000	1700	4.5–28	SC70JW 8L 2.2 x 2.0 x 1.05

Port Protection and Power Distribution

Current Limited Load Switches

Multiple Input High Side Switches—Current Limiters

Part Number	Number of Channels	Enable	Fault Flag	I_{LIM}	Typ. I_Q (μ A)	Typ. $R_{DS(ON)}$ (m Ω)	Shutdown	V_{IN} (V)	Package (mm)
AAT4650	2	No	Yes	Fixed 1 A	15	80	Yes	2.7–5.5	SOP 8L 4.9 x 6.0 x 1.55
AAT4670	2	No	Yes	Fixed 1 A	18	95	Yes	2.2–5.5	SOP 8L 4.9 x 6.0 x 1.55
AAT4672	2	Yes	Yes	2 A	10	120	No	2.5–6.0	TSOPJW 12L 3 x 1.85 x 1.02
AAT4674	2	Yes	No	2 A	10	120	No	2.5–6.0	TSOPJW 12L 3 x 1.85 x 1.02

Port Protection and Power Distribution

Current Limited Load Switches

Single Input Side Switches—Current Limiters

Part Number	Number of Channels	Enable	Fault Flag	I _{LIM}	Typ. I _Q (μA)	Typ. R _{DS(ON)} (mΩ)	V _{IN} (V)	Package (mm)
 AAT4601	1	Yes	Yes	Adj. 1.8 A	12	70	2.7–5.5	SOP 8L 4.9 x 6.0 x 1.55
 AAT4601A	1	Yes	Yes	Adj. 1.8 A	12	70	2.7–5.5	SOP 8L 4.9 x 6.0 x 1.55, MSOP 8L 4.9 x 3.0 x 0.95
 AAT4608	1	No	No	Adj. 1 A	15	160	2.7–5.5	SOT-23 5L 2.85 x 2.80 x 1.20
 AAT4610	1	Yes	No	Adj. 1 A	15	160	2.7–5.5	SOT-23 5L 2.85 x 2.80 x 1.20
 AAT4610A	1	Yes	No	Adj. 1 A	9	145	2.4–5.5	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4610B	1	Yes	No	Adj. 1 A	9	145	2.4–5.5	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4611	1	Yes	No	Adj. 1 A	15	160	2.7–5.5	SOT-23 5L 2.85 x 2.80 x 1.20
 AAT4614	1	Yes	Yes	Adj. 1.6 A	10	160	2.4–5.5	SC70JW 8L 2.0 x 2.1 x 1.05, SOT-23 6L 2.85 x 2.80 x 1.20, SOT-23 5L 2.85 x 2.80 x 1.20
 AAT4616	1	Yes	Yes	300 mA to 1.6 A	10	130	2.4–5.5	SOT-23 5L 2.85 x 2.80 x 1.20, TDFN22-8 2 x 2 x 0.75
 AAT4616A	1	Yes	Yes	300 mA to 1.6 A	10	130	2.4–5.5	TDFN22 6L 2 x 2 x 0.75
 AAT4618	1	Yes	Yes	Fixed 400 mA, 500 mA, 1 A	10	125	2.4–5.5	SOT-23 5L 2.85 x 2.80 x 1.20, SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4620	1	Yes	Yes	Adj. to 1.2 A	40	65	3.0–5.5	TSOPJW 12L 3 x 2.85 x 1.02
 AAT4621	1	Yes	Yes	Adj. 1.2 A	40	65	3.0–5.5	TDFN 14L 3 x 3 x 0.75
 AAT4625	1	Yes	Yes	Fixed 1 A, 1.5 A, 2 A	16	60	2.7–5.5	SOP 8L 4.9 x 6.0 x 1.55, MSOP 8L 4.9 x 3.0 x 0.95
 AAT4626	2	Yes	Yes	Fixed 750 mA, 1 A, 1.5 A	20	90	2.7–5.5	SOP 8L 4.9 x 6.0 x 1.55
 AAT4631/AAT4631-1	1	Yes	Yes	500 mA to 3.1 A	10	90	2.4–5.5	TDFN2222-10 2.2 x 2.2 x 0.75
 AAT4644	4	No	No	Fixed 600 mA, 1 A, 1.5 A	20	100	2.7–5.5	TSSOP 8L 3.0 x 6.4 x 1.2, SOP 8L 4.9 x 6.0 x 1.55
 AAT4702	1	Yes	Yes	150 mA, 1 A	15	220	2.4–5.5	FTDFN22 8L 2 x 2 x 0.75

Port Protection and Power Distribution

I/O Expander Serial Controlled Load Switches

Part Number	Number of Channels	Enable	Turn On Rise Time (T _R)	Typ. R _{DS(ON)} (mΩ)	Typ. I _Q (μA)	V _{IN} (V)	Package (mm)
 AAT4290	5	S ² Cwire™	0.27 μs	1100	4.5	1.8–5.5	SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4290A	5	S ² Cwire™	0.27 μs	1100	4.5	1.8–5.5	SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4291	3	S ² Cwire™	0.27 μs	1100	4.5	1.8–5.5	SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4292	7	AS ² Cwire™	0.27 μs	1100	6.3	1.8–5.5	SC70JW 10L 2.2 x 2.0 x 0.55
 AAT4296	5	S ² Cwire™	1.6 μs	Pch 2.5, Nch 1.9	3.0	1.8–5.5	SC70JW 8L 2.0 x 2.1 x 1.05
 AAT4298	6	S ² Cwire™	1.6 μs	Pch 2.5, Nch 1.9	3.0	1.8–5.5	SC70JW 10L 2.2 x 2.0 x 0.55, TSOPJW 12L 3 x 2.85 x 1.02

Over Voltage Protection

Part Number	Number of Channels	Enable	Fault Flag	I _{LIM}	Typ. I _Q (μA)	Typ. R _{DS(ON)} (mΩ)	V _{IN} (V)	Package (mm)
 AAT4684	1	Yes	Yes	1.8 A	30	100	3.0–14	TSOPJW 12L 3 x 2.85 x 1.02
 AAT4685	1	Yes	Yes	1.9 A	600	120	3.0–28	TDFN33 12L 3 x 3 x 0.75
 AAT4686	1	Yes	Yes	N/A	30	N/A	3.0–14	SC70JW 8L 2 x 2.1 x 1.05
 AAT4687	1	Yes	Yes	N/A	30	130	3.0–14	SC70JW 10L 2 x 2 x 1.1
 AAT4687-1	1	Yes	Yes	N/A	45	120	2.2–14	SC70JW 10L 2 x 2 x 1.1

Port Protection and Power Distribution

Slew Rate Controlled

Part Number	Description	Number of Channels	Enable	Turn On Rise Time (T_R)	Typ. $R_{DS(ON)}$ ($m\Omega$)	Typ. I_Q (μA)	V_{IN} (V)	Package (mm)
 AAT4250	Slew Rate Controlled Load Switch	1	Yes	1.5 ms	120	2.000	1.8–5.5	SOT-23 5L (SOT25) 2.85 x 2.8 x 1.2, SC70JW 8L 2 x 2.1 x 1.05
 AAT4252A	Dual Slew Rate Controlled Load Switch	2	Yes	1.0 ms, 0.5 μs , 100 μs	87	0.500	1.5–6.5	TSOPJW 12L 3 x 2.85 x 1.02
 AAT4280	Slew Rate Controlled Load Switch	1	Yes	0.5 μs , 0.1 ms, 1.0 ms	80	2.500	1.8–5.5	SOT-23 6L 2.85 x 2.8 x 1.2, SC70JW 8L 2.2 x 2 x 1.05
 AAT4280A	Slew Rate Controlled Load Switch	1	Yes	0.5 μs , 0.1 ms, 1.0 ms	80	0.025	1.5–5.5	SOT-23 6L 2.85 x 2.8 x 1.2, SC70JW 8L 2.2 x 2 x 1.05
 AAT4282A	Dual Slew Rate Controlled Load Switch	2	Yes	0.5 μs , 0.1 ms, 1.0 ms	60	1.000	1.5–6.5	FTDFN22-8 2 x 2 x 0.75, SC70JW 8L 2.2 x 2 x 1.05
 AAT4282B	—	2	Yes	0.065 ms, 0.75 ms	67	0.040	1.5–6.5	TDFN22-8, 2 x 2 x 0.75
 AAT4285	12 V Slew Rate Controlled Load Switch	1	Yes	0.1 ms	240	25.000	3.0–13.2	SC70JW 8L 2.2 x 2 x 1.05
 SKY84632	—	1	Yes	2 ms	40	9.000	1.5–5.5	CSP-6 1 x 1 x 0.625

Supervisors / Monitors, Voltage Detectors—Microprocessors

Part Number	Accuracy (%)	Manual Reset	Output: Active Low, Open Drain	Output: Push-Pull Active High	Output: Push-Pull Active Low	Typ. I_Q (μA)	Threshold (V)	V_{IN} (V)	Watchdog Timer	Package (mm)
 AAT3510	± 1.5	Yes	No	No	Yes	5.00	2.6–5.0	1.0–5.5	Yes	SOT-23 5L 2.85 x 2.8 x 1.2
 AAT3515	± 1.5	Yes	No	Yes	Yes	5.00	2.6–5.0	1.0–5.5	No	SOT-23 5L 2.85 x 2.8 x 1.2
 AAT3517	± 1.5	Yes	Yes	No	Yes	5.00	2.6–5.0	1.0–5.5	Yes	SOT-23 5L 2.85 x 2.8 x 1.2
 AAT3518	± 1.5	No	Yes	No	No	5.00	2.6–5.0	1.0–5.5	Yes	SOT-23 5L 2.85 x 2.8 x 1.2
 AAT3522	± 1.5	No	No	No	Yes	0.85	2.2–4.6	1.2–5.5	No	SOT23 3L 2.92 x 2.37 x 0.96
 AAT3524	± 1.5	No	Yes	No	Yes	0.85	2.2–4.6	1.2–5.5	No	SOT23 3L 2.92 x 2.37 x 0.96
 AAT3532	± 2.6	Yes	Yes	Yes	No	23.00	4.5, 4.75	4.5–5.5	Yes	SOP 8L 4.9 x 6 x 1.55

RF PASSIVES

MIS Silicon Chip Capacitors

Skyworks Solutions' metal-insulator-semiconductor (MIS) chip capacitors are available in a wide range of capacitance values and die sizes for chip-and-wire circuits requiring DC blocking, RF bypassing, or as tuning elements in filters, oscillators, and matching networks.

The capacitors have a dielectric composed of thermally-grown silicon dioxide over which a layer of silicon nitride is deposited. This two-layer dielectric produces a very low temperature coefficient of capacitance, very high insulation resistance, outstanding long-term stability, and excellent reliability. The temperature coefficient of capacitance is less than 50 ppm/°C, and the capacitors are suitable for operation from -65 °C to 200 °C. Skyworks' MIS chip capacitors offer very high Q.

Wafers can be supplied on expanded film frame for automatic pick-and-place manufacturing. To reduce cost, chips can be supplied packaged in vials with sample electrical testing. Packaging in waffle packs with 100 percent electrical test and visual inspection is available, if required.

Part Number	Capacitance Value (pF) $\pm 20\%$	Die Size (mils)
 SC00080912	0.8	12 x 12
 SC00120912	1.2	12 x 12
 SC00180912	1.8	12 x 12
 SC00260912	2.6	12 x 12
 SC00380912	3.8	12 x 12
 SC00560912	5.6	12 x 12
 SC00680912	6.8	12 x 12
 SC00820710	8.2	10 x 10
 SC00821518	8.2	18 x 18
 SC01000710	10	10 x 10
 SC01000912	10	12 x 12
 SC01001518	10	18 x 18
 SC01500912	15	12 x 12
 SC01501518	15	18 x 18
 SC02201518	22	18 x 18
 SC03301518	33	18 x 18
 SC04701518	47	18 x 18
 SC06801518	68	18 x 18
 SC10002430	100	30 x 30
 SC33303440	333	40 x 40
 SC50004450	500	50 x 50
 SC99906068	1000	68 x 68

Couplers

Skyworks' wideband directional couplers come in low profile SOT-6 surface mount packages and address diverse markets such as WLAN, wireless infrastructure, test & measurement, distortion cancellation, RFID readers, and other RF/microwave applications. These products offer excellent insertion loss, very good directivity, high isolation, and low input/out VSWR.

Skyworks also offers a broad selection of monolithic hybrid couplers in surface mount packages for diverse markets such as WLAN, wireless infrastructure, automotive, test & measurement, energy management, and other RF/microwave applications. These couplers are utilized for generation of quadrature signals as found in balanced signal chains, I/Q modulators, I/Q demodulators, analog phase shifters, analog variable attenuators, and more. Their low insertion loss, excellent phase, and amplitude balance produce outstanding system performance.

These product solutions leverage the extensive design knowledge, technical leadership, manufacturing expertise, and superior quality of Skyworks.

Directional Couplers

Part Number	Frequency (GHz)	Typ. Insertion Loss (dB)	Typ. Isolation (dB)	Typ. Input VSWR	Typ. Output VSWR	Typ. Coupling (dB)	Typ. Coupled Port VSWR	Package (mm)
DC08-73LF	0.81–0.96	0.45	22	1.05:1	1.05:1	15.0	1.2:1	SOT-23 6L 2.8 x 2.9 x 1.18
DC09-73LF	0.81–0.96	0.20	30	1.1:1	1.1:1	19.8	1.1:1	SOT-23 6L 2.8 x 2.9 x 1.18
DC16-73LF	1.42–1.99	0.30	24	1.1:1	1.1:1	15.0	1.1:1	SOT-23 6L 2.8 x 2.9 x 1.18
DC18-73LF	1.71–1.99	0.20	38	1.1:1	1.1:1	18.8	1.2:1	SOT-23 6L 2.8 x 2.9 x 1.18
DC25-73LF	2.30–2.60	0.20	33	1.1:1	1.1:1	17.2	1.3:1	SOT-23 6L 2.8 x 2.9 x 1.18

Detectors

Skyworks' directional detectors incorporate innovative directional technology along with our advanced Schottky diode technology to produce a wide bandwidth, wide power range detector circuit with excellent directivity, and low insertion loss that is easily temperature compensated with a single differential amplifier. This product is well-suited for use in radio infrastructure transmitter automatic level control systems, power amplifier monitors, and many other applications.

Directional Detectors

Part Number	Frequency (GHz)	Typ. Insertion Loss (dB)	Directivity (dB)	Typ. Input VSWR	Typ. Output VSWR	Directed Output Voltage (dBm)	Package (mm)
DD02-999LF	0.65–3.0	0.2	2	1.1:1	1.1:1	80 mV @ 900 MHz 160 mV @ 1800 MHz	SC-88 6L 2.1 x 2 x 0.95

Fixed Attenuator Pads

Skyworks Solutions is pleased to now offer two fixed attenuator pad options for radar, test & measurement, high frequency transceivers, and other high performance microwave applications up to 40 GHz. The next generation ATN3590 series offers enhanced RF power handling and attenuation flexibility. The unique ATN3590 die design eliminates the need for RF ground bonds enabling greatly improved return loss and attenuation flatness across multi-octave bandwidths.

These two product solutions, available in die form, leverage Skyworks' extensive design knowledge, technical leadership, manufacturing expertise, and superior quality.

The ATN3590 and ATN3580 attenuator families are optimized for surface mounting on co-planar waveguide or microstrip printed circuit boards. Bond wires or ribbons are used to connect the input and output ports of the attenuators to the external circuit transmission lines. Connection to ground is accomplished by through-die vias to the die backside metallization on the ATN3590 family and bond wires or ribbons on the ATN3580 family.

The dice are attached using eutectic solder or conductive epoxy and can operate over a temperature range of -65 °C to 150 °C.

ATN3580 Fixed Attenuator Pads

Part Number	Nominal Attenuation (dB)	Attenuation Tolerance @ DC (dB)	Attenuation Flatness			Return Loss		
			0.1–12 GHz (dB)	0.1–26.5 GHz (dB)	0.1–40 GHz (dB)	0.1–12 GHz (dB)	0.1–26.5 GHz (dB)	0.1–40 GHz (dB)
 ATN3580-01	1	±0.15	0.2	0.4	0.6	23	18	15
 ATN3580-02	2	±0.15	0.2	0.4	0.6	23	18	15
 ATN3580-03	3	±0.25	0.2	0.4	0.6	23	18	15
 ATN3580-04	4	±0.25	0.2	0.4	0.6	23	18	15
 ATN3580-05	5	±0.25	0.3	0.5	0.8	23	18	15
 ATN3580-06	6	±0.25	0.3	0.5	0.8	23	18	15
 ATN3580-07	7	±0.25	0.3	0.5	0.8	23	18	15
 ATN3580-08	8	±0.35	0.3	0.5	0.8	23	18	15
 ATN3580-09	9	±0.35	0.3	0.5	0.8	23	18	15
 ATN3580-10	10	±0.35	0.4	0.6	1.0	23	18	15
 ATN3580-12	12	±0.50	0.4	0.6	1.0	23	18	15
 ATN3580-15	15	±0.50	0.4	0.6	1.0	23	18	15
 ATN3580-20	20	±1.10	0.4	0.6	1.0	23	18	15
 ATN3580-30	30	±1.60	0.6	1.0	2.0	23	18	15
 ATN3580-40	40	±1.60	1.0	2.0	4.0	23	18	15

Fixed Attenuator Pads

The ATN3590 family of fixed resistive attenuators are integrated circuits comprising thin film resistors and through-die vias that provide excellent attenuation flatness from low frequency to 40 GHz or higher. These attenuators are available from 0 to 30 dB.

The ATN3590 attenuator family is optimized for surface mounting on co-planar waveguide or microstrip printed circuit boards. Bond wires or ribbons are used to connect the input and output ports of the attenuators to the external circuit transmission lines. Connection to ground is accomplished by through-die vias to the die backside metallization.

The dice are attached using eutectic solder or conductive epoxy and can operate over a temperature range of -65 °C to 150 °C.

ATN3590 Fixed Attenuator Pads

Part Number	Nominal Attenuation (dB)	Attenuation Tolerance @ DC (dB)	Attenuation Flatness				Return Loss			
			DC–12 GHz (dB)	12–26 GHz (dB)	26–33 GHz (dB)	33–40 GHz (dB)	DC–12 GHz (dB)	12–26 GHz (dB)	26–33 GHz (dB)	33–40 GHz (dB)
 ATN3590-00	0	0.25	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-01	1	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-02	2	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-03	3	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-04	4	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-05	5	±0.20	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-06	6	±0.40	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-07	7	±0.40	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-08	8	±0.40	±0.15	±0.15	±0.20	±0.20	28	24	20	16
 ATN3590-09	9	±0.40	±0.20	±0.20	±0.25	±0.30	28	24	20	16
 ATN3590-10	10	±0.40	±0.20	±0.20	±0.25	±0.50	28	24	20	16
 ATN3590-12	12	±0.40	±0.20	±0.20	±0.30	±0.50	28	24	20	16
 ATN3590-15	15	±0.40	±0.20	±0.20	±0.50	±0.75	28	24	20	16
 ATN3590-20	20	±1.0	±0.20	±0.20	±0.75	±1.0	28	24	20	16
 ATN3590-30	30	±1.0	±0.20	±0.25	±0.75	±2.5	28	24	20	16

Power Dividers / Combiners

Skyworks Solutions offers a broad selection of monolithic 2-way and 4-way power divider/combiners in surface mount packages for diverse markets such as WLAN, wireless infrastructure, automotive, test and measurement, energy management, and other RF/microwave applications. These divider/combiners are utilized to equally split signals into in-phase signals as found in balanced signal chains, local oscillator distribution networks, and more. Conversely, they can also be used to combine two or four signals while providing excellent isolation between the individual signal sources. Their low insertion loss, excellent phase, and amplitude balance produce outstanding system performance. The solutions we offer leverage the extensive design knowledge, technical leadership, manufacturing expertise, and superior quality of Skyworks.

Power Dividers—2 Way

Part Number	Frequency (GHz)	Typ. Insertion Loss Less 3 dB Split	Typ. Isolation (dB)	Typ. Input VSWR	Typ. Output VSWR	Amplitude Balance (dB)	Typ. Phase Balance (Deg.)	Total Max. Power w/2.0:1 All Ports	Package (mm)
PD09-73LF	0.81–0.96	0.40	25	1.2:1	1.3:1	±0.1	±1	1.5 W	SOT-23 6L 2.8 x 2.9 x 1.18
PD15-73LF	1.42–1.66	0.40	23	1.2:1	1.2:1	±0.1	±1	1.5 W	SOT-23 6L 2.8 x 2.9 x 1.18
PD16-73LF	1.42–1.66	0.40	23	1.2:1	1.2:1	±0.1	±1	1.5 W	SOT-23 6L 2.8 x 2.9 x 1.18
PD18-73LF	1.71–1.99	0.40	23	1.3:1	1.2:1	±0.1	±1	1.5 W	SOT-23 6L 2.8 x 2.9 x 1.18
PD19-73LF	1.71–1.99	0.55	25	1.3:1	1.2:1	±0.1	±1	1.5 W	SOT-23 6L 2.8 x 2.9 x 1.18
PD22-73LF	2.10–2.30	0.55	18	1.5:1	1.1:1	±0.1	±1	1.5 W	SOT-23 6L 2.8 x 2.9 x 1.18
 SKY16406-381LF	2.20–2.80	0.30	28	1.2:1	1.2:1	±0.1	±1	2.0 W	6-pin DFN, 1.5 x 2.0 x 0.75

Power Dividers / Combiners

Power Dividers—4 Way

Part Number	Frequency (GHz)	Typ. Insertion Loss Less 6 dB Split	Typ. Isolation (dB)	Typ. Input VSWR	Typ. Output VSWR	Amplitude Balance (dB)	Typ. Phase Balance (Deg.)	Total Max. Power w/2.0:1 All Ports	Package (mm)
PD4W09-12LF	0.81–0.96	1.3	23	1.2:1	1.2:1	±0.4	±6	1.5 W	SOIC 8L 6 x 4.9 x 1.6
 PD4W09-59LF	0.81–0.96	1.3	23	1.2:1	1.2:1	±0.4	±6	1.5 W	MSOP 8L 4.9 x 3 x 0.96
PD4W18-12LF	1.71–1.99	0.7	25	1.6:1	1.2:1	±0.3	±5	1.5 W	SOIC 8L 6 x 4.9 x 1.6
PD4W18-59LF	1.71–1.99	0.7	25	1.3:1	1.3:1	±0.3	±5	1.5 W	MSOP 8L 4.9 x 3 x 0.96

Phase Shifter

Part Number	Frequency (MHz)	Description	Max. Insertion Loss (dB)	Min. Phase Shift (Deg.)	Min. IP3 (dBm)	Control Voltage Range (V)	Package (mm)
PS088-315	700–1100	Voltage Controlled Phase Shifter	2.8	85	33	0–12	MCM 4.9 x 3.2 x 1.0

SWITCHES

Skyworks Solutions is pleased to offer a broad selection of GaAs switches for diverse markets such as WLAN, handset, wireless infrastructure, SatCom (LNB/DBS–CATV), automotive, test & measurement, energy management, and other microwave applications. Skyworks' switches are available in many different configurations including broadband, high power, high isolation, low insertion loss, reflective, and non-reflective. Our lead (Pb)-free, RoHS-compliant and Green™ high quality products are available for applications including antenna transmit/receive (T/R) switches for use in cellular handsets and WLAN systems, synthesizer switches for infrastructure needs, and many other high volume, high performance requirements. These switch product solutions leverage the extensive design knowledge, technical leadership, manufacturing expertise, and superior quality of Skyworks.

Select General Purpose RF Switches

Select Switches Available from Stock for Prototype or High Volume Production

Our select switches portfolio includes the most popular, broad-market GaAs SPST, SPDT, SP3T, SP4T, and DPDT products readily available to ship from stock. These devices provide excellent performance and value while utilizing Skyworks' proven technology for high reliability. The select switches are used in a wide variety of systems, including cellular telephone handsets and base stations, WLAN front-end modules, RF microwave test instruments, satellite TV receivers, and more. All pHEMT switches are broadband by design and require DC blocking capacitors for positive voltage operation. Select switches have been fully characterized for low-frequency applications, covering the UHF and VHF ranges.

Tx/Rx WLAN/Bluetooth® (802.11a/b/g/n)

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input IP3 (dBm)	Input P ₁ dB (dBm)
 AS179-92LF	SPDT (R)	0.02–3.0	0.40	23.0	43	30
 SKY13351-378LF	SPDT (R)	0.02–6.0	0.35	24.0	50	30 (0.5 dB)
AS193-73LF	SPDT (R)	0.10–2.5	0.55	17.0	55	37
 SKY13348-374LF	SPDT (A)	0.50–6.0	0.6–1.0	27–24	57	37
 SKY13370-374LF	SPDT (A)	0.50–6.0	0.7–1.15	31–24	55	39
 SKY13317-373LF	SP3T (R)	0.02–6.0	0.60	25.0	50	29
 SKY13385-460LF	SP3T (R)	0.10–3.5	0.5–0.6	39–25	57	33
 SKY13322-375LF	SP4T (R)	0.02–6.0	0.60	26.0	51	30
 SKY13318-321LF	DPDT (R)	0.10–6.0	0.95	22.0	57	34
 SKY13355-374LF	DPDT (R)	0.10–6.0	0.60	23.5	55	33
 SKY13381-374LF	DPDT (R)	0.10–6.0	0.60	22.0	62	38

Select General Purpose RF Switches

Select Switches Available from Stock for Prototype or High Volume Production

Smart Energy, Broadband, Cellular Infrastructure, Test & Measurement, Military (COTS)

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input IP3 (dBm)	Input P ₁ dB (dBm)
 SKY13270-92LF	SPDT (R)	0.02–2.5	0.3–0.55	30–17	56	38
 SKY13286-359LF	SPDT (A)	0.10–6.0	0.8–1.50	62–42	46	30
 SKY13298-360LF	SPDT (R)	3.00–8.0	0.7–0.90	25–22	47	26
AS204-80LF	SP4T (A)	LF–3.5	0.4–0.90	45–25	40	26

DBS/LNB 4 x 2 Matrix Switch

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P ₁ dB (dBm)
SKY13272-340LF	LNB/DBS (A)	0.25–2.15	7.5–8.5	40–31	15

UHF/VHF (48–1000 MHz)

Part Number	Description	Insertion Loss f = 48 MHz (dB)	Isolation f = 48 MHz (dB)	Input P ₁ dB f = 48 MHz (dBm)	Insertion Loss f = 1 GHz (dB)	Isolation f = 1 GHz (dB)	Input P ₁ dB f = 1 GHz (dBm)
 AS179-92LF	SPDT (R)	0.15	56	29	0.30	25	34
 SKY13351-378LF	SPDT (R)	0.20	55	28	0.35	24	30 (0.5 dB)
SKY13299-321LF	SPDT (R)	0.30	42	38.5 (0.1 dB)	0.40	29	38.5 (0.1 dB)
 SKY13290-313LF	SPDT (R)	0.30	44	39.8 (0.8 dB)	0.45	23	40.5 (0.1 dB)
 SKY13317-373LF	SP3T (R)	0.30	49	26	0.45	27	29
 SKY13322-375LF	SP4T (R)	0.30	49	26	0.60	28	30
 SKY14151-350LF	SP4T (R)	0.30	54	41	0.45	24	38 (0.1 dB)

SPST RF Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
SKY13316-12LF	SPST (A)	LF–2.5	0.5–0.75	59–30	46	24	SOIC 8L 6 x 4.9 x 1.6
SKY13347-360LF	SPST (A)	0.5–3.0	0.6–0.80	45–30	40	31	DFN 8L 2 x 2 x 0.75

SPDT (SP2T) RF Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
AS177-86LF	SPDT (R)	LF–3.0	0.70–0.90	55–40	41	21	MSOP 10L 2 x 2 x 0.9
 AS179-000	SPDT (R)	0.2–3.0	0.30–0.35	25–22	48	30	Chip
 AS179-92LF	SPDT (R)	0.02–3.0	0.30–0.40	25–23	43	30	SC-88 6L 2.1 x 2 x 0.95
AS183-92LF	SPDT (R)	LF–2.5	0.30–0.55	20–13	48	30	SC-88 6L 2.1 x 2 x 0.95
AS186-302LF	SPDT (A)	LF–4.0	0.80–1.00	55–40	27	17	MSOP 8L 4.9 x 3 x 0.96
 AS193-000	SPDT (R)	0.1–2.5	0.30–0.55	30–17	55	37	Chip
AS193-73LF	SPDT (R)	0.1–2.5	0.30–0.55	30–17	55	37	SOT-23 6L 2.8 x 2.9 x 1.18
AS211-334	SPDT (R)	0.1–4.0	0.30–0.60	26–22	50	34	LGA-6 1.5 x 1.2 x 0.8
AS213-92LF	SPDT (R)	0.1–3.0	0.30–0.50	27–19	40	27	SC-88 6L 2.1 x 2 x 0.95
AS215-92LF	SPDT (R)	0.5–3.0	0.50–0.75	28–20	40	20	SC-88 6L 2.1 x 2 x 0.95
AS222-92LF	SPDT (R)	0.1–3.0	0.35–0.50	27–18	44	20	SC-88 6L 2.1 x 2 x 0.95
AS225-313LF	SPDT (R)	0.1–6.0	0.50–0.60	21–20	52	30	QFN 6L 2 x 3 x 1
 SKY13268-344LF	SPDT (R)	0.3–3.0	0.30–0.40	25–23	43	30	SOT-666 1.65 x 1.65 x 0.6
 SKY13270-92LF	SPDT (R)	0.02–2.5	0.30–0.55	30–17	56	38	SC-88 6L 2.1 x 2 x 0.95
 SKY13274-349LF	SPDT (A/R)	0.5–6.0	0.50–0.80	25–17	46	25	QFN 8L 2 x 2 x 0.9
 SKY13276-334	SPDT (R)	0.1–6.0	0.60–0.70	21–20	53	30	LGA 6L 1.5 x 1.2 x 0.8
 SKY13278-313LF	SPDT (R)	0.1–2.5	0.40–0.55	32–18	62	40	QFN 6L 2 x 3 x 1
SKY13286-359LF	SPDT (A)	0.1–6.0	0.80–1.50	62–42	46	30	QFN 16L 4 x 4 x 0.9
 SKY13290-000	SPDT (R)	0.02–2.5	0.40–0.55	26–18	63	40	Chip
 SKY13290-099	SPDT (R)	0.02–2.5	0.40–0.55	26–18	63	40	Chip on Film Frame
 SKY13290-313LF	SPDT (R)	0.02–2.5	0.40–0.55	26–18	63	40	QFN 6L 2 x 3 x 1
 SKY13298-360LF	SPDT (R)	3.0–8.0	0.70–0.90	25–22	47	26	QFN 8L 2 x 2 x 0.9
SKY13299-321LF	SPDT (R)	0.02–5.0	0.30–0.75	30–22	57	39	QFN 12L 3 x 3 x 0.75
 SKY13306-313LF	SPDT (R)	0.1–6.0	0.40–0.55	26–18	53	35	QFN 6L 2 x 3 x 1
 SKY13314-374LF	SPDT (R)	0.1–6.0	0.45–0.60	22–21	47	31	QFN 6L 1.5 x 1.5 x 0.45
 SKY13319-374LF	SPDT (R)	0.1–3.0	0.35–0.60	25–17	60	36	QFN 6L 1.5 x 1.5 x 0.45
 SKY13320-374LF	SPDT (R)	0.1–6.0	0.40–0.60	28–24	52	34	QFN 6L 1.5 x 1.5 x 0.45
 SKY13321-360LF	SPDT (R)	0.1–3.0	0.40–0.60	26–16	62	39	QFN 8L 2 x 2 x 0.9
 SKY13323-378LF	SPDT (R)	0.1–3.0	0.20–0.50	27–24	50	27	QFN 6L 1 x 1 x 0.45
 SKY13330-397LF	SPDT (R)	0.1–6.0	0.30–0.55	35–16	55	39	QFN 12L 2 x 2 x 0.55
 SKY13335-381LF	SPDT (R)	0.1–6.0	0.20–0.60	27–24	48	29	QFN 6L 1.5 x 2 x 0.45

SPDT (SP2T) RF Switches (Continued)

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ (dBm)	Package (mm)
 SKY13344-378LF	SPDT (R)	2.0–6.0	0.35–0.60	27–22	50	27	QFN 6L 1 x 1 x 0.45
 SKY13348-374LF	SPDT (A)	0.5–6.0	0.60–1.00	27–24	57	37	DFN 6L 1.5 x 1.5 x 0.45
 SKY13350-385LF	SPDT (R)	0.8–6.0	0.35–0.60	18–20	50	33	QFN 6L 1 x 1 x 0.45
 SKY13351-378LF	SPDT (R)	0.02–6.0	0.35–0.50	24–26	50	30	QFN 6L 1 x 1 x 0.45
 SKY13366-378LF	SPDT (R)	2.0–6.0	0.35–0.50	24–26	50	30	QFN 6L 1 x 1 x 0.45
 SKY13370-374LF	SPDT (A)	0.5–6.0	0.70–1.15	31–24	55	39	DFN 6L 1.5 x 1.5 x 0.45
 SKY13372-467LF	SP2T (A)	0.1–6.0	0.80–1.70	42–65	45	26	QFN 16L 4 x 4 x 0.9
 SKY13374-397LF	SPDT (R)	0.03–6.0	0.35–0.80	22–34	68	39	QFN 12L 2 x 2 x 0.55
 SKY13377-313LF	SPDT (A)	0.5–6.0	0.70–1.20	31–24	62	39	DFN 6L 2 x 3 x 0.9
 SKY13405-490LF	SPDT (R)	1.0–3.0	0.35–0.50	37–27	68	38	QFN 12L 2 x 2 x 0.55
 SKY13431-374LF	SPDT (A)	0.5–6.0	0.50–0.80	25–20	58	36	DFN 6L 1.5 x 1.5 x 0.45
 SKY13446-374LF	SPDT (R)	0.1–6.0	0.50–0.80	38–30	50	33	QFN 6L 1.5 x 1.5 x 0.45
 SKY13448-001	SPDT (R)	0.1–3.0	0.35–0.50	25–32	IMD3, -110	40	8-bump WLCSP 1.1 x 1.1 x 0.36
 SKY13453-385LF	SPDT (R)	0.01–6.0	0.40–0.70	27–15	57	33	QFN 6L 1 x 1 x 0.45
 SKY13472-460LF	SPDT (R)	0.1–6.0	0.35–0.80	22–40	70	39	QFN 12L 2 x 2 x 0.55
 SKYA21001	SPDT (R)	0.02–3.0	0.30–0.40	23–25	43	30	SC70 2 x 1.25 x 0.9
 SKYA21012	SPDT (R)	0.02–6.0	0.35–0.50	24–26	50	30	DFN 6L 1 x 1 x 0.5
 SKYA21013	SPDT (R)	0.1–6.0	0.35–0.80	22–34	68	39	QFN 12L 2 x 2 x 0.55

High Power SPDT and SPST PIN Diode Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Max. CW Power (dBm)	Package (mm)
 SKY12207-306LF	SPDT (R)	0.9–4.0	0.3–0.6	28–41	78	50	QFN 16L 4 x 4 x 0.9
 SKY12207-478LF	SPDT (R)	0.9–4.0	0.3–0.4	30–42	78	50	QFN 16L 4 x 4 x 1.5
 SKY12208-306LF	SPDT (R)	0.02–2.7	0.2–0.5	33–45	70	50	QFN 16L 4 x 4 x 0.9
 SKY12208-478LF	SPDT (R)	0.02–2.7	0.2–0.5	33–50	70	50	QFN 16L 4 x 4 x 1.5
 SKY12209-478LF	SPDT (R)	0.9–4.0	0.4–0.6	35–46	76	40	QFN 16L 4 x 4 x 1.5
 SKY12210-478LF	SPDT (R)	0.9–4.0	0.3–0.6	25–50	78	100	QFN 16L 4 x 4 x 1.5
 SKY12211-478LF	SPDT (R)	0.05–2.7	0.2–0.5	32–49	73	40	QFN 16L 4 x 4 x 1.5
 SKY12212-478LF	SPDT (R)	0.05–2.7	0.2–0.5	29–50	67	100	QFN 16L 4 x 4 x 1.5
 SKY12213-478LF	SPST (R)	0.5–6.0	0.5–1.0	20–34	72	150	QFN 16L 4 x 4 x 1.5
 SKY12215-478LF	SPDT (R)	0.9–4.0	0.3–0.5	31–43	71	125	QFN 16L 4 x 4 x 1.5

SP3T RF Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 AS227-000	SP3T (R)	0.2–2.0	0.45–0.70	32–20	63	37	Chip
 AS227-099LF	SP3T (R)	0.2–2.0	0.45–0.70	32–20	63	37	Wafer
 SKY13309-370LF	SP3T (R)	0.1–3.0	0.50–0.60	26–25	45	29	QFN 8L 2 x 2 x 0.55
 SKY13317-373LF	SP3T (R)	0.02–6.0	0.40–0.80	27–55	50	29	QFN 8L 1.5 x 1.5 x 0.45
 SKY13345-368LF	SP3T (R)	0.1–3.5	0.50–0.60	39–25	55	34	QFN 12L 2 x 2 x 0.5
 SKY13346-368LF	SP3T (R)	0.5–2.5	0.40–0.50	28–25	47	30	QFN 8L 2 x 2 x 0.9
 SKY13373-460LF	SP3T (R)	0.1–3.5	0.35–0.50	40–30	55	39	QFN 12L 2 x 2 x 0.55
 SKY13385-460LF	SP3T (R)	0.1–3.5	0.50–0.60	39–25	57	33	QFN 12L 2 x 2 x 0.5
 SKY13386-000	SP3T (R)	0.1–4.0	0.50–0.80	30–22	54	30	Bumped Die–200 µm Pitch
 SKY13398-000	SP3T (R)	0.02–6.0	0.55–1.50	27–15	50	33	Die 0.65 x 0.45 x 0.127
 SKY13408-465LF	SP3T (A)	1.0–6.0	0.80–1.30	24–28	54	34	QFN 12L 2 x 2 x 0.55
 SKYA21002	SP3T (R)	0.1–3.0	0.50–0.60	25	45	29	8-pin DFN 2 x 2 x 0.55

SP4T RF Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 AS192-000	SP4T (R)	0.10–2.5	0.90–1.10	34–21	55	37	Chip
AS204-80LF	SP4T (A)	LF–3.5	0.40–0.90	45–25	40	26	SSOP 16L 6 x 4.9 x 1.6
AS221-000	SP4T (R)	0.10–2.5	0.60–1.10	34–22	55	38	Chip
AS221-306LF	SP4T (R)	0.10–2.5	0.60–1.10	34–22	55	38	QFN 16L 4 x 4 x 0.9
SKY13296-340LF	SP4T (A)	0.02–2.5	0.40–0.70	40–26	40	18	QFN 20L 4 x 4 x 0.75
 SKY13322-375LF	SP4T (R)	0.02–6.0	0.45–2.00	28–18	51	30	QFN 10L 2 x 3 x 0.45
 SKY13380-350LF	SP4T (R)	0.02–3.0	0.50–0.60	28–21	65	39	QFN 12L 3 x 3 x 0.75
 SKY13384-350LF	SP4T (A)	0.02–4.0	0.60–1.20	50–36	51	30	QFN 16L 3 x 3 x 0.75
SKY13388-465LF	SP4T (R)	0.10–2.7	0.50–0.65	31–21	65	36	QFN 12L 3 x 3 x 0.55
 SKY13392-359LF	SP4T (A)	0.02–4.0	0.90–1.50	60–46	47	30	QFN 16L 4 x 4 x 0.9
 SKY14151-350LF	SP4T (R)	0.02–2.5	0.40–0.50	29–23	60	39	QFN 16L 3 x 3 x 0.75

DPDT Antenna Diversity Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 AS218-000	DPDT (R)	0.1–6.0	1.60–1.40	19	54	33	Chip
AS236-321LF	DPDT (R)	LF–6.0	0.95–1.15	22–15	56	34	QFN 12L 3 x 3 x 0.75
SKY13267-321LF	DPDT (R)	LF–6.0	0.70–0.90	32–20	49	30	QFN 12L 3 x 3 x 0.75
SKY13318-321LF	DPDT (R)	0.1–6.0	0.95–1.15	22–15	57	34	QFN 12L 3 x 3 x 0.75
 SKY13355-374LF	DPDT (R)	0.1–6.0	0.50–0.95	31–15	55	33	DFN 6L 1.5 x 1.5 x 0.5
 SKY13381-374LF	DPDT (R)	0.1–6.0	0.50–1.40	31–14	62	38	DFN 6L 1.5 x 1.5 x 0.5
 SKY13395-397LF	DPDT (R)	0.1–4.0	0.50–1.00	27–17	62	38	QFN 12L 2 x 2 x 0.5
 SKY13396-397LF	DPDT (R)	0.1–3.0	0.30–0.50	31–18	58	38	QFN-12L 2 x 2 x 0.55
 SKY13411-374LF	DPDT (R)	0.1–6.0	0.50–0.90	26–14	50	31	DFN 6L 1.5 x 1.5 x 0.5
 SKY13438-374LF	DPDT (R)	0.1–6.0	0.5–1.2	34–25	54	31	DFN 6L 1.5 x 1.5 x 0.5

Ultra Linear (SVLTE) Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 SKY13405-490LF	SPDT (R)	0.1–3.0	0.35–0.50	37–27	68	38	QFN 12L 2 x 2 x 0.55

Dual Pole (xT) RF Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 SKY13354-368LF	DPxDT	0.1–3.0	0.4–0.55	29–32	55	28	QFN 12L 2 x 2 x 0.55
 SKY13399-468LF	DPx3T	0.7–2.7	0.3–0.45	27–21	55	37	QFN 18L 2 x 2 x 0.45
 SKY13421-486LF	DPxDT	0.1–3.0	0.3–0.45	26–18	55	24	QFN 14L 1.6 x 1.6 x 0.55

High Throw Count (>4T) Switches / Antenna Switch Modules (ASMs) (GPIO and MIPI® RFFE)

High Throw Count Switches (Band Distribution, Linear Tx / Rx, Rx Diversity, General Purpose Signal Routing)

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
AS195-306LF	SP5T (R)	0.1–2.0	0.5–1.00	35–23	55	37.0	QFN 16L 4 x 4 x 0.9
 SKY13358-388LF	SP5T (R)	0.1–3.0	0.5–1.00	30–21	–	37.5	DFN 16L 2.3 x 2.3 x 0.45
 SKY13397-388LF	DP5T (R)	0.1–3.0	0.35	29	–	37.0	QFN 16L 2.3 x 2.3 x 0.05
 SKY13414-485LF	SP4T (R)	0.1–3.0	0.35–0.55	35–25	69	39.0	QFN 14L 2 x 2 x 0.5
 SKY13415-485LF	SP5T (R)	0.1–3.0	0.35–0.55	35–25	69	39.0	QFN 14L 2 x 2 x 0.5
 SKY13416-485LF	SP6T (R)	0.1–3.0	0.35–0.55	35–25	69	39.0	QFN 14L 2 x 2 x 0.5
 SKY13417-485LF	SP7T (R)	0.1–3.0	0.35–0.65	35–20	69	38.0	QFN 14L 2 x 2 x 0.5
 SKY13418-485LF	SP8T (R)	0.1–3.0	0.35–0.65	35–20	69	38.0	QFN 14L 2 x 2 x 0.5
 SKY13434-002	DP5T (R)	0.1–6.0	0.6–1.00	24–30	28–30	–	Wire Bond Die 0.5 x 0.875 x 0.127
 SKY13442-553LF	SP10T (R)	0.4–2.7	0.35–0.90	45–27	–	39	20-pin QFN 2.5 x 2.5 x 0.75
 SKY13445-000	DP5T (R)	2.4–5.9	0.7–1.1	24–20	–	31	Wire bond die 0.806 x 0.496 x 0.127
 SKY13445-368LF	DP5T (R)	2.4–5.9	0.7–1.1	24–20	–	31	12-pin QFN 2 x 2 x 0.55
 SKY13473-569LF	SP10T (R)	0.4–2.7	0.45–0.8	37–27	–	–	20-pin QFN 2.4 x 2.4 x 0.75
 SKY13473-12-569LF	SP10T (R)	0.4–2.7	0.45–0.8	37–27	–	–	20-pin QFN 2.4 x 2.4 x 0.75
 SKY13477-001A	3P4T (R)	2.3–2.7	0.35–0.66	30	–	–	WLCSP 15-bump 1.942 x 1.142 x 0.420
 SKY13526-485LF	SP6T (R)	0.4–2.7	0.4–0.7	34–23	–	–	14-pin QFN 2 x 2 x 0.55

High Throw Count (>4T) Switches / Antenna Switch Modules (ASMs)

Antenna Switch Modules

Skyworks Solutions is pleased to offer a broad selection of high throw count antenna switch modules (ASMs) leveraging both GaAs and SOI technology to respond to all cellular standards specific requirements (GSM, GPRS, EDGE, WCDMA, TD-SCDMA, and LTE). Using either multi-chip module (MCM) or quad flat no-lead (QFN) packaging allows the integration of filtering functions such as Tx harmonic filters and ESD protection, and respond to a wide range of cellular front-end switching requirements such as antenna switching, Rx diversity switching, or WCDMA band mode switching. Any cellular RF front-end that requires high performance, reduced current consumption, and low insertion loss in a compact footprint would benefit from our portfolio of antenna switch module solutions.

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IMD3 (dBm)	Package (mm)
 SKY13362-389LF	SP10T (R)	0.4–2.7	0.5–1.35	21–38	-105	QFN 26L 3 x 3.8 x 0.85
 SKY13364-389LF	SP10T (R)	0.4–2.7	0.5–1.10	30	-105	QFN 26L 3 x 3.8 x 0.85
 SKY13404-466LF	SP10T (R)	0.4–2.7	0.5–1.35	45–24	-110	QFN 26L 2.6 x 3.4 x 0.55
 SKY13406-389LF	SP10T (R)	0.4–2.7	0.5–1.35	45–24	-110	QFN 26L 2.6 x 3.4 x 0.55
 SKY13412-487LF	SP12T (R)	0.4–2.7	0.4–1.10	35–23	-110	QFN 30L 3 x 3.8 x 0.75
 SKY13413-488LF	SP12T (R)	0.4–2.7	0.4–1.10	35–23	–	26-pin QFN 2.6 x 3.4 x 0.55
 SKY13437-11	SP12T (R)	0.4–2.7	0.55–1.35	22–44.5	–	22-pin MCM 3.2 x 2.5 x 0.8
 SKY13441	SP10T (R)	0.4–2.7	0.5–1.35	45–31	–	20-pin MCM 3.2 x 2.5 x 0.8
 SKY13454	SP12T (R)	0.4–2.7	0.5–1.20	23–43	–	22-pin MCM 3.2 x 2.5 x 0.8
 SKY13488	SP12T (R)	0.4–3.8	0.7–1.25	35–20	–	20-pin MCM 2.5 x 2.5 x 0.8
 SKY13491-21	SP14T (R)	0.4–3.8	0.6–1.25	35–20	–	22-pin MCM 2.5 x 2.9 x 0.8
 SKY13492	SP16T	0.7–2.7	TBD	TBD	TBD	22-pin MCM 2.5 x 3.3 x 0.8
 SKY13498	SP10T (R)	0.4–3.8	0.7–1.25	35–20	–	20-pin MCM 2.5 x 2.5 x 0.8
 SKY18106-455LF	SP8T (R)	0.4–2.2	0.4–0.80	25	-102	QFN 26L 3 x 3.8 x 0.75
 SKY18108-11	SP9T (R)	0.4–2.7	0.8–0.90	>35	-110	20-pin MCM 3.2 x 3.5 x 0.9
 SKY18120-11	SP9T (R)	0.4–2.7	0.5–11.00	24–44	-105	20-pin MCM 2.5 x 2.5 x 0.9

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IIP3 (dBm)	Typ. IP ₁ dB (dBm)	Package (mm)
 SKY13455-31	SP12T (R)	0.4–2.7	0.6–1.25	22–43	–	–	22-pin MCM 3.2 x 2.5 x 0.8

Carrier Aggregation Switches

Part Number	Description	Main or Diversity Function	Number of Low Band Ports	Number of High Band Ports	DC Control	Package (mm)
 SKY13456-11	SP7T + SP7T Carrier Aggregation Switch	Main	7	7	MIPI®	26-pin MCM 2.8 x 3.2 x 0.8
 SKY13484	SP5T + SP7T Carrier Aggregation Switch	Diversity	5	7	MIPI®	22-pin MCM 2.5 x 2.9 x 0.8
 SKY13530	SP6T + SP4T Carrier Aggregation Switch	Main	4	6	dMIPI®	22-pin MCM 2.4 x 2.8 x 1.0
 SKY13532	SP8T + SP6T Carrier Aggregation Switch	Main	6	8	dMIPI®	24-pin MCM 2.8 x 2.8 x 1.0
 SKY13535	SP12T + SP9T Carrier Aggregation Switch	Main	9	12	dMIPI®	28-pin MCM 3.6 x 2.8 x 1.0

Antenna Tuning Switches

Part Number	Configuration	Number of RF Ports	Peak RF Voltage (V)	R _{ON} (Ω)	C _{OFF} (fF)	Capacitance Range (pF)	DC Control	Package (mm)
 SKY19001-001	SPST	2	40	1	400	N/A	GPIO	10-bump WLCSP 1.2 x 1.6 x 0.606

LNB / DBS Matrix Switches

Part Number	Description (Absorptive/ Reflective)	Frequency (GHz)	Typ. IL (dB)	Typ. Isol. (dB)	Typ. IP ₁ dB (dBm)	Package (mm)
SKY13272-340LF	LNB/DBS (A)	0.25–2.15	7.5–8.5	40–31	15	QFN 20L 4 x 4 x 0.75
SKY13292-365LF	LNB/DBS (A)	0.25–2.15	7.5–9.0	40–30	15	QFN 20L 4 x 4 x 0.75
 SKY13293-340LF	LNB/DBS (A)	0.25–2.15	8.0–9.0	57–45	15	QFN 20L 4 x 4 x 0.75
 SKY13327-365LF	LNB/DBS (A)	0.25–2.15	8.0–9.0	37–41	15	QFN 20L 4 x 4 x 0.75
 SKY13369-365LF	LNB/DBS (A)	0.25–2.15	8.0–9.0	37–41	15	QFN 20L 4 x 4 x 0.75
 SKY13410-365LF	LNB/DBS (A)	0.25–2.15	7.5–9.0	30–40	12	QFN 20L 4 x 4 x 0.75
 SKY13419-365LF	LNB/DBS (A)	0.25–2.15	7.1–8.5	43–38	12	QFN 20L 4 x 4 x 0.75

TECHNICAL CERAMICS

**Ceramic Coaxial Resonators***

Skyworks Solutions, through Trans-Tech, its industry-leading ceramic products division, designs and manufactures a complete line of RF and microwave components for commercial markets. With over 50 years of experience, we offer a complete line of high quality, low cost ceramic-based components for a number of RF and microwave markets including wireless communications, infrastructure, military, cable television, broadband access, circuit miniaturization, technical powder, and ingots. Our tightly controlled processes, from raw materials to forming, firing, finishing, assembly and test, produce the highest quality and the most consistently reproducible components available today for both low and high volume requirements. Our product portfolio includes dielectric resonators and coaxial transmission line elements for DRO and VCO applications, ceramic band pass filters, ferrite, and garnet material for circulators/isolators.



Skyworks' Green™ products are compliant to all applicable materials legislation and are halogen-free. For additional information, refer to Skyworks' Definition of Green™, document number SQ04-0074.

Recommended Frequencies 1000 Series ($\epsilon_r = 10.5 \pm 0.5$, $T_F = 0 \pm 10$)

Type	Profile	Recommended Range f (MHz)	Nominal Length (in.) ± 0.030 in.	Nominal Length Range (in.)	Characteristic Impedance (Ω)
$\lambda/4$ Quarter Wave Length	HP	1150–800	$L = 911/f_0$ (MHz)	0.506–0.792	25.3
	EP	1150–2500		0.364–0.792	22.5
	SP	1150–3100		0.294–0.792	18.3
	LS	1150–4600		0.198–0.792	18.4
	LP	1150–4100		0.222–0.792	27.4
	MP	1150–5100		0.179–0.792	25.7
	SM	1150–5100		0.179–0.792	18.4
$\lambda/2$ Half Wave Length	HP	2300–3400	$L = 1821/f_0$ (MHz)	0.536–0.792	25.3
	EP	2300–5000		0.364–0.792	22.5
	SP	2300–6000		0.304–0.792	18.3
	LS	2300–6000		0.304–0.792	18.4
	LP	2300–6000		0.304–0.792	27.4
	MP	2300–6000		0.304–0.792	25.7
	SM	2300–6000		0.304–0.792	18.4

Recommended Frequencies 2000 Series ($\epsilon_r = 20.6 \pm 1$, $T_F = 0 \pm 10$)

Type	Profile	Recommended Range f (MHz)	Nominal Length (in.) ± 0.030 in.	Nominal Length Range (in.)	Characteristic Impedance (Ω)
$\lambda/4$ Quarter Wave Length	HP	800–1200	$L = 650/f_0$ (MHz)	0.542–0.813	18.1
	EP	800–1700		0.382–0.813	16.1
	SP	800–2200		0.296–0.813	13.1
	LS	800–3200		0.203–0.813	13.1
	LP	800–2900		0.224–0.813	19.6
	MP	800–3600		0.181–0.813	18.4
	SM	800–3600		0.181–0.813	13.1
$\lambda/2$ Half Wave Length	HP	1600–2500	$L = 1300/f_0$ (MHz)	0.520–0.813	18.1
	EP	1600–3500		0.372–0.813	16.1
	SP	1600–4500		0.289–0.813	13.1
	LS	1600–6000		0.217–0.813	13.1
	LP	1600–6000		0.217–0.813	19.6
	MP	1600–6000		0.217–0.813	18.4
	SM	1600–6000		0.217–0.813	13.1

*These products are produced by Trans-Tech (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Ceramic Coaxial Resonators

Recommended Frequencies 8800 Series ($\epsilon_r = 39 \pm 1.5$, $T_F = 4 \pm 2$)

Type	Profile	Recommended Range f (MHz)	Nominal Length (in.) ± 0.030 in.	Nominal Length Range (in.)	Characteristic Impedance (Ω)
$\lambda/4$ Quarter Wave Length	HP	600–900	$L = 472/f_0$ (MHz)	0.525–0.787	13.1
	EP	600–1200		0.394–0.787	11.7
	SP	600–1600		0.295–0.787	9.5
	LS	600–2300		0.205–0.787	9.5
	LP	600–2100		0.225–0.787	14.2
	MP	600–2600		0.182–0.787	13.3
	SM	600–2600		0.182–0.787	9.5
$\lambda/2$ Half Wave Length	HP	1200–1900	$L = 945/f_0$ (MHz)	0.497–0.787	13.1
	EP	1200–2500		0.378–0.787	11.7
	SP	1200–3200		0.295–0.787	9.5
	LS	1200–4700		0.201–0.787	9.5
	LP	1200–4300		0.220–0.787	14.2
	MP	1200–5200		0.182–0.787	13.3
	SM	1200–5200		0.182–0.787	9.5

Recommended Frequencies 9000 Series ($\epsilon_r = 90 \pm 3$, $T_F = 0 \pm 10$)

Type	Profile	Recommended Range f (MHz)	Nominal Length (in.) ± 0.030 in.	Nominal Length Range (in.)	Characteristic Impedance (Ω)
$\lambda/4$ Quarter Wave Length	HP	400–600	$L = 311/f_0$ (MHz)	0.518–0.778	8.6
	EP	300–800		0.389–1.037	7.7
	SP	300–1000		0.311–1.037	6.3
	LS	300–1500		0.207–1.037	6.3
	LP	300–1400		0.222–1.037	9.4
	MP	400–1700		0.183–0.778	8.8
	SM	400–1700		0.183–0.778	6.3
$\lambda/2$ Half Wave Length	HP	800–1200	$L = 622/f_0$ (MHz)	0.518–0.778	8.6
	EP	800–1700		0.366–0.778	7.7
	SP	800–2100		0.296–0.778	6.3
	LS	800–3100		0.201–0.778	6.3
	LP	800–2800		0.222–0.778	9.4
	MP	800–3400		0.183–0.778	8.8
	SM	800–3400		0.183–0.778	6.3

Coaxial Resonator Order Information

An Order Example

SR 8800 SP Q 1300 B Y E

Skyworks' Green™ products are compliant to all applicable materials legislation and are halogen-free. For additional information, refer to *Skyworks' Definition of Green™*, document number SQ04-0074.

Tab: Y = Yes, N = No

Frequency Tolerance: B = +1.0%, A = 0.5%

Resonant Frequency: State in MHz

Type: Q for $\lambda/4$, H for $\lambda/2$

Profile: HP, EP, SP, LP, LS, MP, SM

Material: 8800, 9000, 1000, 2000

Product Code: SR - square coaxial resonator

Ceramic Coaxial Inductors*

Skyworks’ coaxial inductors are most frequently used in the resonant circuit of voltage-controlled oscillators (VCOs), where a varactor provides the tuning capability. The designer is usually confronted with trade-offs between high Q for best phase noise and component size versus circuit board real estate. An algorithm for selecting the correct Skyworks’ part follows. In addition, Skyworks’ COAX Program can provide valuable assistance for determining the correct Skyworks part. Application notes and references give example circuits, basic principles, and some helpful hints.

While there is no physical distinction between a coaxial resonator and a coaxial inductor, the selection of an inductor for a VCO begins by first knowing (from analysis or experiment) the equivalent inductance that the active circuit, including the varactor, must see. In general, the VCO active circuit loads the “resonator”, lowering the resonator’s self-resonant frequency (SRF). The situation is analogous to externally capacitively loading a discrete parallel resonant L-C circuit.

While there is an approximate equivalent L-C circuit for the coaxial resonator close to resonance, this model has limited application.

The coaxial resonators and inductors are more accurately modeled as a transmission line. Our application notes and references delve further into this topic.

Values of inductance that can be achieved depend upon the separation between the VCO frequency and the SRF of the coaxial line element. Values less than 1 nH are not practical, since the metal connection tab itself has an equivalent inductance of this order.

Equivalent inductances in the range of 3–20 nH have been popular among designers of VCOs for wireless equipment.

Call for availability, utilize the Inductor Selection Guide, use the COAX Program, or refer to the application notes for assistance with ordering the correct part.

 Skyworks’ Green™ products are compliant to all applicable materials legislation and are halogen-free. For additional information, refer to *Skyworks’ Definition of Green™*, document number SQ04-0074.

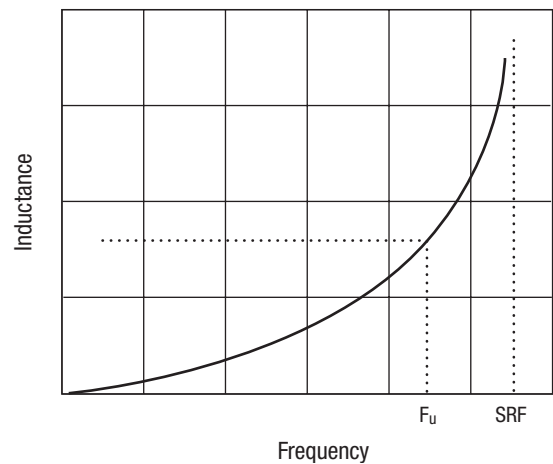


Figure 1. Frequency of Use vs. Inductance

Coaxial Inductor Order Information

An Order Example

SI	8800	LP	Q	0450	Y	6.3	E
----	------	----	---	------	---	-----	---

Skyworks’ Green™ products are compliant to all applicable materials legislation and are halogen-free. For additional information, refer to *Skyworks’ Definition of Green™*, document number SQ04-0074.

Inductance: (see Figure 1) Available in 0.01 nH increments

Tab: Y = Yes, N = No

Frequency of Use (Fu): (see Figure 1 for definition)

Type: Q for $\lambda/4$ standard

Profile: HP, EP, SP, LP, LS, MP, SM

Material: 1000, 2000, 8800, 9000

Product Code: SI - square coaxial inductor

*These products are produced by Trans-Tech (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Ceramic Coaxial Inductors

Coax Line Properties vs. Profile and Material

Profile	1000	2000	8800	9000	Tab Inductors
HP	25.3 Ω	18.1 Ω	13.1 Ω	8.6 Ω	1.8 nH
EP	22.5 Ω	16.1 Ω	11.7 Ω	7.7 Ω	1.0 nH
SP	18.3 Ω	13.1 Ω	9.5 Ω	6.3 Ω	1.0 nH
LS	18.4 Ω	13.1 Ω	9.5 Ω	6.3 Ω	0.9 nH
LP	27.4 Ω	19.6 Ω	14.2 Ω	9.4 Ω	1.0 nH
SP	25.7 Ω	18.4 Ω	13.3 Ω	8.8 Ω	0.6 nH
SM	18.4 Ω	13.1 Ω	9.5 Ω	6.3 Ω	0.6 nH

Wavelength (λ_g) in Dielectric

Material	ϵ_r	Wavelength Formula for λ_g (inches)
1000	10.5 $\pm$ 0.5	3642/ f_0
2000	20.6 $\pm$ 1.0	2601/ f_0
8800	39.0 $\pm$ 1.5	1890/ f_0
9000	90.0 $\pm$ 3.0	1244/ f_0

Figure 2.

Inductor Selection Guide

- 1) Select one of Skyworks' four dielectric materials.
- 2) Determine the VCO's operating frequency (f_{vco}).
- 3) Determine the desired inductance or circuit impedance (Z_{in}).
Note: Convert inductances to impedances by using:
 $Z_{in} = 2\pi \cdot f_{vco} \cdot L_{in} \Omega$.
- 4) Calculate the effect of the tab. Tab inductances are given in Figure 9. Use the formula
($Z_{in} = 2\pi \cdot f_{vco} \cdot L_{tab} \Omega$)
to convert the tab inductances to impedances.
- 5) Determine the input impedance by subtracting the effect of the tab using: $Z_{input} = Z_{in} - Z_{tab}$.
- 6) Calculate the wavelength (λ_g) of the part in the dielectric (see Figure 2 for appropriate formula).
- 7) Determine the characteristic impedance (Z_0) of the part (see Figure 3).
- 8) Calculate the physical length of the part using the formula: $1 = (\lambda_g / 2 \cdot \xi) \tan^{-1} (Z_{input} / Z_0)$ inches.
- 9) Determine the SRF of this part using:
 $SRF = (\lambda_g \cdot f_{vco}) / (4 \cdot 1)$ MHz.
- 10) Check the recommended frequency chart for the appropriate material to ensure a valid part.

Measurement Description of Q, f_0 , and L

Evaluation of Q (quality factor) and f_0 (resonant frequency) of coaxial components is made with a one-port reflection measurement on a network analyzer. The probe is moved into the inner diameter (ID) of the device until the input resistance of the device matches the terminal resistance of the network analyzer. This is indicated by a 50 Ω circle on the Smith Chart display and is known as "critical" coupling. The point on this circle where the response is purely resistive (capacitance reactance equals inductive reactance) is the point of resonance and will be defined by a complex impedance of $Z = 50 + j \Omega$. The Q is computed by observing the frequency span between VSWR-2.616 ($Z = 50 \pm j50 \Omega$) on either side of f_0 . The Q is defined as $f_0/\Delta f$.

The inductance parameter (L) is measured with an APC-7 mm connector mounted flush with a conducting plane and a full one-port calibration (open, short, broadband 50 Ω load) is performed. The inductor is then clamped into place with the tab touching the inner conductor and the metallized body touching the grounding plane. The inductance (L) is measured at the frequency of use. The impedance vector on the Smith Chart of an ANA gives the necessary information where $Z = R + j\omega L$.

Characteristic Impedance

As shown in Figure 3, the characteristic impedance (Z_0) of the coaxial TEM mode components is a function of the profile dimensions and the dielectric constant of the material. Z_0 is reduced over its air line value by the square root of the dielectric constant of the material. At one-eighth wavelength, the short-circuit line exhibits an inductive reactance while the open-circuit line exhibits a capacitive reactance equal in magnitude to Z_0 .

$$Z_0 = \text{characteristic impedance} = \frac{60}{\sqrt{\epsilon_r}} \ln \left(1.079 \frac{W}{d} \right)$$

where:

w = width of resonator

d = diameter of inner conductor

ϵ_r = dielectric constant

Profile	1000	2000	8800	9000
HP	25.3 Ω	18.1 Ω	13.1 Ω	8.6 Ω
EP	22.5 Ω	16.1 Ω	11.7 Ω	7.7 Ω
SP	18.3 Ω	13.1 Ω	9.5 Ω	6.3 Ω
LS	18.4 Ω	13.1 Ω	9.5 Ω	6.3 Ω
LP	27.4 Ω	19.6 Ω	14.2 Ω	9.4 Ω
MP	25.7 Ω	18.4 Ω	13.3 Ω	8.8 Ω
SM	18.4 Ω	13.1 Ω	9.5 Ω	6.3 Ω

Figure 3.

Ceramic Coaxial Inductors

Soldering Conditions

Skyworks' coaxial components are compatible with standard surface mount reflow and wave soldering methods. The HP profile components may require mechanical support mounting because of the larger size. Consult the factory for details.

Use silver-bearing solder such as SN62 (62Sn-36Pb-2Ag). Skyworks' tabs are pretinned to improve solderability. Additional attaching methods include hot air gun, infrared source, soldering iron, hot plate, vapor phase, and others. The coaxial component body is a ceramic and subject to thermal shock if heated or cooled too rapidly. Figure 4 is the recommended soldering profile, not to exceed 230 °C for a duration of about 10 seconds. Repeatable results can be best achieved with air cooling only, not quenching.

Figure 5 indicates the maximum tolerance of the component planarity with respect to the datum plane.

Equation (1) Input Impedance f_0

$$Z_{\text{input}} = fZ_0 \tan \left(\frac{2f_0}{4\text{ SRF}} \right)$$

where: f_0 = use frequency

Equation (2) Resonant Frequency

$$f = \frac{c}{4\text{ SRF} \sqrt{\epsilon_r}}$$

where: c = speed of light ϵ_r = 39.08800 material
 90.09000 material
 10.51000 material
 20.62000 material

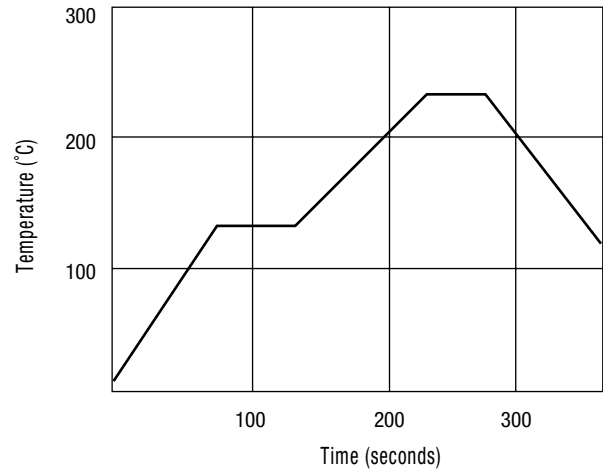


Figure 4. Soldering Profile

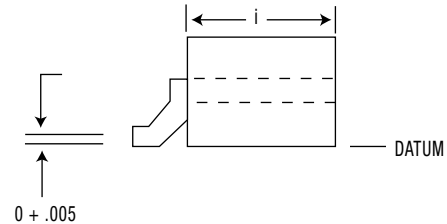


Figure 5. Surface Mount Tolerance for Components with Tabs

Ceramic Coaxial Inductors







Packaging

Tape and reel packaging is available. Consult the factory for details.

Notes: 1. Dimension "L" is length which depends on frequency.

Key:

- = Solder over metallic mounting pad
- = Solder mask over metallic mounting pad
- = Exposed metallic mounting pad

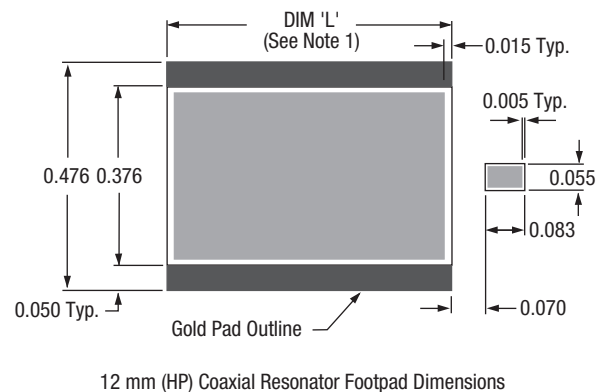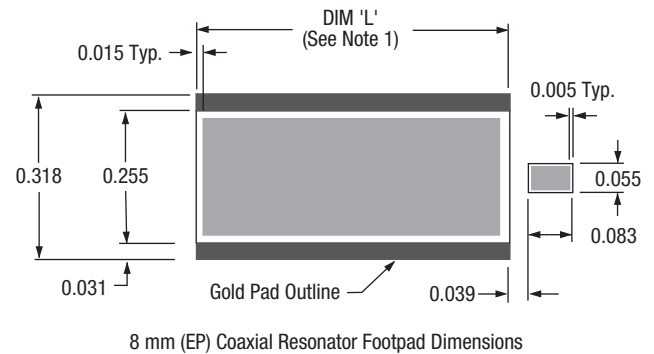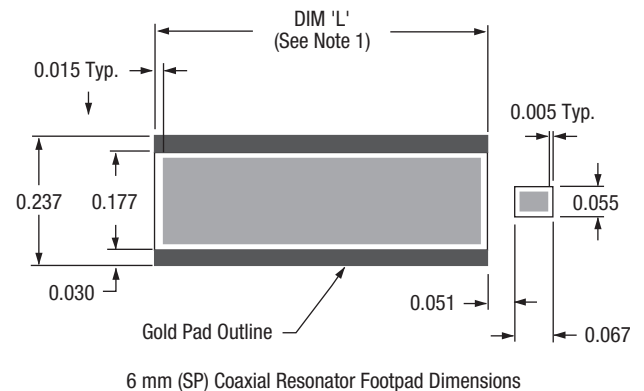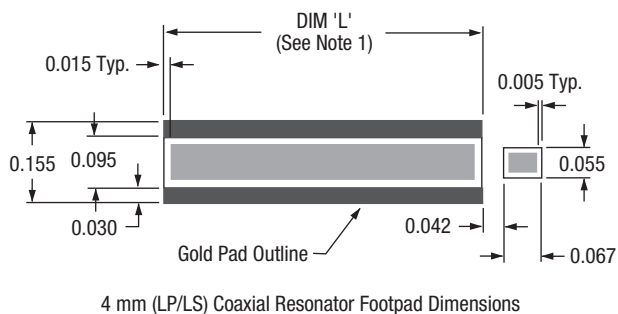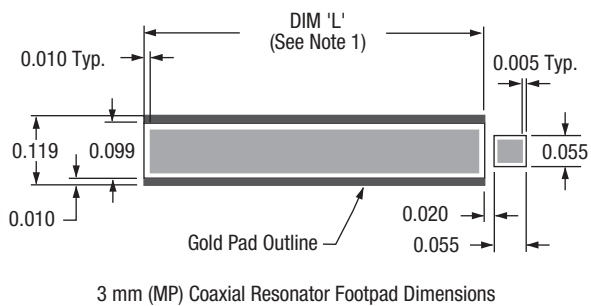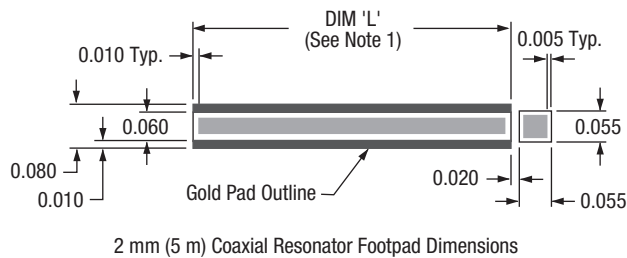

Standard Filters / Diplexers*

This list contains Skyworks' most popular filter and diplexer designs. A variety of footprints and configurations are available for application-specific needs. Please contact the factory or your local representative with your specifications or for more information on any of these

designs. Skyworks maintains a list of over 700 active filters and diplexers. We welcome every opportunity to assist in the selection or creation of a filter or diplexer that will meet your specifications.

CATV

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT3P2-1068P0-3507	Band Pass	3 mm/2 pole	1068	35	0.7	PCB SMT
TT4P2-1013P2-2020	Band Pass	4 mm/2 pole	1013	20	2.0	PCB SMT
TT4P2-1082.5P2-0720	Band Pass	4 mm/2 pole	1082.5	07	2.0	PCB SMT
TT4P2-1082P2-0620	Band Pass	4 mm/2 pole	1082	06	2.0	PCB SMT
TT4P2-1090P2-0610	Band Pass	4 mm/2 pole	1090	06	1.0	PCB SMT
TT4P3-1030P2-1535	Band Pass	4 mm/3 pole	1030	15	3.5	PCB SMT
TT4P3-1067P2-4420	Band Pass	4 mm/3 pole	1067	44	2.0	PCB SMT
TT6P4-1080P4-7015	Band Pass	6 mm/4 pole	1080	70	1.5	PCB SMT
TT6P4-1090P2-1036	Band Pass	6 mm/4 pole	1090	10	3.6	PCB SMT

WCS

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT6P6-0750P0-5017	Band Pass	6 mm/6 pole	0750	50	1.7	PCB SMT
TT6P5-0765P0-11225	Band Pass	6 mm/5 pole	0765	112	2.5	PCB SMT
TT6P2-0770T-1215	Band Pass	6 mm/2 pole	0770	12	1.5	PCB SMT
TT6P3-0770T-1225	Band Pass	6 mm/3 pole	0770	12	2.5	PCB SMT
TT6P3-0770T-2020	Band Pass	6 mm/3 pole	0770	20	2.0	PCB SMT

MDS

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT4P3-2120P2-6020	Band Pass	4 mm/3 pole	2120	60	2.0	PCB SMT
TT4P6-2122P0-2835	Band Pass	4 mm/6 pole	2122	28	3.5	PCB SMT
TT6P4-2158P2-1422	Band Pass	6 mm/4 pole	2158	14	2.2	PCB SMT
TT6P6-2500P3-3635	Band Pass	6 mm/6 pole	2500	36	3.5	PCB SMT

*These products are produced by Trans-Tech (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Standard Filters / Diplexers*

ISM

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT4P2-0915P2-2620	Band Pass	4 mm/2 pole	0915	26	2.0	PCB SMT
TT6P2-0902F-2518	Band Pass	6 mm/2 pole	0902	25	1.8	PCB SMT
TT6P2-0915T-2518	Band Pass	6 mm/2 pole	0915	25	1.8	PCB SMT
TT6P3-0902T-2520	Band Pass	6 mm/3 pole	0902	25	2.0	PCB SMT
TT6P3-0915T-2520	Band Pass	6 mm/3 pole	0915	25	2.0	PCB SMT
TT6P3-0917F-1425	Band Pass	6 mm/3 pole	0917	14	2.5	PCB SMT
TT3P3-2400P1-1030	Band Pass	3 mm/3 pole	2400	10	3.0	PCB SMT
TT3P3-2450P1-1445	Band Pass	3 mm/3 pole	2450	14	4.5	PCB SMT
TT6P3-2467P0-3330	Band Pass	6 mm/3 pole	2467	33	3.0	PCB SMT

Cell, PCS, DCS, UMTS

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT3P2-1880P0-6010	Band Pass	3 mm/2 pole	1880	60	1.0	PCB SMT
TT3P3-0881.5P2-2530	Band Pass	3 mm/3 pole	0881.5	25	3.0	PCB SMT
TT3P3-1880P0-6022	Band Pass	3 mm/3 pole	1880	60	2.2	PCB SMT
TT3P3-1960P0-6022	Band Pass	3 mm/3 pole	1960	60	2.2	PCB SMT
TT3P3-1960P2-6030	Band Pass	3 mm/3 pole	1960	60	3.0	PCB SMT
TT3P4-0836.5P2-2525	Band Pass	3 mm/4 pole	0836.5	25	2.5	PCB SMT
TT3P4-0881.5P2-2525	Band Pass	3 mm/4 pole	0881.5	25	2.5	PCB SMT
TT3P4-1880P2-6020	Band Pass	3 mm/4 pole	1880	60	2.0	PCB SMT
TT3P4-1880P2-6030	Band Pass	3 mm/4 pole	1880	60	3.0	PCB SMT
TT4P3-0863P0-0585	Band Pass	4 mm/3 pole	0863	05	8.5	PCB SMT
TT4P3-2180P1-2540	Band Pass	4 mm/3 pole	2180	25	4.0	PCB SMT
TT4P4-1880P0-6216	Band Pass	4 mm/4 pole	1880	62	1.6	PCB SMT
TT4P4-1960P0-6216	Band Pass	4 mm/4 pole	1960	62	1.6	PCB SMT
TT4P5-2240P2-1032	Band Pass	4 mm/5 pole	2240	10	3.2	PCB SMT
TT4P6-0860.5P0-1937	Band Pass	4 mm/6 pole	0860.5	19	3.7	PCB SMT
TT6P3-0836T-2520	Band Pass	6 mm/3 pole	0836	25	2.0	PCB SMT
TT6P3-0860P3-2020	Band Pass	6 mm/3 pole	0860	20	2.0	PCB SMT
TT6P3-0860T-2020	Band Pass	6 mm/3 pole	0860	20	2.0	PCB SMT
TT6P3-0881F-2520	Band Pass	6 mm/3 pole	0881	25	2.0	PCB SMT
TT6P5-1960P0-6025	Band Pass	6 mm/5 pole	1960	60	2.5	PCB SMT
TT6P5-2280P1-7032	Band Pass	6 mm/5 pole	2280	70	3.2	PCB SMT
TT6P6-1900P3-8035	Band Pass	6 mm/6 pole	1900	80	3.5	PCB SMT
TT6P3-2140P2-6011	Band Pass	6 mm/3 pole	2140	60	1.1	PCB SMT
TT6P10-R1950-T2140	Diplexer	6 mm/10 pole	1950	—	—	PCB SMT

*These products are produced by Trans-Tech (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Standard Filters / Diplexers*

GPS

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT4P4-R1227.6-T1575.42	Diplexer	4 mm/4 pole	1227.6	-	-	PCB SMT
TT4P3-1227.6P1-2030	Band Pass	4 mm/3 pole	1227.6	20	3.0	PCB SMT
TT4P3-1575.42P2-2040	Band Pass	4 mm/3 pole	1575.42	20	4.0	PCB SMT
TT3P3-1227.6P1-1030	Band Pass	3 mm/3 pole	1227.6	10	3.0	PCB SMT
TT3P3-1575.42P2-1030	Band Pass	3 mm/3 pole	1575.42	10	3.0	PCB SMT

Other

Part Number	Filter Type	Size/Poles	Center Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB)	Package
TT3P4-2513P2-5055	Band Pass	3 mm/4 pole	2513	50	5.5	PCB SMT
TT3P5-3687P1-7466	Band Pass	3 mm/5 pole	3687	74	6.6	PCB SMT
TT4P3-3417P2-0220	Band Pass	4 mm/3 pole	3417	02	2.0	PCB SMT
TT4P5-1090P0-1050	Band Pass	4 mm/5 pole	1090	10	5.0	PCB SMT
TT6P5-0810P3-5030	Band Pass	6 mm/5 pole	0810	50	3.0	PCB SMT
TT6P4-0509P7-0148	Band Pass	6 mm/4 pole	0509	01	4.8	PCB SMT
TT4P4-1000P2-1030	Band Pass	4 mm/4 pole	1000	10	3.0	PCB SMT
TT6P3-0826.5P3-0520	Band Pass	6 mm/3 pole	0826.5	05	2.0	PCB SMT
TT6P3-0827P3-0620	Band Pass	6 mm/3 pole	0825	06	2.0	PCB SMT
TT6P6-1000P5-8530	Band Pass	6 mm/6 pole	1000	85	3.0	PCB SMT
TT6P6-0545P6-3022	Band Pass	6 mm/6 pole	0545	30	2.2	PCB SMT
TT4P3-3500P2-10020	Band Pass	4 mm/3 pole	3500	100	2.0	PCB SMT
TT6P6-0889P3-4029	Band Pass	6 mm/6 pole	0889	40	2.9	PCB SMT
TT6P4-0722P4-4817	Band Pass	6 mm/4 pole	0722	48	1.7	PCB SMT
TT3P3-1088P2-9015	Band Pass	3 mm/3 pole	1088	90	1.5	PCB SMT
TT6P3-0740P3-2020	Band Pass	6 mm/3 pole	0740	20	2.0	PCB SMT
TT6P5-1950P3-6040	Band Pass	6 mm/5 pole	1950	60	4.0	PCB SMT
TT3P4-0917P2-4524	Band Pass	3 mm/4 pole	0917	45	2.4	PCB SMT
TT6P3-1090P2-1029	Band Pass	6 mm/3 pole	1090	10	2.9	PCB SMT
TT6P4-0770P0-1240	Band Pass	6 mm/4 pole	0770	12	4.0	PCB SMT
TT6P3-1030P2-1029	Band Pass	6 mm/3 pole	1030	10	2.9	PCB SMT
TT6P5-0881.5P0-2530	Band Pass	6 mm/5 pole	0881.5	25	3.0	PCB SMT
TT6P3-0730P3-1213	Band Pass	6 mm/3 pole	0730	12	1.3	PCB SMT
TT6P3-0445.25T-0145	Band Pass	6 mm/3 pole	0445.25	01	4.5	PCB SMT
TT4P3-2400P1-20015	Band Pass	4 mm/3 pole	2400	200	1.5	PCB SMT
TT6P3-1080P2-0650	Band Pass	6 mm/3 pole	1080	06	5.0	PCB SMT
TT6P3-0745.3P3-1920	Band Pass	6 mm/3 pole	0745.3	19	2.0	PCB SMT
TT6P4-0435P0-3019-NS	Band Pass	6 mm/4 pole	0435	30	1.9	PCB SMT
TT3P4-0895.5P2-3926	Band Pass	3 mm/4 pole	0895.5	39	2.6	PCB SMT

*These products are produced by Trans-Tech (a wholly owned subsidiary of Skyworks Solutions, Inc.)

Reference Material


Block Diagrams	138
<i>Smartphone, Handset and Tablet</i>	139
SkyOne®	138
Smartphone Using Discrete Switches or Antenna Switch Modules (ASMs)	139
Embedded Connectivity in Handsets	139
<i>WiFi Connectivity</i>	140
802.11a/b/g/n/ac Single-band WiFi Front-end Modules (FEMs)	140
802.11a/b/g/n/ac Dual-band WiFi Front-end Modules (FEMs)	140
802.11a/b/g/n/ac Dual-band WiFi and Bluetooth® Front-end Components—Handset and Tablet ..	141
802.11a/b/g/n/ac Dual-band WiFi Front-end Components—Computing	142
802.11a/b/g/n/ac Single-band WiFi Front-end Components—Networking	142
802.11a/b/g/n/ac Single-band WiFi Front-end Components—Home Entertainment	143
<i>Infrastructure</i>	143
2G, 3G Base Station Repeater	143
Direct Conversion Base Station Transceiver ..	144
Superheterodyne Base Station Transceiver ..	145
Base Station Receiver System Using Antenna Diversity	146
Base Station Transmitter with Combining Amplifier	147
Transceiver	148
Small Cell Basestation	149
<i>Smart Energy</i>	149
Thermostat	149
Smart Meter Communication Module (Simplified)	150
Short Range Radio	150
<i>Automotive</i>	151
Automotive	151
Telematics and Infotainment	152
Car to Communications 802.11P	152
<i>Broadband Access Systems</i>	153
Satellite Systems	153
<i>CATV Modem</i>	153
<i>Reader / Active Antennas / Transmitter, Full Duplex 2440</i>	154
<i>Low Noise Block (LNB)</i>	154
<i>Transceiver (Simplified)</i>	155
<i>RF ID Transmitter</i>	156
<i>RF ID Receiver</i>	156
<i>RF ID Full Duplex Tag</i>	157
<i>2.45 GHz DSS Wireless Reader (Simplified)</i> ..	157
<i>Power Management</i>	158
ADSL and Cable Modems	158
Bluetooth® Devices	158
Desktop Computers / Workstations / Servers ..	159
Digital Cameras	160
Digital Photo Frames	161
Media Players (MP3, MP4, PMP)	162
Netbooks / MID	163
Notebooks / Laptops / Tablet PCs	164
Portable Navigation Devices (PNDs)	165
Set-Top Boxes and Game Consoles	166
Smartphones	167
LCD TVs and Monitors	168
Wireless LAN Cards / Clients	169
Package Selection Guide	170
Power Management Products	174
Warranty / Order Information	177
Part Number Index	178
Skyworks' Sales Representatives	184
Skyworks' Distributors	186
Skyworks' Sales Offices	195

SkyOne®



Smartphone, Handset and Tablet

Smartphone Using Discrete Switches or Antenna Switch Modules (ASMs)

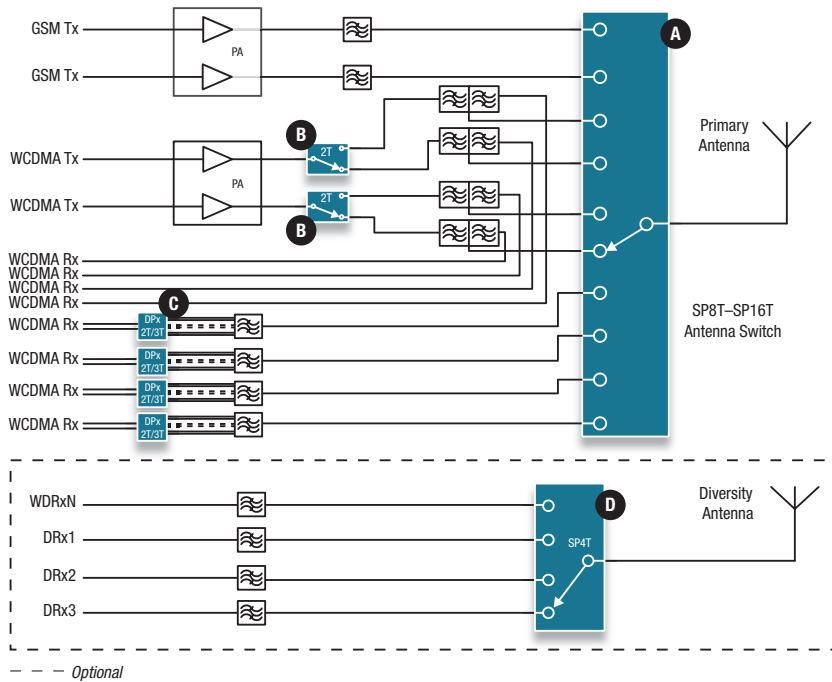

Primary Antenna Switches

A	SKY13404-466LF	SKY13454
	SKY13406-389LF	SKY13455
	SKY13412-487LF	SKY13488
	SKY13413-488LF	SKY13491-21
	SKY13437	SKY13492
	SKY13441	SKY13498

WCDMA Distribution (Mode/Band) Switches

B	SKY13405-490LF
	SKY13448-001
	SKY13449-001
	SKY13489-001

Rx Differential Switches


C	SKY13354-368LF
	SKY13399-468LF
	SKY13421-486LF

Diversity Antenna Switches

D	SKY13414-485LF
	SKY13415-485LF
	SKY13416-485LF
	SKY13417-485LF
	SKY13418-485LF
	SKY13473
	SKY13521
	SKY13525
	SKY13526-485LF

Smartphone, Handset and Tablet

Embedded Connectivity in Handsets

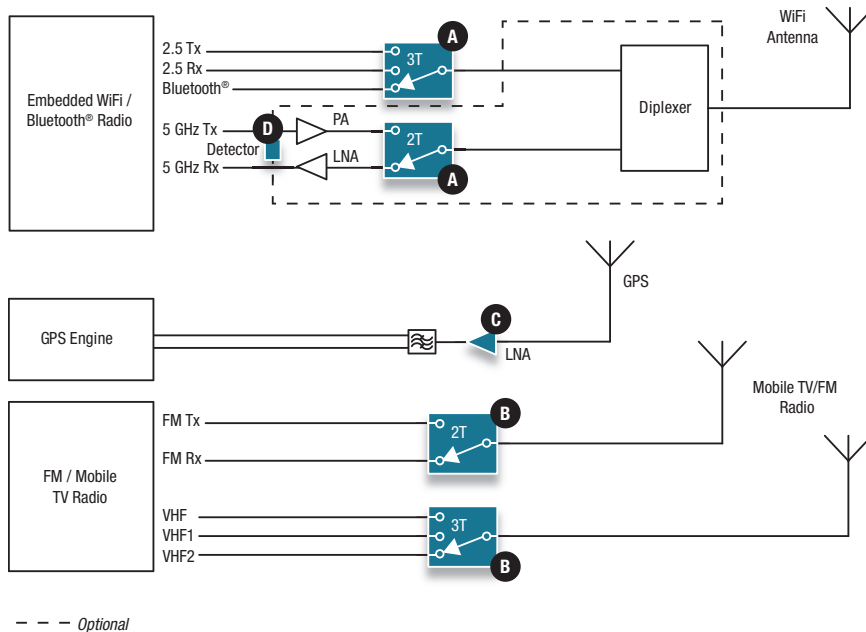

Mobile Connectivity—Embedded WiFi

A	SKY13309-370LF	SKY13383-002
	SKY13317-373LF	SKY13385-460LF
	SKY13323-378LF	SKY13386-002
	SKY13345-368LF	SKY13399-468LF
	SKY13348-374LF	SKY13408-465LF
	SKY13350-385LF	SKY13411-374LF
	SKY13351-378LF	SKY13421-486LF
	SKY13353-337LF	SKY13431-374LF
	SKY13355-374LF	SKY13445-368LF
	SKY13366-378LF	SKY13446-374LF
	SKY13370-374LF	SKY13453-385LF
	SKY13377-313LF	SKY13527-002
	SKY13381-374LF	

Mobile Connectivity—Mobile TV

B	SKY13317-373LF
	SKY13322-375LF
	SKY13323-378LF
	SKY13350-385LF
	SKY13351-378LF

GPS LNA/LNA Module


C	SKY65601-477LF	SKY65704-61
	SKY65602-477LF	SKY65708-11
	SKY65605-11	SKY65709-81
	SKY65611-11	SKY65713-11
	SKY65704-22	SKY65717-11

Detector

D	SMS7630-061
----------	-------------


WiFi Connectivity

802.11a/b/g/n/ac Single-band WiFi Front-end Modules (FEMs)

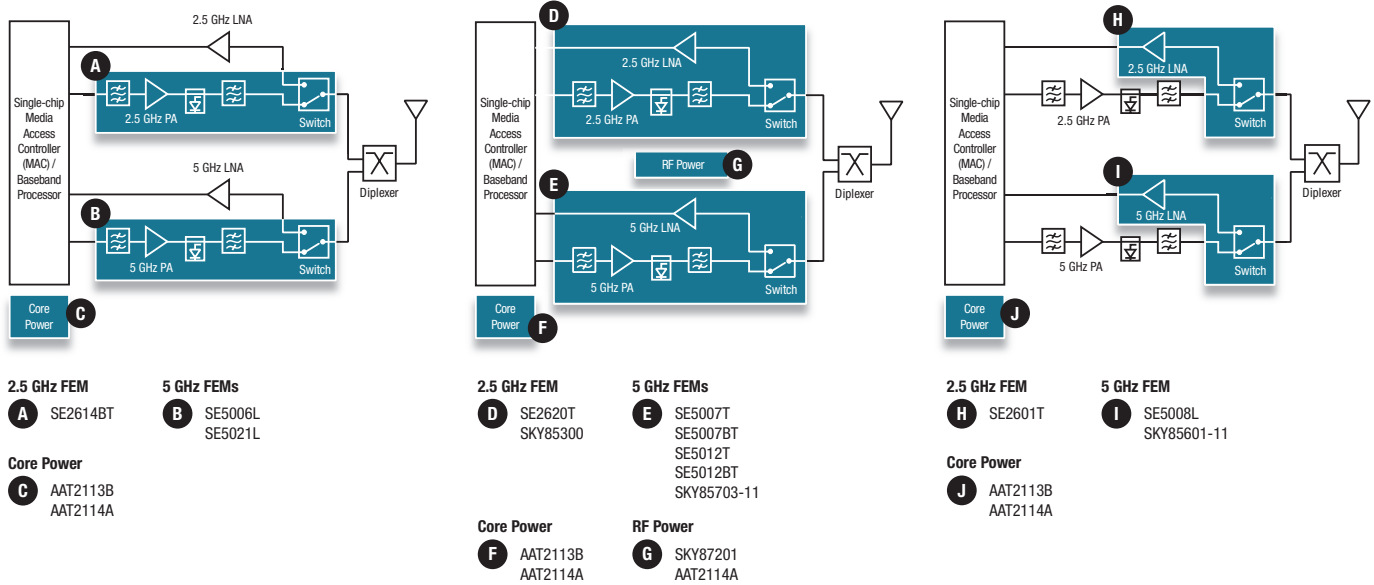


WiFi Connectivity

802.11a/b/g/n/ac Dual-band WiFi Front-end Modules (FEMs)

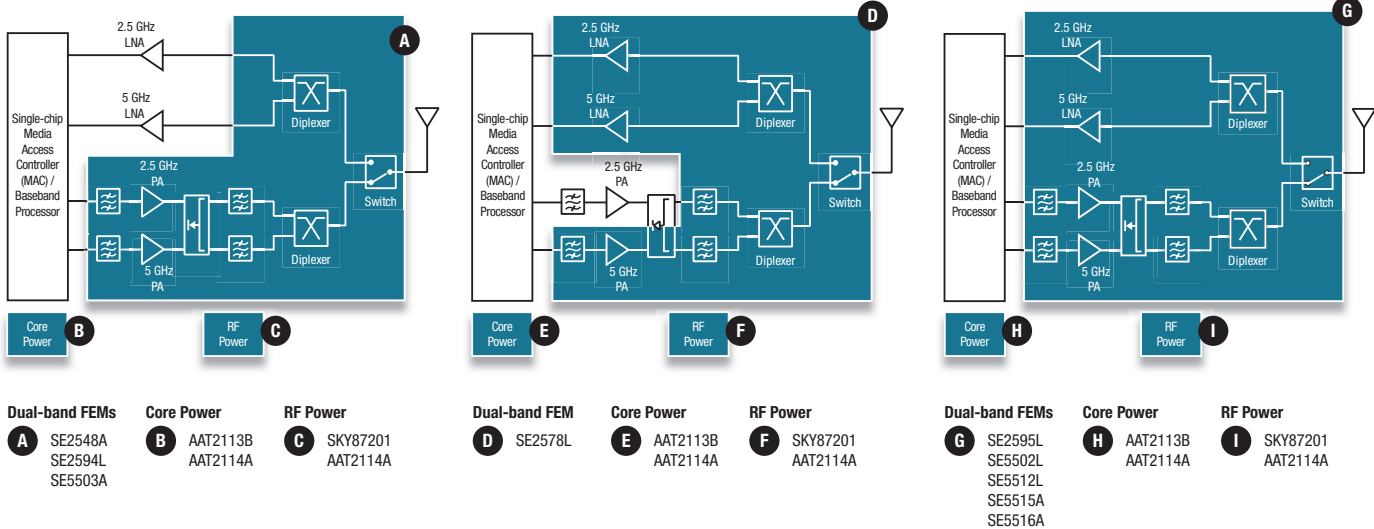


WiFi Connectivity

802.11a/b/g/n/ac Dual-band WiFi and Bluetooth® Front-end Components—Handset and Tablet

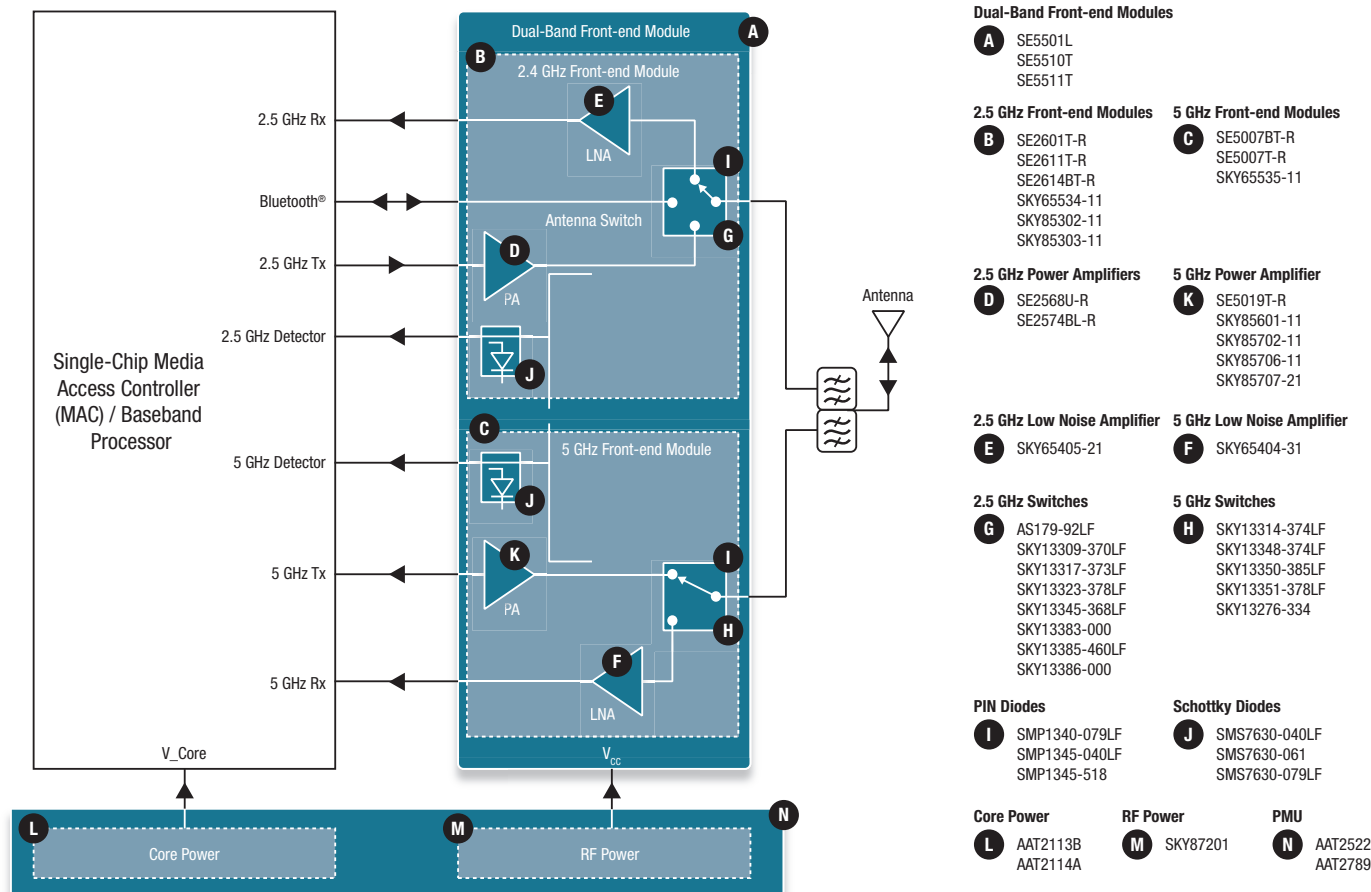

WiFi Connectivity

802.11a/b/g/n/ac Dual-band WiFi Front-end Components—Computing

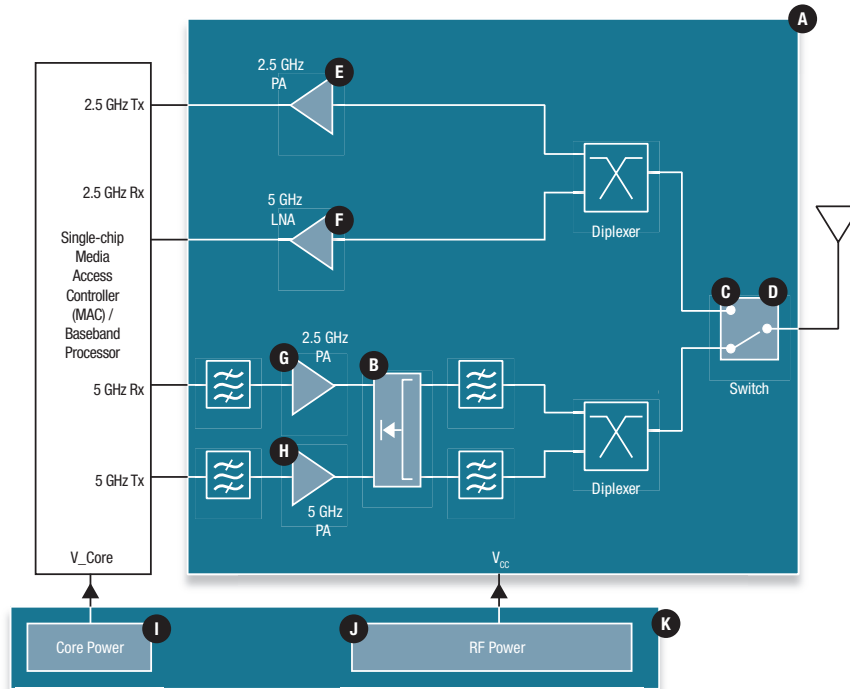

Dual-band Front-end Modules

A SE2595L
SE5502L
SE5512L
SE5515A
SE5516A

Schottky Diodes

B SMS7630-061
SMS7630-040LF
SMS7630-079LF

2.5 GHz Switches

C AS179-92LF
SKY13309-370LF
SKY13317-373LF
SKY13323-378LF
SKY13345-368LF
SKY13383-000
SKY13385-460LF
SKY13386-000

5 GHz Switches

SKY13314-374LF
SKY13348-374LF
SKY13350-385LF
SKY13351-378LF
SKY13276-334

PIN Diodes

D SMP1340-079LF
SMP1345-040LF
SMP1345-518

2.5 GHz Low Noise Amplifier

E SKY65405-21

2.5 GHz Power Amplifiers

G SE2568U-R
SE2574L-R

5 GHz Low Noise Amplifier

F SKY65404-31

5 GHz Power Amplifier

H SE5019T-R

Core Power

I AAT2113B
AAT2114A

RF Power


J SKY87201
AAT2114A

PMU

K AAT2522
AAT2789

WiFi Connectivity

802.11a/b/g/n/ac Single-band WiFi Front-end Components—Networking

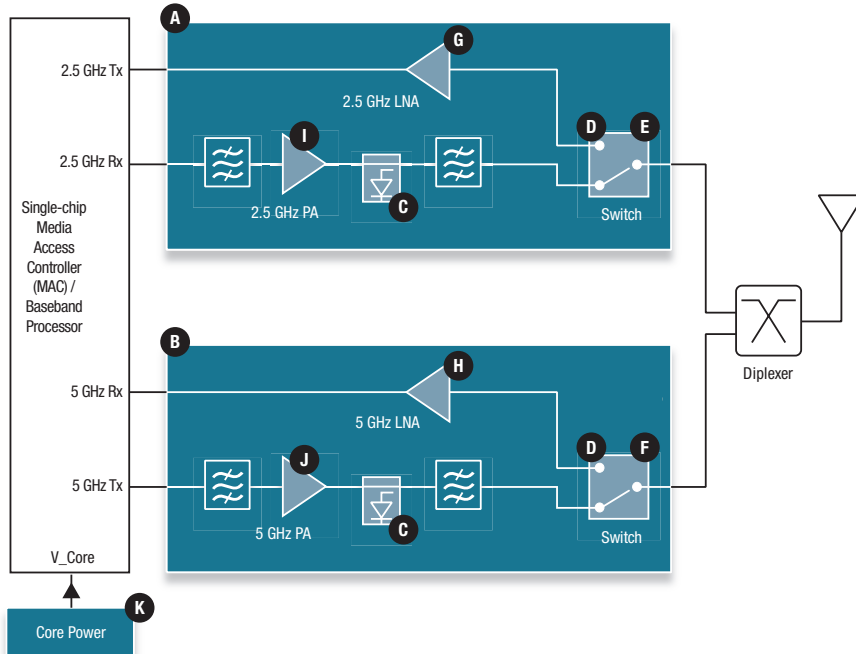

2.5 GHz Front-end Module

A SE2620T
SKY85300

5 GHz Front-end Modules

B SE5007T
SE5007BT
SE5012T
SE5012BT
SKY85703-11

Schottky Diodes

C SMS7630-061
SMS7630-040LF
SMS7630-079LF

PIN Diodes

D SMP1340-079LF
SMP1345-040LF
SMP1345-518

2.5 GHz Switches

E AS179-92LF
SKY13323-378LF
SKY13411-374LF
SKY13355-374LF
SKY13370-374LF

5 GHz Switches

F SKY13314-374LF
SKY13348-374LF
SKY13350-385LF
SKY13351-378LF

2.5 GHz Low Noise Amplifier

G SKY65405-21

5 GHz Low Noise Amplifier

H SKY65404-31

2.5 GHz Power Amplifiers

I SE2568U-R
SE2574L-R
SKY65900-11

5 GHz Power Amplifier


J SE5003L1-R
SE5019T-R
SKY85402-11

Core Power

K AAT2113B
AAT2114A

WiFi Connectivity

802.11a/b/g/n/ac Single-band WiFi Front-end Components—Home Entertainment

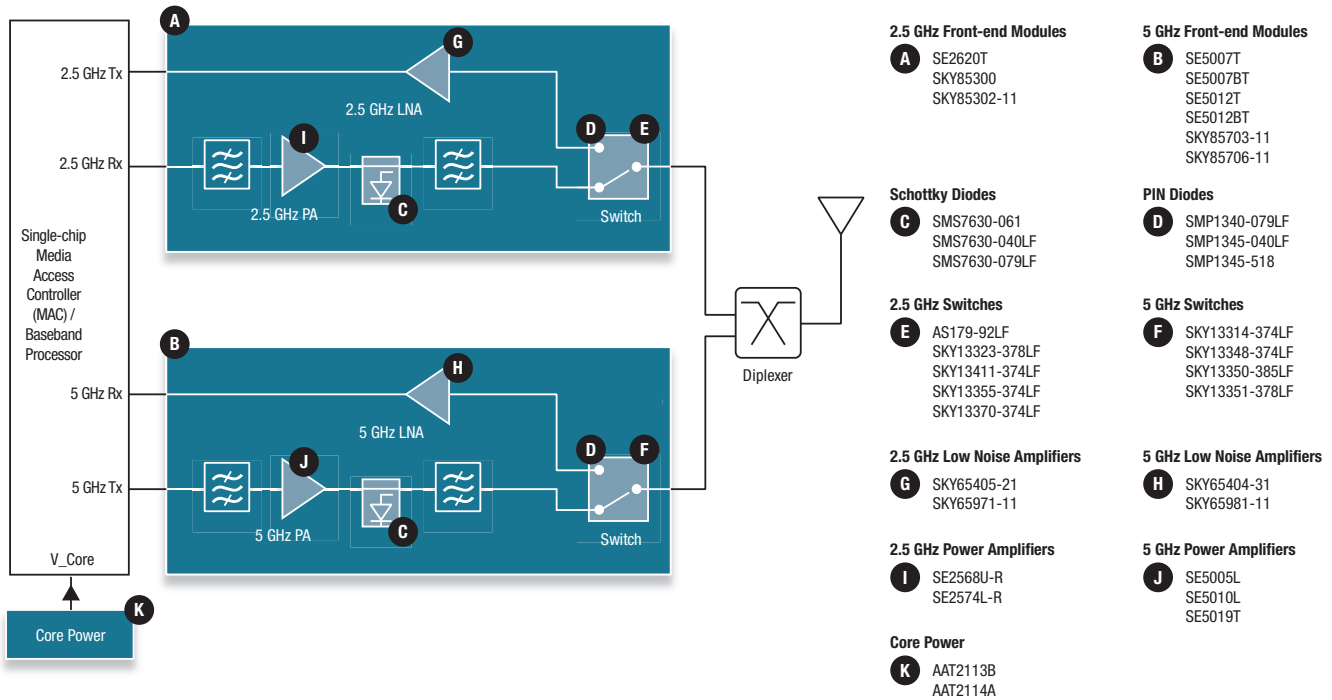

Infrastructure


2G, 3G Base Station Repeater

Down-Link/Up-Link

RF Frequency Band: GSM, DCS, PCS, TD-SCDMA, WCDMA

800 MHz, 900 MHz, 1800/1900 MHz, LTE 2.1 GHz, 2.3–2.4 GHz

IF Frequency: 50~250 MHz

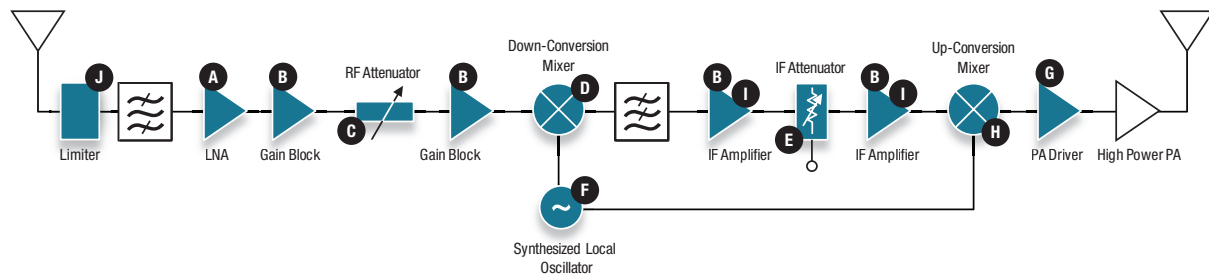**Loise Noise Amplifiers**

- A** SKY65050-372LF
SKY65053-377LF
SKY65066-360LF
SKY67021-396LF
SKY67022-396LF
SKY67023-396LF
SKY67100-396LF
SKY67101-396LF
SKY67102-396LF
SKY67105-306LF
SKY67106-306LF
SKY67107-306LF
SKY67111-396LF
SKY67175-306LF

General Purpose Amplifiers

- B** SKY65013
SKY65014
SKY65015
SKY65016
SKY65017-70LF
SKY65161-70LF
SKY65162-70LF

RF Attenuators

- C** **Digital**
SKY12329-350LF
SKY12339-350LF
SKY12340-364LF
SKY12343-364LF
SKY12345-362LF
SKY12347-362LF
Voltage Variable
AV101-12LF
SKY12228-12
SKY12233-11
SKY12235-11
PIN Diodes
SMP1304 Series
SMP1307 Series
SMP1352 Series

Down-Conversion Mixers

- D** SKY73032
SKY73033-11
SKY73035-11
SKY73062-11
SKY73063
SKY73069-11
SKY73070

IF Attenuators

- E** **PIN Diodes**
SMP1304 Series
SMP1307 Series
SMP1352 Series
Digital Attenuators
AA116-72LF
SKY12343-364LF
SKY12348-350LF
SKY12406-360LF

PLLs/VCOs/Synthesizers

- F** SKY72300-362
SKY72310-362
SKY73100
SKY73101-11
SKY73103-11
SKY73112
SKY73120
SKY73121
SKY73134

PA Drivers

- G** SKY65009-70LF
SKY65038-70LF
SKY65045-70LF
SKY65080-70LF
SKY65112-84LF
SKY65113-84LF
SKY65120
SKY65124
SKY65126-21
SKY65127
SKY65162-70LF

Up-Conversion Mixers

- H** SKY73062-11
SKY73063
SKY73069-11

IF Amplifiers

- I** SKY65013
SKY65014
SKY65015
SKY65016
SKY65017-70LF

Limiters


- J** CLA46XX Series
SMP1330-085LF

Infrastructure

Direct Conversion Base Station Transceiver

Frequencies Include:

From 400 to 2700 MHz

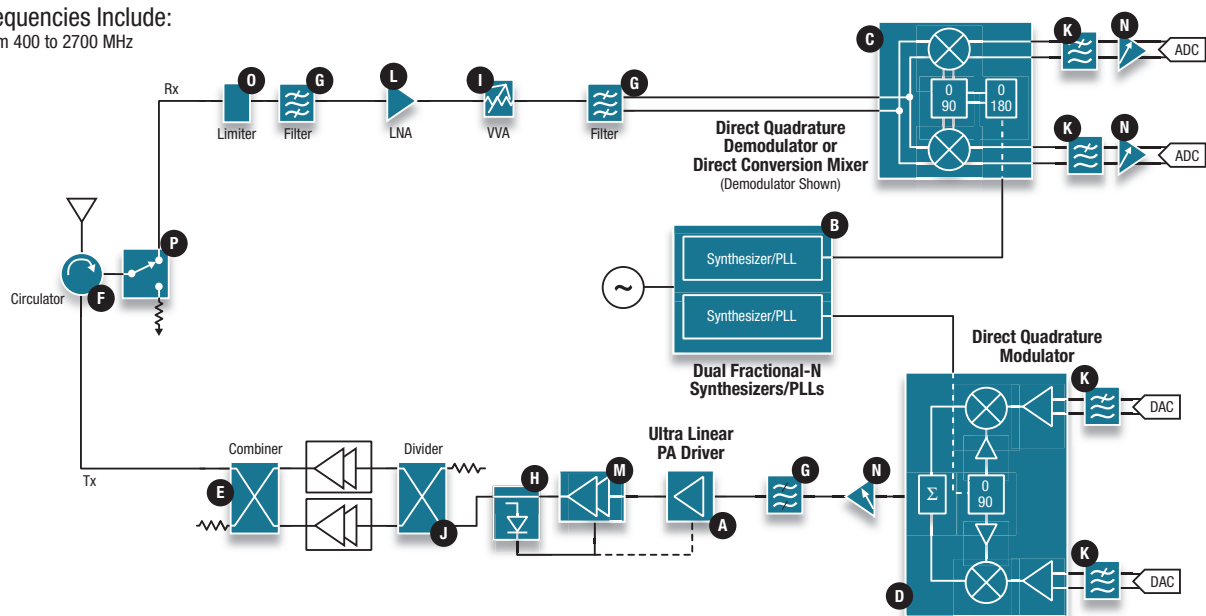

PA Drivers

- A** SKY65009-70LF
SKY65013-70LF
SKY65014-70LF
SKY65015-70LF
SKY65016-70LF
SKY65017-70LF
SKY65112-84LF
SKY65113-84LF
SKY65162-70LF
SKY67130-396LF

Synthesizers/PLLs

- B** SKY72310
SKY73100
SKY73101-11
SKY73103
SKY73112
SKY73126-11
SKY73134-11

Quadrature Demodulators

- C** SKY73009
SKY73012

Direct Quadrature Modulators

- D** SKY73077-459LF
SKY73078-459LF
SKY73092-459LF

Hybrids

- E** HY12-12LF
HY19-12LF
HY22-73LF
HY92-12LF

F Dielectric Resonators**G** Ceramic Band Pass Filters

Directional Detectors/Couplers

- H** DD02-999LF
DC08-73LF
DC09-73LF
DC18-73LF
DC25-73LF

VVA/PIN Diodes

- I** AV101-12LF
SKY12228-12
SKY12233-11
SKY12235-11
SMP1304 Series
SMP1307-011LF

Power Dividers

- J** PD09-73LF
PD18-73LF
PD19-73LF
PD22-73LF

Programmable Filters

- K** SKY73201-364LF
SKY73202-364LF

Low Noise Amplifiers

- L** SKY65045-70LF
SKY65080
SKY65373
SKY67021-396LF
SKY67022-396LF
SKY67023-396LF
SKY67012-396LF
SKY67013-396LF
SKY67014-396LF
SKY67100-396LF
SKY67101-396LF
SKY67102-396LF
SKY67111-396LF
SKY67130-396LF
SKY67150-396LF
SKY67151-396LF
SKY67153-396LF

High Gain PA Modules

- M** SKY65120
SKY65124
SKY65126
SKY65127

Variable Gain Amplifiers

- N** SKY65185

Limiter Diodes


- O** CLA46XX Series
SMP1330-085LF

High Power Fail Safe Switches

- P** SKY12207-478LF
SKY12208-478LF
SKY12210-478LF
SKY12211-478LF
SKY12212-478LF
SKY12215-478LF

Infrastructure

Superheterodyne Base Station Transceiver

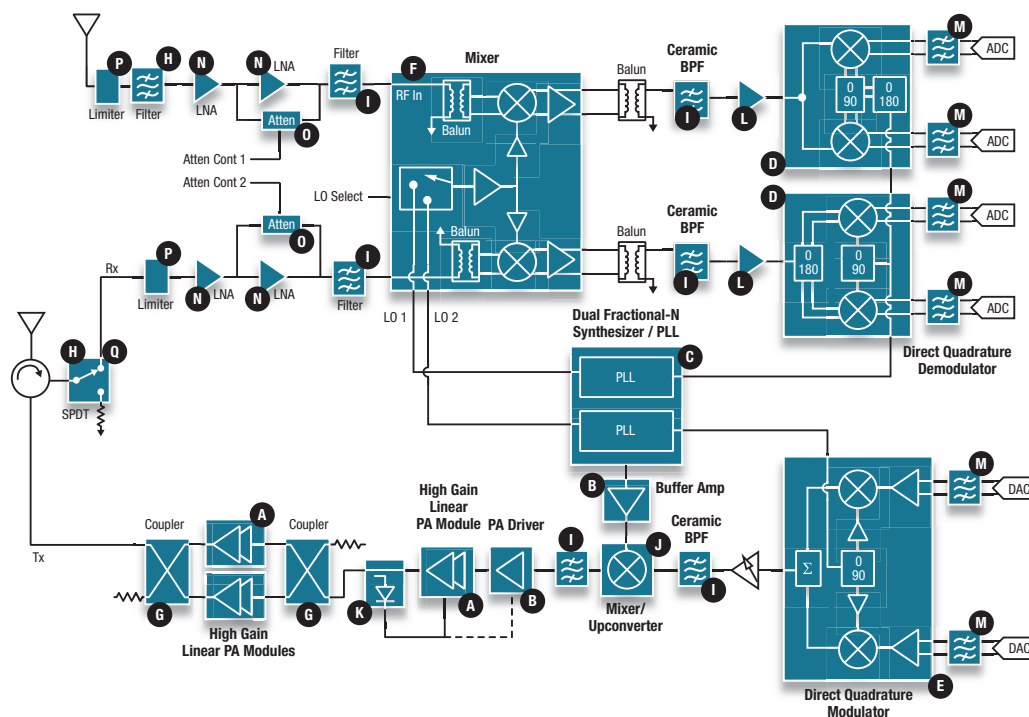

High Gain PA Modules

A SKY65120 SKY65126
SKY65124 SKY65127

PA Drivers

B SKY65009-70LF	SKY65016	SKY65162-70LF
SKY65013	SKY65017-70LF	SKY67130-396LF
SKY65014	SKY65045-70LF	
SKY65015	SKY65080-70LF	

Synthesizers/PLLs

C	SKY72300-21	SKY73101	SKY73126
	SKY72310	SKY73103	SKY73134
	SKY73100	SKY73112	

Direct Quadrature Demodulators

D SKY73009-11 SKY73012-11

Direct Quadrature Modulators

E SKY73077-459LF SKY73078-459LF SKY73092-459LF

Mixers

SKY42068-355LF	SKY73025	SKY73069
SKY73020-11 (dual)	SKY73032 (single)	SKY73084
SKY73021-11	SKY73033 (single)	SKY73085
SKY73022	SKY73062	
SKY73023	SKY73063	

Hybrids

G HY17-12LF HY19-12LF HY92-12LF

H Dielectric Resonators **I** Ceramic Band Pass Filters

Schottky Diodes

J SMS3927-023LF SMS3928-023LF SMS3940-026LF

Directional Detectors/Couplers

K DC08-73LF DC09-73LF DD02-999LF

Gain Block Amplifiers

L	SKY65013	SKY65015	SKY65017-70LF
	SKY65014	SKY65016	SKY67130-396LF

Programmable Filters

M SKY73201-364LF SKY73202-364LF

Low Noise Amplifiers

N SKY67021-396LF	SKY67101-396LF	SKY67150-396LF
SKY67022-396LF	SKY67102-396LF	SKY67151-396LF
SKY67023-396LF	SKY67111-396LF	SKY67153-396LF
SKY67100-396LF		

Digital Attenuators

0 SKY12339-350LF	SKY12343-364LF	SKY12348-350LF
SKY12340-364LF	SKY12345-362LF	

PIN Diodes

SMP1304 Series SMP1307 Series SMP1352 Series

Limiters

P CLA460X Series
SMP1330-085LF

Limiters High Power T/R Switches


P CLA460X Series
SMP1330-085LF

Q SKY12207-478LF
SKY12208-478LF
SKY12210-478LF
SKY12212-478LF
SKY12215-478LF

Infrastructure

Base Station Receiver System Using Antenna Diversity


Rx Frequencies:
400–2700 MHz

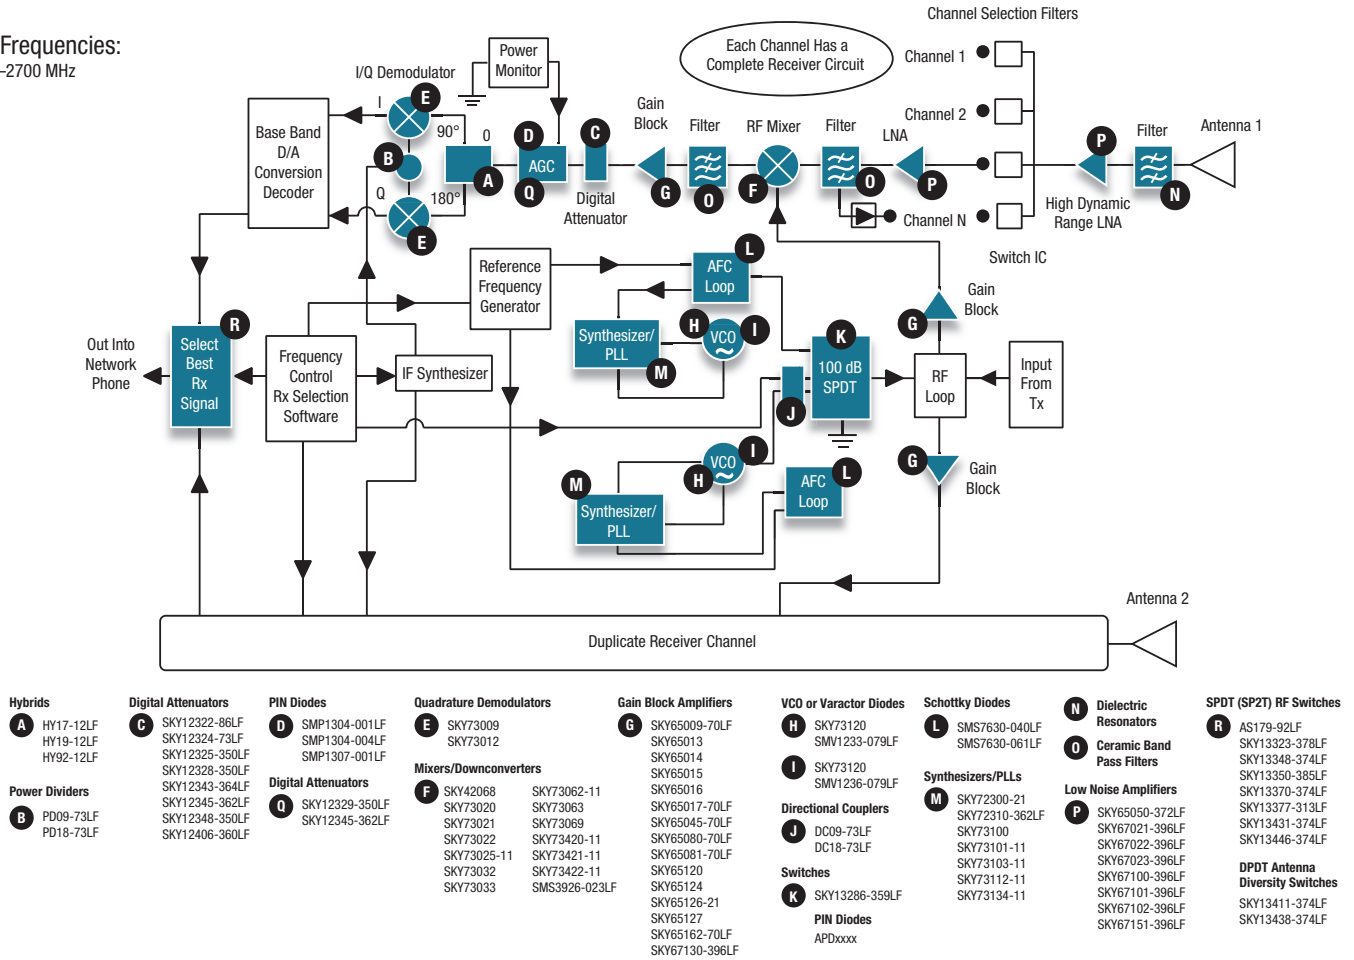

Infrastructure

Base Station Transmitter With Combining Amplifier

Tx Frequencies:
400–2700 MHz

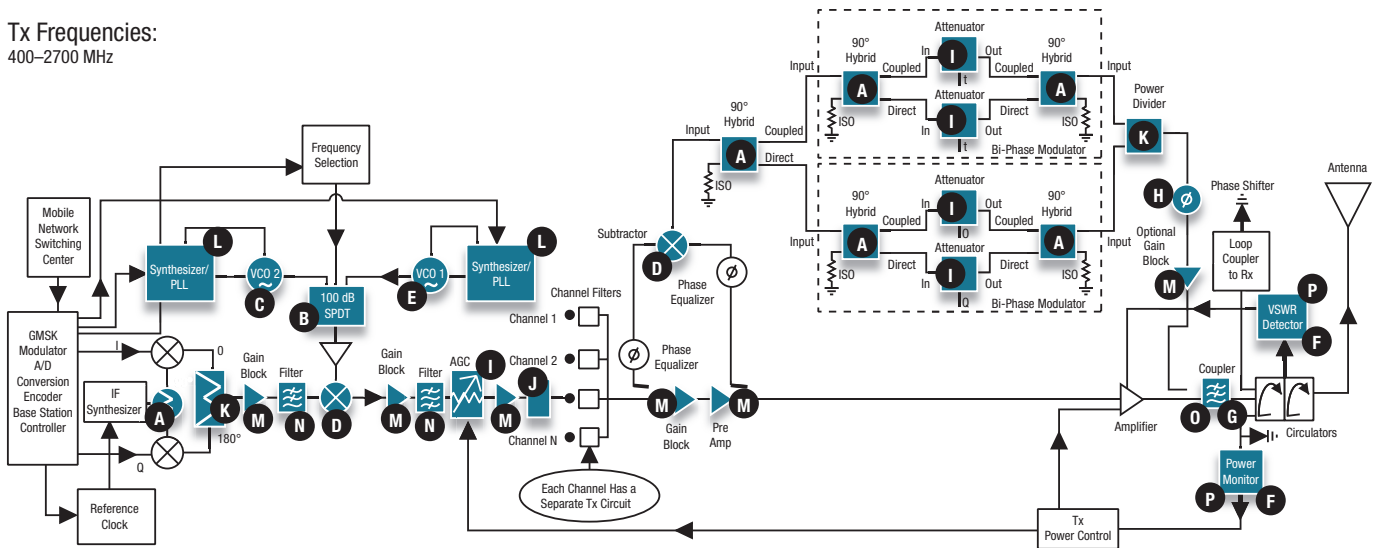

Hybrids

- A** HY17-12LF
HY19-12LF
HY22-73LF
HY92-12LF

Switches

- B** SPST RF Switch
SKY13347-360LF
SPDT (SP2T)
RF Switch
SKY13286-359LF
SP3T RF Switch
SKY13408-465LF
SP4T RF Switches
SKY13384-350LF
SKY13392-359LF
PIN Diodes
APDxxxx
SMP1302-011LF

Varactor Diodes

- C** SMV1233-079LF
SMV1763-079LF
E SMV1236-079LF
Schottky Diodes
and Mixers
D SKY73032
SKY73033-11
SKY73062-11
SKY73063
SKY73069-11
SMS3926-023LF

Schottky Diode

- F** SMS3923-005LF

Directional Couplers

- G** DC09-73LF
DC18-73LF
DC25-73LF

Phase Shifter

- H** PS088-315

PIN Diodes

- I** SMP1304-001LF
SMP1307-001LF

VW Attenuators

- AV101-12LF
AV102-12LF
AV111-12LF
AV113-12LF

Digital Attenuators

- J** SKY12322-86LF
SKY12324-73LF
SKY12325-350LF
SKY12328-350LF
SKY12339-350LF
SKY12343-364LF
SKY12345-362LF
SKY12347-362LF
SKY12406-360LF

Power Dividers

- K** PD09-73LF
PD18-73LF
PD22-73LF

Synthesizers/PLLs

- L** SKY72300-21
SKY73134

Amplifiers

- M** SKY65009-70LF
SKY65013-70LF
SKY65014-70LF
SKY65015-70LF
SKY65016-70LF
SKY65017-70LF
SKY65045-70LF
SKY65080-70LF
SKY65081-70LF
SKY65120
SKY65124
SKY65126-21
SKY65127
SKY65162-70LF

Ceramic Band Pass Filters

- N** DD02-999LF

Ferrites


- O** DD02-999LF

Directional Detector

- P** DD02-999LF

Infrastructure

Transceiver

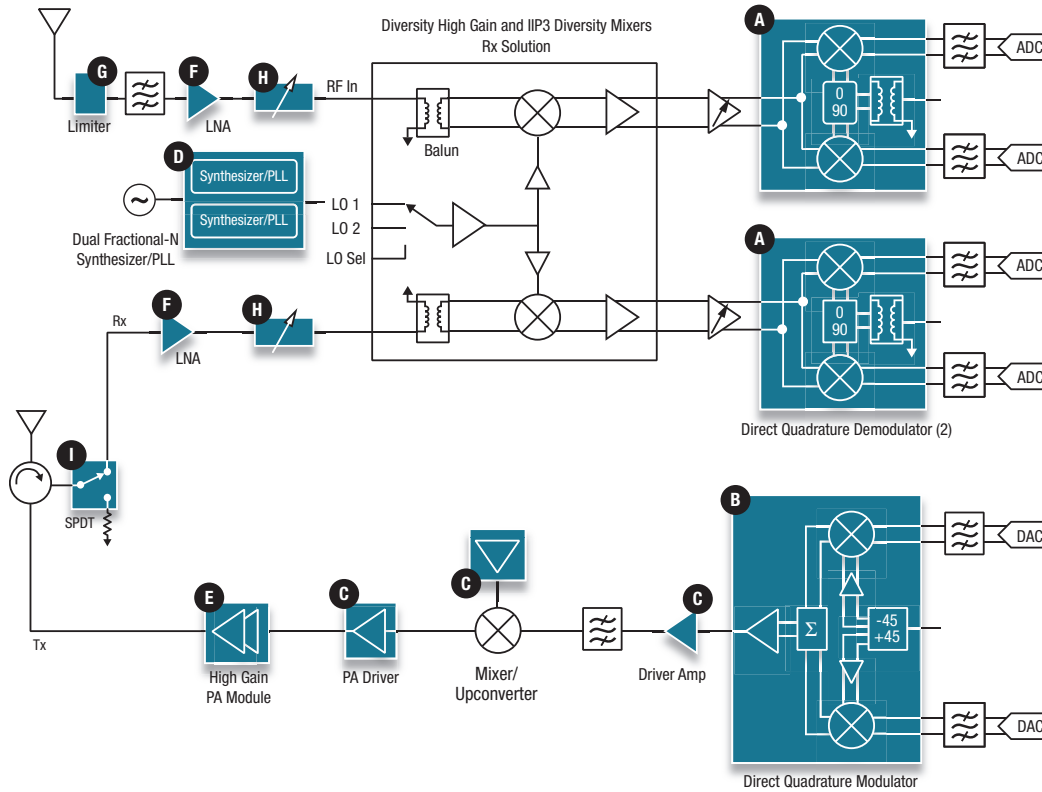

Direct Quadrature Demodulators

A SKY73009
SKY73012

Direct Quadrature Modulators

B SKY73077-459LF
SKY73078-459LF
SKY73092-459LF

Amplifiers

C SKY65015 SKY65081-70LF
SKY65016 SKY65095
SKY65017-70LF SKY65162-70LF
SKY65045-70LF SKY67130-396LF
SKY65080-70LF

Synthesizer/PLLs

D SKY73100 SKY73112-11
SKY73101-11 SKY73126-31
SKY73103-11 SKY73134

High Gain PA Modules

E SKY65126-21 SKY66002-11
SKY65127 SKY66008-11

Low Noise Amplifiers

F SKY65081-70LF SKY67102-396LF
SKY67021-396LF SKY67111-396LF
SKY67022-396LF SKY67150
SKY67023-396LF SKY67151
SKY67100-396LF SKY67153
SKY67101-396LF

Limiter Diodes

G CLA46XX Series
SMP1330-007LF

RF Attenuators

H Digital Voltage Variable
SKY12329-350LF AV101-12LF
SKY12339-350LF SKY12228-12
SKY12340-364LF SKY12238-11
SKY12343-364LF SKY12235-11
SKY12345-362LF
PIN Diodes
SMP1304 Series
SMP1307 Series
SMP1352 Series


High Power T/R Switches

I SKY12207-306LF SKY12210-478LF
SKY12207-478LF SKY12212-478LF
SKY12208-478LF SKY12215-478LF

Infrastructure

Small Cell Basestation

<0.25 W, 0.25 W, 1 W, 5 W

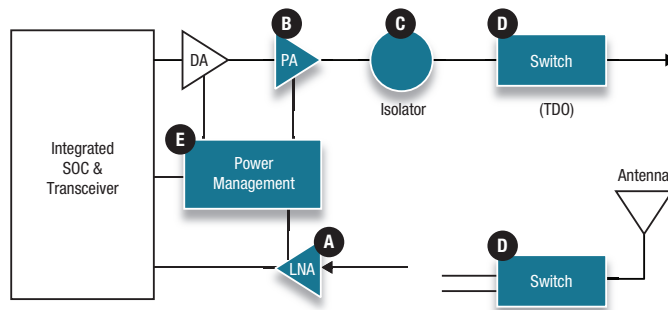

Low Noise Amplifiers

A SKY67021-396LF
SKY67022-396LF
SKY67023-396LF
SKY67150-396LF
SKY67151-396LF
SKY67153-396LF

Low Noise Amplifier + Switch

SKY65971
SKY65981

Power Amplifiers

B SKY66001-11
SKY66002-11
SKY66005-11
SKY66008-11
SKY66013-11

**High Linearity
2.4 GHz and 5 GHz**
SKY65900
SE5004L

Isolators

C SKYFR-000812
SKYFR-000748

Switches


D SKY13374-397LF
SKY13373-460LF
SKY13380-350LF

Power Management

E Step-Down Converter
SKY87608

Smart Energy

Thermostat

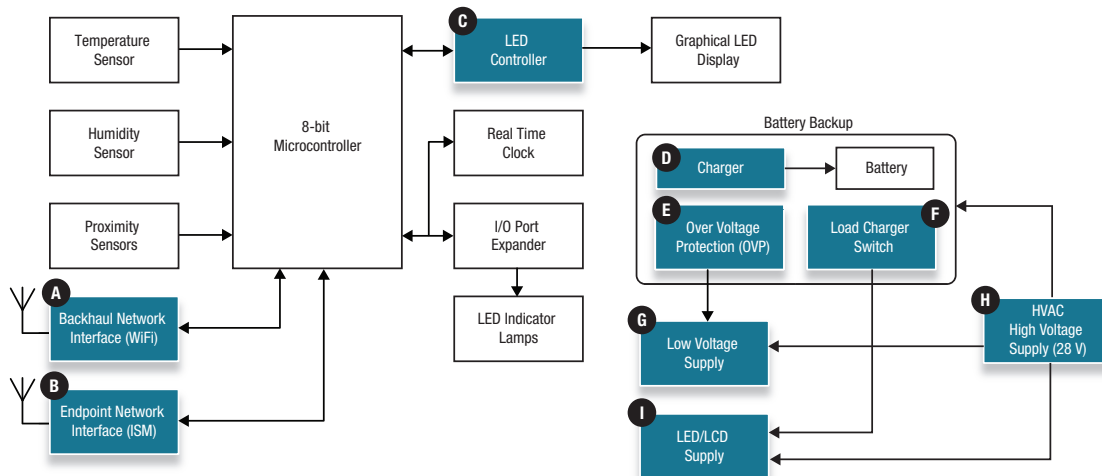

2.5 GHz Front-end Modules for WiFi Connectivity

A SKY85302-11
SKY85303-11

Front-end Modules for ISM / Smart Energy

B SE2431L
SE2432L
SE2436L
SE2438T
SKY65378-11

LED Controller

C AAT1401

Switching Charger

D AAT3620

Over Voltage Protection

E AAT4684
AAT4686
AAT4687

Load Charger Switch Slew-rate Controlled Load Switches

F AAT4250
AAT4280
AAT4282A
AAT4282B

Low Voltage Supply

G AAT2114
AAT3221
SKY87201

High Voltage Supply


H SKY87608

LED/LCD Supply

I AAT1403
SKY87201

Smart Energy

Smart Meter Communication Module (Simplified)

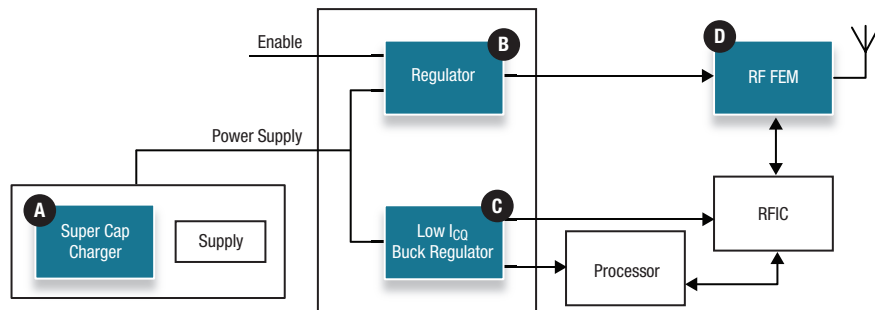

Supercap Chargers

A AAT4712

Current Limited Load Switches
AAT4621

DC/DC Converters (Switching Regulators) Step Down Converters

B AAT1232
AAT2138
SKY87201

Step-Down Converter


C SKY87201

Front-end Modules

D SE2435L-R
SE2438T
SE2442L-R
SKY65313-21
SKY65364-11
SKY65367
SKY65378
SKY66100
SKY66101
SKY66108
SKY66109-11

Smart Energy

Short Range Radio

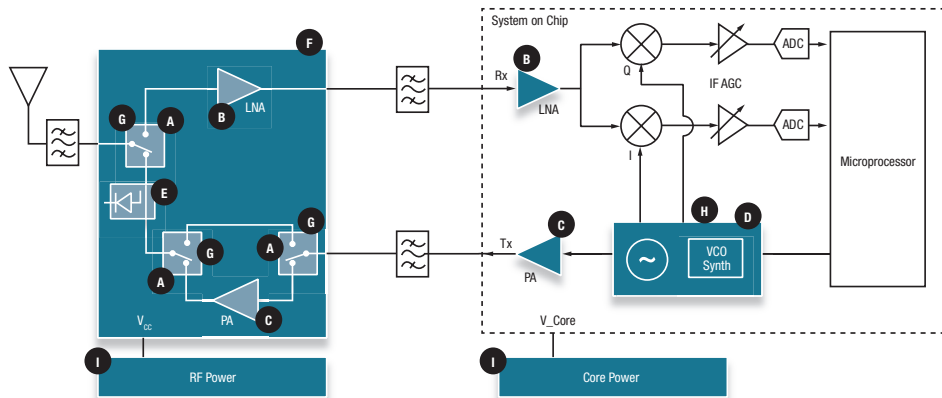

Switches

A AS179-92LF
AS193-73LF
SKY13270-92LF
SKY13299-321LF
SKY13309-370LF
SKY13318-321LF
SKY13348-374LF
SKY13370-374LF

PIN Diodes

G SMP1302-040LF
SMP1302-079LF
SMP1320-040LF
SMP1320-079LF
SMP1340-040LF
SMP1340-079LF
SMP1345-518

LNAs

B SKY65045-70LF
SKY65047-360LF
SKY67013-396LF

Power Drivers/Amplifiers

C SE2425U-R
SE2433T-R
SKY65006-348LF
SKY65009-70LF
SKY65045-70LF
SKY65111-348LF
SKY65116
SKY65131
SKY65132
SKY65135
SKY65146
SKY65152
SKY65162-70LF

Synthesizers/PLLs/VCOs

D SKY72300-21
SKY72300-362
SKY72301-22
SKY72310-362
SKY73120

Varactor Diodes

H SMV1142-011LF
SMV1233-011LF
SMV1235-040LF
SMV1235-079LF
SMV1236-004LF
SMV1247-011LF
SMV1247-040LF
SMV1249-040LF
SMV1249-079LF
SMV1251-001LF
SMV1253-079LF
SMV1255-011LF
SMV1405-040LF
SMV1405-079LF
SMV1408-001LF
SMV1413-079LF
SMV1763-040LF
SMV1763-079LF

Schottky Diodes

E SMS3926-023LF
SMS3927-023LF
SMS3928-023LF
SMS7621-040LF
SMS7621-060
SMS7621-079LF
SMS7630-040LF
SMS7630-061
SMS7630-079LF

Tx/Rx Front-end Modules

F SE2431L-R
SE2432L-R
SE2435L-R
SE2436L-R
SE2438T-R
SE2442L-R
SKY66101-11
SKY66108
SKY66109-11
SKY65313-21
SKY65342-11
SKY65346-21
SKY65364-11
SKY65366-21
SKY65367-11
SKY66100-11

Battery Chargers

I Linear Chargers
AAT3663
AAT3681

Switching Charger
AAT3620


Super Capacitor Chargers

AAT4621
AAT4712

DC/DC Converters
Step-Down Converters

AAT2114A
SKY87201

Automotive

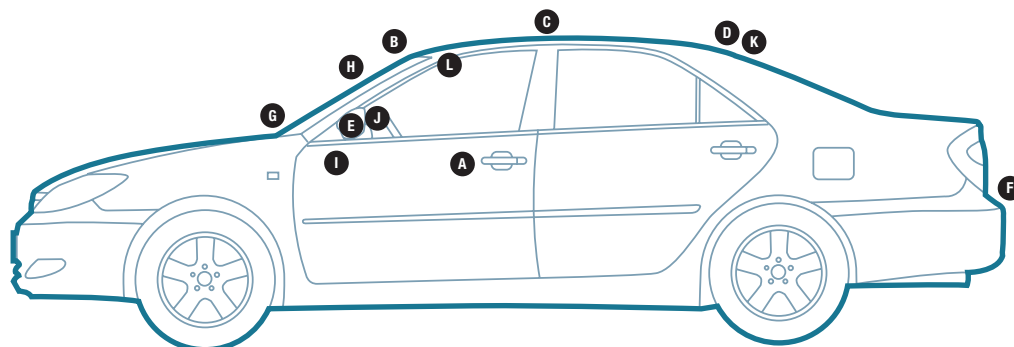

AEC-Q101 Qualified Products*

SMPA1302-079LF	SMSA7630-061
SMPA1304-011LF	SMVA1200-999LF
SMPA1304-019LF	SMVA1211-001LF
SMPA1320-070LF	SMVA1248-079LF
SMPA3923-011LF	SMVA1253-079LF
SMSA3923-011LF	SMVA1400-611LF
SMSA7621-060	SMVA1705-004LF

*Not all stresses listed within AEC-Q101 have been performed. Qualification report available upon request. Contact your sales representative for more information. For the full details of Skyworks Quality and Reliability on our products that can be designed into automotive applications, please view the "Skyworks Quality Standards for Automotive Customers" on our Web site.

Keyless Entry

- A PIN Diode**
SMP1345-079LF
- Schottky Diode**
SMS7630-040LF
- Switches**
AS179-92LF
AS211-334
SKY13268-344LF
SKY13314-374LF
SKY13330-397LF

Garage Door Openers, Remote Controls

- B PIN Diodes**
SMPA1302-004LF*
SMPA1320-079LF*
SMPA1322-004LF*
- Schottky Diode**
SMSA3923-011LF*
- Varactor Diodes**
SMV1413-001LF
SMVA1705-004LF*
- Switches**
AS179-92LF
SKY13309-370LF

Infotainment

Audio/Video/Displays

- C Varactor Diodes**
SMV1212-079LF
SMV1235-079LF
SMV1255-004LF
AS179-92LF
SKY13330-397LF
- PIN Diode**
SMP1320-011LF
- Detector Diode**
SMS7630-061

Power Management

- Low Drop-out (LDO) Linear Regulators**
AAT3224
AAT3221 / AAT3222
- Power Half Bridge**
AAT1405
- Mid to Large Screen LCD LED Backlight with PWM Interface**
AAT1405

WiFi Connectivity

- 802.11a,b,g,n,ac,p**
5 GHz Power Amplifier
SE5004L
- 2.5 GHz Front-end Module**
SE2614BT
- 5 GHz Front-end Module**
SE5007BT
- Dual-band Front-end Module**
SE5516A

Switches

- SKY13330-397LF
SKY13370-374LF
SKY13373-460LF
SKY13351-378LF
SKY13317-373LF
SKY13309-370LF
AS179-92LF

- Low Noise Amplifier**
SKY65981-11

Satellite Radio

- D Switches**
AS179-92LF
AS211-344
SKY13268-344LF
SKY13314-374LF
- Varactor Diode**
SMV1235-011LF
- Low Noise Amplifiers**
SKY67175-306LF
SKY65050-372LF
SKY67107-306LF

Cruise Control/ Navigation Systems

- E Schottky Diode**
SMS7630-040LF
- PIN Diodes**
SMPA1304-011LF
SMPA1304-019LF
- Varactor Diodes**
SMVA1211-001LF
SMVA1248-079LF
- GPS Receiver IC**
SE4150L

Rear Collision Avoidance Sensors (24 and 77 GHz)

- F Schottky Diodes**
SMS7630-061
SMS7621-060
SMS7621-005LF
SMS7621-040LF
SMS7630-040LF
- Schottky Flip Chips**
DMK2308-000
DMK2790-000
- Step-down Converter**
AAT2148
- Varactor Diode**
SMV1253-011LF

In-Dash Monitor, Direction System

- G Varactor Diode**
SMV1405-074LF

Toll Tag Transponder

- H Schottky Diode**
SMS7630-006LF

Airbags

- I Switches**
AS179-92LF
AS211-334
SKY13268-344LF

Climate Control

- J LNA**
SKY67012-396LF
- Switch**
AS213-92LF

Intelligent Antenna


- K Switches**
SKY13330-397LF
AS179-92LF

Telematics

- L Power Amplifiers**
SKY77619
SKY77701
SKY77702
SKY77703
SKY77704
SKY77705
SKY77736
SKY77737
- Switches**
AS172-73
SKY13290-313LF
SKY13414-485LF
SKY13323-378LF
SKY13321-360LF
SKY13418-485LF

Automotive

Telematics and Infotainment

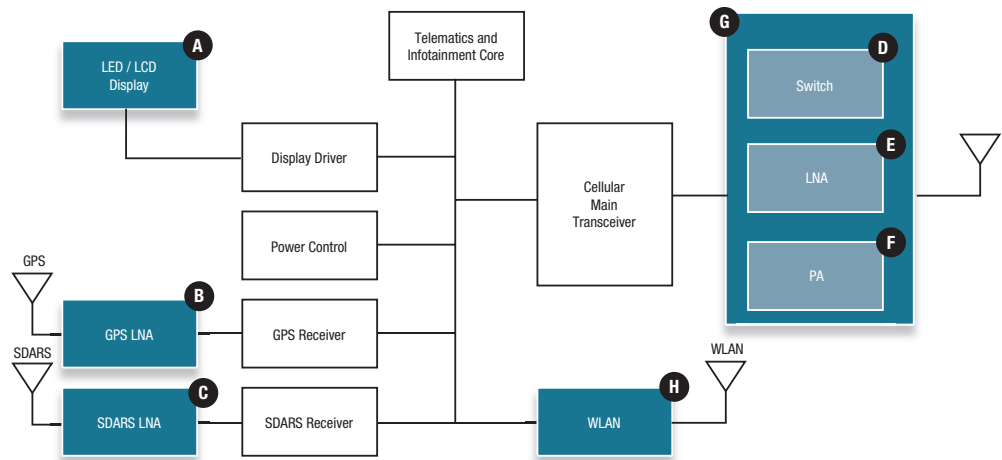

- | | | | | |
|---|---|---|---|--|
| A LCD Panel Power Supply
SKY82830

WLED Backlight Driver
SKYA21004 | B GPS Low Noise Amplifier
SKY65902-21

C Low Noise Amplifiers
SKY65151-396LF
SKYA21007 | D Switches
SKY13421-486LF
SKY13437-11
SKYA21003

E Low Noise Amplifier
SKY65151-396LF | F Power Amplifier
SKY77619-51


G Front-end Modules
SKY78010
SKY78011 | H WiFi Front-end Modules
2.4 GHz
SE2611T
SE2601T

5 GHz
SE5007BT

GPS Receiver
SE4150L-R |
|---|---|---|---|--|

Automotive


Car to Communications 802.11P

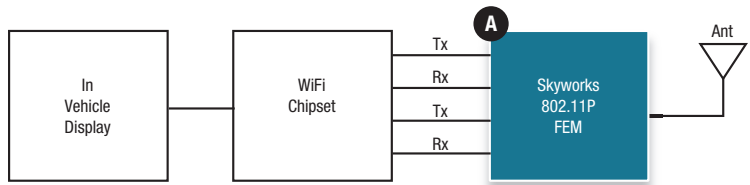


- 5 GHz Power Amplifiers**
- A** SE5003L
SE5004L
SE5017L
SKY85710
- Dual Band Front-End Module**
SE5517A

Broadband Access Systems


Satellite Systems

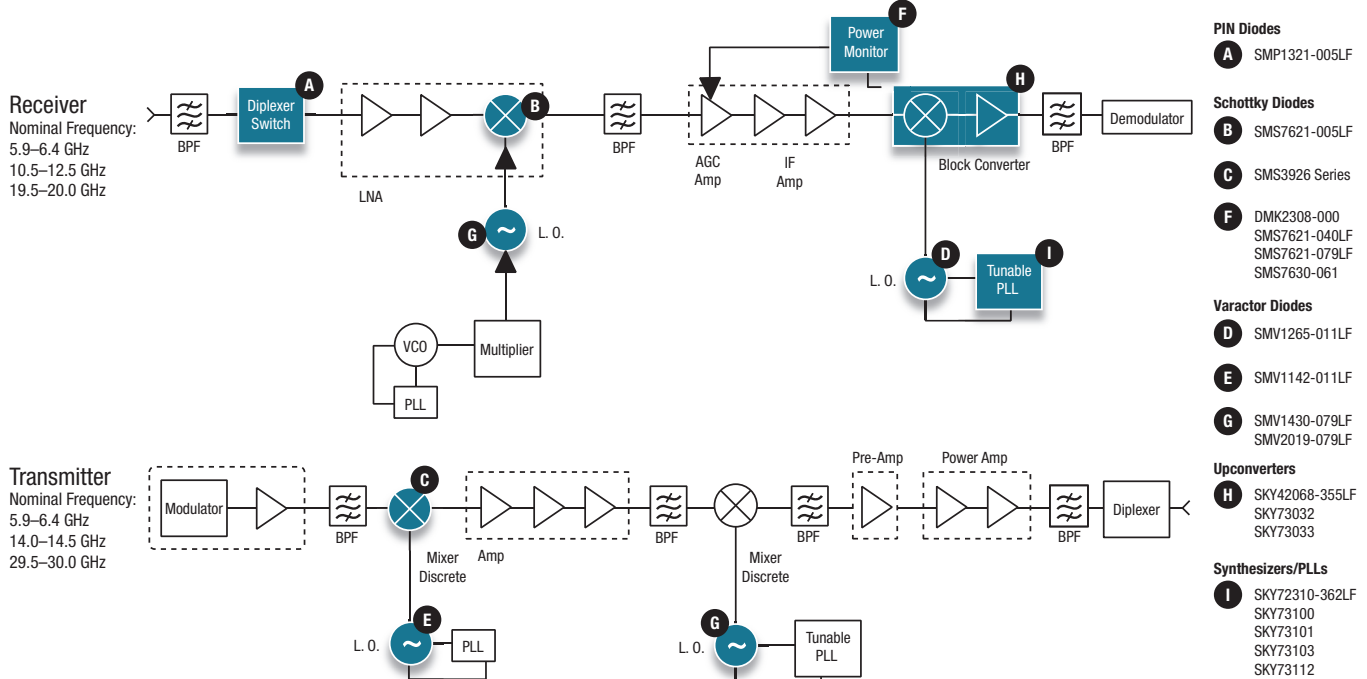

CATV Modem

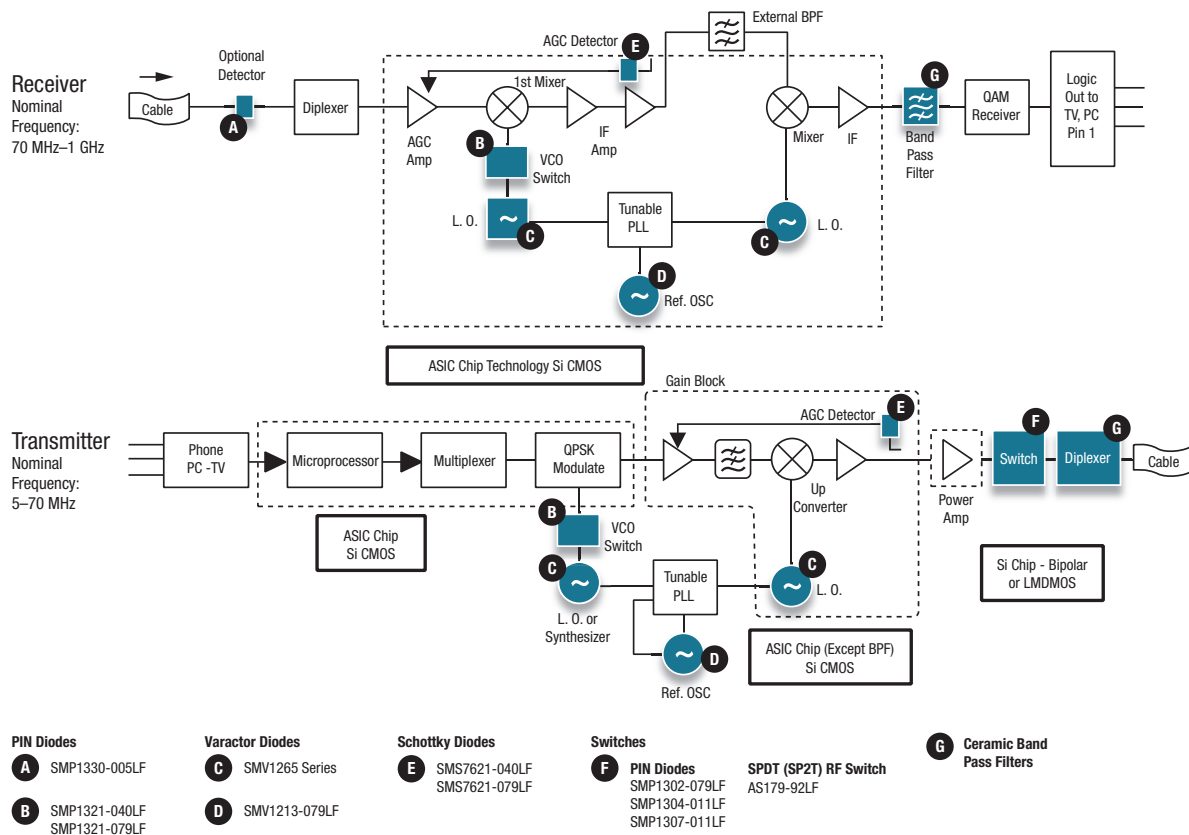

Reader / Active Antennas / Transmitter, Full Duplex 2440

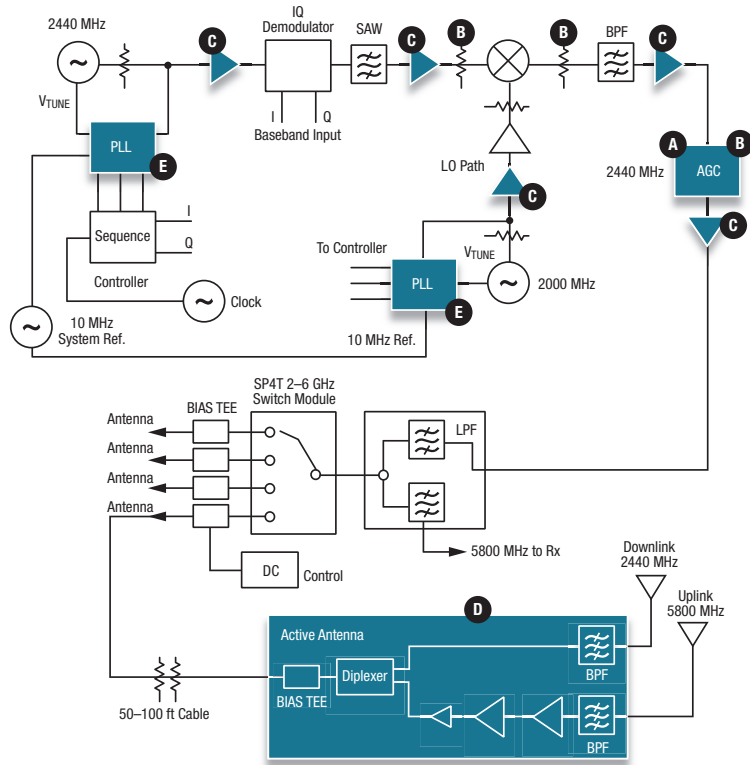

VW Attenuators

- A** AV111-12LF
AV113-12LF

PIN Diodes

- B** SMP1304 Series
SMP1307 Series


Amplifiers

- C** SKY65013
SKY65014
SKY65015
SKY65016
SKY67014-396LF
SKY67130-396LF
- D** SKY65111-348LF
SKY67014-396LF

Synthesizer/PLLs

- E** SKY72300-21

Low Noise Block (LNB)

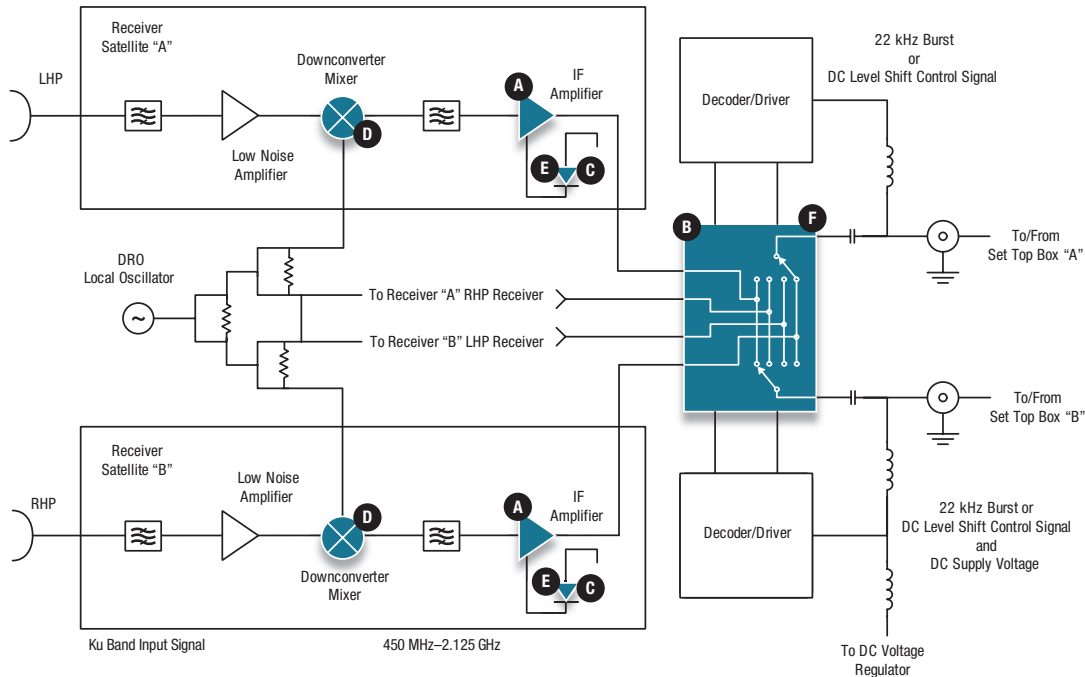

Amplifiers

- A** SKY65013
SKY65014
SKY65015
SKY65016
SKY65017-70LF

Switches

- B** SKY13272-340LF
SKY13292-365LF
SKY13293-340LF
SKY13327-365LF
SKY13369-365LF
- C** SMS7621-006LF


Schottky Diodes

- D** DMK2308-000
DMK2790-000
- E** SMS7621-060

PIN Diodes

- F** SMP1321-005LF
SMP1340-040LF
SMP1340-079LF

Transceiver (Simplified)

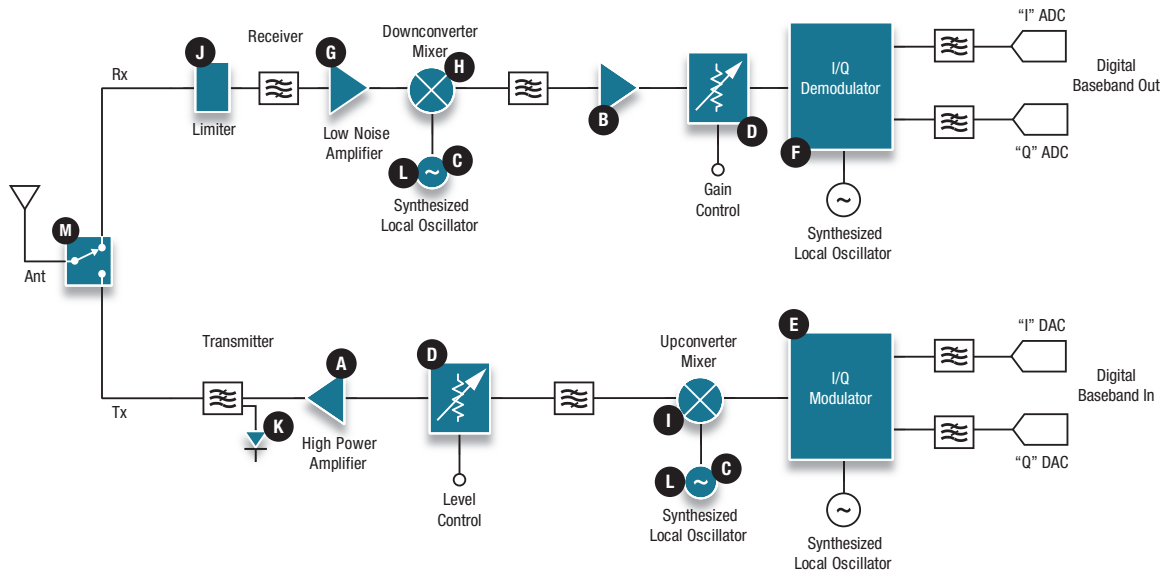

Amplifiers

- A** SKY65095-360LF
SKY65113-84LF
- B** SKY65013
SKY65014
SKY65015
SKY65016
SKY67130-396LF

Synthesizers/PLLs

- C** SKY73101-11
SKY73126-31
SKY73134-11

RF Attenuators

- D** **Digital**
SKY12339-350LF
SKY12340-364LF
SKY12343-364LF
SKY12345-362LF
SKY12355-337LF
- Voltage Variable**
AV101-12LF
SKY12228-12LF
SKY12233-11LF
SKY12235-11
- PIN Diodes**
SMP1304 Series
SMP1307 Series
SMP1352 Series

Direct Quadrature Modulators

- E** SKY73077-459LF
SKY73078-459LF
SKY73092-459LF

Direct Quadrature Demodulators

- F** SKY73009
SKY73012

Low Noise Amplifiers

- G** SKY67021-396LF SKY67102-396LF
SKY67022-396LF SKY67105-306LF
SKY67023-396LF SKY67106-306LF
SKY67012-396LF SKY67107-306LF
SKY67013-396LF SKY67111-396LF
SKY67014-396LF SKY67150-396LF
SKY67100-396LF SKY67151-396LF
SKY67101-396LF SKY67153-396LF

Down-conversion Mixers

- H** SKY73032-11
SKY73033-11
SKY73035-11
SKY73021-11
SKY73087-11
SKY73090-21

Up-conversion Mixers

- I** SKY73062-11
SKY73063
SKY73069-11

Limiter Diodes

- J** CLA460X Series
SMP1330-085LF

Schottky Diodes



- K** SMS3922 Series
SMS7621-040LF
SMS7630-040LF
SMS7630-060
SMS7630-061

Varactor Diodes

- L** SMV121X Series
SMV124X Series
SMV125X Series
SMV1263 Series
SMV1763-079LF
SMV1770-079LF
SMV1771-079LF
SMV2201-040LF


High Power T/R Switches

- M** SKY12207-478LF
SKY12208-478LF
SKY12210-478LF
SKY13270-92LF
SKY13290-313LF
SKY13299-321LF
SKY13306-313LF
SKY13319-374LF
SKY13320-374LF
SKY13321-360LF

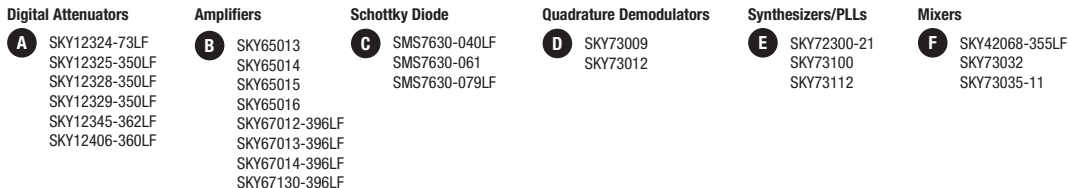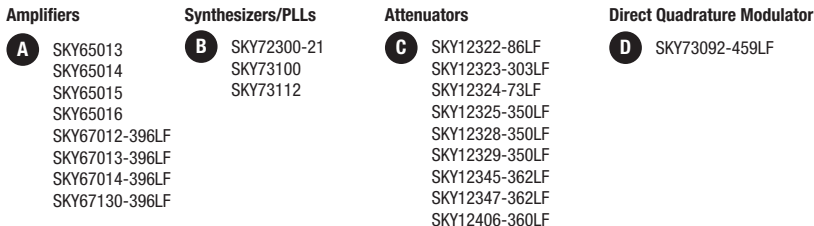

RF ID Full Duplex Tag

Downlink 2.44 GHz DSS
Uplink 5.8 GHz DSS + ESN Bits

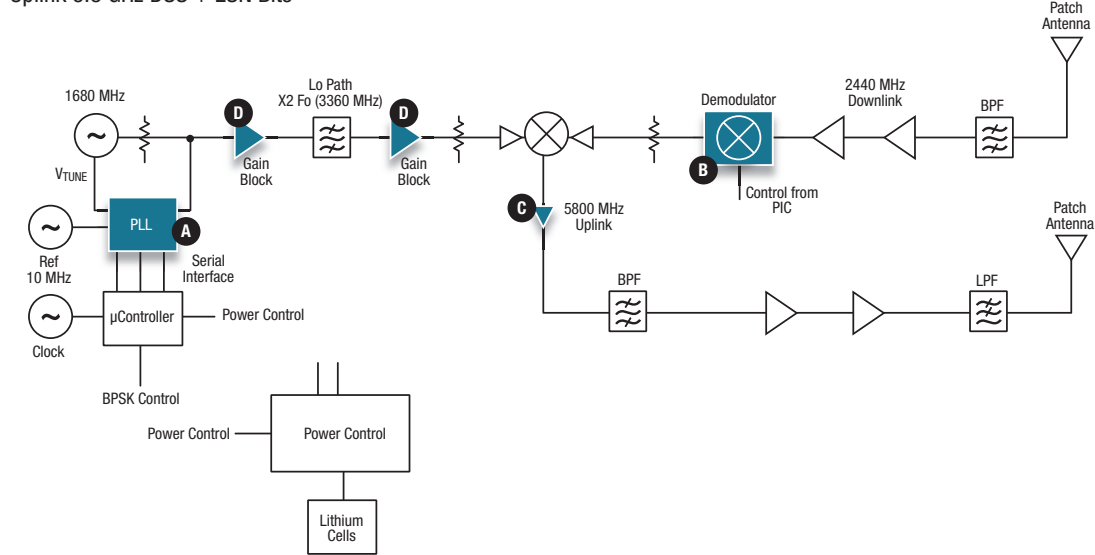

Synthesizers/PLLs

A SKY72300-21


Direct Quadrature Demodulators

B SKY73009
SKY73012

Amplifiers

C SKY65015-70LF
SKY65015-92LF
D SKY65016-70LF
SKY65016-92LF
SKY67130-396LF

2.45 GHz DSS Wireless Reader (Simplified)

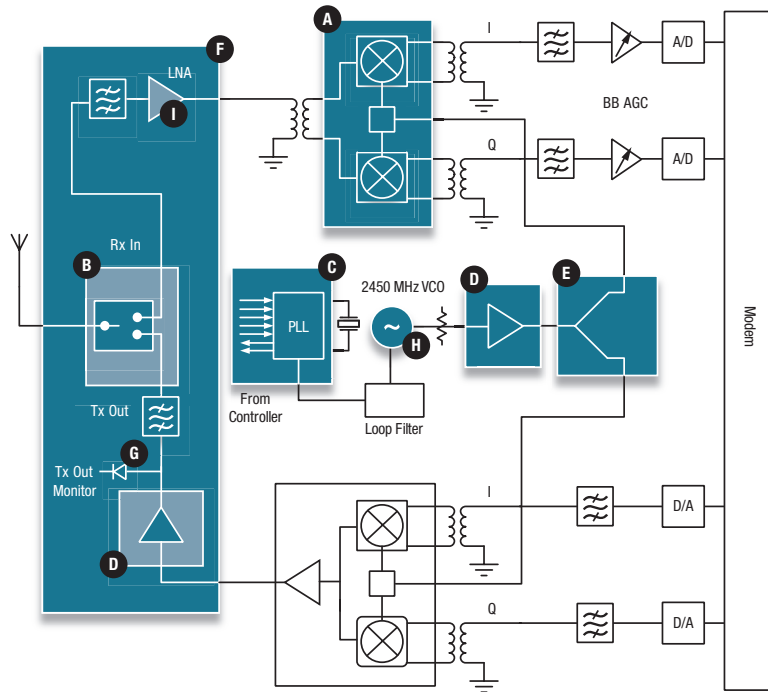

Quadrature Demodulators

A SKY73009
SKY73012

Switch

B AS179-92LF
AS211-334
SKY13306-313LF
SKY13348-374LF
SKY13377-313LF
SMP1325-085LF

Synthesizers/PLLs

C SKY74038-21

Amplifiers

D SE2425U
SE2433T
SKY65006-348LF
SKY65013-70LF
SKY65013-92LF
SKY65131
SKY65132
SKY67130-396LF

Power Divider

E PD22-73LF

Front-end Modules

F SE2431L
SE2432L
SE2436L
SE2437L
SE2438T
SKY65344-21

Schottky Detector

G SMS7630-005LF

Varactor Diodes


H SMV1142-011LF
SMV1235-011LF
SMV1249-003LF
SMV1251-079LF
SMV1413-001LF
SMV1413-079LF

Low Noise Amplifier

I SKY65047-360LF
SKY67014-396LF


Power Management

ADSL and Cable Modems

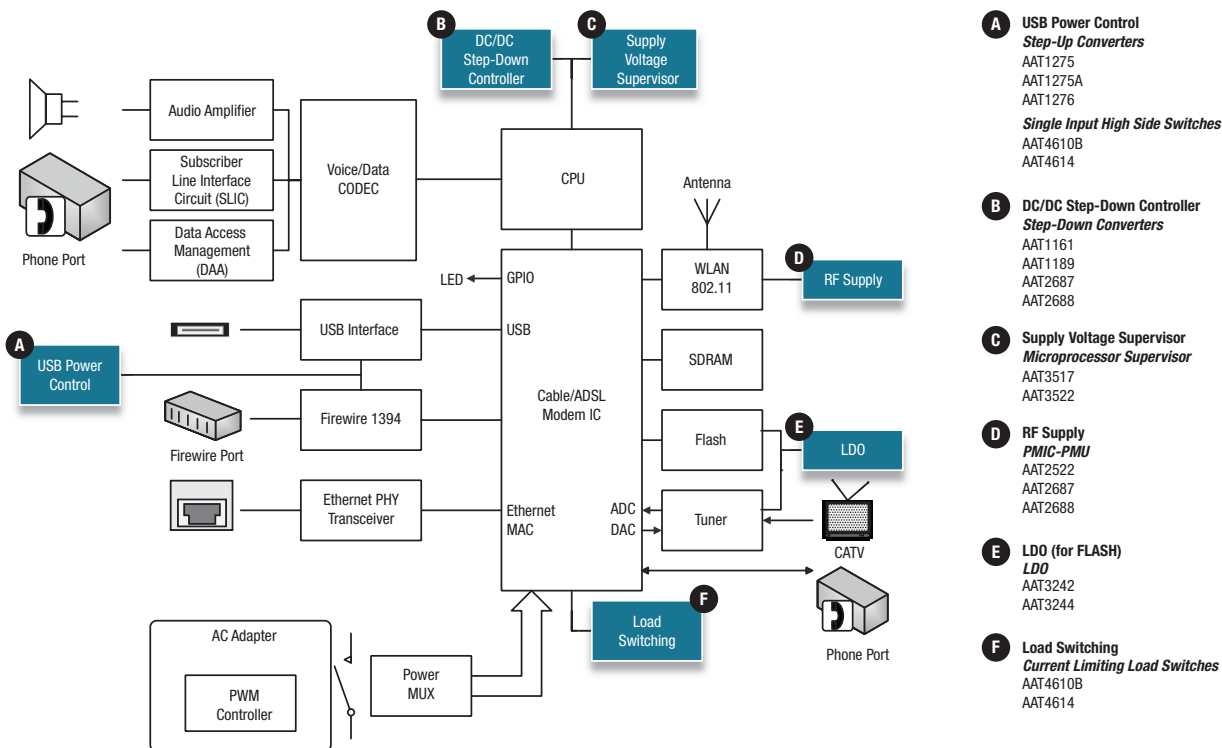

Power Management


Bluetooth® Devices

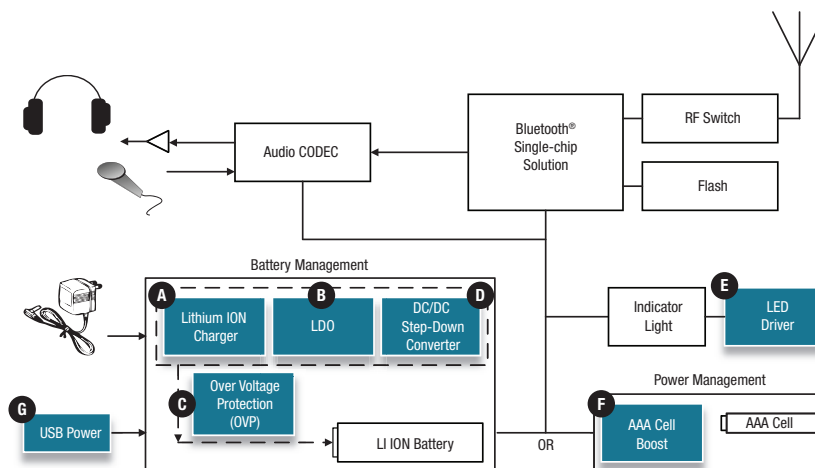

- A Lithium-Ion Charger Battery Chargers**
AAT3681
AAT3688
AAT3698
- B LDO LDO**
AAT3244
PMIC PMU
AAT2605
AAT2606
AAT2608A
AAT3604B
- C OVP**
AAT4684
AAT4686
AAT4687
- D DC/DC Step-Down Converter Step-Down Converters**
AAT2120
SKY87201-11
PMIC PMU
AAT2554
AAT2605A
AAT2749
AAT3604B
- E LED Driver RGB LED Driver**
AAT3129
- F AA Cell Boost Step-Up Converters**
AAT1217
AAT1218
- G USB Power Step-Up Converters**
AAT1275
AAT1275A
AAT1276
Single Input High Side Switches
AAT4614
AAT4616


Power Management

Desktop Computers / Workstations / Servers

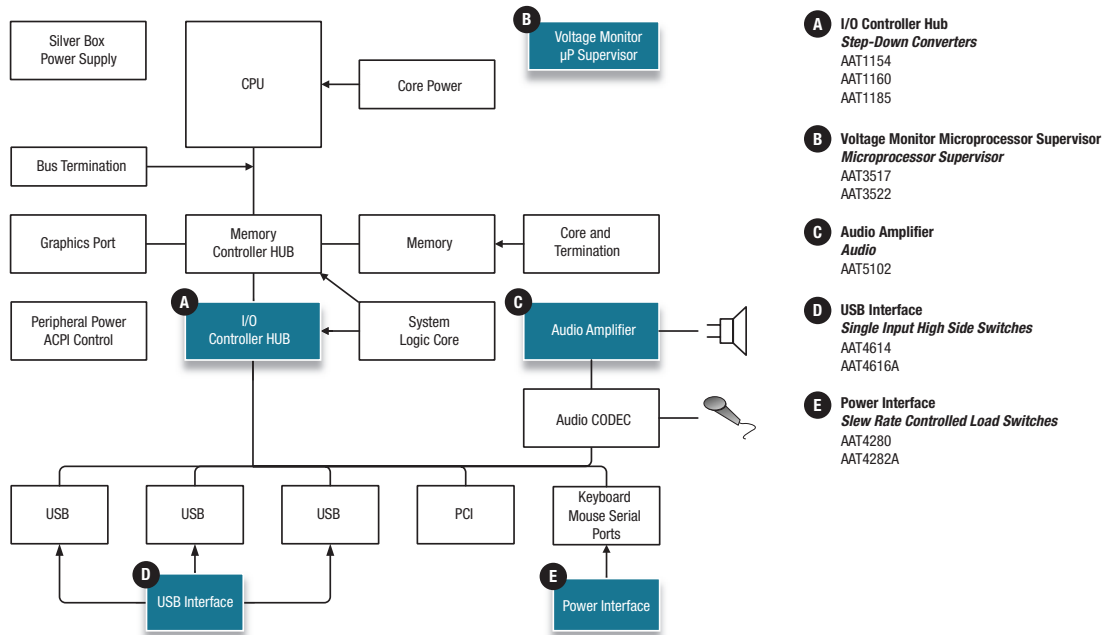

Power Management

Digital Cameras

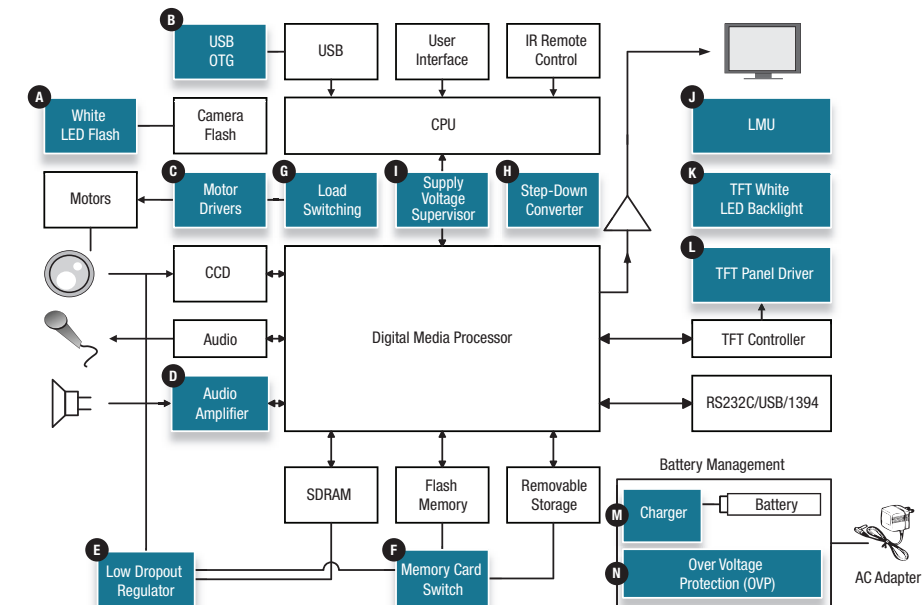

A White LED Flash
LED Camera Flash Driver
AAT1270
AAT1272
AAT1274
AAT1277
AAT1282
AAT3170
AAT3171
AAT3171A
AAT3174
AAT3176A
AAT3177A

B USB OTG
Step-Up Converters
AAT1276

C Motor Driver
Power Half Bridges
AAT4901
AAT4910
AAT4900

D Audio Amplifier
Audio
AAT5102

E LDO
LDO
AAT3244
AAT3218
AAT3220

PMIC-PMU
AAT2601A
AAT3603A

F Memory Card Switch
Single Input
High Side Switches
AAT4610
AAT4614
AAT4618

G Load Switching
Slew Rate Controlled
Load Switches
AAT4280
AAT4285

**I/O Expander Serial Controlled
Load Switches**
AAT4290
AAT4291
AAT4296
AAT4298

**Single Input High Side
Switches**
AAT4610A

H Step-Down Converter
AAT1142
AAT2114A
AAT2148
AAT2158
AAT2522
AAT2785

PMIC-PMU
AAT2601A
AAT3603A

I Supply Voltage Supervisor
Microprocessor Supervisor
AAT3517
AAT3522

J LMU
Lighting Management Unit
AAT2803
AAT2848
AAT2862
AAT2870

K TFT White LED Backlight
Serial Boost LED Driver
AAT1231
AAT1235
AAT1236
AAT1239
AAT1401
AAT1402
AAT1403
AAT1410
AAT1421

L TFT Panel Display
Panel Power
AAT2822
AAT3190


M Chargers
Battery Chargers
AAT3672
AAT3681
AAT3691
AAT3698

PMIC-PMU
AAT2601A
AAT3603A

N OVP
AAT4684
AAT4686
AAT4687

Power Management

Digital Photo Frames

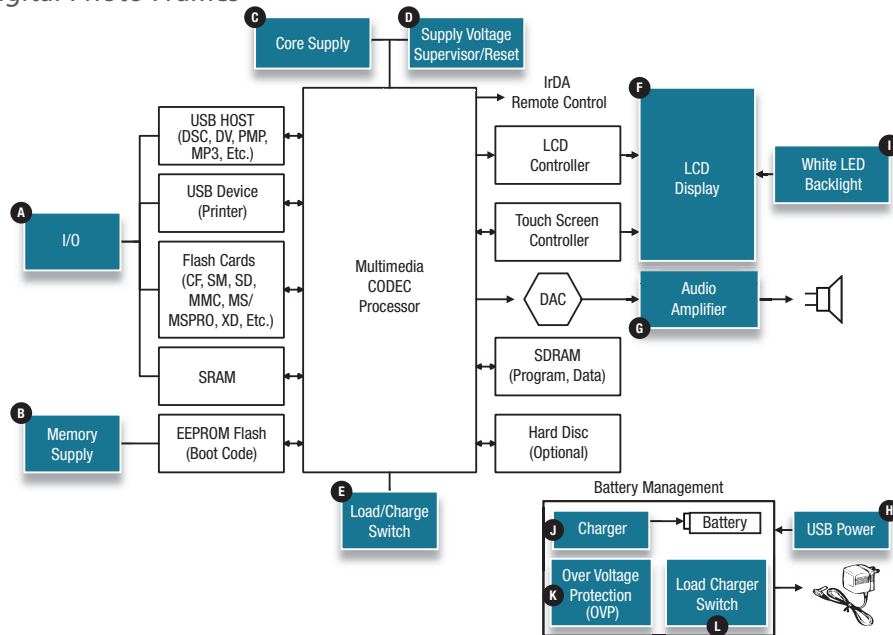

A I/O
LDO
AAT3218
AAT3220
PMIC-PMU
AAT2601A
AAT3603A

B Memory Supply
LDO
AAT3220
AAT3218
PMIC-PMU
AAT2601A
AAT3603A

C Core Supply
LDO
AAT3218
AAT3220
AAT3236

PMIC-PMU
AAT2601A
AAT3603A
Step-Down Converters
AAT1189
AAT1185

D Supply Voltage Supervisor/Reset
Microprocessor Supervisor
AAT3517
AAT3522

E Load/Charge Switch
Slew Rate Controlled
Load Switches
AAT4280
AAT4250

F LCD Display
Panel Power
AAT2822
AAT2823
AAT3190

G Audio Amplifier
Audio
AAT5102

H USB Power
Step-Up Converters
AAT1218
AAT1276

Single Input High Side Switches
AAT4610B
AAT4618
AAT4614

I White LED Backlight Driver
AAT1231
AAT1235
AAT1236
AAT1405
AAT1407
AAT1409
AAT1451

J Charger
Linear Chargers
AAT3670
AAT3686
AAT3691
AAT3698
AAT3673


Switching Chargers
AAT3620

K OVP
AAT4684
AAT4686
AAT4687
PMIC-PMU
AAT2601A
AAT3603A

L Load/Charge Switch
Single Input High Side Switches
AAT4610A
AAT4685
Slew Rate Controlled
Load Switches
AAT4280

Power Management

Media Players (MP3, MP4, PMP)

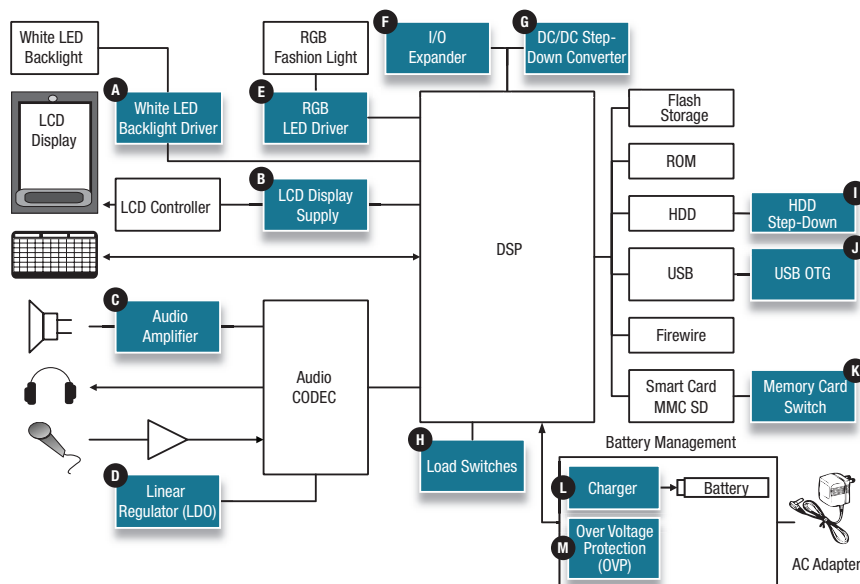

A White LED Driver
Serial Boost LED Driver
AHK3292
AAT1231
AAT1239
AAT3169
AAT1401
AHK1421

B LCD Display Driver
Panel Power
AAT2822
AAT2823
AAT3190

C Audio Amplifier
AAT5102

D LDO
AAT3244
AAT3218
AAT3236

PMIC-PMU
AAT2601A
AAT2605
AAT2606
AAT3603A

E RGB LED Driver
AAT3128

F I/O Expander
Serial Controlled Load Switches
AAT4291

RGB LED Controllers
AAT4295
AAT4297

G DC/DC Step-Down Converter
Step-Down Converter
AAT2114A
AAT2522

PMIC-PMU
AAT2608A

H Load Switching
Slew Rate Controlled Load Switches
AAT4280
AAT4282A

Single Input High Side Switches
AAT4610A
AAT4614
AAT4616

I HDD Step-Down
Step-Down Converters
AAT1160
AAT1161
AAT1185

J USB OTG
Step-Up Converters
AAT1275
AAT1276


K Memory Card Switch
Single Input High Side Switches
AAT4610
AAT4618
AAT4614

L Charger
Linear Chargers
AAT3691
AAT3692

M OVP
AAT4684
AAT4686
AAT4687

Power Management

Netbooks / MID

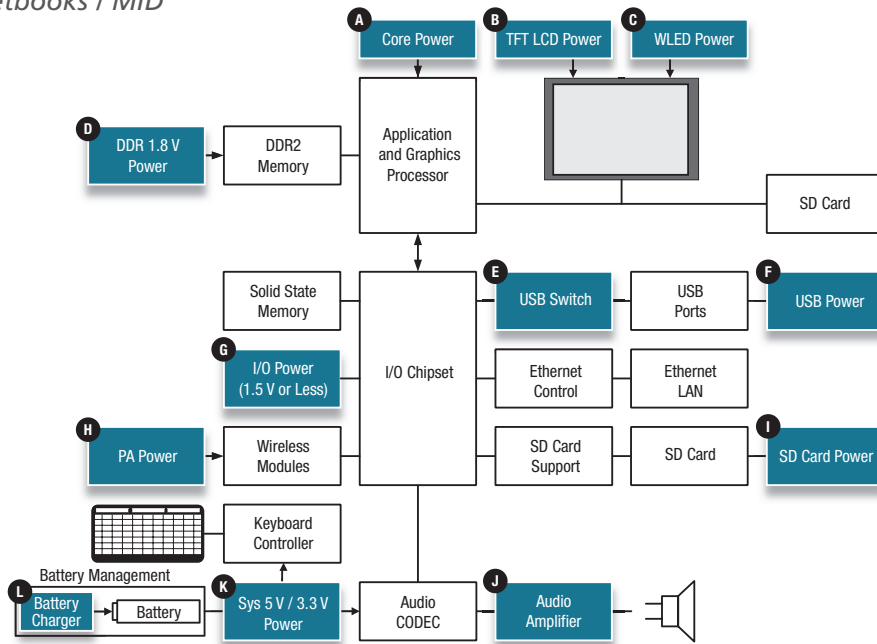

A Core Power
Step-Down Converters
AAT1142*
AAT1185
AAT2114A
AAT2522

PMIC-PMU
AAT3601A
AAT3603A

B TFT LCD Power
Panel Power
AAT2822
AAT2823
AAT3190

C White LED Backlight
Drivers
AAT1231
AAT1235
AAT1236
AAT1239
AAT1405
AAT1407
AAT1409
AAT1451

D DDR 1.8 V Power
PMIC-PMU
AAT2153
AAT2158

E USB Switch
Single Input High Side Switches
AAT4614
AAT4616
AAT4616A

Slew Rate Controlled Load Switches
AAT4282A

F USB Power
Step-Up Converters
AAT1218
AAT1276

G I/O Power (1.5 V or Less)
PMIC-PMU
AAT3601A
AAT3603A

H PA Power
LDO
AAT3218
AAT3236
AAT3244

Step-Down Converter
AAT1171

I SD Card Power
Single Input High Side Switches
AAT4620
AAT4621

Multiple Input High Side Switches
AAT4650

J Audio Amplifier
AAT5102


K Sys 5 V / 3.3 V Power
Step-Down Converters
AAT1160*
AAT1161
AAT1185

PMIC-PMU
AAT3601A
AAT3603A

L Battery Charger
Switching Charger
AAT3620

Power Management


Notebooks / Laptops / Tablet PCs

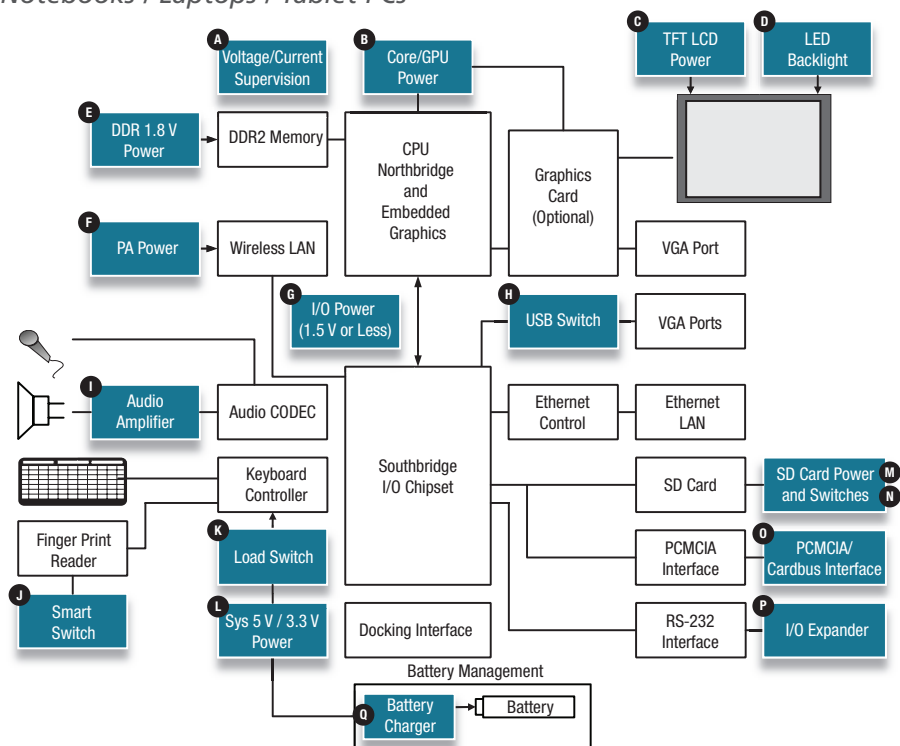

- A** Voltage Supervision
AHK432
Microprocessor Supervisor
AAT3512
AAT3522
- B** Core/GPU Power
Step-Down Converters
AAT1160
AAT1185
PMIC-PMU
AAT3601A
AAT3603A
- C** TFT LCD Power
Panel Power
AAT2822
AAT2823
AAT3190
- D** White LED Backlight Driver
AAT1409
AAT1451
- E** DDR 1.8 V Power
PMIC PMU
AAT2114A
AAT2153
AAT2158
AAT3603A
- F** PA Power
LDO
AAT3218
AAT3236
AAT3244
Step-Down Converter
AAT1171
- G** I/O Power (1.5V or less)
PMIC-PMU
AAT3601A
AAT3603A
- H** USB Switch
Single Input High Side Switches
AAT4610B
AAT4614
Slew Rate Controlled Load Switches
AAT4280
AAT4282A
- I** Audio Amplifier
AAT5102
- J** Smart Switch
Single Input High Side Switches
AAT4610
AAT4614
AAT4618
- K** Load Switch
Single Input High Side Switches
AAT4610B
AAT4614
Slew Rate Controlled Load Switches
AAT4280
AAT4282A
- L** Sys 5 V / 3.3 V Power
Step-Down Converters
AAT1160
AAT1161
AAT1185
PMIC-PMU
AAT3601A
AAT3603A
- M** SD Card Power
Single Input High Side Switches
AAT4620
AAT4621
- N** SD Card Power
Multiple Input High Side Switches
AAT4650
- O** PCMCIA/Cardbus Interface
Single Input High Side Switches
AAT4620
AAT4621
Multiple Input High Side Switches
AAT4650
- P** I/O Expander
Slew Rate Controlled Load Switches
AAT4280
AAT4282A
Serial Controlled Load Switches
AAT4290
AAT4296
AAT4298
- Q** Battery Charger
Switching Chargers
AAT3620

Power Management

Portable Navigation Devices (PNDs)

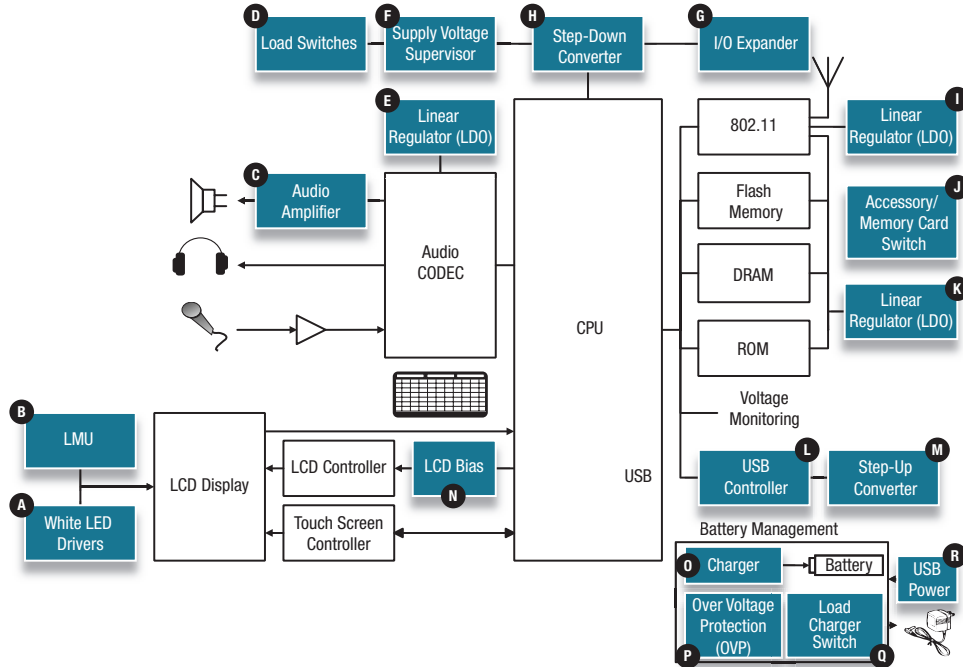

A White LED Backlight
Serial Boost LED Driver
AAT1231
AAT1235
AAT1236
AAT1239
AAT1405
AAT1407
AAT1451

B LMU
Lighting Management Unit
AAT2848
AAT2862
AAT2822
AAT2870

C Audio Amplifier
AAT5102

D Load Switching
Slew Rate Controlled
Load Switches
AAT4282A
AAT4280
Serial Controlled
Load Switches
AAT4290
AAT4291

E LDO for CPU
LDO
AAT3218
AAT3220
AAT3236
PMIC-PMU
AAT3608

F Supply Voltage Supervisor
Microprocessor Supervisor
AAT3517
AAT3522

G I/O Expander
Serial Controlled
Load Switches
AAT4296
AAT4298

H Step-Down Converters
AAT1185
AAT1189
AAT2114A
AAT2522
AAT2687
AAT2688
AAT2689

I LDO for 802.11
LDO
AAT3244
AAT3218

J Memory Card Switch
Single Input High Side Switches
AAT4610
AAT4614
AAT4618

K LDO
LDO
AAT3218
AAT3220
AAT3236

L USB Controller
Single Input High Side Switches
AAT4601
AAT4618
AAT4626

M Step-Up Converters
AAT2215
AAT1218
AAT1276

N LCD Bias
Panel Power
AAT2822
AAT2823
AAT3190

O Charger
Switching Chargers
AAT3620


P OVP
AAT4684
AAT4686
AAT4687

Q Load Charger Switch
Slew Rate
Controlled Load Switches
AAT4250
AAT4280
AAT4282

R USB Power
PMIC-PMU
AAT2601A
AAT2608A
AAT3603A
Single Input
High Side Switches
AAT4610
AAT4618
AAT4614

Power Management

Set-top Boxes and Game Consoles

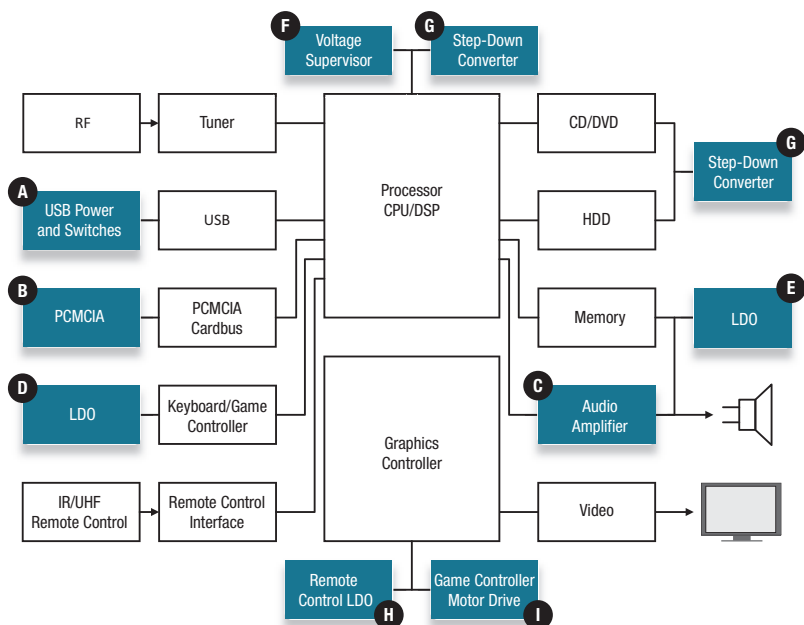

A USB Power
Step-Up Converters
AAT1275
AAT1275A
AAT1276

Single Input
High Side Switches
AAT4614
AAT4616
AAT4616A

B PCMCIA
Multiple Input
High Side Switches
AAT4650

C Audio Amplifier
AAT5102

D LDO
LDO
AAT3244
AAT3218

PMIC PMU
AAT2605
AAT2606

E LDO
LDO
AAT3221

F Voltage Supervisor
Microprocessor Supervisor
AAT3512
AAT3522

G Step-Down Converters
AAT1189
AAT1185
AAT1160
AAT2522


PMIC PMU
AAT2687
AAT2688
AAT2689

H Remote Control LDO
LDO
AAT3218
AAT3220

I Game Controller Motor Drive
Power Half Bridges
AAT4901
AAT4910

Power Management

Smartphones

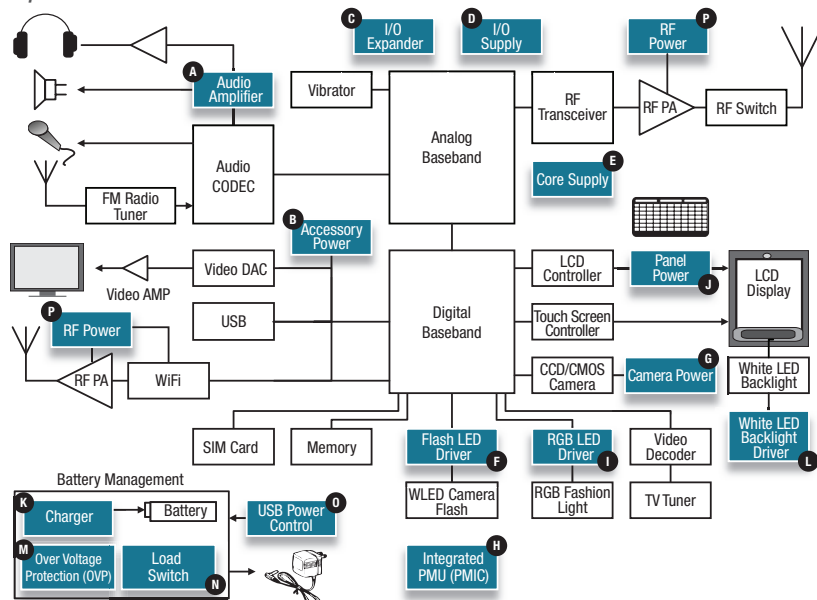

- | | | | | | | | | | | | | | | | |
|----------|---|----------|--|---|--|----------|--|----------|--|----------|--|----------|--|----------|---|
| A | Audio Amplifier
AAT5102 | D | I/O Supply
<i>LDO</i>
AAT3218
AAT3220 | F | Flash LED Driver
<i>LED Camera Flash Driver</i>
AAT1270
AAT1272
AAT1274
AAT1282
AAT3176A
AAT2158
SKY61279
SKY61292 | H | Integrated PMU
<i>PMIC-PMU</i>
AAT2601A
AAT3603A
AAT2605
AAT2606
AAT2608A | K | Charger
<i>Linear Chargers</i>
AAT3672
AAT3683

<i>Switching Chargers</i>
AAT3620 | L | White LED Backlight Driver
AAT1231
AAT1235
AAT1236
AAT1239
AAT3169
AHK3294
AHK3296
AAT1401
AHK1421 | M | Over Voltage Protection (OVP)
AAT4684
AAT4687 | O | USB Power Control
<i>Single Input High Side Switches</i>
AAT4601
AAT4610
AAT4618 |
| | Accessory Power
<i>PMIC-PMU</i>
AAT2605
AAT2612
AAT2614

<i>Single Input High Side Switches</i>
AAT4610
AAT4618
AAT4614 | | E | Core Supply
<i>Step-Down Converters</i>
AAT1142


<i>LDO</i>
AAT3236
AAT3237

<i>PMIC-PMU</i>
AAT2603
AAT2608 | N | | Load Switch
<i>Slow Rate Controlled Load Switches</i>
AAT4250
AAT4280
AAT4282B | | | | | | | | |
| C | I/O Expander
<i>Serial Controlled Load Switches</i>
AAT4298
AAT4292 | G | CCD Power
<i>Camera Power</i>
AAT3190
AAT2612
AAT2614 | I | RGB LED Drivers
<i>RGB LED Controllers</i>
AAT4295

<i>RGB LED Drivers</i>
AAT3128
AAT3129 | J | LCD Display Supply
<i>Panel Power</i>
AAT2822
AAT2823
AAT3190 | N | Lighting Management Unit
AAT2861
AAT2862
AAT2866
AAT2803
AAT2870
AAT2893 | P | RF Power
SKY67000 | | | | |


Power Management

LCD TVs and Monitors

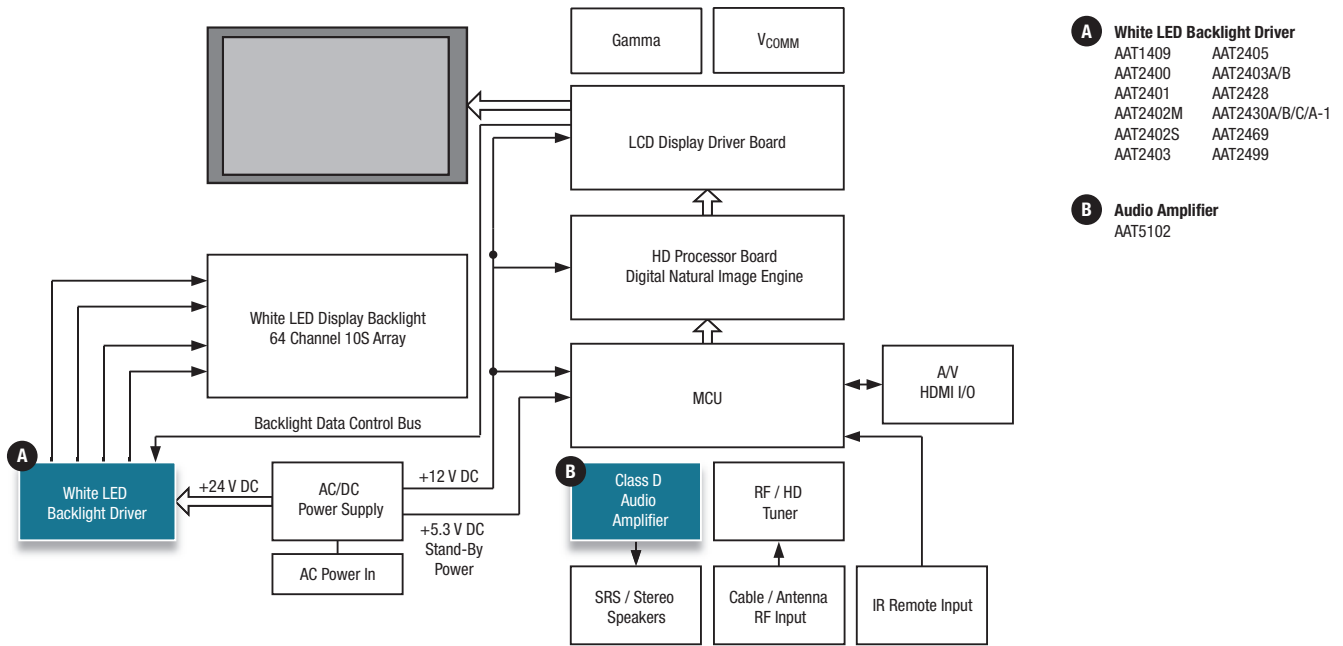

Power Management

Wireless LAN Cards / Clients

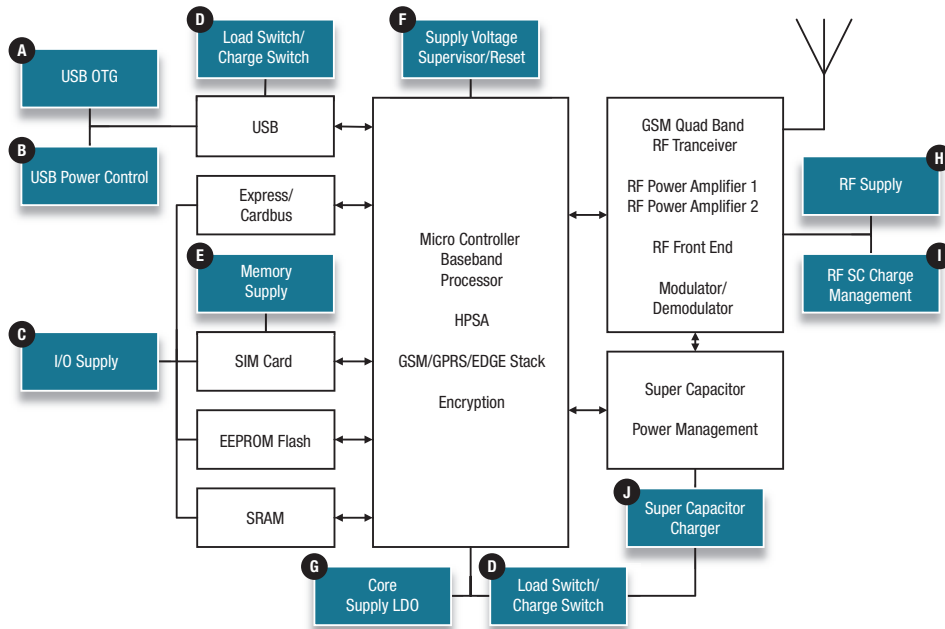

A USB OTG
Step-Up Converters
AAT1275
AAT1275A
AAT1276

B USB Power Control
Single Input High-Side Switches
AAT4610
AAT4601
AAT4618

C I/O Supply
LDO
AAT3220
AAT3236

D Load Switch/Charge Switch
Slew Rate Controlled Load Switches
AAT4250
AAT4280
AAT4282

Single Input High Side Switches
AAT4616
AAT4616A

E Memory Supply
LDO
AAT3218
AAT3220
AAT3236

F Supply Voltage Supervisor/Reset
Microprocessor Supervisor
AAT3512
AAT3522

G Core Supply
LDO
AAT3236
AAT3244

H RF Supply
LDO
AAT3215
AAT3218
AAT3236

I RF SC Charge Management
Single Input High Side Switches
AAT4616

J Super Capacitor Charger
Single Input High Side Switches
AAT4712

PACKAGE SELECTION GUIDE

Part Number Suffix	Package Type	Actual Size	Package Dimensions (mm) (Lead Inclusive)*
-060, -061	0201 Micro Surface Mount Device	-	0.60 x 0.30 x 0.27
-040	SOD-882 2L (0402)	-	1.00 x 0.60 x 0.46
-378, -385	QFN 6L	-	1.00 x 1.00 x 0.45
N/A	WLCSP 15-bump	-	1.04 x 1.04 x 0.285
N/A	WLCSP 8-bump	-	1.10 x 1.10 x 0.36
N/A	WLCSP 15-bump	-	1.20 x 1.60 x 0.606
-517, -518	MIS	-	1.47 x 1.23 x 0.813
-334	LGA 6L	-	1.50 x 1.20 x 0.80
-374	QFN 6L	-	1.50 x 1.50 x 0.45
-373	QFN 8L	-	1.50 x 1.50 x 0.45
-381	QFN 6L	-	1.50 x 2.00 x 0.50
-079	SC-79	-	1.60 x 0.80 x 0.60
-344	SOT-666	-	1.65 x 1.65 x 0.60
N/A	WLCSP 20-bump	-	1.75 x 2.30 x 0.65
-477	DFN 6L	-	2.00 x 1.30 x 0.45
-372	SC-70 4L (SOT-323)	-	2.00 x 1.35 x 1.10
-468	QFN 18L	-	2.00 x 2.00 x 0.45
-397, -460	QFN 12L	-	2.00 x 2.00 x 0.50
-368, -465	QFN 12L	-	2.00 x 2.00 x 0.55
-370	QFN 8L	-	2.00 x 2.00 x 0.60
-396	QFN 8L	-	2.00 x 2.00 x 0.75
-085, -086	QFN 3L (2 x 2)	-	2.00 x 2.00 x 0.90
-087	QFN 2L (2 x 2)	-	2.00 x 2.00 x 0.90
-335	QFN 6L (2 x 2)	-	2.00 x 2.00 x 0.90
-360	QFN 8L (2 x 2)	-	2.00 x 2.00 x 0.90
-349	QFN 8L EP (2 x 2)	-	2.00 x 2.00 x 0.90
-360	QFN 8L	-	2.00 x 2.00 x 0.90
-375	QFN 10L	-	2.00 x 3.00 x 0.45
-313	QFN 6L	-	2.00 x 3.00 x 1.00
-92, -081, -999	SC-88 (SC-70 6L)	-	2.10 x 2.00 x 0.95
-073, -074, -075, -076	SC-70 3L	-	2.10 x 2.00 x 0.95

Part Number Suffix	Package Type	Actual Size	Package Dimensions (mm) (Lead Inclusive)*
-377	QFN 4L	-	2.20 x 2.00 x 1.35
-388	QFN 16L	-	2.30 x 2.30 x 0.45
-001, -003, -004, -005, -006, -007, -39	SOT-23 3L	-	2.37 x 2.92 x 1.00
-015, -016, -017, -019, -020, -021, -022, -023, -026, -32	SOT-143 3L	-	2.37 x 2.92 x 1.00
-555LF	MLP 2-pin	-	2.50 x 2.50 x 0.75
-011	SOD-323	-	2.52 x 1.25 x 1.04
-027, -72	SOT-23 5L	-	2.80 x 2.90 x 1.18
-73	SOT-23 6L	-	2.80 x 2.90 x 1.18
-465	QFN 12L	-	3.00 x 3.00 x 0.55
-321, -337, -348, -350, -356	QFN (3 x 3)	-	3.00 x 3.00 x 0.75
-389	QFN 26L	-	3.00 x 3.80 x 0.75
-455	QFN 26L	-	3.00 x 3.80 x 0.75
N/A	Multichip Module (MCM)	-	3.00 x 3.00
N/A	Multichip Module (MCM)	-	3.00 x 5.00
N/A	Multichip Module (MCM)	-	3.00 x 6.00
N5A	LGA 24L	-	3.50 x 4.50
N/A	Multichip Module (MCM)	-	4.00 x 3.00
N/A	Multichip Module (MCM)	-	4.00 x 4.00
N/A	LGA, RFLGA	-	4.00 x 4.00
-340	QFN 20L (4 x 4) 2.1 mm Paddle	-	4.00 x 4.00 x 0.75
-359, -467	QFN 16L (4 x 4)	-	4.00 x 4.00 x 0.90
-306	QFN 16L EP (4 x 4)	-	4.00 x 4.00 x 0.90


*Dimensions indicated: lead tip to lead tip x body width x total thickness.

Part Number Suffix	Package Type	Actual Size	Package Dimensions (mm) (Lead Inclusive)*
-307	QFN 16L (4 x 4) 2.8 mm Paddle		4.00 x 4.00 x 0.90
-362, -459	QFN 24L (4 x 4)		4.00 x 4.00 x 0.90
-365	QFN 20L EP (4 x 4)		4.00 x 4.00 x 0.90
-478	QFN 16L (4 x 4)		4.00 x 4.00 x 1.50
-70	SOT-89		4.50 x 2.50 x 1.50
-59	MSOP 8L		4.90 x 3.00 x 0.96
-86	MSOP 10L		4.90 x 3.00 x 0.96
-302	MSOP 8L EP		4.90 x 3.00 x 1.10 (Max.)
-303	MSOP 10L EP		4.90 x 3.00 x 1.10
-315	Multichip Module (MCM)		4.90 x 3.20 x 1.00
N/A	Multichip Module (MCM)		5.00 x 4.00
N/A	Multichip Module (MCM)		5.00 x 5.00
N/A	RFLGA		5.00 x 5.00
-355	QFN 20L		5.00 x 5.00 x 0.90
-364	QFN 32L 3.15 mm Paddle		5.00 x 5.00 x 0.90
-470	QFN 32L (5 x 5) 3.3 mm Paddle		5.00 x 5.00 x 0.90
N/A	Multichip Module (MCM)		5.00 x 6.00
N/A	LGA		5.00 x 6.00
N/A	Multichip Module (MCM)		5.00 x 7.00
-207	Hermetic Ceramic Pill		5.08 x 2.18
-210	Hermetic Pill		5.7 x 3.15
-230	Epoxy Stripline		5.98 x 1.4 x 0.76
-232	Epoxy Stripline		5.98 x 3.69 x 0.76

Part Number Suffix	Package Type	Actual Size	Package Dimensions (mm) (Lead Inclusive)*
-234, -235	Epoxy Stripline		5.98 x 5.98 x 0.76
-339, -84	SOIC 8L Exposed Pad		5.99 x 4.93 x 1.55
-12	SOIC 8L		6.00 x 4.90 x 1.60
-80	SSOP 16L		6.00 x 4.90 x 1.60
N/A	Multichip Module (MCM)		6.00 x 6.00
N/A	Multichip Module (MCM)		6.00 x 8.00
-24	SOIC 14L		6.00 x 8.70 x 1.55
-93	TSSOP 16L Exposed Pad		6.40 x 6.40 x 1.00
N/A	Multichip Module (MCM)		7.00 x 6.00
N/A	Multichip Module (MCM)		7.5 x 7.00
-85	SSOP 20L		7.80 x 7.20 x 1.90
N/A	Multichip Module (MCM)		8.00 x 6.00
N/A	Multichip Module (MCM)		8.00 x 8.00
-345, -501, N/A	Multichip Module (MCM)		8.00 x 10.00
-250, -251	Epoxy Stripline		8.12 x 2.54 x 1.27
-252, -253	Epoxy Stripline		8.12 x 5.33 x 1.27
-254	Epoxy Stripline		8.12 x 8.12 x 1.27
-255, -257	Epoxy Stripline		8.12 x 8.12 x 1.27
N/A	CLCC 8L		8.30 x 8.30

*Dimensions indicated: lead tip to lead tip x body width x total thickness.

Package Selection Guide

Part Number Suffix	Package Type	Actual Size	Package Dimensions (mm) (Lead Inclusive)*
N/A	Multichip Module (MCM)		9.10 x 11.60 x 1.50
-25	SOIC 16L		10.00 x 6.00 x 1.70
N/A	Multichip Module (MCM)		10.00 x 14.00
-220, -221	Hermetic Stripline		11.3 x 1.91 x 1.14
-224	Hermetic Stripline		11.3 x 11.3 x 1.14

Part Number Suffix	Package Type	Actual Size	Package Dimensions (mm) (Lead Inclusive)*
-225	Hermetic Stripline		11.3 x 11.3 x 1.14
-222	Hermetic Stripline		11.3 x 6.6 x 1.14
-223	Hermetic Stripline		11.3 x 6.6 x 1.14
-240	Hermetic Stripline		11.52 x 2.64 x 1.18
N/A	Multichip Module (MCM)		13.00 x 13.00

Trans-Tech Inc., a wholly owned subsidiary of Skyworks Solutions Inc., offers filters in a number of standard packages. In addition to SMT, Trans-Tech offers a flatpack and through-hole configuration. In addition to our standard offering, Trans-Tech has the capability and experience to meet many unique footprint layouts and custom packages. For each of our 2- to 6-pole packages, Trans-Tech offers profiles ranging from 2 mm to 6 mm. Dimension “L” will vary in length, dependent upon filter’s frequency.

Part Number Suffix	Package Type	Not Actual Size	Package Dimensions (mm) (Lead Inclusive)*
TT2P2-P	SMT		5.33 x L x 3.01
TT2P3-P	SMT		7.42 x L x 3.01
TT2P4-P	SMT		9.50 x L x 3.01
TT2P5-P	SMT		11.58 x L x 3.01
TT2P6-P	SMT		13.67 x L x 3.01
TT3P2-P	SMT		7.80 x L x 4.01
TT3P3-P	SMT		11.18 x L x 4.01
TT3P4-P	SMT		13.72 x L x 4.01
TT3P5-P	SMT		16.81 x L x 4.01
TT3P6-P	SMT		19.91 x L x 4.01
TT4P2-P	SMT		9.16 x L x 4.99
TT4P3-P	SMT		13.16 x L x 4.99
TT4P4-P	SMT		17.48 x L x 4.98
TT4P5-P	SMT		21.08 x L x 4.98
TT4P6-P	SMT		25.40 x L x 4.98
TT6P2-P	SMT		13.14 x L x 7.01
TT6P3-P	SMT		19.14 x L x 7.01

Part Number Suffix	Package Type	Not Actual Size	Package Dimensions (mm) (Lead Inclusive)*
TT6P4-P	SMT		25.85 x L x 7.01
TT6P5-P	SMT		31.14 x L x 7.01
TT6P6-P	SMT		37.16 x L x 7.01
TT6P2-F	Flatpack		17.00 x L x 6.50
TT6P3-F	Flatpack		24.00 x L x 6.50
TT6P2-T	Through Hole		13.00 x L x 6.50
TT6P3-T	Through Hole		20.00 x L x 6.50
TT4P4-T-R	SMT		16.10 x 19.30 x 4.98
TT6P10-T-R	SMT		62.79 x 21.23 x 7.01
Notch Filter Connectorized	SMA		57.79 x 55.75 x 20.62
Connectorized Filter Assembly	SMA		31.12 x 55.50 x 144.27

*Dimensions indicated: lead tip to lead tip x body width x total thickness.

Power Management Products

Classification Package	Package Name	Package Dimensions (L x W x H)	PCB Footprint (mm ²)	Packing Standard		Moisture Sensitivity Level (MSL)	Package Classification Suffix
				Quantity/Reel	Packing Method		
	WLCSP-5	1.235 x .910 x .58	1.12	3000	Tape and Reel	Level 1	UV
	WLCSP-9	1.35 x 1.36 x 0.62	1.14	3000	Tape and Reel	Level 1	UR
	WLCSP-10	1.545 x 1.145 x 0.62	1.15	3000	Tape and Reel	Level 1	UQ
	WLCSP-16	1.645 x 1.645 x 0.59	1.59	3000	Tape and Reel	Level 1	UN
	WLCSP-12	2.23 x 1.535 x 0.63	3.43	3000	Tape and Reel	Level 1	RG
	TDFN2.2x2.2-10L	2.20 x 2.20 x 0.75	3.63	3000	Tape and Reel	Level 1	DH
	STDFN22-8	2.00 x 2.00 x 0.55	4	3000	Tape and Reel	Level 1	ES
	TDFN22-8	2.00 x 2.00 x 0.75	4	3000	Tape and Reel	Level 1	PS
	FTDFN22-8	2.00 x 2.00 x 0.75	4	3000	Tape and Reel	Level 1	PS
	SC70JW-8	2.20 x 2.00 x 1.05	4.2	3000	Tape and Reel	Level 1	JS
	TQFN3.0x2.2-18	3.00 x 2.20 x 0.75	4.5	3000	Tape and Reel	Level 1	BO
	SC70JW-10	2.20 x 2.00 x 0.55	4.84	3000	Tape and Reel	Level 1	JQ
	STDFN2.2x2.2-10	2.20 x 2.20 x 0.55	4.84	3000	Tape and Reel	Level 1	OQ
	WLCSP-30	3.115 x 2.615 x 0.69	5.62	3000	Tape and Reel	Level 1	UW
	DLN-8L	2.4 x 2.4 x 1.00	5.76	4000	Tape and Reel	Level 1	TM
	TDFN33-10L	3.00 x 3.00 x 0.75	6.75	3000	Tape and Reel	Level 1	DE
	TDFN33-12	3.00 x 3.00 x 0.75	6.75	3000	Tape and Reel	Level 1	WP
	SOT143	2.92 x 2.37 x 1.01	6.92	3000	Tape and Reel	Level 1	CX
	SOT23-3	2.92 x 2.37 x 1.02	6.92	3000	Tape and Reel	Level 1	GY
	DLN-10L	2.95 x 2.4 x 1.00	7.08	4000	Tape and Reel	Level 1	DI
	SC59	2.85 x 2.80 x 1.20	7.98	3000	Tape and Reel	Level 1	GY
	SOT23-5	2.85 x 2.80 x 1.20	7.98	3000	Tape and Reel	Level 1	GV
	SOT23-6	2.85 x 2.80 x 1.20	7.98	3000	Tape and Reel	Level 1	GU

Power Management Products

Classification Package	Package Name	Package Dimensions (L x W x H)	PCB Footprint (mm ²)	Packing Standard		Moisture Sensitivity Level (MSL)	Package Classification Suffix
				Quantity/Reel	Packing Method		
	TSOT23-6	2.90 x 2.80 x 1.00	8.12	3000	Tape and Reel	Level 1	CA
	TSOP-6	2.95 x 2.80 x 1.05	8.26	3000	Tape and Reel	Level 1	DU
	TSOPJW-8	3.00 x 2.85 x 1.01	8.621	3000	Tape and Reel	Level 1	TS
	TSOPJW-12	3.00 x 2.85 x 1.02	8.721	3000	Tape and Reel	Level 1	TP
	TSOPJW-14	3.05 x 2.85 x 1.02	8.69	3000	Tape and Reel	Level 1	TO
	STDFN33-12	3.00 x 3.00 x 0.55	9	1500	Tape and Reel	Level 1	FP
	STDFN33-14	3.00 x 3.00 x 0.55	9	1500	Tape and Reel	Level 1	FO
	QFN33-16	3.00 x 3.00 x 0.93	9	1500	Tape and Reel	Level 1	VN
	TQFN33-20	3.00 x 3.00 x 0.75	9	1500	Tape and Reel	Level 1	DG
	TDFN33-14	3.00 x 3.00 x 0.75	9	1500	Tape and Reel	Level 1	WO
	QFN34-20	3.00 x 4.00 x 0.93	12	1500	Tape and Reel	Level 1	ZL
	TDFN34-16	3.00 x 4.00 x 0.75	12	1500	Tape and Reel	Level 1	RN
	TDFN34-16L	3.00 x 4.00 x 0.75	12	1500	Tape and Reel	Level 1	RN
	TQFN34-20	3.00 x 4.00 x 0.75	12	1500	Tape and Reel	Level 1	ML
	TQFN34-24	3.00 x 4.00 x 0.75	12	1500	Tape and Reel	Level 1	MK
	MSOP-8	4.90 x 3.00 x 0.95	14.7	1500	Tape and Reel	Level 1	KS
	TDFN44-16	4.00 x 4.00 x 0.75	16	1500	Tape and Reel	Level 1	XN
	TQFN44-28	4.00 x 4.00 x 0.75	16	1500	Tape and Reel	Level 1	BJ
	QFN44-24	4.00 x 4.00 x 0.93	16	1500	Tape and Reel	Level 1	SK
	QFN44-16	4.00 x 4.00 x 0.93	16	1500	Tape and Reel	Level 1	SN
	TQFN44-24	4.00 x 4.00 x 0.75	16	1500	Tape and Reel	Level 1	BK
	TQFN44-28-0.4	4.00 x 4.00 x 0.75	16	1500	Tape and Reel	Level 1	NJ

Power Management Products

Classification Package	Package Name	Package Dimensions (L x W x H)	PCB Footprint (mm ²)	Packing Standard		Moisture Sensitivity Level (MSL)	Package Classification Suffix
				Quantity/Reel	Packing Method		
	SOT89	4.50 x 4.095 x 1.50	18.43	1000	Tape and Reel	Level 1	QY
	TQFN55-40	5.00 x 5.00 x 0.75	18.75	1000	Tape and Reel	Level 1	IC
	TSSOP-8	6.40 x 3.00 x 1.20	19.2	2500	Tape and Reel	Level 1	HS
	TQFN45-24	5.00 x 4.00 x 0.75	20	1500	Tape and Reel	Level 1	FK
	TQFN56-42	5.00 x 6.00 x 0.75	22.5	1000	Tape and Reel	Level 1	CG
	TQFN77-48	7.00 x 7.00 x 0.50	24.5	1000	Tape and Reel	Level 1	SZ
	SOP-8	4.90 x 6.00 x 1.55	29.4	2500	Tape and Reel	Level 1	AS
	TQFN55-36	5.50 x 5.50 x 0.75	30.25	2000	Tape and Reel	Level 1	IH
	T0-92	17.38 x 5.50 x 3.57	60.2	2000	Tape and Reel	Level 3	LY

WARRANTY / ORDER INFORMATION

How to Order

To order products from this brochure or for additional information, please contact your local representative, distributor, or contact us directly.

A worldwide list of sales offices as well as representatives and distributors appears at the back of this brochure. Please provide part numbers, quantities, and any additional information that will help us expedite your order.

Warranty

Skyworks provides world-class warranty coverage for all products purchased.

A full statement of Terms and Conditions of Sales is included with the order acknowledgment.

Customer Satisfaction

As an integral part of our total quality management, Skyworks primary focus is customer satisfaction. Our reputation with customers for impeccable quality is the result of an aggressive, ongoing Total Quality Management Program in which each employee accepts responsibility for continuously improving the company's products, processes, and procedures.

To our customers, Skyworks is a trusted partner. We work closely with you to provide product solutions that best achieve your design and manufacturing objectives. Skyworks has a worldwide network of sales representatives, distributors, and experienced application engineers ready to work with you towards your specific product requirements.

Terms of Sale

For minimum order requirements, fees, or charges, please contact your local sales representatives or contact us directly. A complete set of Skyworks Terms and Conditions of Sales is available upon request.

Returns

Skyworks requires a Returned Material Authorization (RMA) number prior to returning any product. Please contact your sales representative or contact us directly so that we may help you with your request in the quickest and most efficient manner.

Notice

The information contained in this brochure is subject to change without notice. Skyworks reserves the right to change specifications, designs, and any other information in this brochure at any time, without notice, and assumes no responsibility for errors and/or omissions.

PART NUMBER INDEX

Part No.	Page No.	Part No.	Page No.	Part No.	Page No.	Part No.	Page No.
AA103-72LF	24, 25	AAT2403A	101	AAT3112	100	AAT3670	93
AA104-73LF	24, 25	AAT2404	96	AAT3113	106	AAT3672	93
AA106-86LF	25	AAT2405	102	AAT3114	106	AAT3673	93
AA116-72LF	24, 25	AAT2428	101	AAT3119	106	AAT3681	94
AAT1106	96	AAT2430A	101	AAT3120	106	AAT3681A	94
AAT1110	96	AAT2430A-1	101	AAT3121	106	AAT3682	94
AAT1112	96	AAT2430B	101	AAT3122	106	AAT3683	94
AAT1120	96	AAT2430C	101	AAT3123	106	AAT3685	94
AAT1121	96	AAT2469	101	AAT3124	106	AAT3686	94
AAT1123	96	AAT2491	102	AAT3125	96	AAT3687	94
AAT1126	96	AAT2499	101	AAT3128	104	AAT3688	94
AAT1130	96	AAT2500*	97	AAT3129	104	AAT3689	94
AAT1138	96	AAT2500M	97	AAT3131	106	AAT3690	94
AAT1141	96	AAT2503	97	AAT3132	106	AAT3691	94
AAT1142	96	AAT2504	97	AAT3134	106	AAT3692	94
AAT1143	96	AAT2505	98	AAT3140	106	AAT3693	94
AAT1145	97	AAT2506	98	AAT3141	106	AAT3696	94
AAT1146	97	AAT2510	98	AAT3142	106	AAT3697	94
AAT1147	97	AAT2511	98	AAT3143	106	AAT3698	94
AAT1149	97	AAT2512	98	AAT3150	106	AAT3783	94
AAT1149A	97	AAT2513	98	AAT3151	106	AAT4250	112
AAT1149B	97	AAT2514	98	AAT3151B	106	AAT4252A	112
AAT1150	97	AAT2515	98	AAT3152	106	AAT4280	112
AAT1151	97	AAT2522	98	AAT3155	106	AAT4280A	112
AAT1153	97	AAT2550	108	AAT3156	107	AAT4282A	112
AAT1154	97	AAT2552	108	AAT3157	107	AAT4282B	112
AAT1155	97	AAT2554	108	AAT3158	107	AAT4285	112
AAT1157	97	AAT2556	108	AAT3159	107	AAT4290	111
AAT1160	97	AAT2557	108	AAT3164	107	AAT4290A	111
AAT1161	97	AAT2601	108	AAT3166	107	AAT4291	111
AAT1162	97	AAT2601A	108	AAT3167	107	AAT4292	111
AAT1171	97	AAT2601B	108	AAT3169	107	AAT4295	104
AAT1184	97	AAT2603	108	AAT3170	100	AAT4296	111
AAT1185	97	AAT2605	108	AAT3171	100	AAT4297	104
AAT1189	97	AAT2606	108	AAT3172	100	AAT4298	111
AAT1210	96	AAT2608	108	AAT3174	100	AAT4601	110
AAT1217	96	AAT2608A	108	AAT3175	100	AAT4601A	110
AAT1218	96	AAT2610	108	AAT3176	100	AAT4608	110
AAT1219	96	AAT2612	108	AAT3176A	100	AAT4610	110
AAT1230	96, 104	AAT2614	109	AAT3177	100	AAT4610A	110
AAT1231	105	AAT2630	109	AAT3177A	100	AAT4610B	110
AAT1232	96, 104	AAT2687	98	AAT3183	98	AAT4611	110
AAT1235	105	AAT2688	98	AAT3190	104	AAT4614	110
AAT1236	105	AAT2689	98	AAT3192	107	AAT4616	110
AAT1239-1	105	AAT2713	98	AAT3193-1	107	AAT4616A	110
AAT1270	100	AAT2749	98	AAT3193-4	107	AAT4618	110
AAT1271	100	AAT2782	98	AAT3194	107	AAT4620	95, 110
AAT1272	100	AAT2783	98	AAT3195	107	AAT4621	95, 110
AAT1274	100	AAT2784	98	AAT3200	99	AAT4625	110
AAT1275	96	AAT2785	98	AAT3215	99	AAT4626	110
AAT1275A	96	AAT2786	98	AAT3218	99	AAT4631	110
AAT1276	96	AAT2789	98	AAT3220	99	AAT4631	110
AAT1277	100	AAT2803	103	AAT3221	99	AAT4631-1	110
AAT1278	100	AAT2822	104	AAT3222	99	AAT4644	110
AAT1282	100	AAT2823	104	AAT3223	99	AAT4650	109
AAT1290	100	AAT2842	103	AAT3236	99	AAT4670	109
AAT1401	105	AAT2845	103	AAT3237	99	AAT4672	109
AAT1402	105	AAT2845A	103	AAT3238	99	AAT4674	109
AAT1403	105	AAT2846	103	AAT3242	99	AAT4681	93
AAT1405	102	AAT2847	103	AAT3244	99	AAT4684	111
AAT1407	102	AAT2848	103	AAT3258	99	AAT4685	111
AAT1409	102	AAT2856	103	AAT3340	107	AAT4686	111
AAT1410	105	AAT2861	103	AAT3351	107	AAT4687	111
AAT1451	102	AAT2862	103	AAT3369-1	107	AAT4687-1	111
AAT2113B	97	AAT2863	103	AAT3510	112	AAT4702	110
AAT2114A	97	AAT2866	103	AAT3515	112	AAT4710	95
AAT2120	97	AAT2868	103	AAT3517	112	AAT4712	95
AAT2138	97	AAT2869	103	AAT3518	112	AAT4900	109
AAT2146	97	AAT2870	103	AAT3522	112	AAT4901	109
AAT2146W	97	AAT2893	103	AAT3524	112	AAT4902	109
AAT2148	97	AAT3103	106	AAT3532	112	AAT4910	109
AAT2153	97	AAT3103-1	106	AAT3601	109	AAT5101	93
AAT2158	97	AAT3103-2	106	AAT3603	109	AAT5102	93
AAT2215	96	AAT3104-1	106	AAT3603A	109	AHK1421	105
AAT2400	101	AAT3104-2	106	AAT3604B	109	AHK3292	108
AAT2401	101	AAT3105	106	AAT3608	109	AHK3293	108
AAT2402M	101	AAT3110	106	AAT3620	95	AHK3294	108
AAT2402S	101	AAT3111	106	AAT3663	93	AHK3296	108

Part No.	Page No.	Part No.	Page No.	Part No.	Page No.	Part No.	Page No.
APD0505-000	40	ATN3590-00	27, 116	CLA4607-219	35	DME2333-230	48
APD0505-203	40	ATN3590-01	27, 116	CLA4607-240	35	DME2333-250	48
APD0505-210	40	ATN3590-02	27, 116	CLA4608-000	35	DME2458-000	52
APD0505-219	40	ATN3590-03	27, 116	CLA4608-085LF	34	DME2458-220	48
APD0505-240	40	ATN3590-04	27, 116	CLA4608-203	35	DME2458-230	48
APD0510-000	40	ATN3590-05	27, 116	CLA4608-210	35	DME2459-000	54
APD0510-203	40	ATN3590-06	27, 116	CLA4608-219	35	DME2459-224	50
APD0510-210	40	ATN3590-07	27, 116	CLA4608-240	35	DME2459-234	50
APD0510-219	40	ATN3590-08	27, 116	CLA4609-000	35	DME2829-000	52
APD0510-240	40	ATN3590-09	27, 116	CLA4609-086LF	33, 34	DME2829-222	49
APD0520-000	40	ATN3590-10	27, 116	CLA4609-203	35	DME2829-252	49
APD0520-203	40	ATN3590-12	27, 116	CLA4609-210	35	DME2830-000	52
APD0520-210	40	ATN3590-15	27, 116	CLA4609-219	35	DME2830-222	49
APD0520-219	40	ATN3590-20	27, 116	CLA4609-240	35	DME2830-232	49
APD0520-240	40	ATN3590-30	27, 116	CLA4610-000	35	DME2830-252	49
APD0805-000	40	AV101-12LF	28	CLA4610-085LF	34	DME2831-000	52
APD0805-203	40	AV102-12LF	28	CLA4610-203	35	DME2831-222	49
APD0805-210	40	AV111-12LF	28	CLA4610-210	35	DME2831-232	49
APD0805-219	40	AV113-12LF	28	CLA4610-219	35	DME2838-000	53
APD0805-240	40	AX508	8	CLA4610-240	35	DME2838-221	50
APD0810-000	40	CDB7619-000	55	CME7660-000	55	DME2850-000	54
APD0810-203	40	CDB7619-203	48	CME7660-203	48	DME2850-225	51
APD0810-210	40	CDB7619-207	48	CME7660-207	48	DME2850-255	51
APD0810-219	40	CDB7620-000	55	CX77144	7	DME2851-000	54
APD0810-240	40	CDB7620-203	48	DC08-73LF	114	DME2851-225	51
APD1505-203	40	CDB7620-207	48	DC09-73LF	114	DME2851-235	51
APD1505-210	40	CDC7630-000	55	DC16-73LF	114	DME2857-000	54
APD1505-219	40	CDC7630-203	48	DC18-73LF	114	DME2857-224	50
APD1505-240	40	CDC7630-207	48	DC25-73LF	114	DME2857-254	50
APD1505 Series	40	CDC7631-000	55	DD02-999LF	114	DME2858-000	54
APD1510-000	40	CDC7631-203	48	DDB2265-000	55	DME2858-224	50
APD1510-203	40	CDC7631-207	48	DDB2265-220	51	DME2858-254	50
APD1510-210	40	CDE7618-000	55	DDB2265-230	51	DME2859-000	54
APD1510-219	40	CDE7618-203	48	DDB2265-250	51	DME2859-224	50
APD1510-240	40	CDE7618-207	48	DDB2503-000	55	DME2859-234	50
APD1520-000	40	CDF7621-000	55	DDB2503-220	51	DME2859-254	50
APD1520-203	40	CDF7621-203	48	DDB2503-230	51	DME2864-000	53
APD1520-210	40	CDF7621-207	48	DDB2503-250	51	DME2864-223	49
APD1520-219	40	CDF7623-000	55	DDB2504-000	55	DME2957-000	52
APD1520-240	40	CDF7623-203	48	DDB2504-220	51	DME2957-220	48
APD2220-000	43	CDF7623-207	48	DDB2504-230	51	DME2957-250	48
APD2220-203	43	CDP7624-000	55	DDB2504-250	51	DME3927-000	56
APD2220-210	43	CDP7624-203	48	DDC2353-000	55	DME3930-000	56
APD2220-219	43	CDP7624-207	48	DDC2353-220	51	DME3933-000	56
APD2220-240	43	CLA4601-000	35	DDC2353-250	51	DME3936-000	56
AS177-86LF	121	CLA4601-203	35	DDC2354-000	55	DME3939-000	57
AS179-000	121	CLA4601-210	35	DDC2354-220	51	DME3939-257	51
AS179-92LF	119, 120, 121	CLA4601-219	35	DDC2354-250	51	DME3943-000	56
AS183-92LF	121	CLA4601-240	35	DME2029-000	54	DME3946-000	57
AS186-302LF	121	CLA4602-000	35	DME2029-225	51	DMF2011-000	54
AS192-000	123	CLA4602-203	35	DME2029-255	51	DMF2011-224	50
AS193-000	121	CLA4602-210	35	DME2031-000	54	DMF2011-234	50
AS193-73LF	119, 121	CLA4602-219	35	DME2031-225	51	DMF2011-254	50
AS195-306LF	125	CLA4602-240	35	DME2031-235	51	DMF2012-000	54
AS204-80LF	120, 123	CLA4603-000	35	DME2031-255	51	DMF2012-224	50
AS211-334	121	CLA4603-085LF	33, 34	DME2050-000	52	DMF2012-234	50
AS213-92LF	121	CLA4603-203	35	DME2050-222	49	DMF2012-254	50
AS215-92LF	121	CLA4603-210	35	DME2050-252	49	DMF2076-000	54
AS218-000	124	CLA4603-219	35	DME2127-000	52	DMF2076-225	51
AS221-000	123	CLA4603-240	35	DME2127-220	48	DMF2076-255	51
AS221-306LF	123	CLA4604-000	35	DME2127-250	48	DMF2077-000	54
AS222-92LF	121	CLA4604-203	35	DME2205-000	53	DMF2077-225	51
AS225-313LF	121	CLA4604-210	35	DME2205-223	49	DMF2077-255	51
AS227-000	123	CLA4604-219	35	DME2205-253	49	DMF2078-000	54
AS227-099LF	123	CLA4604-240	35	DME2206-000	53	DMF2078-225	51
AS236-321LF	124	CLA4605-000	35	DME2206-223	49	DMF2078-235	51
ATN3580-01	26, 115	CLA4605-085LF	34	DME2206-253	49	DMF2078-255	51
ATN3580-02	26, 115	CLA4605-203	35	DME2207-000	53	DMF2182-000	53
ATN3580-03	26, 115	CLA4605-210	35	DME2207-223	49	DMF2182-223	49
ATN3580-04	26, 115	CLA4605-219	35	DME2207-253	49	DMF2182-253	49
ATN3580-05	26, 115	CLA4605-240	35	DME2282-000	53	DMF2183-000	53
ATN3580-06	26, 115	CLA4606-000	35	DME2282-221	50	DMF2183-223	49
ATN3580-07	26, 115	CLA4606-085LF	33, 34	DME2282-251	50	DMF2183-253	49
ATN3580-08	26, 115	CLA4606-203	35	DME2283-000	53	DMF2184-000	53
ATN3580-09	26, 115	CLA4606-210	35	DME2283-221	50	DMF2184-223	49
ATN3580-10	26, 115	CLA4606-219	35	DME2283-251	50	DMF2184-253	49
ATN3580-12	26, 115	CLA4606-240	35	DME2284-000	53	DMF2185-000	53
ATN3580-15	26, 115	CLA4607-000	35	DME2284-221	50	DMF2185-221	50
ATN3580-20	26, 115	CLA4607-085LF	34	DME2284-251	50	DMF2185-251	50
ATN3580-30	26, 115	CLA4607-203	35	DME2333-000	52	DMF2186-000	53
ATN3580-40	26, 115	CLA4607-210	35	DME2333-220	48	DMF2186-221	50

Part Number Index

Part No.	Page No.	Part No.	Page No.	Part No.	Page No.	Part No.	Page No.
DMF2186-251	50	DMJ2455-000	54	MAFR-000630-000001	30	SE2600S	18
DMF2187-000	53	DMJ2455-224	50	MAFR-000631-000001	30	SE2601T	18
DMF2187-221	50	DMJ2455-234	50	MAFR-000632-000001	30	SE2603L	83
DMF2187-251	50	DMJ2502-000	54	MAFR-000633-000001	31	SE2604L	17
DMF2344-000	52	DMJ2502-224	50	MAFR-000644-000001	30	SE2605L	17
DMF2344-220	48	DMJ2502-254	50	MAFR-000645-000001	29	SE2609L	17
DMF2344-230	48	DMJ2667-000	54	MAFR-000649-000001	30	SE2611T	84
DMF2344-250	48	DMJ2667-224	50	MAFR-000650-000001	30	SE2613T	84
DMF2454-000	54	DMJ2667-234	50	MAFR-000653-000001	30	SE2614BT	84
DMF2454-224	50	DMJ2667-254	50	MAFR-000654-000001	30	SE2620T	84
DMF2454-234	50	DMJ2768-000	54	MAFR-000657-000001	31	SE2621L	84
DMF2820-000	52	DMJ2768-225	51	MAFR-000662-000001	31	SE2623L	17
DMF2820-220	48	DMJ2768-235	51	MAFR-000663-000001	30	SE5003L	18
DMF2820-250	48	DMJ2768-255	51	MAFR-000667-000001	29	SE5003L1-R	18
DMF2821-000	52	DMJ2777-000	52	MAFR-000668-000001	29	SE5004L	18
DMF2821-220	48	DMJ2777-220	48	MAFR-000677-000001	29	SE5005L	18
DMF2821-250	48	DMJ2777-250	48	MAFR-000688-000001	30	SE5006L	84
DMF2822-000	52	DMJ2823-000	52	PD4W09-12LF	118	SE5007BT	84
DMF2822-220	48	DMJ2823-220	48	PD4W09-59LF	118	SE5007T	84
DMF2822-230	48	DMJ2823-250	48	PD4W18-12LF	118	SE5008L	19
DMF2826-000	52	DMJ2824-000	52	PD4W18-59LF	118	SE5012T	85
DMF2826-222	49	DMJ2824-220	48	PD09-73LF	117	SE5023L	18
DMF2826-252	49	DMJ2824-230	48	PD15-73LF	117	SE5501L	86
DMF2827-000	52	DMJ2824-250	48	PD16-73LF	117	SE5502L	86
DMF2827-222	49	DMJ2825-000	52	PD18-73LF	117	SE5503A	86
DMF2827-232	49	DMJ2825-220	48	PD19-73LF	117	SE5510T	86
DMF2827-252	49	DMJ2825-230	48	PD22-73LF	117	SE5511T	86
DMF2828-000	52	DMJ2832-000	52	PS088-315	118	SE5512L	86
DMF2828-222	49	DMJ2832-222	49	SC00080912	113	SE5516A	86
DMF2828-232	49	DMJ2832-232	49	SC00120912	113	SKY12146-321LF	28
DMF2834-000	53	DMJ2832-252	49	SC00180912	113	SKY12207-306LF	122
DMF2834-223	49	DMJ2833-000	52	SC00260912	113	SKY12207-478LF	122
DMF2835-000	52	DMJ2833-222	49	SC00380912	113	SKY12208-306LF	122
DMF2835-222	49	DMJ2833-232	49	SC00560912	113	SKY12208-478LF	122
DMF2835-252	49	DMJ2836-000	53	SC00680912	113	SKY12209-478LF	122
DMF2837-000	53	DMJ2836-223	49	SC00820710	113	SKY12210-478LF	122
DMF2837-221	50	DMJ2839-000	53	SC00821518	113	SKY12211-478LF	122
DMF2848-000	54	DMJ2839-221	50	SC01000710	113	SKY12212-478LF	122
DMF2848-225	51	DMJ2852-000	54	SC01000912	113	SKY12213-478LF	122
DMF2848-235	51	DMJ2852-225	51	SC01001518	113	SKY12215-478LF	122
DMF2865-000	54	DMJ2852-235	51	SC01500912	113	SKY12228-12LF	28
DMF2865-224	50	DMJ2990-000	54	SC01501518	113	SKY12230-12LF	28
DMF2865-254	50	DMJ2990-224	50	SC02201518	113	SKY12232-21	28
DMF3926-000	56	DMJ2990-254	50	SC03301518	113	SKY12233-11	28
DMF3929-000	56	DMJ3928-000	56	SC04701518	113	SKY12235-11	28
DMF3932-000	56	DMJ3931-000	56	SC06801518	113	SKY12236-11	28
DMF3935-000	56	DMJ3934-000	56	SC10002430	113	SKY12322-86LF	24, 25
DMF3938-000	57	DMJ3937-000	56	SC33303440	113	SKY12323-303LF	24, 25
DMF3938-257	51	DMJ3940-000	57	SC50004450	113	SKY12324-73LF	24, 25
DMF3942-000	56	DMJ3940-257	51	SC99906068	113	SKY12325-350LF	24, 25
DMF3945-000	57	DMJ3944-000	56	SE2425U	17	SKY12328-350LF	24, 25
DMJ2088-000	54	DMJ3947-000	57	SE2425U-R	20	SKY12329-350LF	25
DMJ2088-225	51	DMK2308-000	57	SE2431L	87	SKY12338-337LF	24, 25
DMJ2088-255	51	DMK2790-000	57	SE2432L	87	SKY12339-350LF	24, 25
DMJ2092-000	52	DSG9500-000	41	SE2433T-R	20	SKY12340-364LF	24, 25
DMJ2092-222	49	DSM8100-000	41	SE2435L	87	SKY12343-364LF	24, 25
DMJ2092-252	49	MAFR-000399-000001	29	SE2436L	87	SKY12345-362LF	24, 25
DMJ2093-000	52	MAFR-000409-000001	29	SE2438T	87	SKY12347-362LF	24, 25
DMJ2093-222	49	MAFR-000428-000001	29	SE2442L	87	SKY12348-350LF	24, 25
DMJ2093-252	49	MAFR-000430-000001	29	SE2521A60	83	SKY12349-362LF	25
DMJ2208-000	53	MAFR-000493-000001	29	SE2521A80	83	SKY12353-470LF	25
DMJ2208-223	49	MAFR-000514-000001	29	SE2527L	17	SKY12355-337LF	25
DMJ2208-253	49	MAFR-000533-000001	30	SE2528L	17	SKY12406-360LF	24, 25
DMJ2209-000	53	MAFR-000553-000001	30	SE2537L	18	SKY12407-321LF	24, 25
DMJ2209-223	49	MAFR-000554-000001	30	SE2547A	86	SKY12408-321LF	25
DMJ2209-253	49	MAFR-000562-000001	30	SE2548A	86	SKY13267-321LF	124
DMJ2210-000	53	MAFR-000565-000001	30	SE2564L	83	SKY13268-344LF	121
DMJ2210-223	49	MAFR-000566-000001	30	SE2565T	17	SKY13270-92LF	120, 121
DMJ2210-253	49	MAFR-000569-000001	30	SE2567L	18	SKY13272-340LF	120, 127
DMJ2246-000	53	MAFR-000575-000001	31	SE2568L	17	SKY13274-349LF	121
DMJ2246-221	50	MAFR-000578-000001	29	SE2568U	17	SKY13276-334	121
DMJ2246-251	50	MAFR-000583-000001	31	SE2574BL-R	17	SKY13278-313LF	121
DMJ2303-000	53	MAFR-000589-000001	31	SE2574L	17	SKY13286-359LF	120, 121
DMJ2303-221	50	MAFR-000592-000001	30	SE2576L	17	SKY13290-000	121
DMJ2303-251	50	MAFR-000601-000001	30	SE2577L	86	SKY13290-099	121
DMJ2304-000	53	MAFR-000608-000001	29	SE2580L	18	SKY13290-313LF	120, 121
DMJ2304-221	50	MAFR-000613-000001	29	SE2593A20	86	SKY13292-365LF	127
DMJ2304-251	50	MAFR-000618-000001	30	SE2594L	86	SKY13293-340LF	127
DMJ2312-000	54	MAFR-000627-000001	29	SE2595L	86	SKY13296-340LF	123
DMJ2312-225	51	MAFR-000628-000001	29	SE2597L	17	SKY13298-360LF	120, 121
DMJ2312-255	51	MAFR-000629-000001	29	SE2598L	17	SKY13299-321LF	120, 121

Part No.	Page No.	Part No.	Page No.	Part No.	Page No.	Part No.	Page No.
SKY13306-313LF	121	SKY13492	126	SKY65388-11	23	SKY73103-11	92
SKY13309-370LF	123	SKY13498	126	SKY65404-31	7, 19, 20	SKY73112-11	92
SKY13314-374LF	121	SKY13526-485LF	125	SKY65405-21	7, 20	SKY73120	92
SKY13316-12LF	120	SKY13529-11	82	SKY65534-11	84	SKY73121-11	92
SKY13317-373LF	119, 120, 123	SKY13530	127	SKY65535	85	SKY73126-31	92
SKY13318-321LF	119, 124	SKY13532	127	SKY65601-477LF	20	SKY73134-11	92
SKY13319-374LF	121	SKY13535	127	SKY65602-477LF	20	SKY73208-11	90
SKY13320-374LF	121	SKY13568-11	82	SKY65702-11	88	SKY73212-11	90
SKY13321-360LF	121	SKY13569-11	82	SKY65704-22	88	SKY73420-11	89
SKY13322-375LF	119, 120, 123	SKY14151-350LF	120, 123	SKY65708-11	88	SKY73421-11	89
SKY13323-378LF	121	SKY16406-381LF	117	SKY65708-51	88	SKY73422-11	89
SKY13327-365LF	127	SKY16601-555LF	35	SKY65709-51	88	SKY74038-21	92
SKY13330-397LF	121	SKY16602-632LF	35	SKY65709-81	88	SKY77161	15
SKY13335-381LF	121	SKY18106-455LF	83, 126	SKY65900-11	17	SKY77166	7
SKY13344-378LF	122	SKY18108-11	83, 126	SKY65971-11	20	SKY77174	15
SKY13345-368LF	123	SKY18120-11	83, 126	SKY65981-11	20	SKY77176	7
SKY13346-368LF	123	SKY19001-001	127	SKY66001-11	19	SKY77192-14	7
SKY13347-360LF	120	SKY42068-355LF	88	SKY66002-11	19	SKY77195	16
SKY13348-374LF	119, 122	SKY65008	22	SKY66005-11	19	SKY77196	16
SKY13350-385LF	122	SKY65009-70LF	22	SKY66008-11	19	SKY77197	16
SKY13351-378LF	119, 120, 122	SKY65013-70LF	22	SKY66013-11	19	SKY77198-12	15
SKY13354-368LF	125	SKY65013-214LF	22	SKY66100-11	87	SKY77336	9
SKY13355-374LF	119, 124	SKY65014-70LF	22	SKY66101-11	87	SKY77344	9
SKY13358-388LF	125	SKY65015-70LF	22	SKY66104-11	87	SKY77346	9
SKY13362-389LF	83, 126	SKY65015-92LF	23	SKY66108	87	SKY77351	9
SKY13364-389LF	83, 126	SKY65016-70LF	23	SKY66109-11	87	SKY77354	9
SKY13366-378LF	122	SKY65017-70LF	23	SKY67012-396LF	7, 20	SKY77413	75
SKY13369-365LF	127	SKY65045-70LF	22	SKY67013-396LF	7, 20	SKY77425	75
SKY13370-374LF	119, 122	SKY65047-360LF	20	SKY67014-396LF	7, 20	SKY77433	75
SKY13372-467LF	122	SKY65048-360LF	20	SKY67015-396LF	6, 20	SKY77436	75
SKY13373-460LF	123	SKY65050-372LF	20	SKY67021-396LF	6, 21	SKY77437	75
SKY13374-397LF	122	SKY65080-70LF	22	SKY67022-396LF	6, 21	SKY77446	15
SKY13377-313LF	122	SKY65081-70LF	22	SKY67023-396LF	6, 21	SKY77447	15
SKY13380-350LF	123	SKY65094-360LF	22	SKY67100-396LF	6, 21	SKY77448	15
SKY13381-374LF	119, 124	SKY65095-360LF	22	SKY67101-396LF	6, 21	SKY77449	9
SKY13384-350LF	123	SKY65099-360LF	22	SKY67102-396LF	6, 21	SKY77455	79
SKY13385-460LF	119, 123	SKY65111-348LF	20	SKY67105-306LF	6, 21	SKY77456	79
SKY13386-000	123	SKY65112-84LF	22	SKY67106-306LF	6, 21	SKY77457	79
SKY13388-465LF	123	SKY65113-84LF	22	SKY67107-306LF	6, 21	SKY77458	79
SKY13392-359LF	123	SKY65116	20	SKY67110-396LF	6, 21	SKY77460	15
SKY13395-397LF	124	SKY65120	19	SKY67111-396LF	6, 21	SKY77461	16
SKY13396-397LF	124	SKY65124	19	SKY67130-396LF	22	SKY77517	77
SKY13397-388LF	125	SKY65126-21	19	SKY67150-396LF	21	SKY77521	76
SKY13398-000	123	SKY65127	19	SKY67151-396LF	6, 21	SKY77526	76
SKY13399-468LF	125	SKY65129-11	19	SKY67153-396LF	21	SKY77527	76
SKY13404-466LF	83, 126	SKY65131	17	SKY67161-306LF	6, 21	SKY77529	76
SKY13405-490LF	122, 124	SKY65152-11	17	SKY67175-306LF	21	SKY77544	76
SKY13406-389LF	83, 126	SKY65162-70LF	17, 22	SKY67215-11	21	SKY77546	76
SKY13408-465LF	123	SKY65170-21	19	SKY67216-11	21	SKY77549	76
SKY13410-365LF	127	SKY65171-21	19	SKY67221-11	21	SKY77552	77
SKY13411-374LF	124	SKY65173-70LF	22	SKY67226-11	21	SKY77554-21	78
SKY13412-487LF	83, 126	SKY65174-21	17	SKY72300-21	92	SKY77558	76
SKY13413-488LF	126	SKY65175	23	SKY72300-362	92	SKY77559	78
SKY13414-485LF	125	SKY65185	23	SKY72301-22	92	SKY77562	78
SKY13415-485LF	125	SKY65186-11	23	SKY72310-362LF	92	SKY77570	76
SKY13416-485LF	125	SKY65187-11	23	SKY73012	90	SKY77570-12	81
SKY13417-485LF	125	SKY65249-11	84	SKY73020-11	89	SKY77573-12	76
SKY13418-485LF	83, 125	SKY65313-21	87	SKY73021	89	SKY77573-21	77
SKY13419-365LF	127	SKY65326-11	87	SKY73022-11	89	SKY77573-31	77
SKY13421-486LF	125	SKY65336-11	87	SKY73023-11	89	SKY77576-11	78
SKY13431-374LF	122	SKY65337-11	87	SKY73025-11	89	SKY77577-11	77
SKY13434-002	125	SKY65338-21	87	SKY73032	88	SKY77580	78
SKY13437-11	126	SKY65342-11	87	SKY73033-11	88	SKY77582	78
SKY13438-374LF	124	SKY65343-11	87	SKY73035-11	88	SKY77584	78
SKY13441	126	SKY65344-21	87	SKY73049-350LF	88, 89	SKY77585	78
SKY13442-553LF	125	SKY65352-11	87	SKY73062-11	89	SKY77589	78
SKY13445-000	125	SKY65364-11	87	SKY73063	89	SKY77590-11	77
SKY13445-368LF	125	SKY65366-11	87	SKY73069-11	89	SKY77590-21	77
SKY13446-374LF	122	SKY65367-11	87	SKY73070	88	SKY77590-51	81
SKY13448-001	122	SKY65369-11	23	SKY73075-21	89	SKY77590-61	81
SKY13453-385LF	122	SKY65370-11	23	SKY73077-459LF	90	SKY77592	81
SKY13454	126	SKY65371-11	23	SKY73078-459LF	90	SKY77593	82
SKY13455-31	83, 126	SKY65372-11	23	SKY73084-11	89	SKY77594	82
SKY13456-11	127	SKY65373-11	23	SKY73085-11	89	SKY77597-11	82
SKY13472-460LF	122	SKY65374-11	23	SKY73086	89	SKY77601	11
SKY13473-12-569LF	125	SKY65375-11	23	SKY73087-11	89	SKY77603	11
SKY13473-569LF	125	SKY65376-11	23	SKY73089-11	89	SKY77604-11	11
SKY13477-001A	125	SKY65378-11	87	SKY73090-21	89	SKY77606	11
SKY13484	127	SKY65385-11	23	SKY73092-459LF	90	SKY77615	11
SKY13488	126	SKY65386-11	23	SKY73100	92	SKY77619	12
SKY13491-21	126	SKY65387-11	23	SKY73101-11	92	SKY77621-11	12

Part Number Index

Part No.	Page No.	Part No.	Page No.	Part No.	Page No.	Part No.	Page No.
SKY77621-31	12	SKY85712-11	85	SMP1321-003LF	37	SMS3923 Series	46
SKY77621-51	12	SKY85712-21	85	SMP1321-004LF	37	SMS3924-005LF	46
SKY77627-11	13	SKY85803	86	SMP1321-005LF	37	SMS3924-015LF	46
SKY77629	13	SKY87000-11	98	SMP1321-007LF	37	SMS3924-040LF	46
SKY77629-21	13	SKY87000-13	98	SMP1321-011LF	37	SMS3924-075LF	46
SKY77629-51	13	SKY87201-11	98	SMP1321-040LF	37	SMS3924-079LF	46
SKY77630	14	SKY87202	98	SMP1321-073LF	37	SMS3924 Series	46
SKY77631	14	SKY87222	98	SMP1321-074LF	37	SMS3925-040LF	46
SKY77632	14	SKY87250	98	SMP1321-075LF	37	SMS3925-079LF	46
SKY77701	15	SKY87608	98	SMP1321-079LF	37	SMS3926-022LF	47
SKY77702	15	SKY87609	98	SMP1321-099	40	SMS3926-023LF	47
SKY77703	15	SKYA21001	122	SMP1321 Series	37	SMS3926-099	58
SKY77704	15	SKYA21002	123	SMP1322-001LF	38	SMS3926 Series	47
SKY77705	16	SKYA21012	122	SMP1322-003LF	38	SMS3927-023LF	47
SKY77706	9	SKYA21013	122	SMP1322-004LF	38	SMS3927-099	58
SKY77707	9	SKYFR-000700	30	SMP1322-005LF	38	SMS3927 Series	47
SKY77708	9	SKYFR-000709	31	SMP1322-011LF	38	SMS3928-023LF	47
SKY77709	9	SKYFR-000727	31	SMP1322-016LF	38	SMS3928-099	58
SKY77731	9	SKYFR-000733	31	SMP1322-040LF	38	SMS3930-021LF	47
SKY77732	7	SKYFR-000736	30	SMP1322-074LF	38	SMS3931-021LF	47
SKY77733	9	SKYFR-000738	30	SMP1322-079LF	38	SMS7621-001LF	45
SKY77735	7	SKYFR-000742	31	SMP1322-099	40	SMS7621-005LF	33, 45
SKY77736	9	SKYFR-000748	31	SMP1322 Series	38	SMS7621-006LF	45
SKY77737	9	SKYFR-000779	31	SMP1324-087LF	36	SMS7621-015LF	45
SKY77741	16	SKYFR-000781	31	SMP1325-085LF	36	SMS7621-040LF	33, 45
SKY77742	16	SKYFR-000782	31	SMP1325-087LF	32, 36	SMS7621-060	33, 47
SKY77742-21	16	SKYFR-000788	31	SMP1330-005LF	33, 34	SMS7621-074LF	45
SKY77751-12	16	SKYFR-000812	31	SMP1330-007LF	34	SMS7621-075LF	45
SKY77752	16	SKYFR-000827	31	SMP1330-040LF	34	SMS7621-079LF	45
SKY77753	14	SKYFR-000848	31	SMP1330-085LF	33, 34	SMS7621-081LF	45
SKY77754-11	14	SKYFR-000855	31	SMP1330 Series	34	SMS7621-092	47
SKY77758	16	SMP1302-001LF	41	SMP1334-084LF	36, 42	SMS7621-517	45
SKY77761-11	9	SMP1302-003LF	41	SMP1340-003LF	38	SMS7621 Series	45
SKY77761-12	10	SMP1302-004LF	41	SMP1340-004LF	38	SMS7630-001LF	45
SKY77762	10	SMP1302-005LF	41	SMP1340-005LF	38	SMS7630-005LF	45
SKY77764	10	SMP1302-006LF	41	SMP1340-007LF	38	SMS7630-006LF	45
SKY77765	15	SMP1302-011LF	41	SMP1340-011LF	38	SMS7630-011LF	45
SKY77767	10	SMP1302-027LF	41	SMP1340-040LF	38	SMS7630-020LF	45
SKY77768	10	SMP1302-040LF	41	SMP1340-074LF	38	SMS7630-040LF	33, 45
SKY77771	10	SMP1302-074LF	41	SMP1340-075LF	38	SMS7630-061	33, 47
SKY77772-11	10	SMP1302-075LF	41	SMP1340-079LF	38	SMS7630-079LF	45
SKY77773	10	SMP1302-079LF	41	SMP1340-099	40	SMS7630-517	45
SKY77778-11	10	SMP1302-085LF	32, 36, 41	SMP1340 Series	38	SMS7630 Series	45
SKY77778-21	10	SMP1302-087LF	36, 41	SMP1345-003LF	39	SMSA3923-011LF	58
SKY77778-51	10	SMP1302-099	44	SMP1345-004LF	39	SMSA7621-060	58
SKY77778-61	10	SMP1302 Series	41	SMP1345-005LF	39	SMSA7630-061	58
SKY77781-11	10	SMP1304-001LF	42	SMP1345-040LF	32, 39	SMV1129-079LF	62
SKY77806	79	SMP1304-004LF	42	SMP1345-075LF	39	SMV1129 Series	62
SKY77807	10	SMP1304-005LF	42	SMP1345-079LF	39	SMV1130-001LF	61
SKY77814-11	10	SMP1304-006LF	42	SMP1345-087LF	36	SMV1130-011LF	61
SKY78010	79	SMP1304-007LF	42	SMP1345-518	39	SMV1130-040LF	61
SKY78011	79	SMP1304-011LF	42	SMP1345 Series	39	SMV1130-079LF	61
SKY78013	79	SMP1304-019LF	42	SMP1352-005LF	39	SMV1130 Series	61
SKY78015	80	SMP1304-027LF	42	SMP1352-011LF	39	SMV1135-004LF	61
SKY78021	80	SMP1304-079LF	42	SMP1352-040LF	39, 41	SMV1135 Series	61
SKY78022	80	SMP1304-085LF	36	SMP1352-079LF	32, 39	SMV1139-011LF	62
SKY78025	80	SMP1304-087LF	36	SMP1352 Series	39	SMV1139 Series	62
SKY78026	80	SMP1304-099	44	SMP1353-099	40	SMV1142-011LF	62
SKY78027-12	80	SMP1304 Series	42	SMP1371-087LF	36	SMV1142 Series	62
SKY81279	100	SMP1307-001LF	43	SMPA1302-079LF	41, 44	SMV1143-011LF	62
SKY81290	100	SMP1307-003LF	43	SMPA1304-011LF	44	SMV1143 Series	62
SKY81292	100	SMP1307-004LF	32, 43	SMPA1304-019LF	44	SMV1144-011LF	62
SKY81296	100	SMP1307-005LF	43	SMPA1320-079LF	41	SMV1144 Series	62
SKY81452-13	105	SMP1307-006LF	43	SMS325-079LF	46	SMV1145-011LF	62
SKY81453-13	105	SMP1307-011LF	43	SMS1546-005LF	45	SMV1145-079LF	62
SKY84632	112	SMP1307-027LF	32, 43	SMS3922-001LF	46	SMV1145 Series	62
SKY85202-11	18	SMP1307-099	44	SMS3922-004LF	46	SMV1147-011LF	62
SKY85203-11	18	SMP1307 Series	43	SMS3922-005LF	46	SMV1147-079LF	62
SKY85302-11	84	SMP1320-001LF	37	SMS3922-011LF	46	SMV1147 Series	62
SKY85303-11	84	SMP1320-003LF	37	SMS3922-015LF	46	SMV1148-011LF	62
SKY85309-11	84	SMP1320-004LF	37	SMS3922-040LF	46	SMV1148 Series	62
SKY85402-11	18	SMP1320-007LF	37	SMS3922-079LF	33, 46	SMV1206-079LF	69
SKY85601-11	85	SMP1320-011LF	37	SMS3922 Series	46	SMV1211-001LF	63
SKY85606-11	19	SMP1320-040LF	32, 37	SMS3923-001LF	46	SMV1211 Series	63
SKY85608-11	19	SMP1320-074LF	37	SMS3923-005LF	46	SMV1212-001LF	63
SKY85702-11	85	SMP1320-075LF	37	SMS3923-011LF	46	SMV1212-004LF	63
SKY85703-11	85	SMP1320-077LF	37	SMS3923-015LF	46	SMV1212-074LF	63
SKY85706-11	85	SMP1320-079LF	37	SMS3923-040LF	46	SMV1212-079LF	63
SKY85707-21	85	SMP1320-099	40	SMS3923-079LF	46	SMV1212 Series	63
SKY85709-11	85	SMP1320 Series	37	SMS3923-081LF	46	SMV1213-001LF	63
SKY85710-11	85	SMP1321-001LF	37	SMS3923-517	46	SMV1213-004LF	63

Part No.	Page No.	Part No.	Page No.	Part No.	Page No.	Part No.	Page No.
SMV1213-011LF	63	SMV1253-040LF	65	SMV1763-079LF	71	TT4P2-1090P2-0610	134
SMV1213-040LF	63	SMV1253-079LF	65	SMV1770-040LF	71	TT4P3-0863P0-0585	135
SMV1213-074LF	63	SMV1253 Series	65	SMV1770-079LF	71	TT4P3-1030P2-1535	134
SMV1213-079LF	63	SMV1255-001LF	65	SMV1770 Series	71	TT4P3-1067P2-4420	134
SMV1213 Series	63	SMV1255-004LF	65	SMV1771-040LF	71	TT4P3-1227.6P1-2030	136
SMV1214-001LF	63	SMV1255-011LF	65	SMV1771-079LF	71	TT4P3-1575.42P2-2040	136
SMV1214 Series	63	SMV1255-040LF	65	SMV1771 Series	71	TT4P3-2120P2-6020	134
SMV1215-001LF	63	SMV1255-079LF	33, 65	SMV1801-079LF	68	TT4P3-2180P1-2540	135
SMV1215-011LF	63	SMV1255 Series	65	SMV1801 Series	68	TT4P3-2400P1-20015	136
SMV1215 Series	63	SMV1263-040LF	71, 72	SMV2019-000	73	TT4P3-3417P2-0220	136
SMV1220-079LF	71	SMV1263-074LF	71	SMV2019-040LF	70	TT4P3-3500P2-10020	136
SMV1231-011LF	64	SMV1263-079LF	71	SMV2019-079LF	70	TT4P4-1000P2-1030	136
SMV1231-040LF	64	SMV1263 Series	71	SMV2019-203	74	TT4P4-1880P0-6216	135
SMV1231-074LF	64	SMV1265-011LF	66	SMV2019-210	74	TT4P4-1960P0-6216	135
SMV1231-079LF	64	SMV1265-040LF	66	SMV2019-219	74	TT4P4-R1227.6-T1575.42	136
SMV1231 Series	64	SMV1265 Series	66	SMV2019-240	74	TT4P5-1090P0-1050	136
SMV1232-011LF	64	SMV1270-040LF	71	SMV2019 Series	70	TT4P5-2240P2-1032	135
SMV1232-040LF	33, 64	SMV1270-079LF	71	SMV2020-000	73	TT4P6-0860.5P0-1937	135
SMV1232-074LF	64	SMV1272-079LF	71	SMV2020-079LF	70	TT4P6-2122P0-2835	134
SMV1232-079LF	64	SMV1273-079LF	66	SMV2020-203	74	TT6P2-0770T-1215	134
SMV1232 Series	64	SMV1275-079LF	66	SMV2020-210	74	TT6P2-0902F-2518	135
SMV1233-001LF	64	SMV1276-079LF	66	SMV2020-219	74	TT6P2-0915T-2518	135
SMV1233-004LF	64	SMV1281-011LF	66	SMV2020-240	74	TT6P3-0445.25T-0145	136
SMV1233-011LF	64	SMV1281-079LF	66	SMV2020-Series	70	TT6P3-0730P3-1213	136
SMV1233-040LF	64	SMV1281 Series	66	SMV2021-000	73	TT6P3-0740P3-2020	136
SMV1233-074LF	64	SMV1283-011LF	66	SMV2021-203	74	TT6P3-0745.3P3-1920	136
SMV1233-079LF	64	SMV1283-040LF	66	SMV2021-210	74	TT6P3-0770T-1225	134
SMV1233 Series	64	SMV1283 Series	66	SMV2021-219	74	TT6P3-0770T-2020	134
SMV1234-001LF	64	SMV1405-000	60	SMV2021-240	74	TT6P3-0826.5P3-0520	136
SMV1234-004LF	64	SMV1405-040LF	33, 59	SMV2022-000	73	TT6P3-0827P3-0620	136
SMV1234-011LF	64	SMV1405-074LF	59	SMV2022-004LF	70	TT6P3-0836T-2520	135
SMV1234-040LF	33, 64	SMV1405-079LF	59	SMV2022-203	74	TT6P3-0860P3-2020	135
SMV1234-073LF	64	SMV1405-203	60	SMV2022-210	74	TT6P3-0860T-2020	135
SMV1234-079LF	64	SMV1405-210	60	SMV2022-219	74	TT6P3-0881F-2520	135
SMV1234 Series	64	SMV1405-219	60	SMV2022-240	74	TT6P3-0902T-2520	135
SMV1235-001LF	64	SMV1405-240	60	SMV2022 Series	70	TT6P3-0915T-2520	135
SMV1235-004LF	64	SMV1405 Series	59	SMV2023-000	73	TT6P3-0917F-1425	135
SMV1235-011LF	64	SMV1408-000	60	SMV2023-001LF	70	TT6P3-1030P2-1029	136
SMV1235-040LF	64	SMV1408-001LF	59	SMV2023-004LF	70	TT6P3-1080P2-0650	136
SMV1235-074LF	64	SMV1408-040LF	59	SMV2023-011LF	70	TT6P3-1090P2-1029	136
SMV1235-079LF	64	SMV1408-203	60	SMV2023-203	74	TT6P3-2140P2-6011	135
SMV1235 Series	64	SMV1408-210	60	SMV2023-210	74	TT6P3-2467P0-3330	135
SMV1236-001LF	64	SMV1408-219	60	SMV2023-219	74	TT6P4-0435P0-3019-NS	136
SMV1236-004LF	64	SMV1408-240	60	SMV2023-240	74	TT6P4-0509P7-0148	136
SMV1236-011LF	64	SMV1408 Series	59	SMV2023 Series	70	TT6P4-0722P4-4817	136
SMV1236-040LF	64	SMV1413-000	60	SMV2025-079LF	72	TT6P4-0770P0-1240	136
SMV1236-074LF	64	SMV1413-001LF	59	SMV2026-040LF	72	TT6P4-1080P4-7015	134
SMV1236-079LF	64	SMV1413-004LF	59	SMV2026-079LF	72	TT6P4-1090P2-1036	134
SMV1236 Series	64	SMV1413-074LF	59	SMV2201-040LF	73	TT6P4-2158P2-1422	134
SMV1237-001LF	64	SMV1413-079LF	33, 59	SMV2202-040LF	73	TT6P5-0765P0-11225	134
SMV1237 Series	64	SMV1413-203	60	SMV2203-040LF	73	TT6P5-0810P3-5030	136
SMV1245-011LF	66	SMV1413-210	60	SMV2204-040LF	73	TT6P5-0881.5P0-2530	136
SMV1245-079LF	66	SMV1413-219	60	SMV2205-040LF	73	TT6P5-1950P3-6040	136
SMV1245 Series	66	SMV1413-240	60	SMVA1211-001LF	74	TT6P5-1960P0-6025	135
SMV1247-011LF	65	SMV1413 Series	59	SMVA1248-079LF	74	TT6P5-2280P1-7032	135
SMV1247-040LF	33, 65	SMV1430-040LF	59	SMVA1253-079LF	74	TT6P6-0545P6-3022	136
SMV1247-074LF	65	SMV1430-079LF	59	SMVA1470-004LF	74	TT6P6-0750P0-5017	134
SMV1247-079LF	65	SMV1430 Series	59	SMVA1705-004LF	74	TT6P6-0889P3-4029	136
SMV1247 Series	65	SMV1470-004LF	66	TT3P2-1068P0-3507	134	TT6P6-1000P5-8530	136
SMV1248-001LF	65	SMV1470-007LF	66	TT3P2-1880P0-6010	135	TT6P6-1900P3-8035	135
SMV1248-040LF	65	SMV1493-000	60	TT3P3-0881.5P2-2530	135	TT6P6-2500P3-3635	134
SMV1248-074LF	65	SMV1493-079LF	59	TT3P3-1088P2-9015	136	TT6P10-R1950-T2140	135
SMV1248-079LF	65	SMV1493-203	60	TT3P3-1227.6P1-1030	136		
SMV1248 Series	65	SMV1493-210	60	TT3P3-1575.42P2-1030	136		
SMV1249-001LF	65	SMV1493-219	60	TT3P3-1880P0-6022	135		
SMV1249-003LF	65	SMV1493-240	60	TT3P3-1960P0-6022	135		
SMV1249-004LF	65	SMV1493 Series	59	TT3P3-1960P2-6030	135		
SMV1249-011LF	65	SMV1494-000	60	TT3P3-2400P1-1030	135		
SMV1249-040LF	65	SMV1494-079LF	59	TT3P3-2450P1-1445	135		
SMV1249-074LF	65	SMV1494-203	60	TT3P4-0836.5P2-2525	135		
SMV1249-079LF	33, 65	SMV1494-210	60	TT3P4-0881.5P2-2525	135		
SMV1249 Series	65	SMV1494-219	60	TT3P4-0895.5P2-3926	136		
SMV1251-001LF	65	SMV1494-240	60	TT3P4-0917P2-4524	136		
SMV1251-004LF	65	SMV1494 Series	59	TT3P4-1880P2-6020	135		
SMV1251-011LF	65	SMV1702-011LF	68	TT3P4-1880P2-6030	135		
SMV1251-040LF	65	SMV1705-000	73	TT3P4-2513P2-5055	136		
SMV1251-074LF	65	SMV1705-004LF	71	TT3P5-3687P1-7466	136		
SMV1251-079LF	65	SMV1705-040LF	71	TT4P2-0915P2-2620	135		
SMV1251 Series	65	SMV1705-079LF	71	TT4P2-1013P2-2020	134		
SMV1253-004LF	65	SMV1705 Series	71	TT4P2-1082.5P2-0720	134		
SMV1253-011LF	65	SMV1763-040LF	71	TT4P2-1082P2-0620	134		

SKYWORKS' SALES REPRESENTATIVES

AMERICAS

EASTERN USA

Alabama/Mississippi

Beacon Electronic Associates, Inc.
7500 Memorial Parkway, South
Suite 215M
Huntsville, AL 35802
Telephone: 1 (256) 881-5031
Email: datapa@beaconmail.com

Connecticut (Fairfield County), Delaware, New Jersey, New York, Pennsylvania (Eastern)

Beacon Electronic Associates, Inc.
115 Locust Grove Rd.
Rosemont, PA 19010
Telephone: 1 (610) 525 9783
Fax: 1 (610) 525 9783
Email: mmaz@beaconmail.com

Connecticut/Maine/Massachusetts/ New Hampshire/Rhode Island/Vermont

Advanced Technology Marketing
2 Courthouse Lane,
Suite 16
Chelmsford, MA 01824
Telephone: 1 (978) 458 0200
Fax: 1 (978) 458 7990
Email: atm@atmink.com

Florida

Beacon Electronic Associates, Inc.
1465 Waukon Circle
Casselberry, FL 32707
Telephone: 1 (407) 491 1679
Fax: 1 (407) 209 1482
Email: dyonchik@beaconmail.com

Georgia/Kentucky/Tennessee

Beacon Electronic Associates, Inc.
5887 Glenridge Dr.,
Suite 230
Atlanta, GA 30328
Telephone: 1 (404) 256 9640
Fax: 1 (404) 256 1398
Email: kmilligan@beaconmail.com

Maryland/Virginia/West Virginia

Beacon Electronic Associates, Inc.
8 Heritage Hills Ct.
Kingsville, MD 21087
Telephone: 1 (410) 299 6344
Fax: 1 (408) 538 9926
Email: jherbert@beaconmail.com

North Carolina/South Carolina

Beacon Electronic Associates, Inc.
127 Southwold Dr.
Cary, NC 27519
Telephone: 1 (919) 303 7129
Fax: 1 (425) 675 0868
Email: davery@beaconmail.com

Pennsylvania (Zip Codes 15000-16399, 16600-16899)

Cain-Forlaw Co.
7323 E. Main St.,
Suite B
Reynoldsberg, OH 43068
Telephone: 1 (847) 302 9898
Email: sales@cain-forlaw.com

MIDWESTERN USA

Arkansas/Louisiana/Oklahoma/Texas (except El Paso)

Cain-Forlaw Co.
1701 N. Greenville Ave.,
Suite 1101
Richardson, TX 75801
Telephone: 1 (972) 783 1849
Fax: 1 (847) 202 9896
Email: sales@cain-forlaw.com

Illinois/Indiana/Ohio/ Wisconsin (Eastern)/Michigan

Cain-Forlaw Co.
510 N. Plum Grove Rd.
Palatine, IL 60067
Telephone: 1 (847) 202 9898
Fax: 1 (847) 202 9896
Email: sales@cain-forlaw.com

Iowa/Kansas/Missouri/Nebraska

Cain-Forlaw Co.
1845 Ellis Blvd NW
Cedar Rapids, IA 52405
Telephone: 1 (319) 286 9898
Fax: 1 (847) 202-9896
Email: sales@cain-forlaw.com

Minnesota/North Dakota/South Dakota/ Wisconsin (Western)

Cain-Forlaw Co.
201 W. Travelers Trail,
Suite 20
Burnsville, MN 55337
Telephone: 1 (952) 882 4090
Fax: 1 (952) 882 4088
Email: sales@cain-forlaw.com

WESTERN USA

Arizona/New Mexico/El Paso, Texas and Bordering Cities of Nogales and Juarez, Mexico

Youngewirth & Olenick Associates
2925 East Riggs Rd.,
Suite 8-141
Chandler, AZ 85249
Telephone: 1 (800) 515 1554
Fax: 1 (800) 515 1574
Email: jbeard@yando.com

California (Northern)/Nevada

Disman Bakner
883 N. Shoreline Blvd.,
Suite C100
Mountain View, CA 94043
Telephone: 1 (650) 969 3010
Fax: 1 (650) 969 5620
Email: sales@dbsales.com

Colorado/Utah

Crestone Technology Group
9033 E. Easter Place,
Suite 201
Englewood, CO 80112
Telephone: 1 (303) 280 7202
Fax: 1 (303) 280 7702
Email: info@crestonegroup.com

Washington/Oregon/Idaho/ Montana/Wyoming

Stratus Technical Sales, LLC
608 State St.,
Suite 110
Kirkland, WA 98033
Telephone: 1 (425) 867-5009
Fax: 1 (425) 996 9516
Email: rcrandall@stratustechnical.com

CANADA

Calgary

Intelatech
14939 Mt. McKenzie Dr. S. E.
Calgary, Alberta
T2Z 2M6
Telephone: (905) 629 0082
Fax: (905) 629 1795
Email: sales@intelatech.com

Montreal

Intelatech
620 St-Jean Blvd.,
Suite 202
Pointe Claire, Quebec
H9R 3K2
Telephone: (905) 629 0082
Fax: (905) 629-1795
Email: sales@intelatech.com

Ottawa

Intelatech
21 Concourse Gate,
Unit 12
Nepean, Ont
K2E 7S4
Telephone: (905) 629 0082
Fax: (905) 629 1795
Email: sales@intelatech.com

Toronto

Intelatech
5225 Orbitor Dr.
Mississauga, Ont
L4W 4Y8
Telephone: (905) 629 0082
Fax: (905) 629-1795
Email: sales@intelatech.com

MEXICO • SOUTH AMERICA

Brazil

Marathon International Associates, Inc.
115 Granada Ct.
Orlando, FL 32803 USA
Telephone: 1 (407) 872 5775
Fax: 1 (407) 872 0535
Email: jmg@marathontech.com

Mexico (Guadalajara Jalisco)

Beacon Electronic Associates, Inc.
2100 Trailridge Ct.
Raleigh, NC 27603 USA
Telephone: 1 (919) 523 1483
Fax: 1 (703) 903 8533
Email: egallegos@beaconmail.com

Mexico (Nogales and Juarez)

Youngewirth & Olenick Assoc.
2925 Riggs Rd.,
Suite 8-141
Chandler, AZ 85249 USA
Telephone: 1 (800) 515 1554
Fax: 1 (800) 515 1574
Email: jbeard@yando.com

EUROPE • MIDDLE EAST • AFRICA

Ireland and UK

BFI Optilas Ltd
Mill Square, Featherstone Rd.
Wolverton Mill South
Milton Keynes MK12 5ZY
United Kingdom
Telephone: 44(0)1908 326326
Fax: 44(0)1908 221110
Email: lee.austin@bfioptilas.com

Sweden and Norway

InResonance AB
Birger Jarlsgatan 2, 5th Floor
SE 114 34 Stockholm
Sweden
Telephone: 46 8 505 651 89
Cell: 46 70 743 88 28 (Ronny)
Cell: 46 70 116 49 (Kristina)
Fax: 46 8 768 0460
Email: info@inresonance.se

ASIA • PACIFIC

China

Edom Shenzhen
Room 2703, HuaRong Building
No.178 Min Tian Rd., Futian Dist.,
Shenzhen 518048
China
Telephone: 86 755 83588188, ext. 2110
Cell: 13316975272
Email: johnnyc@edom-tech.com

Holy Stone International Trading
(Shanghai) Co., Ltd.
16/F, Shouxinyindu Building
1160 YanAn(W) Rd.
Shanghai 200052
China
Telephone: 86 21 51875266
Fax: 86 21 62826722
Email: candy_cai@holystone3311.com.cn

Taiwan

Asian Information Technology, Inc. Ltd.
7F, No. 439 Ruei-Guang Rd.,
Taipei 114
Taiwan ROC
Telephone: 886 2 8797 6866 #8697
Fax: 886 2 8751 1651
Email: jim.huang@aitinc.com.tw

Edom Tecnology Co., Ltd.
8F, No. 50, Lane 10, Kee Hu Rd.,
Nei Hu Dist., Taipei 114
Taiwan ROC
Telephone: 886 2 2657-8811 #2361
Fax: 886 2 2657 9090
Email: samh@edom.com.tw

Holy Stone Enterprise Co., Ltd.
7F, No. 17, Lane 91, Sec. 1, Neihu Rd.,
Nei Hu Dist., Taipei 11441
Taiwan ROC
Telephone: 886 2 26589555 #367
Fax: 886 2 27985529
Cell: 886 918 184 683
Email: lanchiang@holystone.com.tw

SKYWORKS' DISTRIBUTORS

NORTH AMERICA

Local branch offices exist throughout North America for the following distributors. Please visit their Web sites for more information.



Component Distributors, Inc.
+1 (800) 777-7334
www.cdiweb.com



Digi-Key Corporation
+1 (800) 338-4105
www.digikey.com



ES Corporation
(For Die Sales Only)
(978) 422-7641
www.escomponents.com



Mouser Electronics
+1 (800) 346-6873
www.mouser.com



RFMW, Ltd.
+1 (877) FOR-RFMW
+1 (877) 367-7369
(USA & Canada)
www.rfmw.com



Richardson RFPD, Inc.
+1 (800) 737-6937
(630) 208-2700
www.richardsonrfpd.com

MEXICO • SOUTH AMERICA

Digi-Key Corporation
Telephone: +1 (800) 338-4105
www.digikey.com

Mouser Electronics
Telephone: +1(817) 804-3848
Email: eusales@mouser.com

Mexico

RFMW, Ltd.
Mexico
Telephone: 52-33-1524-1514
Fax: 52-33-3335-5509
Email: www.rfmw.com

Richardson RFPD
Francisco Pimentel 98
Col. San Rafael CP.
06470 Mexico D.F.
Telephone: 52 (55) 5128 6037
Fax: 52 (55) 5128-6036
Email: sales@richardsonrfpd.com

Mouser Electronics, Inc.
MARZELEC DE MEXICO, SA DE CV
Av. Moctezuma 3515 Loc. J15
Col. Ciudad del Sol, Zapopan
Jalisco, Mexico, CP 45050
Telephone: +52 33 3612 7301
Fax: +52 33 3612 7356
Email: martin.leon-navarro@mouser.com

Brazil

Richardson RFPD
Rua Jose Gomes Falcao, 111
Sao Paulo
SP 04726-010
Brazil
Telephone: 55 (11) 3613-9375
Fax: 55 (11) 3613-9355
Email: sales@richardsonrfpd.com

Central/South America

Mouser Electronics, Inc.
1000 N. Main Street
Mansfield, TX 76063 USA
Telephone: +1 (817) 804-3635
Fax: +1 (817) 804-3898
Email: mauro.salomao@mouser.com

EUROPE • MIDDLE EAST • AFRICA

Digi-Key Corporation
Telephone: +1 (800) 338-4105
www.digikey.com

Mouser Electronics
Telephone: +1(817) 804-3848
Email: eusales@mouser.com

Africa

Mouser Electronics
Suite C, First Floor
Artisan Building
Hillbottom Road
High Wycombe
BUCKS
HP12 4HJ
United Kingdom
Telephone: +44 (0) 1494-467490
Fax: +44 (0) 1494-467499
Email: melissa.nightingale@mouser.com

South Africa

Hi-Q Electronics (Pty) Ltd.
Second Floor,
Syfin House Fairway Close
Parow
7463, Cape Town
South Africa
Telephone: +27 21 595 1307
Fax: +27 21 595 3820
Email: sales@hi-q.co.za

Austria

Acal BFi GmbH
Oppelner Strasse 5
82194 Groebenzzell
Germany
Telephone: +49 (0) 8142 6520 155
Fax: +49 (0) 8142 6520 190
Email: Sabine.Peick@acalbfi.de

Belgium/Luxembourg

Acal BFi Belgium
Lozenberg 4
1932 Zaventem
Belgium
Telephone: +32 (0)2720 5983
Fax: +32 (0) 2725 1014
Email: sales-be@acalbfi.be

Denmark

Acal BFi AB
Portalgatan 2B, P.O. Box 1335
SE-751 43 UPPSALA
Sweden
Telephone: +46 18 56 58 30
Fax: +46 18 69 66 66
Email: Per.Johansson@acalbfi.se

Richardson RFPD, Inc. (Circulators/Isolators)
Karlsunde Strandvej 76
2690 Karlslunde
Denmark
Telephone: +45 24247604
Fax: +45 87604663
Email: sales@richardsonrfpd.com

Estonia/Latvia/Lithuania

Gamma Components OU
Peterburi tee 81
Tallinn, 11415
Estonia
Telephone: +372 3929098
Fax: +372 3929088
Email: pavel.nevzorov@gamma-group.com

Finland

Acal BFi AB
Portalgatan 2B, P.O. Box 1335
SE-751 43 UPPSALA
Sweden
Telephone: +46 18 56 58 30
Fax: +46 18 69 66 66
Email: Per.Johansson@acalbfi.se

Richardson RFPD, Inc. (Circulators/Isolators)
Isokatu 50
Oulu 90100
Finland
Telephone: +358 40 5408410
Fax: +358 (0) 8 825 1110
Email: sales@richardsonrfpd.com

France

Acal BFi France SAS
4 Allée du Cantal
Z.I. La Petite Montagne Sud
CE 1834-91018 EVRY Cedex
France
Telephone: +33 (0)1 60 79 59 00
Fax: +33 (0)1 60 79 89 01
Email: sales-fr@acalbfi.fr

Richardson RFPD, Inc. (Circulators/Isolators)
46 Avenue Kleber
Colombes Cedex 92706
France
Telephone: +33 1 55 66 00 30
Fax: +33 1 55 66 00 31
Email: sales@richardsonrfpd.com

Germany

Acal BFi GmbH
Oppelner Strasse 5
82194 Grobenzell
Germany
Telephone: +49 (0) 8142 6520-155
Fax: +49 (0) 8142 6520-190
Email: Sabine.Peick@acalbfi.de

Richardson RFPD, Inc.
(Circulators/Isolators)
Boschstrasse 1
Puchheim D-82178
Germany
Telephone: +49-89-890214-0
Fax: +49-89-890214-90
Email: sales@richardsonrfpd.com

Ireland

Acal BFi Ltd.
Mill Square, Featherstone Road
Wolverton Mill South
Milton Keynes MK12 5ZY
United Kingdom
Telephone: 44 (0)1908 326326
Fax: 44 (0)1908 221110
Email: Lee.Austin@acalbfi.com

Israel

Mouser Israel Ltd
1 Hanofar Street
43662 Raanana
Israel
Telephone: +972 9 7783020
Fax: +972 9 7458885
Email: mark.nudelman@mouser.com

RFMW
P.O. Box 1064
Hod Hasharon
Israel 45110
Telephone: +972 (9)-740 6884
Fax: +972 (9)-740 5881
Email: israelw@rfmw.com

Richardson RFPD, Inc.
(Circulators/Isolators)
Telephone: (972) 9-7483232
Fax: (972) 9-7416510
Email: sales@richardsonrfpd.com

Italy

Acal BFi Italy SRL
Via Cascina Venina n.20/A
20090 Assago (MI)
Milan, Italy
Telephone: +39 02 53 58 31
Fax: +39-02 53583.201
Email: sales-it@acalbfi.it

Richardson RFPD, Inc. (Circulators/Isolators)
Via Colleoni, 5
Palazzo Taurus 3
Agrate Brianza, Milano 20041
Italy
Telephone: +39 (039) 653 145
Fax: +39 (039) 653 835
Email: sales@richardsonrfpd.com

Richardson RFPD, Inc. (Circulators/Isolators)
Viale L. Ariosto, 492/G
Sesto Fiorentino (Firenze) 50019
Italy
Telephone: +39 (055) 420 83 1
Fax: +39 (055) 421 07 26
Email: sales@richardsonrfpd.com

Netherlands

Acal BFi Netherlands BV
Luchthavenweg 53
5657 EA Eindhoven
The Netherlands
Telephone: +31 (0)40 250 7400
Fax: +31 (0)40 250 74 09
Email: sales-nl@acalbfi.nl

Richardson RFPD, Inc. (Circulators/Isolators)
Dirk Hartogweg 8
5928 LV Venlo
The Netherlands
Telephone: +31 (0) 23 5560492
Fax: +31 (0) 23 5560491
Email: sales@richardsonrfpd.com

Norway

Acal BFi AB
Portalgatan 2B, P.O. Box 1335
SE-751 43 UPPSALA
Sweden
Telephone: +46 18 56 58 30
Fax: +46 18 69 66 66
Email: Per.Johansson@acalbfi.se

Poland/Czech/Slovakia

Gamma Sp. Z o.o.
Kacza str. 6 lok A
01-013 Warsaw
Poland
Telephone: +48 22 8627500
Fax: +48 22 8627501
Email: jan@gamma.pl

Portugal

Acal BFi SA
Anabel Segura 7 Planta Baja
28108 Alcobendas
Madrid
Spain
Telephone: +34 (91) 453 11 60
Fax: +34 (91) 662 68 37
Email: Miguel.Carreras@acalbfi.es

Russia/Ukraine/Byelorussia

Acal BFi GmbH
Oppelner Strasse 5
82194 - Grobenzell
Germany
Telephone: +49(0) 8142 6520-155
Fax: +49(0) 8142 6520-190
Email: Sabine.Peick@acalbfi.de

Gamma SpB
5th Krasnoarmeyskaya str 3
St. Petersburg
Russia
Telephone: +7 812 3255115
Fax: +7 812 3255114
Email: tatiana@gamma.spb.ru

Richardson RFPD, Inc. (Circulators/Isolators)
Mamonovskiy pereulok, 6
123001 Moscow
Russia
Telephone: +7-495-5899972
Fax: +7-495-5899972
Email: sales@richardsonrfpd.com

Spain

Acal BFi SA
Anabel Segura 7 Planta Baja
Alcobendas 28108
Madrid
Spain
Telephone: +34 (91) 453 11 60
Fax: +34 (91) 662 68 37
Email: Miguel.Carreras@acalbfi.es

Richardson RFPD, Inc. (Circulators/Isolators)
Calle: Hierro 33
1a Planta Nave 10 Edificio Legazpi
Madrid 28045
Spain
Telephone: +34 (91) 528-3700
Fax: +34 (91) 467-5468
Email: sales@richardsonrfpd.com

Sweden

Acal BFi AB
Portalgatan 2B, P.O. Box 1335
SE-751 43 UPPSALA
Sweden
Telephone: +46 18 56 58 30
Fax: +46 18 69 66 66
Email: Per.Johansson@acalbfi.se

Richardson RFPD, Inc. (Circulators/Isolators)
Girovagen 13, 1tr
Jarfalla 175 62
Sweden
Telephone: +46 (0) 8 564 705 90
Fax: +46 (0) 8 760 4663
Email: sales@richardsonrfpd.com

Switzerland

Acal BFi GmbH
Oppelner Strasse 5
82194 Groebenzell
Germany
Telephone: +49(0) 8142 6520-155
Fax: +49(0) 8142 6520-190
Email: Sabine.Peick@acalbfi.de

Turkey

Mplus Technologies, Turkey
Kosuyolu Mah. Katip Salih Sok. No; 65/2A
Kadikoy 34718
Istanbul, Turkey
Telephone: +90 216 340 8831
Fax: +90 216 340 86 29
Email: onur@m-plustec.com

United Kingdom

3 The Business Centre
Molly Millars Lane
Wokingham
Berkshire
RG41 2EY
UK
Telephone: +44 (0) 118 978 8878
Fax: +44 (0) 1908 221 110
Email: sales-uk@acalbfi.co.uk

Richardson RFPD, Inc. (Circulators/Isolators)
226 Berwick Avenue
Slough, Berks. SL1 4QT
United Kingdom
Telephone: +44 (0) 1753) 733010
Fax: +44 (0) 1753) 733012
Email: sales@richardsonrfpd.com

ASIA • PACIFIC

Digi-Key Corporation
Telephone: +1 (800) 338-4105
www.digikey.com

Mouser Electronics
Telephone: +1 (817) 804-3848
www.mouser.com

Australia/New Zealand/Pacific Islands

Avnet Electronics Marketing
Unit 2, 17-19 Melrich Road
Bayswater
VIC 3153, Australia
Telephone: 1300-791-695
(Australia National Sales Hotline)
Telephone: (61 3) 9760 4250
Fax: (61 3) 9760 4255
Email: australia@avnet.com (Australia)
Email: newzealand@avnet.com (New Zealand)

Mouser Electronics
Unit 710, 7/F
LU Plaza, 2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 3101-4700
Fax: +852 3101-4701
Email: luman.loi@mouser.com

CHINA

Beijing

Asian Information Technology Inc. Ltd.
5th Floor, Building A
Eagle Run Plaza No. 26 XiaoYun Road
Chaoyang District
Beijing, PRC 100016
Telephone: 86-10-84583636
Fax: 86-10-51087738
Email: ryan.liu@aitgroup.com.cn

Avnet Memec
Room 1201-1207 Tower A
Cheng Jian Plaza
No 18 Beitapingzhuang Road
Haidian District
Beijing PRC 100088
Telephone: (+86 10) 8206 2488
Fax: (+86 10) 8206 2517
Email: china@avnet.com

Edom Beijing
Room 906-909, Block A, Cyber Tower
No. 2 Zhongguancun South Road
Haidian District, Beijing, PRC 100086
Telephone: 010-62165009
Cell: 13316975272
Email: Johnnyc@edom-tech.com

Fortune Techgroup Co., Ltd.
Rm2B-305, Silicon Valley Bright City
No.1 Nong Da South Road, Haidian District
Beijing 100084 PRC
Telephone: 86-10-64400588
Fax: 86-10-64401318
Email: Service.bj@fortune-co.com

Pangaea Telecommunication Technology
(SZ) Limited – Beijing Branch
Room 915, 9/F, Yingu Mansion
9 Bei Si Huan West Road
Haidian District, Beijing, PRC 100080
Telephone: 86-10-62800228
Fax: 86-10-62800226
Email: youpf@pangaea.com.cn

Changsha

Avnet Memec
Rm 2133, Dolton Grand Source Bldg
No.517, Xiangfu Road
Changsha, PRC (410007)
Telephone: (+86 731) 8528 1766
Fax: (+86 731) 8528 1768
Email: china@avnet.com

Chengdu

Avnet Memec
Block G,H,A1,23F., First City Plaza
No.308, Shun Cheng Avenue
Chengdu, PRC (610017)
Telephone: (+86 28) 8652 8262
Fax: (+86 28) 8652 8261
Email: china@avnet.com

Chongqing

Avnet Memec
Rm.12 B-6, 12 Floor,
TaiXing Science and Technology Plaza
8 YuZhou Road, Shi Qiao Pu
High-Tech District
Chongqing, PRC (400039)
Telephone: (+86 23) 6879 7512
Fax: (+86 23) 6879 1502
Email: china@avnet.com

Dongguan

Avnet Memec
Unit 809, Block 8,
Zhixing Commercial Building
Banshicun, Changping
Dongguan, PRC (523560)
Telephone: (+86 769) 8802 9138
Fax: (+86 769) 8802 9139
Email: china@avnet.com

Fujian

Avnet Memec
Rm. 2118, TianHua Building
283 Wu Si Road, North
Fuzhou
Fujian PRC (350003)
Telephone: (+86 591) 8771 0115
Fax: (+86 591) 8773 7194
Email: china@avnet.com

Avnet Memec
Rm 30 C, International Trade Building
No. 388, Hubin South Road
Xiamen
Fujian, PRC (361004)
Telephone: (+86 592) 516 3621
Fax: (+86 592) 516 3620
mail: china@avnet.com

Guangzhou

Avnet Memec
Unit 1103-1106, West Tower, Poly World
Trade Center
1001 Xingang East Road
Haizhu District
Guangzhou, PRC (510335)
Telephone: (+86 20) 2808 7388
Fax: (+86 20) 2808 7378
Email: china@avnet.com

Hangzhou

Avnet Memec
Room 1010, 10F, Yi Tai Building
No. 76 GuCui Road
Hangzhou
Zhejiang Province, PRC (310014)
Telephone: (+86 571) 8580 0667
Fax: (+86 571) 8580 0919
Email: china@avnet.com

Hong Kong

Avnet Memec
16/F Spectrum Tower
53 Hung To Road
Kwun Tong Kowloon
Hong Kong
Telephone: (+852) 2176 5388
Fax: (+852) 2418 1865
Email: china@avnet.com

Fortune Techgroup Co., Ltd.
B-6F / A1-2 11F, Union Building
112 How Ming Street
Kwun Tong, Kowloon
Hong Kong
Telephone: 00852-2111-5152
Fax: 00852-2111-5150
Email: Service.hk@fortune-co.com

Mouser Electronics
Unit 710, 7/F
LU Plaza, 2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 3101-4700
Fax: +852 3101-4701
Email: luman.loi@mouser.com

Pangaea (Hong Kong), Ltd.
Rooms 902-906
Tai Yau Building
181 Johnston Road
Wan Chai, Hong Kong
Telephone: 852 2836 3301, 852 2202 2388
Fax: 852 2834 7340
Email: sales@pangaea.com.hk

South Base International
Technology Limited
23/F Shun Ho Tower
Ice House ST
Central, Hong Kong
Telephone: +86-755-86119152 Ext: 817
Fax: +86-755-83456805
Email: zhangqiang@southbase.cn

Jiangsu

Avnet Memec
Room 2408/2409, Building A, Xin Tian Xiang
Plaza
No.388 Suyu Road
Suzhou
Jiangsu, PRC (215021)
Telephone: (+86 512) 6522 2535
Fax: (+86 512) 6522 2536
Email: china@avnet.com

Nanjing

Avnet Memec
Block D, 20F, Huangpu Building
No. 2 Huangpu Road
Nanjing, PRC (210016)
Telephone: (+86 25) 8483 8137
Fax: (+86 25) 8483 8148
Email: china@avnet.com

Pangaea Telecommunication Technology
(SZ) Limited – Nanjing Branch
Room 2407, Block A, New Century Plaza
288 East Zhongshan Road
Nanjing 210002 PRC
Telephone: 86-25-84617749
Fax: 86-25-84619271
Email: jialc@pangaea.com.cn

Ningbo

Avnet Memec
Room 1403, Building B,
Yinxin Center Mansion
No. 787, Bai Zhang Road
Ningbo
Zhejiang Province, PRC (315040)
Telephone: (+86 574) 8771 4702
Fax: (+86 574) 8771 4712
Email: china@avnet.com

Qingdao

Avnet Memec
Room C, 10th Floor, 5# Building
No.288, Ning Xia Road
Qingdao City
Shandong Province, PRC (266071)
Telephone: (+86 532) 8097 0716
Fax: (+86 532) 8097 0717
Email: china@avnet.com

Pangaea Telecommunication Technology
(SZ) Limited – Qingdao Office
Room 601, Unit 1, No 17,
Nankou Road,
Shi Beijing District
Qingdao, PRC 266071
Telephone: 86-532-83625810
Fax: 86-532-83625810
Email: wanglf@pangaea.com.cn

Shanghai

Asian Information Technology Inc. Ltd.
2F, 60# Building No. 461 HongCao Road
Shanghai, PRC 200233
Telephone: 86-21-54263188
Fax: 86-21-52989022
Email: Daniel.gu@aitgroup.com.cn

Avnet Memec
12th Floor, Innov Tower
No. 1801, Hongmei Road
Shanghai, PRC (200233)
Telephone: (+86 21) 3367 8387
Fax: (+86 21) 3367 8366
Email: china@avnet.com

Edom Shanghai
Floor 16, No. 20 Building, Tianlin Road
Caohejing Hi-Tech Park, Xuhui District
Shanghai 200233 PRC
Telephone: 86-21-33675222
Cell: 13316975272
Email: Johnnyc@edom-tech.com

Fortune Techgroup Co., Ltd.
6F-B / 7-8F, 82#,
No.1198 North Qinzhou Road,
Xuhui District
Shanghai 200233 PRC
Telephone: 86-21-54644699*8819
Fax: 86-21-54644699*8888
Email: Service.sh@fortune-co.com

**Holy Stone International Trading
(Shanghai) Co., Ltd.**
16/F, Shouxinyindu Building
1160 YanAn(W) Road
Shanghai, PRC 200052
Telephone: 86 21 51875266
Fax: 86 21 62826722
Email: autumn@holystone.com.tw

**Pangaea Telecommunication Technology
(SZ) Limited – Shanghai Branch**
Room 803, 8/F
Eton Place Building, No. 555
Pudong Road
Pudong, Shanghai 200120 PRC
Telephone: 86-21-68596139
Fax: 86-21-68596159
Email: liuht@pangaea.com.cn

**South Base International
Technology Limited**
Room 804, Building 20
Tianlin Road 487
Caohejin
Hi-Tech Park, Xuhui District
Shanghai PRC
Telephone: +86-21-33671275
Email: zhangqiang@southbase.cn

Shenyang

Avnet Memec
#707, C of C Headquarters Mansion
Qingnian Street
Shenhe District
Shenyang, PRC (110014)
Telephone: (+86 24) 8290 2597
Fax: (+86 24) 8290 2595
Email: china@avnet.com

Shenzhen

Asian Information Technology Inc.
T2F, Block East H1, the Hua Qiao Cheng
Industrial Park
East Qiao Cheng Rd.
Nanshan,
Shenzhen PRC 518053
Telephone: 86 755 26711655
Fax: 86 755 88312399
Email: derek.li@aitgroup.com.cn

Avnet Memec
8 Floor, Block 2, Financial Base
8 Kefa Road, Hi-Tech Industrial Park
Nanshan District
Shenzhen PRC (518057)
Telephone: (+86 755) 8378 1886
Fax: (+86 755) 8378 1390
Email: china@avnet.com

Comtech Broadband Corporation, Ltd.
Rm 1104, Tower A, Skyworth Bldg.
High-Tech Industrial Park
Shenzhen PRC 518057
Telephone: +86-755-26743910
Fax: +86-755-26743006
Email: dino@comtech.com.cn

Edom Shenzhen
Room 2703, HuaRong Building
No. 178 Min Tian Road, Futian District
Shenzhen 518048 PRC
Telephone: 86-755-83588188 ext. 2110
Cell: 13316975272
Email: johnnyc@edom-tech.com

Fortune Techgroup Co., Ltd.
1~2#, 3/F, No. 30, Middle Gaoxin 4th Avenue
Middle Section of Science & Technology Park
Nanshan District
Shenzhen 518057 PRC
Telephone: 86-755-26528090
Fax: 86-755-26528090-2180
Email: Service.sz@fortune-co.com

**Holy Stone International Trading
(Shanghai) Co., Ltd.**
Room A703, Building World Trade Center
Fuhong Road, Futian District
Shenzhen, PRC 518031
Telephone: 86 755 83031903
Fax: 86 755 83289091
Email: toddchen@holystone.com.tw

**Pangaea Telecommunication Technology
(SZ) Limited**
Flat F, 21/F, Tian Mian City Tower
Shennan Zhong Road
Shenzhen 518026 PRC
Telephone: 86-755-83297745, 83297749
Fax: 86-755-83297748
Email: linpf@pangaea.com.cn

**South Base International
Technology Limited**
Room 1202, 12th Floor
Unit 3, Building B,
Kexing Science Park
15 Keyuan Road, Central Zone,
Nanshan District, High-Tech Zone
Shenzhen, PRC
Telephone: +86-755-86119152 Ext: 802
Fax: +86-755-83456805
Email: hebeyuan@southbase.cn

Wuhan

Avnet Memec
Unit 2406, Tower B, Zhongshang Plaza
7 Zhongnan Road
Wuchang District
Wuhan, PRC (430071)
Telephone: (+86 27) 8732 2806
Fax: (+86 27) 8732 2729
Email: china@avnet.com

**Pangaea Telecommunication Technology
(SZ) Limited – Wuhan Office**
Room 1002, Unit B1, Building 10,
Dong Chuang International Building,
Optics Valley SBI,
East Lake Hi-Tech Development Area,
Wuhan, Hubei, PRC 430074
Telephone: 86-27-87458525
Fax: 86-27-87458525
Email: tangzy@pangaea.com.cn

Xiamen

Edom Xiamen
Room 1102-1103, Xinjing Center
No. 23 Jiahe Road, Siming
Xiamen PRC 361009
Cell: 13316975272
Email: johnnyc@edom-tech.com

Xian

Avnet Memec
Room 1503-1504, Tower A, HuiXin IBC
No.1, Zhangbayi Road
Gaoxin District, Xi'an
Shanxi Province, PRC (710065)
Telephone: (+86 29) 8831 0515
Fax: (+86 29) 8833 6381
Email: china@avnet.com

Edom Xian
Room 11210, Block B, City Gateway
No. 1 Jinye Road
High-Tech Develop Industry Zone
Xi'an, Shanxi, PRC
Cell: 13316975272
Email: johnnyc@edom-tech.com

**Pangaea Telecommunication Technology
(SZ) Limited – Xian Office**
Room 2717, Wing C
New Generation international Apartment
Number 263, Tai Bai South Road
Yan Ta District, Xian 710065 PRC
Telephone: 86-29-88255510
Fax: 86-29-88255510
Email: lili@pangaea.com.cn

Zhuhai

Avnet Memec
Unit 3007, 30/F
Everbright International Trade Center
47# Haibin South Road
Zhuhai, PRC (519015)
Telephone: (+86 756) 336 5236
Fax: (+86 756) 336 5200
Email: china@avnet.com

INDIA**Bangalore**

Dragon Technology Distribution
Private Limited
No. 744, 10th Main, 10th Cross
Indiranagar 2nd Stage
Bangalore 560 038 India
Telephone: 080-2520-3449/2520-3450
Fax: 080-2520-4300
Email: dragonindia@dragongp.com

Edom Technology
#76, 2nd Floor, 36th Main
1st Stage BTM Layout,
Dollar Scheme Colony, Madiwala
Bangalore 560008 India
Telephone: 91 080-26780722
Fax: 91 080-26780722
Email: ravikumard@edom-tech.com

SM Electronic Technologies Pvt. Ltd.,
Fusion Technology Group
#1790, 5th Main, 9th Cross, RPC Layout
Vijayanagar 2nd Stage
Bangalore 560040 India
Telephone: 91-80-2330 1030
Fax: 91-80-2338 7197
Email: sales@mysmindia.com

Chennai

Dragon Technology Distribution
Private Limited
No. 46 A/13, Vivekananda Street
Gandhi Nagar, Saligramam, India
Chennai 600093 India
Telephone: 91-44-4280-1342
Email: dragonindia@dragongp.com

SM Electronic Technologies Pvt., Ltd.
#3, 2nd Floor, 4th Street
Ragava Reddy Colony, Jaffer Khanpet
Chennai 600 083 India
Telephone: 91-44-2474 6727
Email: sales@mysmindia.com

Delhi

Dragon Technology Distribution
Private Limited
402, Pragati House 47-48, Nehru Place
New Delhi 110019 India
Telephone: 91-11-4132-5651/52/53
Fax: 91-11-4132-5651
Email: dragonindia@dragongp.com

SM Electronic Technologies Pvt., Ltd.
#106 & 108, Ansal Classique Tower
Rajouri Garden
New Delhi 110027 India
Telephone: 91-11-2510 1136/37
Fax: 91-11-2510 1138
Email: sales@mysmindia.com

Hyderabad

Dragon Technology Distribution Pvt., Ltd.
H-No: 4-4-82/22, Near Veera Reddy Nagar
Above ING Vysya Bank
Nacharam Main Road,
Hyderabad – 500 076 India
Telephone: 040-27176123
Fax: 040-27176124
Email: dragonindia@dragongp.com

SM Electronic Technologies Pvt., Ltd.
Flat No. 603, Hno: 2-2-1130/4
Sridhar Plaza, New Nallakunta
Hyderabad 500 044 India
Telephone: 91-40-2755 4414
Email: sales@mysmindia.com

Pune

Dragon Technology Distribution
Private Limited
Flat No. B-12 Amrut Kumbh
Near Senadatta Police Chowky
Near Sadashiv Peth
Pune 400030, India
Telephone: 91-20-2453-4581/6500-1862
Fax: 91-20-2453-3311
Email: lenus.kho@dragongp.com

Edom Technology Co., Ltd
Swapnashilp Bangalov, SR.
No. 27/4/2,
Ambegaon BK,
Near Dnyanprasarak Vidyalay,
Pune 411046, India
Telephone: +91-9823613839
Fax: +91-9823613839
Email: ranjit@edom-tech.com

SM Electronic Technologies Pvt. Ltd.,
Sus - Baner Link Road, Pashan,
Pune India 411021
Phone: +91-80 23301030
Email: sales@mysmindia.com

INDONESIA**Jakarta**

Dragon Technology Group Pte. Ltd.
Bangun Tjipta Sarana 6th Floor
Jl. Gatot Subroto 54
Jakarta 10260
Telephone: 62-21-530-0706
Fax: 62-21-570-8828
Email: lenus.kho@dragongp.com

JAPAN**Tokyo**

Fuji Electronics Co., Ltd
Ochanomizu Center Building
2-12, 3-chome, Hongo, Bunkyo-ku,
Tokyo 113-8444 Japan
Telephone: 81-3-3814-1411
Fax: 81-3-3814-1414
Email: skyworks@fujiele.co.jp

Hakuto Co., Ltd.
Shinjuku Nomura Bldg. 33F
1-26-2 Nishi-Shinjuku
Shinjuku-ku, Tokyo
163-0533, Japan
Telephone: 81-(0)3-6894-5180
Fax: 81-(0)3-6894-5190
Email: yonemaru-s@hakuto.co.jp

Yokohama

TecStar Company
MACNICA, Inc.
Macnica Bldg. No. 1
1-6-3 Shin-Yokohama
Kouhoku-ku, Yokohama
222-8561 Japan
Telephone: 81(45)470-9843
Fax: 81(45)470-9844
Email: skyworks@tecstar.macnica.co.jp

KOREA**Gyeonggi-do**

Unotel Co. Ltd.
#808, Leaders Building, 342-1
Yatap-dong, Bundang-gu Seongnam-Si
Gyeonggi-do, 463-828, Korea
Telephone: 82 31 703 5191
Fax: 82 31 703 5194
Email: ydkim@unotel.co.kr

Seoul

WPG Korea Co., Ltd.
Pangyo Innovalley
B-301, 253, Pangyo-ro, Bundang-gu,
Seongnam-si, Gyeonggi-do,
463-400, Korea
Telephone: 82-2-2152-1711
Fax: 82-2-425-0042
Email: kevin.nam@kr.wpgholdings.com

MALAYSIA

Dragon Technology Distribution Sdn. Bhd.
85A Jalan Molek 3/10
Taman Molek
81100 Johor Bahru,
Johor, Malaysia
Telephone: +60-7-355-0477
Fax: +60-7-353-7349
Email: lenus.kho@dragongp.com

Kuala Lumpur

Avnet Malaysia Sdn Bhd
Kuala Lumpur Branch (475896-K)
24-1 Jalan Medan Setia 2
Plaza Samansara, Bukit Damansara
50490 Kuala Lumpur, Malaysia
Telephone: +603 2093 9721
Fax: +603 2093 9723
Email: Brenda.Boh@Avnet.com

Penang

Avnet Malaysia Sdn. Bhd.
Penang Branch (475896-K)
1-2-29, Krystal Point Corporate Park
Lebuh Bukit Kecil 6
11900 Bayan Lepas
Penang, Malaysia
Telephone: +604 646 1837/2032
Fax: +604 646 1950
Email: Brenda.Boh@Avnet.com

Dragon Technology Distribution Sdn. Bhd.
2-3-11, Bangnuan Lip Sin
Lebuh Pekaka Satu, Sungai Dua
11700 Gelugor, Penang, Malaysia
Telephone: 60-4-657-3535
Fax: 60-4-657-7535
Email: lenus.kho@dragongp.com

Edom Technology
45A-9-1, Menara Kuda Lari
Jalan Lahat, 10450
Penang, Malaysia
Telephone: 604 8275912
Fax: 604 8265912
Email: lingol@edom-tech.com

Selangor

Dragon Technology Distribution Sdn. Bhd.
A-3A-12 Pelangi Square Business Centre
PUJ 6, Persiaran Surian
47800 Petaling Jaya
Selangor, Malaysia
Telephone: +60-3-7725-1778
Fax: +60-3-7725-5778
Email: lenus.kho@dragongp.com

Singapore

Avnet Asia Pte, Ltd.
151 Lorong Chuan
#06-03 New Tech Park
Singapore 556741
Telephone: (65) 6580 6000
Fax: (65) 6580 6200
Email: brenda.boh@avnet.com

Dragon Technology Distribution Pte. Ltd.
Blk 25, Kallang Avenue, #03-06
Kallang Basin Industrial Estate
Singapore 339416
Telephone: 65-6212-9800
Fax: 65-6212-9808
Email: lenus.kho@dragongp.com

Edom Technology Co., Ltd.
Blk. 4012 Ang Mo Kio Ave. 10
#07-08 Techplace 1
Singapore 569628
Telephone: +65 6346 5198
Fax: +65-6459 6345
Email: stevenl@edom-tech.com

PHILIPPINES

Muntinlupa City

Avnet Philippines Pty., Ltd.
1505 Richville Corporate Tower
1107 Alabang Zapote Road
Madrigal Business Park
Ayala Alabang, Muntinlupa City
Philippines 1780
Telephone: (632) 7724201/02/03
Fax: (632) 7724204
Email: brenda.boh@avnet.com

Dragon Technology Distribution Pte. Ltd.
Suite 2105 Richville Corporate Tower
Madrigal Business Park
Ayala Alabang
Muntinlupa City
1780 Philippines
Telephone: 63-2-807-8313
Fax: 63-2-850-4294
Email: lenus.kho@dragongp.com

Edom Technology Co., Ltd.
Blk. 4012 Ang Mo Kio Ave. 10
#07-08 Techplace 1
Singapore 569628
Telephone: +65 6346 5198
Fax: +65-6459 6345
Email: stevenl@edom-tech.com

Pangaea International Trading Corp.
Unit 307 Page 1 Building
1215 Acacia Avenue
Madrigal Business Park,
Ayala Alabang, Muntinlupa City
1780 Philippines
Telephone: 63-2-823-4171 & 74
Fax: 63-2-823-4189
Email: chris@pangaea.com.ph

TAIWAN

Taipei

Asian Information Technology Inc. Ltd.
7F., No. 439 Ruei-Guang Road,
Neihu, Taipei 114, Taiwan ROC
Telephone: +886-2-2656-3961
Fax: +886 2-2656-3937
Cell: 0937048751
Email: eton.lee@aitinc.com.tw

Holy Stone Enterprise Co., Ltd.
7F No.17, Lane 91
Sec. 1, Nei Hu Road.
Taipei 114, Taiwan ROC
Telephone: 886 2 2658 9555, ext. 333
Fax: 886 2 2798 5529
Email: kevin@holystone.com.tw

Edom Technology
8F, No. 50, Lane 10,
Kee Hu Road, Nei Hu
Taipei 114
Taiwan ROC
Telephone: 886 (0)2-2657 8811
Fax: 886 (0)2 02 2657 9090
Email: lawrencelee@edom.com.tw

THAILAND

Bangkok

Avnet Technology Co., Ltd.
184/153 Forum Tower, 25th Floor
Ratchadapisek Road
Khet/Kwang Huay Kwang,
Bangkok 10320 Thailand
Telephone: 662 645 3678/79/80
Fax: 662 645 3681
Email: brenda.boh@avnet.com

Dragon Technology Distribution Co., Ltd.
1201/65-66, Soi Ladprao 94
Wangthong Lang
Bangkok 10310 Thailand
Telephone: +66-2-530-7680-1
Fax: +66-2-530-7862
Email: lenus.kho@dragongp.com

Edom Technology
456/129, Panya-Intra Road
Samwatawantok, Klongsamwa
Bangkok 10510 Thailand
Telephone: 662-508-4349
Fax: 662-508-4349
Email: chaiwatk@edom-tech.com

VIETNAM

Edom Technology Co., Ltd.
Blk 4012 Ang Mo Kio Ave 10
#07-08 Techplace 1
Singapore 569628
Telephone: +65 6346 5198
Fax: +65-6459 6345
Email: stevenl@edom-tech.com



- Sales Offices
- ◆ Design Centers
- ★ Manufacturing

www.skyworksinc.com

USA

Headquarters: Massachusetts
 Skyworks Solutions, Inc.
 20 Sylvan Road
 Woburn, MA 01801
 Telephone: (781) 376-3000
 Fax: (781) 376-3100
sales@skyworksinc.com

California

Skyworks Solutions, Inc.
 5221 California Avenue
 Irvine, CA 92617
 Telephone: (949) 231-3000
 Fax: (949) 231-3206
sales@skyworksinc.com

Skyworks Solutions, Inc.
 3230 Scott Boulevard
 Santa Clara, CA 95054
 Telephone: (408) 330-1400
 Fax: (408) 737-4611
sales@skyworksinc.com

Maryland

Skyworks Solutions, Inc.
 5520 Adamstown Road
 Adamstown, MD 21710
 Telephone: (301) 695-9400
 Fax: (301) 695-7065
transtech@skyworksinc.com

EUROPE

France

Skyworks Solutions, Inc.
 60 rue Saint André des Arts
 Bâtiment D
 75006 Paris
 France
 Telephone: +33 1 43548540
 Fax: +33 1 43540005
irene.pfeiffer@skyworksinc.com

United Kingdom

Skyworks Solutions, Ltd.
 South Building
 Walden Court
 Parsonage Lane
 Bishops Stortford
 Hertfordshire CM23 5DB
 United Kingdom
 Telephone: +44 7585 964479
 Fax: +44 01279 464201
daniel.godsiff@skyworksinc.com

Finland

Skyworks Solutions, Inc.
 Keilaranta 16 (5th Floor)
 FIN-02150 Espoo
 Finland
 Telephone: +358 9251 07131
 Fax: +358 9 2510 7129
tommi.hiillos@skyworksinc.com

ASIA • PACIFIC

China

Skyworks Solutions, Inc.
 Room 2901-02, Chong Hing
 Finance Center
 No. 288 Nanjing Road (W)
 Shanghai 200003 China PRC
 Telephone: +86 21 23066230
 ext. 60167
 Fax: +86 21 33663398
elaine.zhao@skyworksinc.com

Skyworks Solutions, Inc.
 Room 2701, 27/F Tower 3
 Kerry Plaza
 No. 1 Zhongxinsi Road
 Futian District
 Shenzhen 518048 China PRC
 Telephone: +86 755 8828 8399
 Fax: +86 755 8828 8358
jesse.li@skyworksinc.com

Skyworks Solutions, Inc.
 Suite 1315, Tower B, COFCO Plaza, No. 8
 Jianguomennei Avenue
 Dongcheng District
 Beijing 100005 China PRC
 Telephone: +8610 652 60859
 ext. 61602
 Fax: +8610 652 61358
abby.huang@skyworksinc.com

Japan

Skyworks Solutions Co., Ltd.
 Tokyo Opera City Tower 36F
 3-20-2 Nishi-Shinjuku
 Shinjuku-ku
 Tokyo, 163-1436
 Japan
 Telephone: +81 3 5308 5180
 Fax: +81 3 5308 5190
ahihiro.karikomi@skyworksinc.com

Korea

Skyworks Solutions, Inc.
 12th Floor West Wing Posco Center
 892 Daechi 4-Dong, Kangnam-Gu
 Seoul, Korea 135-777
 Telephone: +82 2 3490 3800
 Fax: +82 2 553 5459
juhee.lee@skyworksinc.com

Singapore

Skyworks Global Pte Ltd.
 10 Ang Mo Kio Street 65
 #05-15/16 Techpoint
 Singapore 569059
 Telephone: +65 64031971
 Fax: +65 64031931
yuenfong.choong@skyworksinc.com

Taiwan

Skyworks Solutions, Inc.
 4 F, #198, Section 2
 Tun Hwa S. Road
 Taipei 106, Taiwan ROC
 Telephone: +8862 5559 8992
 Fax: +8662 2735 6508
joanna.wu@skyworksinc.com

Skyworks Solutions, Inc.

20 Sylvan Road, Woburn, MA 01801

USA: (781) 376-3000 • Asia: 886 2 2735 0399

Europe: 33 (0)1 43548540 • Fax: (781) 376-3100

Email: sales@skyworksinc.com • www.skyworksinc.com

NASDAQ: SWKS



BRO254-14B 11/14  Printed on Recycled Paper.

