


# Manual Switches

## Pushbutton Switches and Indicators

Series 2


### BARRIER MOUNT

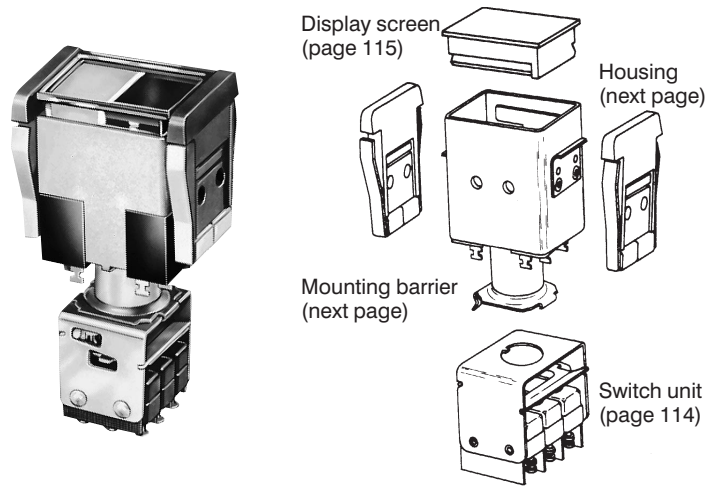

Mounting barriers attach to either the long or short sides of the housing. They have spring clips which grip the panel. Mounting barriers also separate display screens

to protect against inadvertent operation. Multiple units can be attached together in a strip and snapped into a panel slot; or they can be mounted individually.

### FLANGE MOUNT

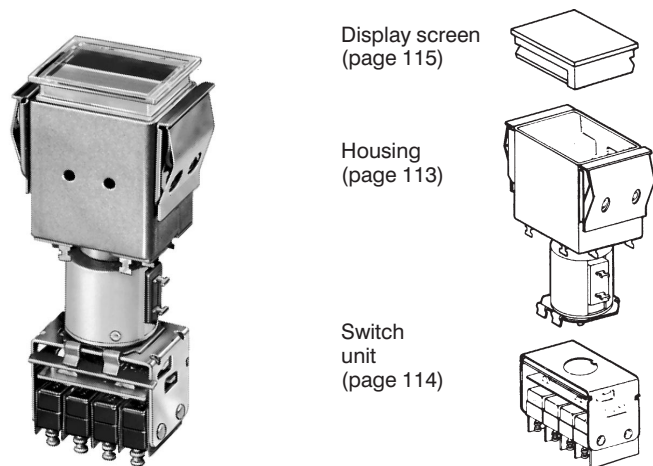

Flange mount units have mounting clips ready-attached to the housing. They can be individually installed or replaced; and

enable use of an overlay panel, if desired. Groupings can be separated by optional spacing barriers.


### MODULES ASSEMBLE EASILY

All modules are ordered as separate items which snap together for easy assembly.

### FEATURES

- Easy-to-assemble modules provide thousands of display/control combinations
- Up to 4 incandescent lamps
- 1, 2, 3, or 4-section display
- Transmitted or projected color
- Integral hold-in coil option provides remote released contacts. Pull-in coils (flange mount only) enable remote actuation
- Switch guard accessory.

### CHANGE LAMPS OR FILTERS FROM PANEL FRONT

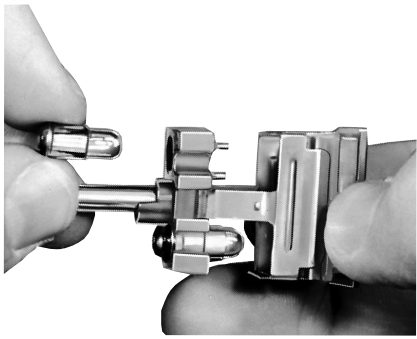


**Without tool.** Remove display screen/lampholder assembly from 2C200 operator-indicator (or 2F200 indicator). Unit is keyed to maintain proper orientation when replacing. Use only flange base T-1¼ lamps with 2C200 and 2F200 devices.

### LAMPS AND FILTERS

Order lamps and filters for projected color from page 111.

Pushbuttons

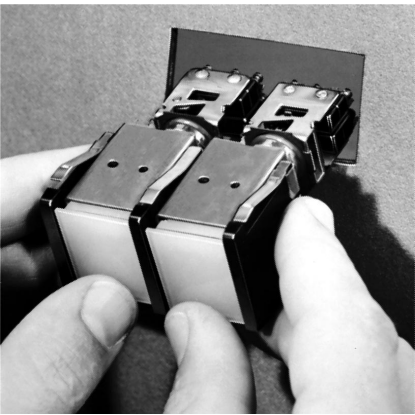

Barriers on long sides

**BARRIER MOUNT MODULES**

Barrier mount assemblies are identical in panel appearance. Operator-indicator housings have spring clips for attaching switch modules. This feature is not provided with indicator housings.

Barriers are necessary for mounting. They can be specified for attachment to the long or short side of the housing, as stated in the order guides.

**BARRIER MOUNT HOUSING ORDER GUIDE**

See “Application Data” for typical bailing circuits for coil-equipped modules.


| Barriers Attach On:    | No. of Lamp Sockets  | Tool Not Required  |                |
|------------------------|----------------------|--------------------|----------------|
|                        |                      | Operator-Indicator | Indicator Only |
| Long Sides of Housing  | 2 (A & C)<br>4 (A-D) | 2C207<br>2C209     |                |
| Short Sides of Housing | 2 (A & C)<br>4 (A-D) | 2C201<br>2C203     | 2F203          |

**MOUNTING BARRIER ORDER GUIDE**


For strip mounting, specify one more barrier than the number of units in the group.


| Mounting Barrier Type | For Panel Thickness        | Catalog Listings |       |
|-----------------------|----------------------------|------------------|-------|
|                       |                            | Gray             | Black |
| Attach to Long Sides  | .06-.19 in. (1,52-4,83 mm) | 2B2              | 2B4   |
| Attach to Short Sides | .06-.19 in. (1,52-4,83 mm) | 2B1              | 2B3   |

Note: Panels .19 in. (1,52 mm) thick require the .06-.19 in. (1,52-4,83 mm) type barriers.


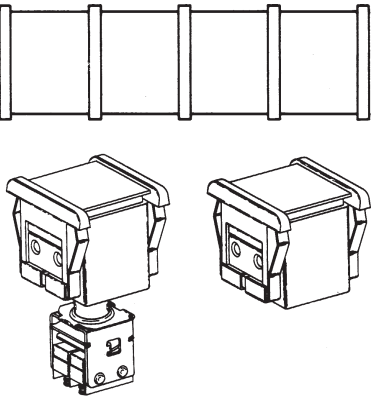


Barriers on short sides

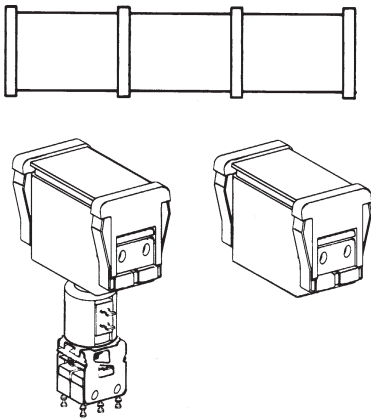

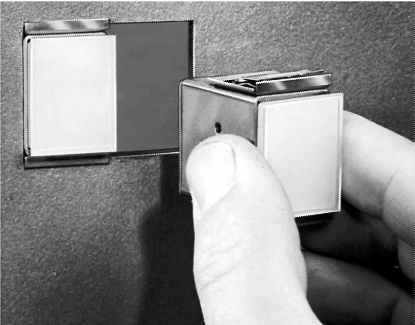

Flanges on long sides

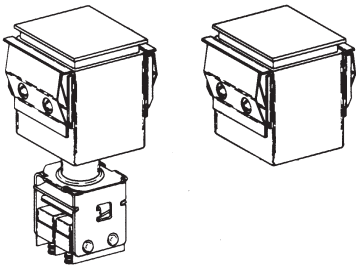

FLANGE MOUNT MODULES

Flange mount assemblies are identical in panel appearance. Operator-indicator housings have spring clips for switch modules attachment (not provided with indicator housings).

Barriers are not required, since the panel mounting clips are ready-attached to flange sides of the housings. However, spacing barriers can be used for color-coding. They also aid in preventing inadvertent operation of two screens with one push.

Mounting dimensions on page 114.

FLANGE MOUNT HOUSING ORDER GUIDE

See “Application Data” for typical bailing circuits for coil-equipped modules.


| Flanges On:           | No. of Lamp Sockets | Tool Not Required  |                |
|-----------------------|---------------------|--------------------|----------------|
|                       |                     | Operator-Indicator | Indicator Only |
| Long Sides of Housing | 2 (A & C)           | 2C204              |                |
|                       | 4 (A-D)             | 2C206              | 2F206          |

SPACING BARRIER ORDER GUIDE

For .06-31 in. (1,5-7,9 mm) thick panels.

| Spacing Barrier Type    | Catalog Listings |       |
|-------------------------|------------------|-------|
|                         | Gray             | Black |
| For Long Flange Housing | 2B9              | 2B18  |

SWITCH MODULES

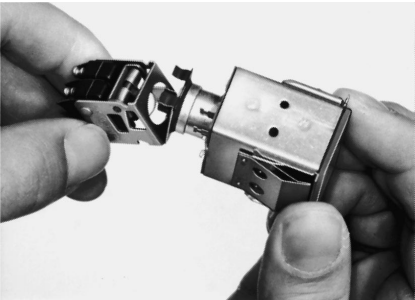

Interchangeable type 2D switch modules attach to spring clips on the bottom of operator-indicator housings. There is a wide selection of circuitry, electrical ratings, operating actions and terminations.


For mounting dimensions, see page 115.

SM SUBMINIATURE MULTI-SPDT SWITCH MODULES



Momentary action

SM switch modules offer a choice of two momentary action styles, one with a pronounced touch-feedback, the other with low operating force for rapid repeat ac-



Alternate action

tuation. Also available with alternate-action and combination momentary/alternate action modules. Extra length turret solder terminals.

ELECTRICAL RATING

Silver contacts:  
30 VDC: 5 amps res. sea level or 50,000 ft,  
3 amps ind. sea level, 2.5 amps 50,000 ft.  
Max. inrush, 24 amps.  
UL and CSA rating for basic switch: 5  
amps, 125 or 250 VAC.

Gold contacts:  
30 VDC: 0.5 amp ind., 1 amp res., sea level  
and 50,000 ft. Max. inrush, 2 amps.

SM SWITCH MODULE ORDER GUIDE

| No. of SPDT Circuits | Momentary Action Touch-Feedback Type Silver Contacts | Alternate Action Low Force Type Silver Contacts |
|----------------------|------------------------------------------------------|-------------------------------------------------|
| 1                    | 2D100                                                | 2D118                                           |
| 2                    | 2D2                                                  | 2D26                                            |
| 4                    | 2D9                                                  | 2D33                                            |

V3 COMPACT SPDT/DPDT SWITCH MODULES



ELECTRICAL RATING

30 VDC: 10 amps ind.\* sea level, 6 amps ind.,\* 50,000 ft. Motor load, 6 amps.\*\* UL and CSA rating for basic switch: 10 amps, 1/3 Hp, 125 or 250 VAC; 1/2 amp, 125 VDC; 1/4 amp, 250 VDC.

\* Inductive currents in accordance with AN3179.  
\*\* Motor load rating based on starting current.

V3 switch modules have screw terminals with lockwashers. Quick-connect terminals (not shown) are also available. When used with short-flange operator indicators, add spacing barriers to prevent interference.

V3 SWITCH MODULE ORDER GUIDE

| No. of SPDT Circuits | Momentary Action |
|----------------------|------------------|
| 1                    | 2D70             |
| 2                    | 2D72             |


ONE-PIECE DISPLAY  
SCREEN OPTIONS



These translucent solid color display screens are single-section/one piece construction

SINGLE-SECTION/  
ONE-PIECE SCREENS ORDER GUIDE

|        | Standard |
|--------|----------|
| Red    | 2A1      |
| Yellow | 2A2      |
| Green  | 2A3      |
| White  | 2A5      |



KEY SLOT KEY SLOT FACES SIDE OF HOUSING SHOWING CATALOG LISTING (ABOVE LAMP TERMINALS "A" AND "B")

THREE-PIECE DISPLAY  
SCREEN OPTIONS




These screens have transparent colored or colorless caps, transparent colorless legend inserts and translucent colored bases.

SINGLE-SECTION/THREE-PIECE  
SCREENS ORDER GUIDE


| Color  | Colorless Caps |
|--------|----------------|
| Red    | 2A81           |
| Yellow | 2A82           |
| Green  | 2A85           |
| White  | 2A70           |
| Amber  | 2A114          |

**NOTE:**  
Add -L to catalog listing if button is to be legended.




2V10 CAP\*  
2V9 INSERT\*

\*Order for replacement only

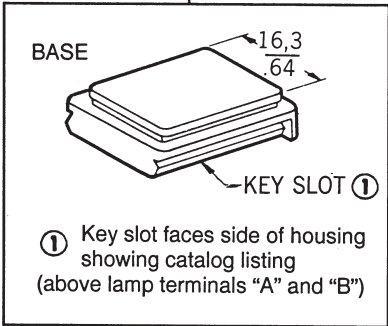

TWO, THREE AND FOUR-SECTION  
DISPLAY SCREENS

Dotted lines show 3-section base configuration

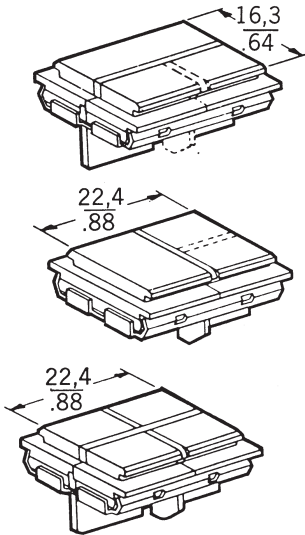

Silicone rubber baffles prevent light spillage from one section to another. Screen caps and legend inserts are transparent colorless. Bases are translucent colored.

For more information on 2, 3, and 4-section display screens, contact the MICRO SWITCH Application Center.

Pushbuttons

Honeywell

FO-62308-H

SERIES 2A, 2L, and 2W
LEGEND ORDER SHEET/PRODUCT SPECIFICATION

- ACCOUNT NO. 126-284
1. Complete ORDER SHEET for EACH NEW or REPEAT ORDER.
2. For each different legend, fill in a Diagram below as follows:
a. Determine proper orientation of the legend (HORIZONTAL or VERTICAL).
b. For SPLIT SCREEN ORDER, draw line(s) to show where the split occurs and indicate BASE COLOR for each section.
c. PRINT or TYPE the required legend in the diagrams provided.
d. Fill in QUANTITY and FIGURE NO. in the columns to the right.
e. Indicate keyed corner on all 2L listings.

Form No. Shaded Area
LEGEND AREAS
HORIZONTAL VERTICAL
TYPE SIZE
5/64
7/64
9/64
13/64
5/16
Full Face
Vertical Two Way Split
Horizontal Two Way Split
Three Way Split
Four Way Split

Catalog Listing
Customer P.O. No.
Customer Dwg. No.
MICRO SWITCH Sales Order
Line Number
Schedule No.

Customer:
Address:

Table with 6 columns: Quantity Ordered, Fig No., Size, Ink Color (BLK, WHT), Customer Part Number, and a note: Round, three and four-way splits are not available on 2W Series Display Screens.

A3
Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.
STANDARD SYMBOLS AVAILABLE
Modified Gothic

(Signature) (Date)

**LEGEND INFORMATION**  
Honeywell MICRO SWITCH Division provides legend service on the inserts supplied with three-piece screens only. To specify your needs, add -L to the catalog listings (example: 2A81-L) and use Legend Order Sheet (Form FO-62308), shown on facing page. Reproduce it on your office copier.

On any one insert, only one size of type is provided in either black or white. After legending, the insert is assembled to the display screen. The type face used is "Modified Gothic".

**LAMPS**  
T-1¼ incandescent lamps are available from MICRO SWITCH in 28 volt versions.

Use of neon lamps is not recommended. Light output is approximately 30% of an incandescent lamp. Also, a neon lamp will not illuminate blue or green filters or display screens due to the absence of these colors from the neon light spectrum.

**LAMP POLICY**  
The 28 volt lamps are offered as a convenience to customers. Honeywell MICRO SWITCH Division does not extend any warranty as to such lamps, and cannot guarantee to provide lamps from specific manufacturers. Any technical or quality questions regarding such lamps should be directed to the lamp manufacturer.

**COLOR FILTERS FOR PROJECTED COLOR**  
Projected color is achieved by using white buttons and color filters over clear lamps. When lamps are lighted, white button takes on color projected by the filters.

Filters used with type 2C200 and 2F200 housings (no-tool relamping) slip over lamp sockets in lampholder.

**SCREEN/LEGEND COLORS**  
The chart below shows recommended display screen and legend color combinations for optimum legibility.

| Screen Color | Legend Lettering |       |
|--------------|------------------|-------|
|              | Black            | White |
| Red          |                  | x     |
| Green        |                  | x     |
| Yellow       | x                |       |
| Amber        | x                | x     |
| White        | x                |       |

**LAMP ORDER GUIDE**

| Catalog Listing | Base Style | Type No. | Rating |      |               | Life/Voltage† |                      |
|-----------------|------------|----------|--------|------|---------------|---------------|----------------------|
|                 |            |          | Volts  | Amps | Life in Hours | Volts         | Expected Life (Hrs.) |
| 2E1             | Flange     | 327      | 28     | .040 | 1000          | 24.0          | 7,500                |
|                 |            |          |        |      |               | 26.0          | 2,800                |
|                 |            |          |        |      |               | 30.0          | 400                  |

† These are experimental continuous life test results supplied by a lamp manufacturer for reference only. Intermittent operation may reduce these figures as much as 50%. Ratings are based on median values of current and life.  
Wattage should not exceed 2.4 watts (2 lamps) per switch, for continuous illumination.

**FILTER ORDER GUIDE**

| Filter Style                      | Red  | Green | Amber | White* |
|-----------------------------------|------|-------|-------|--------|
| For Type 2C200 and 2F200 Housings | 2G12 | 2G14  | 2G16  | 2G17   |

\* Has blue tint to compensate for high yellow content of incandescent lamps at low voltages.


Pushbuttons

SWITCH GUARD ACCESSORY

A hinged cover on the switch guard helps avoid inadvertent operation of the display screen. It is installed in place of the transparent slide-on cap furnished with three-piece screen. Note: When used with pull-in coil devices, specify the 2C200 operator-indicator housings which have the no-tool relamping feature.





Barrier mount assembly with guard installed. (Can also be used with all flange mount units.)

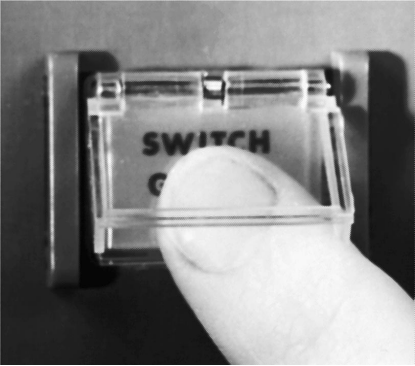

Guard requires a “lift-to-push” response to operate switch normally.

Order Catalog Listing **2H20**



Key:  $\frac{0,0}{0.00} = \frac{\text{mm}}{\text{inches}}$


# Manual Switches

## Pushbutton Switches and Indicators


Series 2

### MOUNTING DIMENSIONS (For reference only)

#### Long barrier operator-indicators

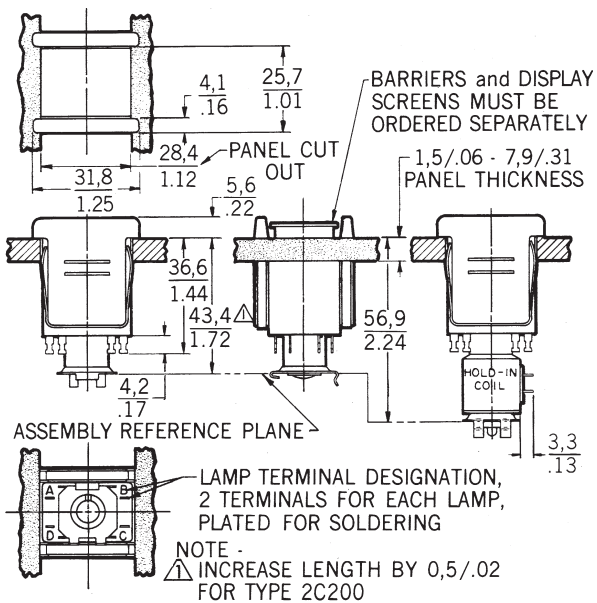


#### Short barrier operator-indicators

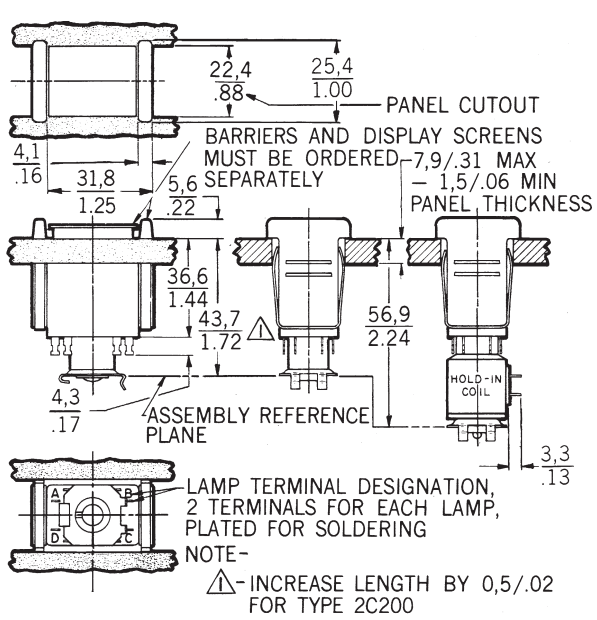


#### Short barrier indicators

#### Long barrier indicators

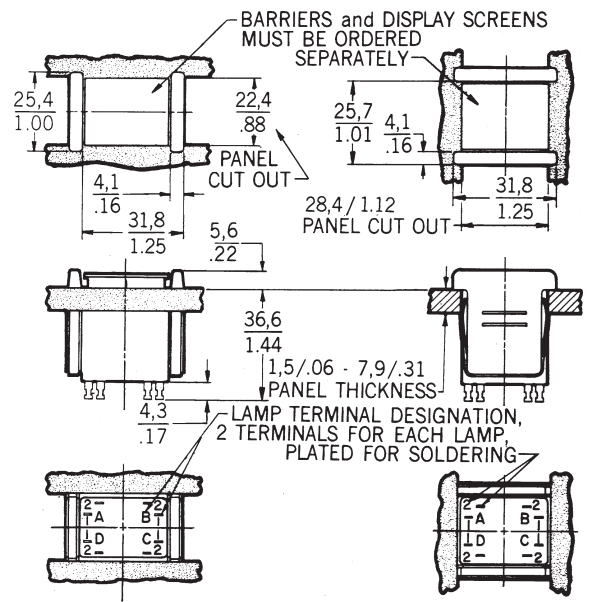

#### Mounting barriers

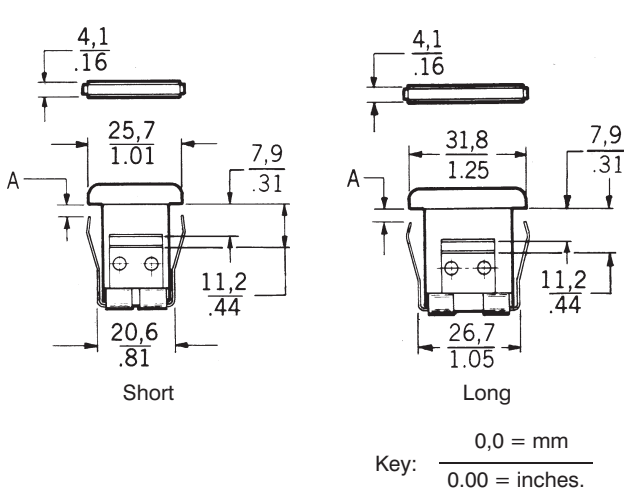

| A       | Panel Thickness  |
|---------|------------------|
| 1,5/.06 | 1,5-4,81/.06-.19 |
| 4,6/.18 | 4,8-7,9/.19-.31  |

### Length Of Panel Cutout\*

| Type of Indicator or Operator-Indicator |     | Number of Units |       |       |        |        |        |        |
|-----------------------------------------|-----|-----------------|-------|-------|--------|--------|--------|--------|
|                                         |     | 1               | 2     | 3     | 4      | 5      | 6      | 7      |
| Short Barrier                           | mm  | 36,09           | 68,00 | 99,87 | 131,72 | 163,60 | 195,48 | 227,36 |
|                                         | in. | 1.421           | 2.677 | 3.932 | 5.186  | 6.441  | 7.696  | 8.951  |
| Long Barrier                            | mm  | 30,00           | 55,78 | 81,58 | 106,34 | 133,12 | 159,90 | 184,68 |
|                                         | in. | 1.181           | 2.196 | 3.212 | 4.226  | 5.241  | 6.256  | 7.271  |

\*Nominal dimensions, ±0,25 mm/0.10 in. (In 5% of the cases, the cutout will be undersized for the build-up of assembled units and will require enlargement.

Pushbuttons


# Manual Switches

## Pushbutton Switches and Indicators


Series 2

### MOUNTING DIMENSIONS (For reference only)


#### Long flange operator-indicators

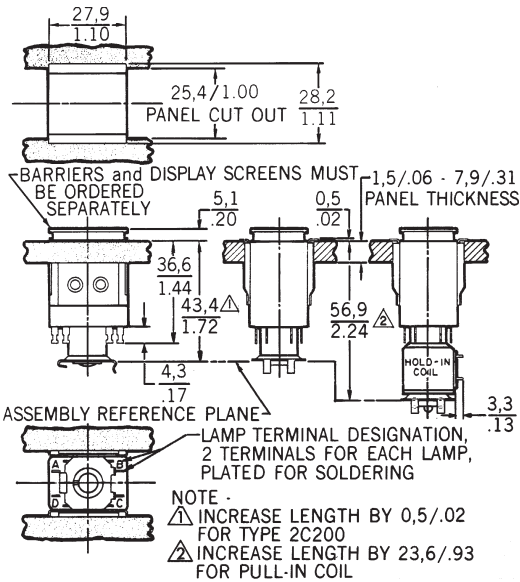

#### Long flange indicators

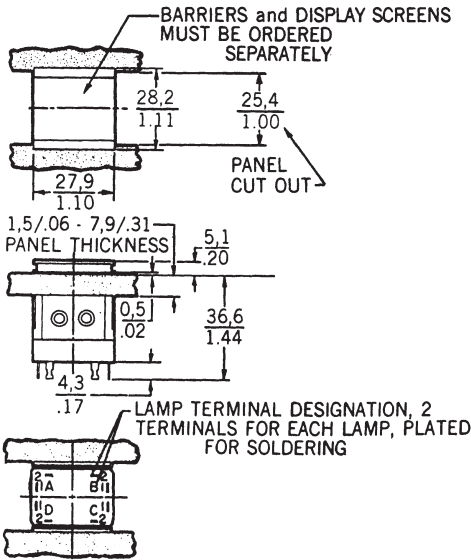

#### Spacing barriers

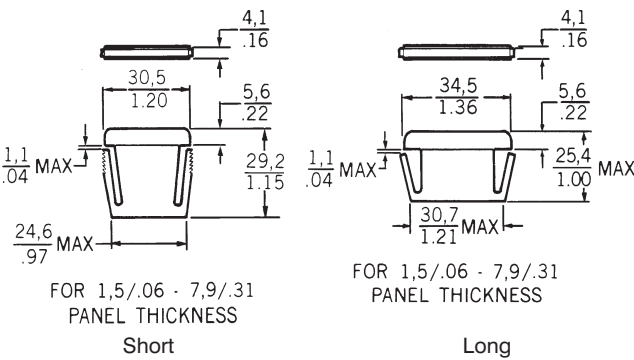

Key: 0,0 = mm  
0.00 = inches.

#### Length Of Panel Cutout\*

Add 4,19 mm/.165 in. to length for each optional spacing barrier used.

| Type of Indicator or Operator-Indicator |     | Number of Units |       |       |        |        |        |        |
|-----------------------------------------|-----|-----------------|-------|-------|--------|--------|--------|--------|
|                                         |     | 1               | 2     | 3     | 4      | 5      | 6      | 7      |
| Long Flange                             | mm  | 27,94           | 55,75 | 83,57 | 111,36 | 139,17 | 166,98 | 194,77 |
|                                         | in. | 1.1             | 2.195 | 3.290 | 4.384  | 5.479  | 6.574  | 7.668  |

\*Nominal dimensions,  $\pm 0,25$  mm/0.10 in. (In 5% of the cases, the cutout will be undersized for the build-up of assembled units and will require enlargement.


# Manual Switches

## Pushbutton Switches and Indicators


Series 2

### MOUNTING DIMENSIONS (For reference only)

#### SM Switch Modules

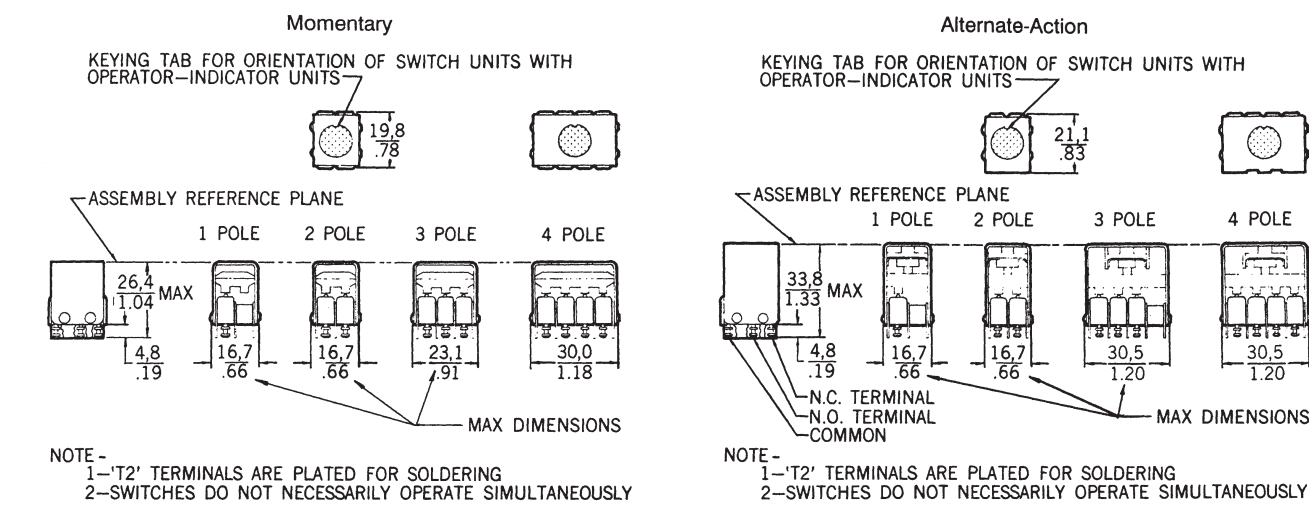

#### V3 Switch Modules

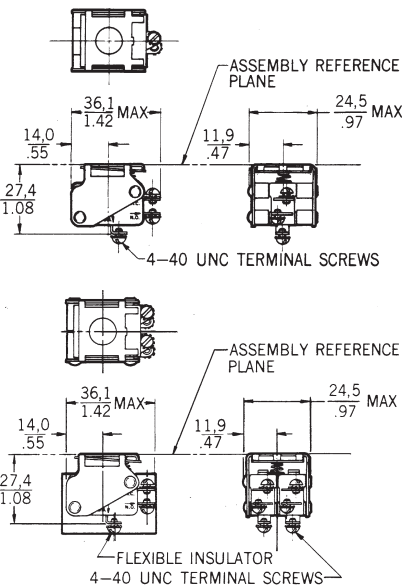

Pushbuttons