

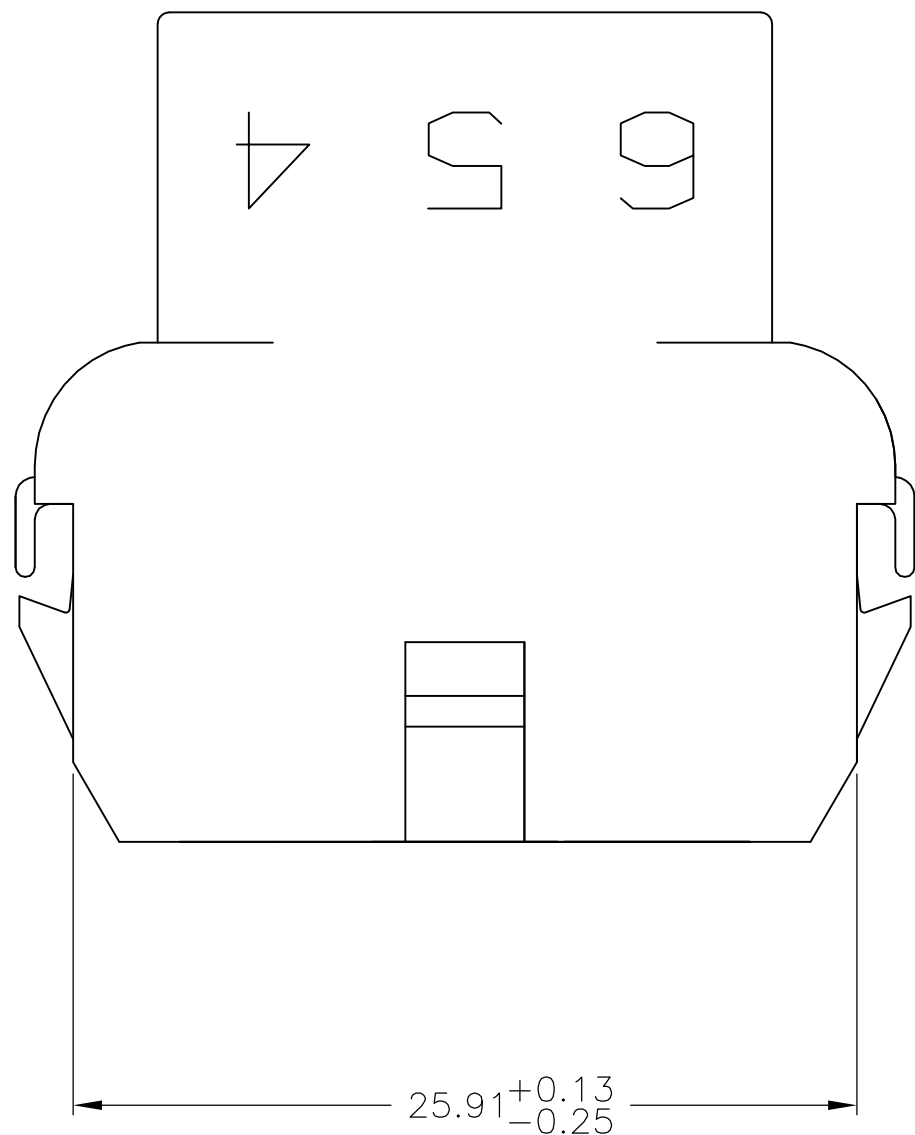
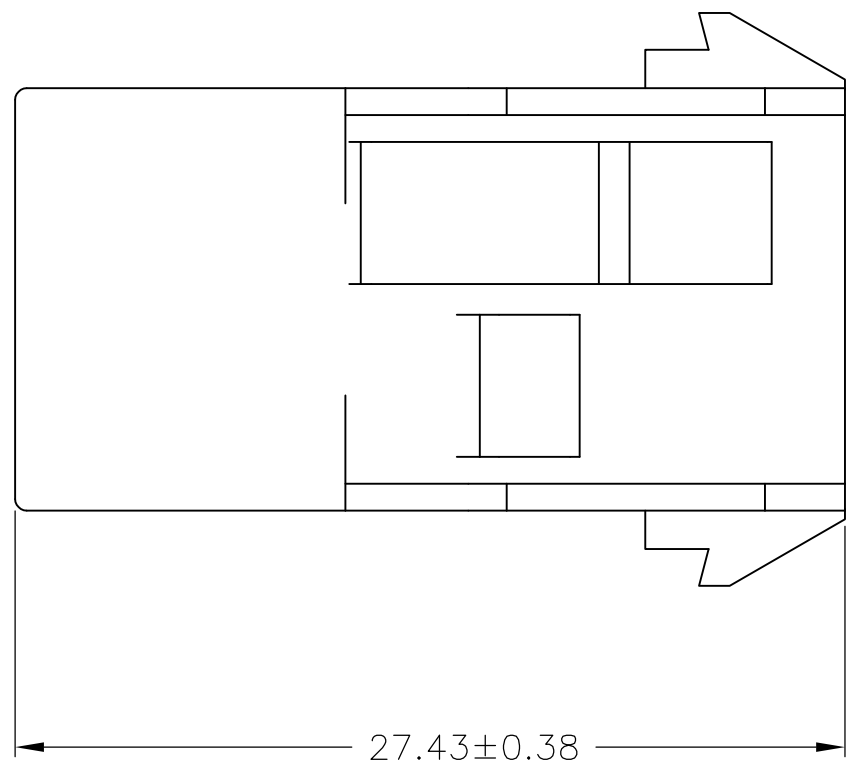
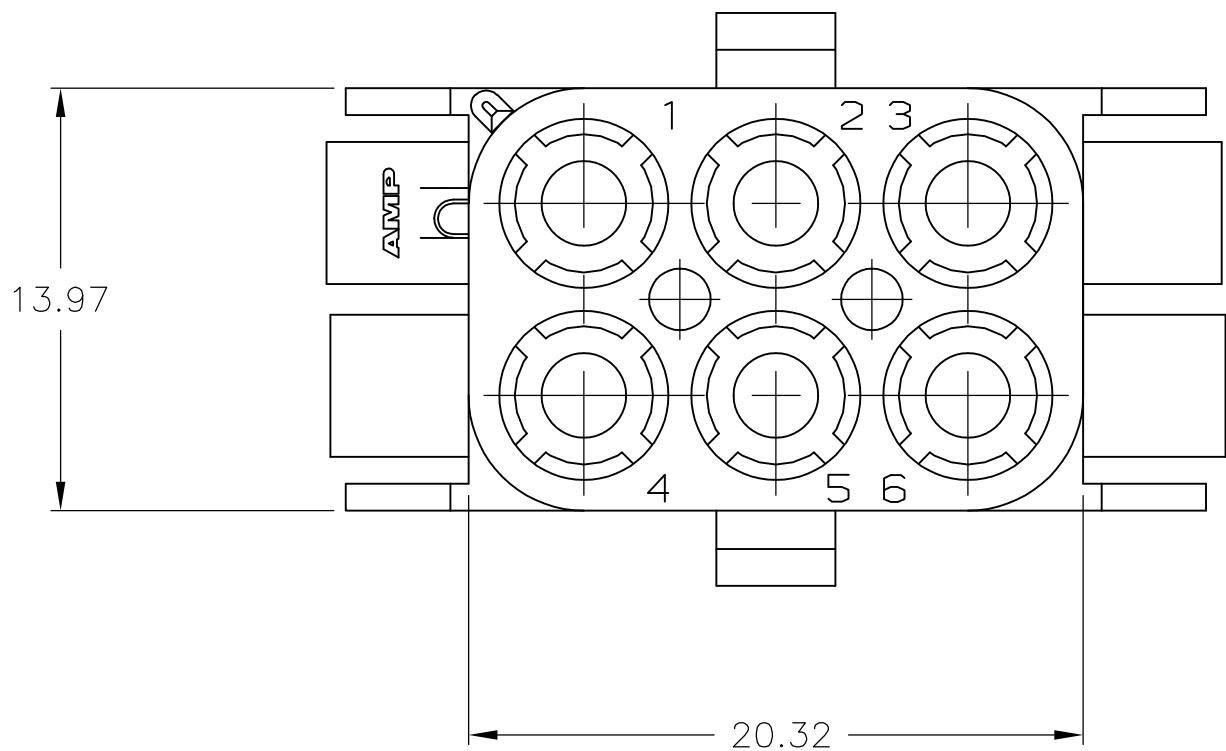
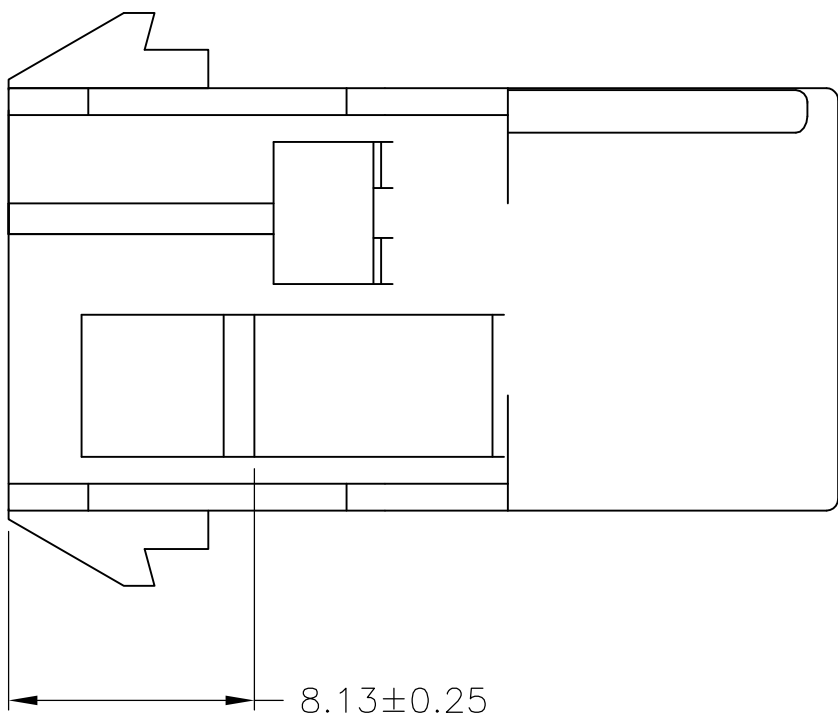


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		-	SEE SHEET 1	-	-	-

- 1
- STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE); CLARIFICATION MARKS UNDER THE 6 & 9.
- 2
- CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
- 3
- VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

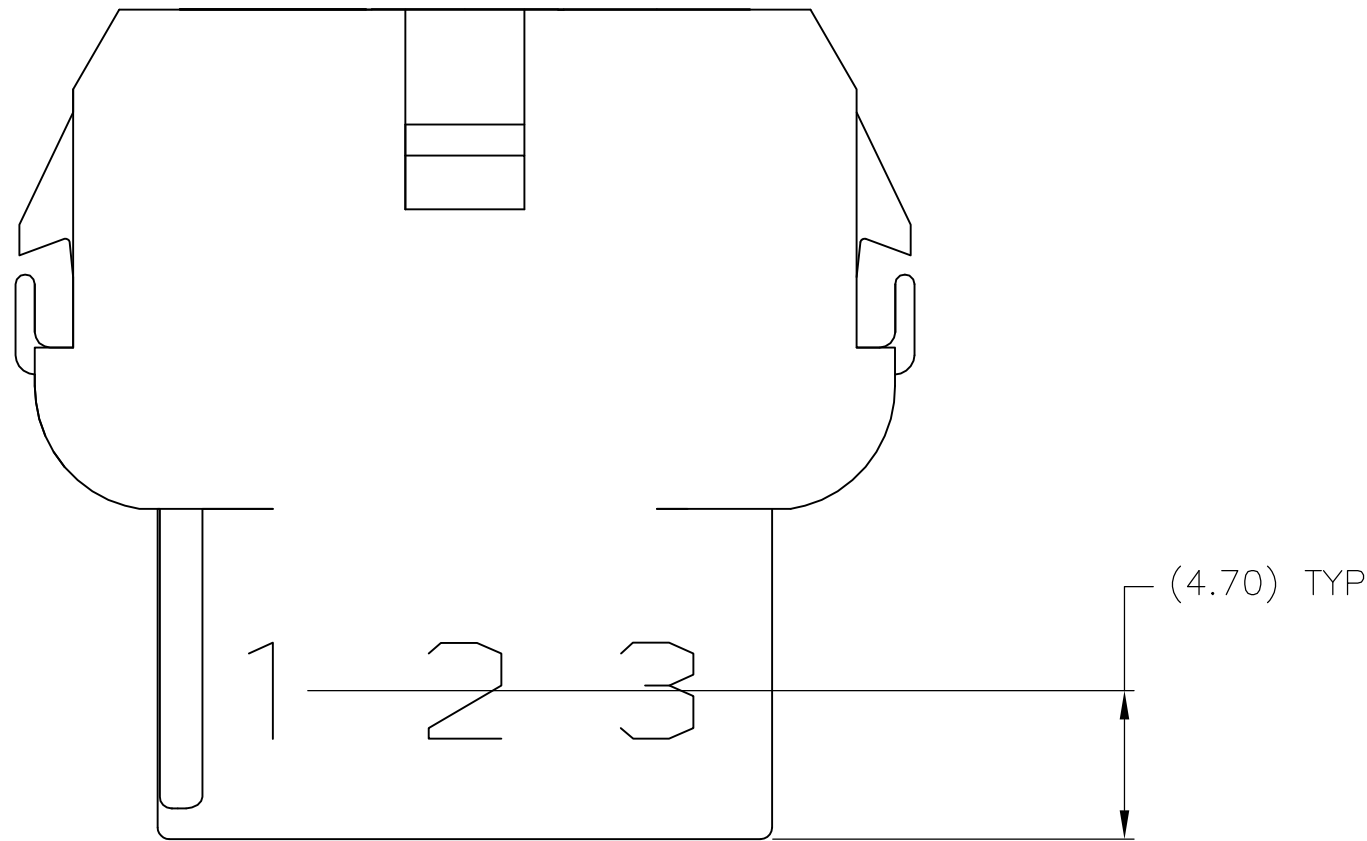

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.32	.800
0.25	.010	13.97	.550
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

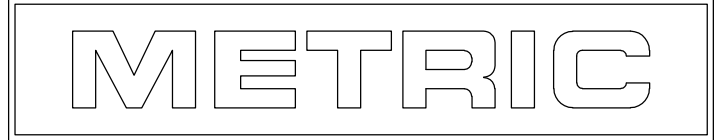

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	28JUL04	NATURAL		2-480705-0	
		CHK S. RIDGILL	28JUL04	COLOR		PART NO.	
		APVD S. RIDGILL	28JUL04	NAME		TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	
mm		0.127		APPLICATION SPEC		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A100779C=480705	
				CUSTOMER DRAWING		SCALE 4:1	
						SHEET 2 OF 2	
						REV AP3	