



4077 Series Sealant Boxes

Instructions

1.0 General

Use the 3M MS²™ 4077 Series Sealant Boxes for moisture resistance and reentry applications. The 4077 Series Sealant Boxes can be used in fold-back and inline splicing operations. Sealant boxes are designed for use with 4005 DPM Super Mate Connector Modules in the following applications:


4077A - One 4005 DPM
4077B - One 4005 DPM/One 4000D
4077C - Two 4005 DPM's
4077D - Three 4005 DPM's

Note: Apply sealant box at ambient temperatures of 32-~~F~~ (0-~~C~~) or above.


2.0 Components

Insertion Tool and Sealant Tag: 1 each per package, to be used with 12 Sealant Boxes.

Sealant Boxes: 12 per primary package.

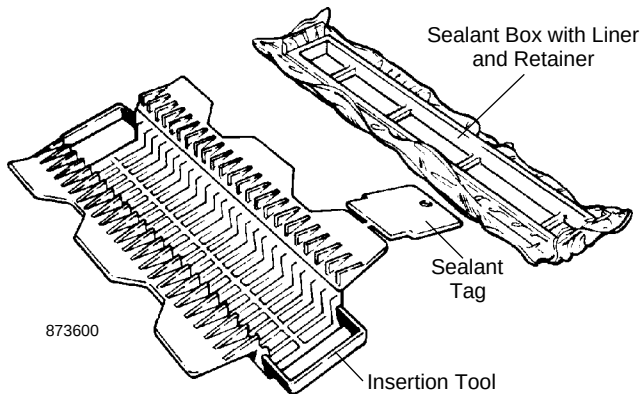

3.02 Peel plastic liner away from the sealant. Discard liner and retainer.

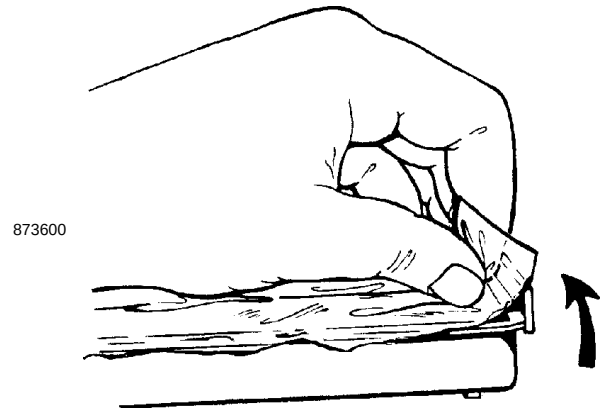

3.03 Place sealant box into insertion tool.



3.04 Insert module into sealant box. Partially press module into sealant with uniform force on each end.

3.05 Lift tool wings to press module completely into sealant box.


Note: The insertion tool must be used to insure proper installation of the sealant box.

3.0 Initial Sealant Box Installation

3.01 Remove retainer.

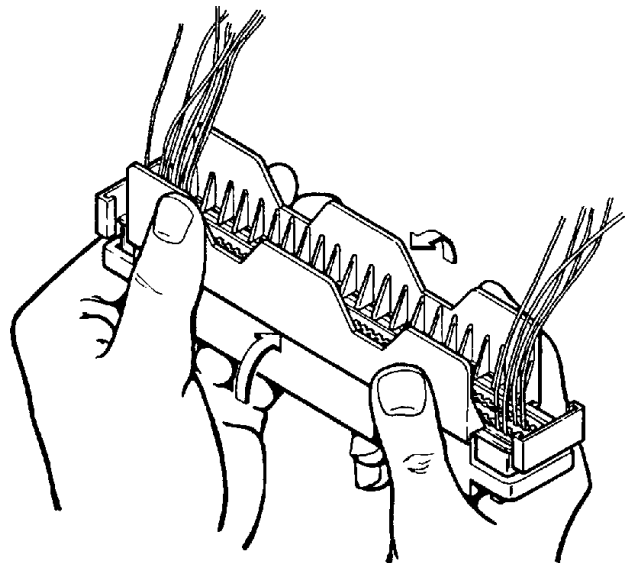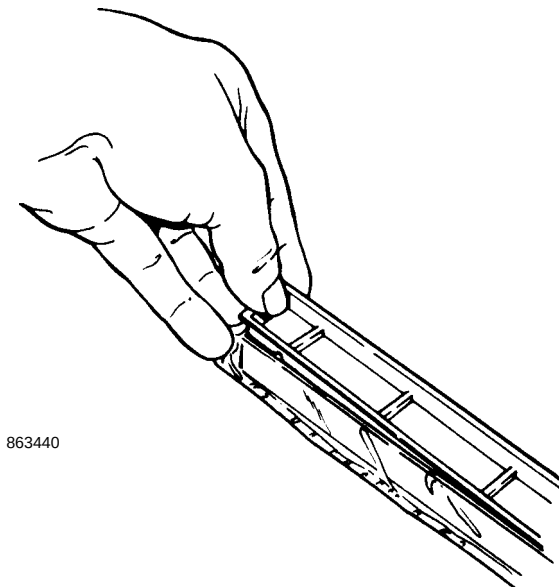

- 3.06 Snap latches on ends of sealant box to lock modules into place

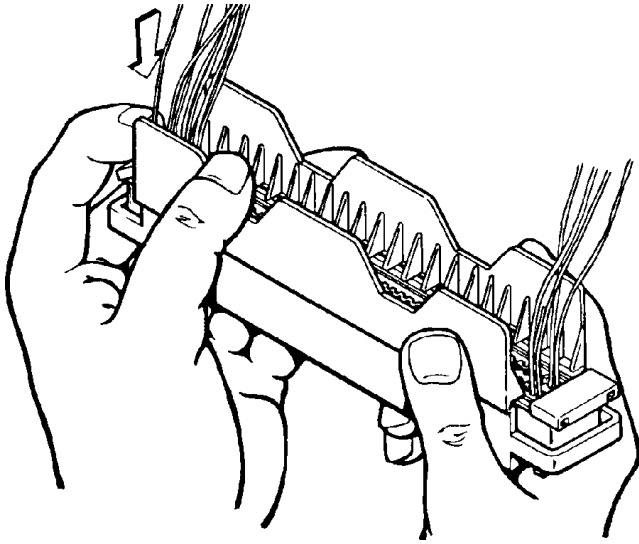


832754

- 3.07 Remove insertion tool and repeat procedure for remaining modules.

4.0 Module Reentry and Rearrangements

- 4.01 To remove module from sealant box, release end latches and remove nipples (see arrows below) from base of box with snips or sheath knife. Remove module.

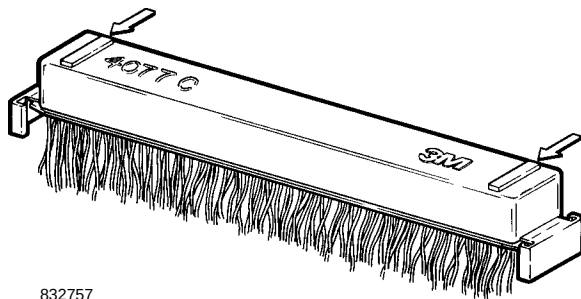

832757


Note: Sealant boxes must not be reused.

- 4.02 Wipe grease from test port side of module.

- 4.03 Perform necessary rearrangement of modules.

- 4.04 To install new sealant box, follow initial installation procedures with the following exception:

Twist Sealant Tag and remove from insertion tool. Before inserting module, use sealant tag to remove excess grease from the box. Scrape grease with tag held vertically.

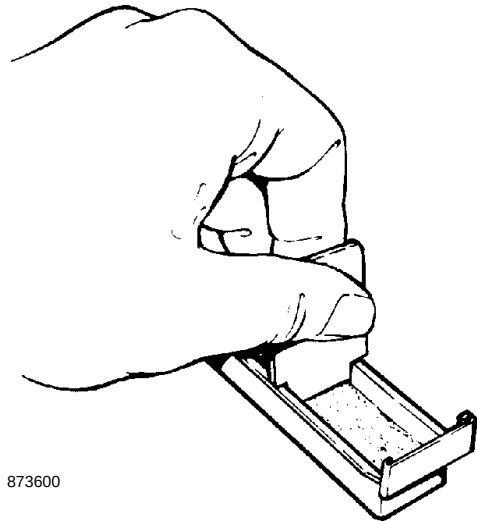

873600

Note: When wire ports have been filled previously with sealant, it will be necessary to remove a small amount of grease from the new sealant box to allow easy module insertion. Use this procedure when ONE OR MORE of the modules in the rearrangement has previously been in a sealant box.

Note: Carefully follow safety, health and environmental information on the product label or Material Safety Data Sheet.

Important Notice

All statements, technical information and recommendations related to the Seller's products are based on information believed to be reliable, but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use.

Any statements or recommendations of the Seller which are not contained in the Seller's current publications shall have no force or effect unless contained in an agreement signed by an authorized officer of the Seller. The statements contained herein are made in lieu of all warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose which warranties are hereby expressly disclaimed.

SELLER SHALL NOT BE LIABLE TO THE USER OR ANY OTHER PERSON UNDER ANY LEGAL THEORY, INCLUDING BUT NOT LIMITED TO NEGLIGENCE OR STRICT LIABILITY, FOR ANY INJURY OR FOR ANY DIRECT OR CONSEQUENTIAL DAMAGES SUSTAINED OR INCURRED BY REASON OF THE USE OF ANY OF THE SELLER'S PRODUCTS THAT WERE DEFECTIVE.

**Telecom Systems Division**

6801 River Place Blvd.
Austin, TX 78726-9000
800/426-8688

34-7030-9963-9
Printed in USA
© 3M 1993

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[3M:](#)
[4077-C](#)