



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



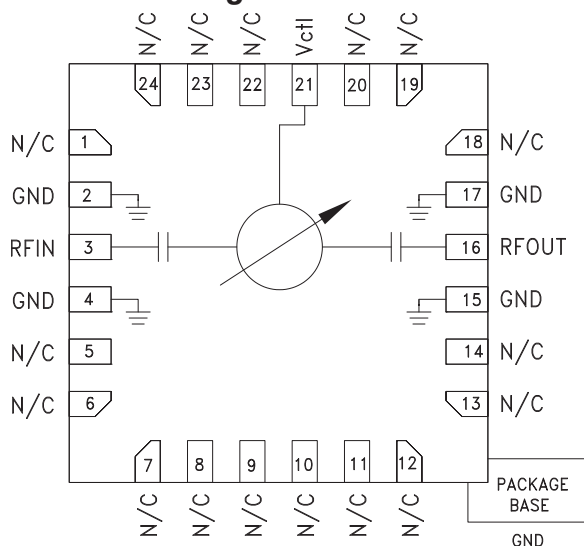
THIS PAGE INTENTIONALLY LEFT BLANK

Typical Applications

The HMC932LP4E is ideal for:

- EW Receivers
- Military Radar
- Test Equipment
- Satellite Communications
- Beam Forming Modules

Functional Diagram



Features

- Wide Bandwidth: 12 - 18 GHz
- 390° Phase Shift
- Low Insertion Loss: 4 dB
- Low Phase Error: ±10 deg Typ.
- Single Positive Voltage Control
- 24 Lead 4x4 mm QFN Package: 16 mm²

General Description

The HMC932LP4E is an Analog Phase Shifter which is controlled via an analog control voltage from 0 to +13V. The HMC932LP4E provides a continuously variable phase shift of 0 to 390 degrees from 12 to 18 GHz, with extremely consistent low insertion loss versus phase shift and frequency. The high accuracy HMC932LP4E is monotonic with respect to control voltage and features a typical low phase error of ±10 degrees over a wide bandwidth. The HMC932LP4E is housed in an RoHS compliant 4x4 mm QFN leadless package.


Electrical Specifications, $T_A = +25^\circ \text{C}$, 50 Ohm System

Parameter	Min.	Typ.	Max.	Units
Frequency Range	12		18	GHz
Phase Shift Range		390		deg
Insertion Loss		4		dB
Return Loss (input and output)		14		dB
Control Voltage Range	0		13	V
Control Current Range			± 1	mA
Input IP3		32		dBm
Input Power @ - 5° Shift In Insertion Phase (V _{ctl} = 0V)		12		dBm
Input Power @ - 2° Shift In Insertion Phase (V _{ctl} = 0.5V)		12		dBm
Phase Voltage Sensitivity		25		deg/V
Phase Error (peak) *		± 10		deg
Phase Error (average) *		+6 / -3		deg
Modulation Bandwidth		75		MHz
Insertion Phase Temperature Sensitivity		0.15		deg/°C


* Up to a phase shift range of 360 degrees.

390° ANALOG PHASE SHIFTER, 12 - 18 GHz

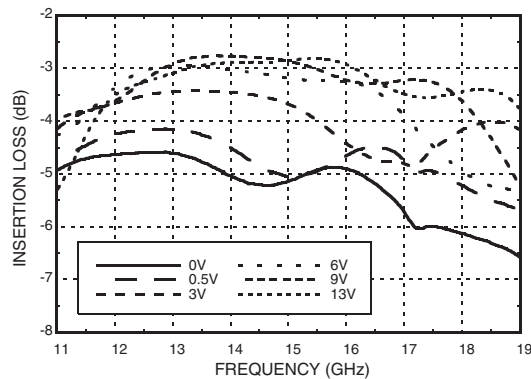
Insertion Loss vs. Frequency



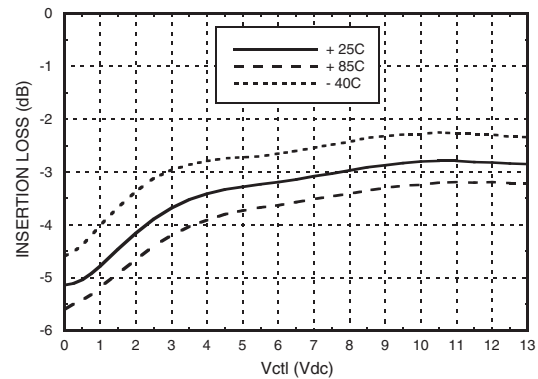
Insertion Loss vs. V_{ctl} , $F = 15$ GHz




Phase Shift vs. V_{ctl}

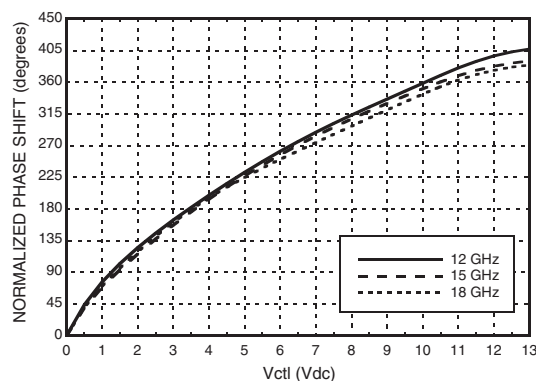

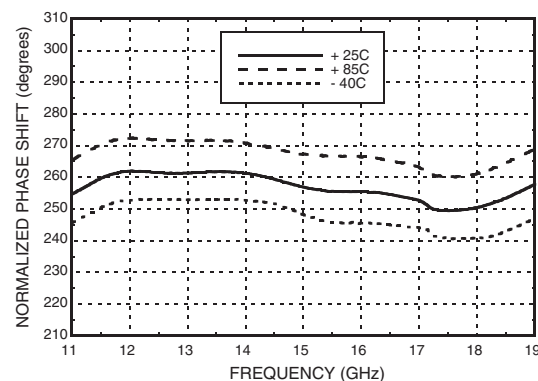
**Phase Shift vs. Frequency @ $V_{ctl} = 6$ V
(Relative to $V_{ctl} = 0$ V)**








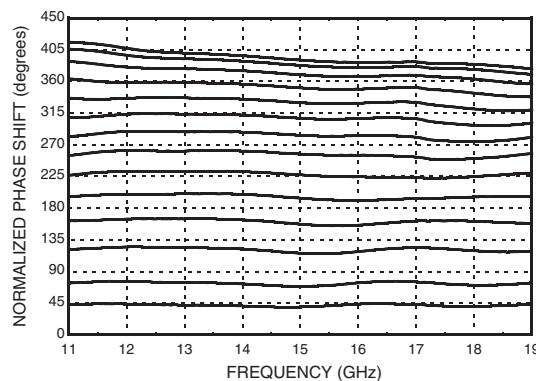
**Phase Shift vs. Frequency
(Relative to $V_{ctl} = 0$ V) $V_{ctl} = 0.5$ to 13V**








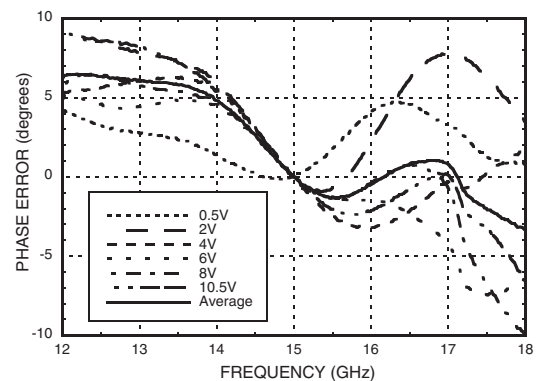**Phase Error vs.
Frequency, $F_{mean} = 15$ GHz [1]**



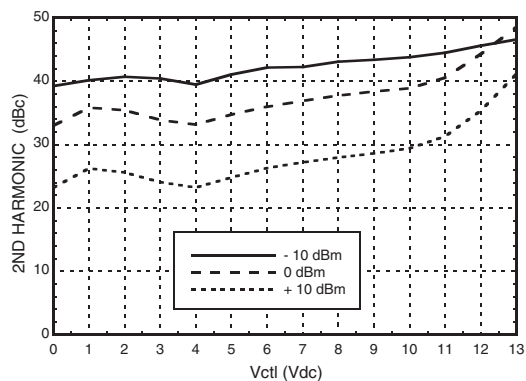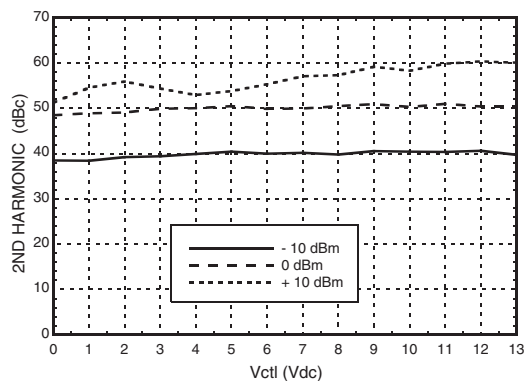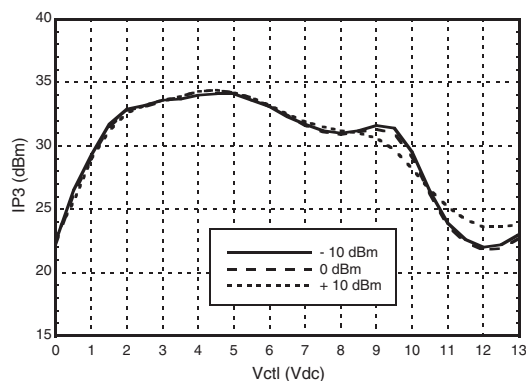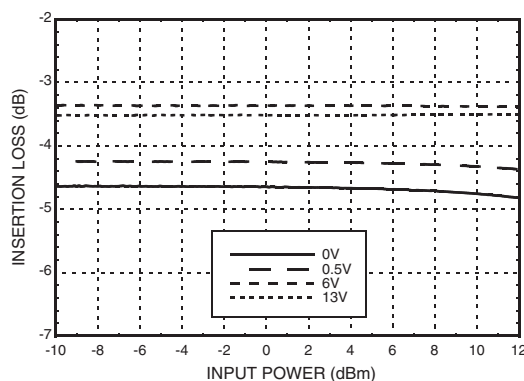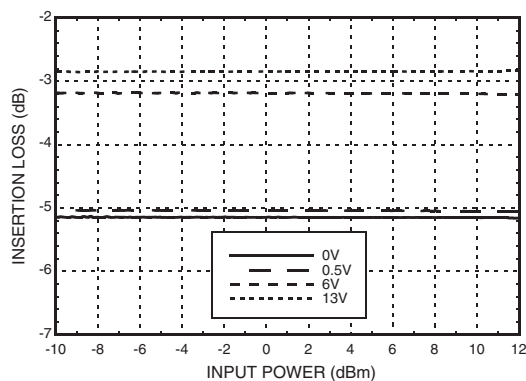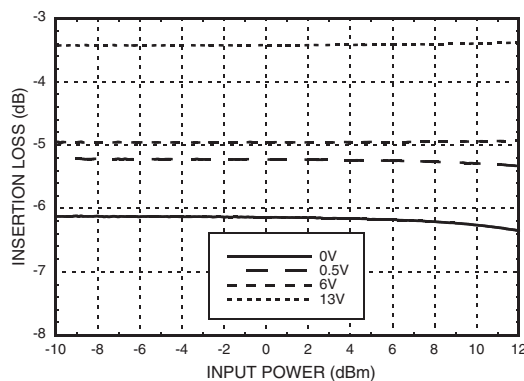[1] 0 to 10.5V provides 0 - 360 degrees phase shift range

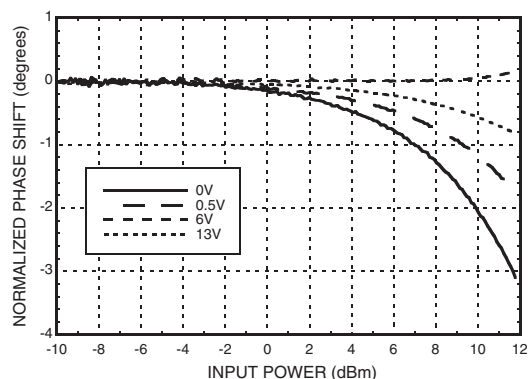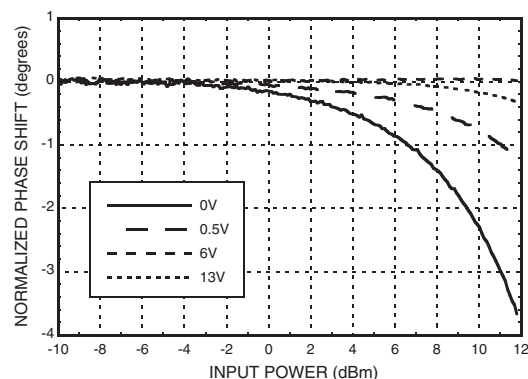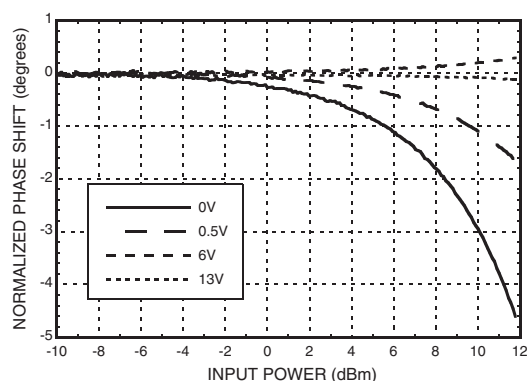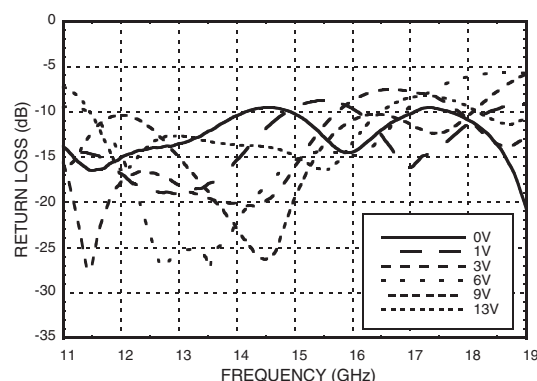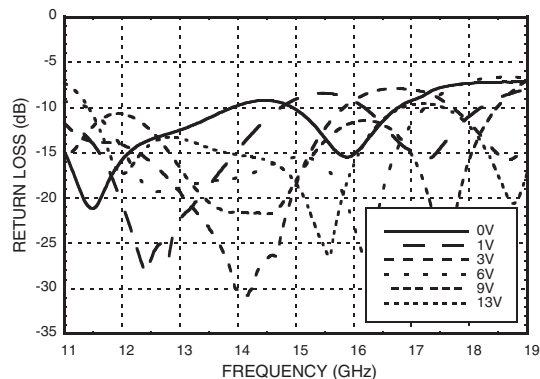**390° ANALOG PHASE SHIFTER,
12 - 18 GHz**
Second Harmonics vs. V_{ctl} , $F = 15$ GHz

Third Harmonics vs. V_{ctl} , $F = 15$ GHz

Input IP3 vs. V_{ctl} , $F = 15$ GHz

Insertion Loss vs. P_{in} @ 12 GHz

Insertion Loss vs. P_{in} @ 15 GHz

Insertion Loss vs. P_{in} @ 18 GHz


**390° ANALOG PHASE SHIFTER,
12 - 18 GHz**
Phase Shift vs. Pin @ 12 GHz

Phase Shift vs. Pin @ 15 GHz

Phase Shift vs. Pin @ 18 GHz

**Input Return Loss vs.
Frequency, Vctl = 0 to +13V**

**Output Return Loss vs.
Frequency, Vctl = 0 to +13V**

Reliability Information

Junction Temperature (Tj)	150 °C
Nominal Junction Temperature (T = 85 °C, Pin = 10 dBm)	87 °C
Thermal Resistance (Junction to GND Paddle)	80 °C/W
Operating Temperature	-40 to +85 °C


Absolute Maximum Ratings

Input Power (RFIN)	+26 dBm
Control Voltage (Vctl)	-0.5V to +15V
Storage Temperature	-65 to +150 °C
ESD Sensitivity (HBM)	Class 1B



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

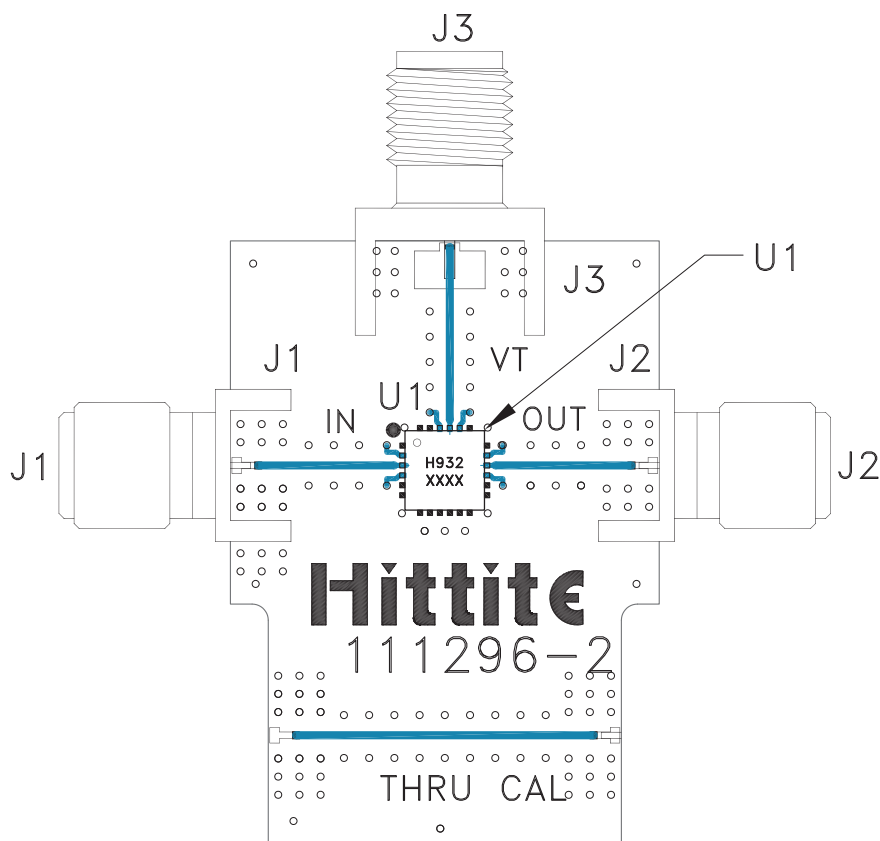Evaluation PCB



List of Materials for Evaluation PCB 108812 ^[1]

Item	Description
J1, J2	PCB Mount SMA Connector, SRI
J3	PCB Mount SMA Connector
U1	HMC932LP4E Analog Phase Shifter
PCB [2]	111296 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.