

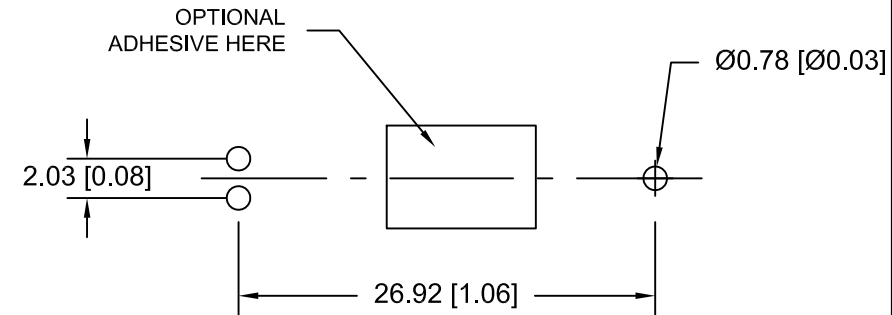
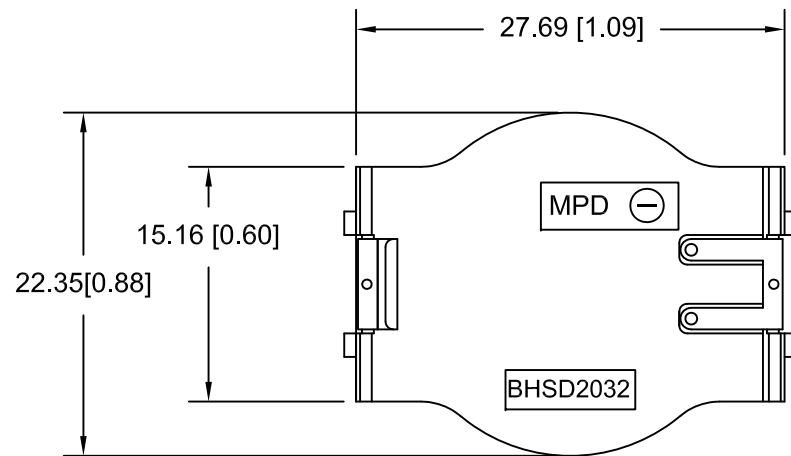


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/19/11	B	UPDATED PCB LAYOUT	T.B.	B.S.	
02/24/12	C	ADDED OPTION ADHESIVE NOTE TO PCB LAYOUT	T.B.	B.S.	
01/10/14	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
07/18/14	E	DIM. 22.35 WAS 22.17 DIM. Ø0.78 WAS Ø1.52 ADDED DIM. 29.17 ADDED CONTACT DETAIL	T.B.	B.S.	

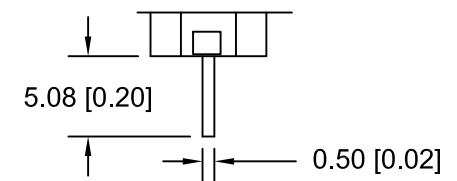

PCB LAYOUT

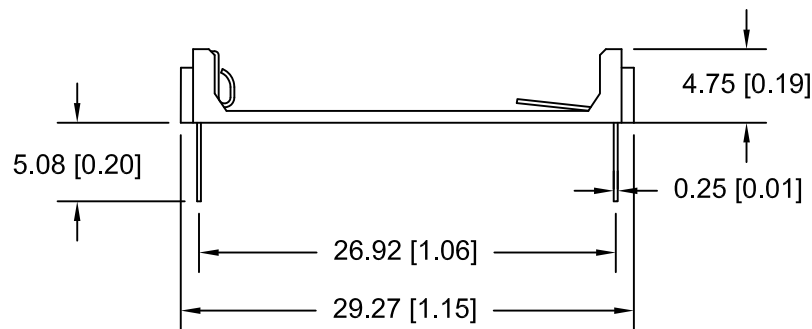

Square Contact Detail

SPECIFICATIONS:

- * Holder material- LCP Vectra, Color white, UL File No. E174096
- * Contacts : Phosphor Bronze C5191, Gold Flash, 1u - 3u thickness
- * Temperature range: -40°C to +280°C
- * Vibration Test: 10-50-10 Hz swept in 60 seconds
X,Y,Z direction: 1 hour each direction
- * Result: No dislodgement of the cell or damage
No discontinuity over 10 micro-seconds
- * Shock Test: Half sine wave acceleration 150G. 6 m/s
3 shock pulses each direction per axis, total of 18 pulses
- * Result: No evidence of physical damage
- * Drop Test: 1meter - No dislodgement of cell
- * ROHS 2 Compliant

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
		Approved By T.B.	
Fractional ± .8 (.030)	Title BASE, CR2032 THROUGH HOLE BATTERY		
Angular ± 3°	Date 07/18/14	Drawing Number BHSD-2032-PC	