



**ZHX10x0**

## ***Family of Transceivers***

**Product Specification**

PS006905-0501



This publication is subject to replacement by a later edition. To determine whether a later edition exists, or to request copies of publications, contact:

**ZiLOG Worldwide Headquarters**

910 E. Hamilton Avenue  
Campbell, CA 95008  
Telephone: 408.558.8500  
Fax: 408.558.8300

[www.ZiLOG.com](http://www.ZiLOG.com)

Windows is a registered trademark of Microsoft Corporation.

**Document Disclaimer**

© 2001 by ZiLOG, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZiLOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZiLOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. Except with the express written approval ZiLOG, use of information, devices, or technology as critical components of life support systems is not authorized. No licenses or other rights are conveyed, implicitly or otherwise, by this document under any intellectual property rights.

# Table of Contents

Description .....	1
Features .....	1
Pin Descriptions .....	2
VCC Positive Supply .....	2
GND Ground .....	2
TXD Transmit Data .....	2
RXD Receive Data .....	3
SD Shutdown .....	3
LEDA IRED Driver Anode .....	3
Recommended Application Circuit .....	4
Electrical and Timing Specifications .....	5
Transceiver Performance .....	7
Mechanical Drawings .....	8
ZHX10x0 Soldering and Cleaning Recommendations .....	11
Reflow Soldering .....	11
Manual Soldering .....	11
Cleaning .....	12
ZHX10x0 Packing, Storage, and Baking Recommendations .....	13
Storage .....	13
Baking .....	13
Moisture-Proof Packing .....	13
Taping Specifications .....	14
Ordering Information .....	18
Document Number Description .....	18
Customer Feedback Form .....	19
Customer Information .....	19
Product Information .....	19
Return Information .....	19
Problem Description or Suggestion .....	19



## ***List of Figures***

Figure 1. Application Block Diagrams .....	4
Figure 2. Typical Radiant Intensity ( $I_E$ ) Versus Angle .....	7
Figure 3. Typical Irradiance ( $E_e$ ) Versus Angle at $BER = 1 \times 10^{-8}$ .....	7
Figure 4. ZHX1000 Mechanical Drawing .....	9
Figure 5. ZHX1010 Mechanical Drawing .....	10
Figure 6. Temperature Profile at the Top Surface of ZHX10x0 .....	11
Figure 7. ZHX1000 Reel Dimensions (Unit: mm) .....	14
Figure 8. ZHX1000 Tape Dimensions and Configuration (Unit: mm) .....	15
Figure 9. ZHX1010 Reel Dimensions (Unit: mm) .....	16
Figure 10. ZHX1010 Tape Dimensions and Configuration (Unit: mm) .....	17

## ***List of Tables***

Table 1. Pin Out for the ZHX10x0 Family of Transceivers .....	2
Table 2. Absolute Maximum Ratings .....	5
Table 3. Recommended Operating Conditions .....	5
Table 4. Electrical Characteristics .....	5

## Description

The ZILOG ZHX10x0 Family of transceivers is the ideal choice for applications in today's ultra-compact and power-conscious portable products, such as mobile phones, digital cameras, portable printers, handheld computers, or personal data assistants (PDAs). Designed to support the SIR (serial infrared) Infrared Data Association (IrDA) Data standard (2.4–115.2 Kbps, 1 meter minimum), LocalTalk™, and Sharp ASK™ modes, the transceiver combines an infrared emitting diode (IRED), a PIN photodiode detector, a digital AC coupled IRED driver, and a receiver/decoder with noise discrimination circuitry in a single, miniature package.

The ZILOG ZHX10x0 Family provides an efficient implementation of the IrDA-Data standard in a small footprint format. Application circuit space is also minimized, as only two external resistors and one capacitor are needed to complete the IrDA transceiver solution. The ZHX10x0 Family meets the IEC825-Class 1 Eye Safety limits.

Two external shields are available to minimize radio frequency interference (RFI) and electromagnetic interference (EMI) problems. ZHX1000 is the full shield option for high EMI/RFI applications. ZHX1010 is the slim shield option for most applications.

## Features

- Compliant to IrDA SIR Specifications (2.4–115.2 Kbps, 1 meter minimum)
- Wide supply voltage range, 2.4 to 5.5 V
- Low power, 120  $\mu$ A (typical) at 3 V
- Two form factors—Full shield (9.9 mm long x 4.2 mm wide x 4.0 mm high) and slim shield (9.9 mm long x 3.7 mm wide x 4.0 mm high)
- Three external components: two resistors and one capacitor
- Extended operating temperature range (–30 °C to +85 °C)

## Pin Descriptions

The ZHX10x0 Family of transceivers uses the pins listed in Table 1. The pins are described in this section.

**Table 1. Pin Out for the ZHX10x0 Family of Transceivers**

Pin	Name	Function	I/O
1	LEDA	IRLED anode	—
2	TXD	Transmitter input	I
3	RXD	Receiver output	O
4	SD	Enables shutdown mode	I
5	V <sub>CC</sub>	Supply voltage	—
6	GND	Ground	—

### V<sub>CC</sub> Positive Supply

(Power)

Connect to positive power supply (2.4–5.5 V).

Place a .33- $\mu$ F ceramic bypass capacitor (optional) as close as possible to the V<sub>CC</sub> pin.

### GND Ground

(Power)

Connect to ground of the power supply. A solid ground plane is recommended for proper operation.

### TXD Transmit Data

(Input, active high)

This CMOS input is used to transmit serial data.

This input has an internal pull-down resistor that is disabled (open-circuited) during shutdown. TXD has integrated digital AC coupling that prevents inadvertent “always on” IRLEDs; therefore, no external AC coupling components are required for input signals between GND and V<sub>CC</sub>.

## RXD Receive Data

(Output, active low).

This output indicates received serial data. It is a tri-state, slew rate controlled CMOS output (tri-stated during shutdown) driver capable of driving a standard CMOS or LSTTL load. No external resistor is required.

## SD Shutdown

(Input, active high)

This input is used to place the integrated circuit into shutdown mode. Maximum current draw in shutdown mode is 1  $\mu$ A. Module shutdown current might be limited by the choice of capacitor used from  $V_{CC}$  to ground. A 0.1-mF ceramic capacitor with very high DC impedance (1–10 G ohm) is required to minimize shutdown current to nanoamp levels. During shutdown, the output is tri-stated, and the TXD input pull-down resistor is disabled (open circuited).

## LEDA IRED Driver Anode

(Output, active low).

This output is internally connected to the IRED anode and is connected to LEDA through a current limiting resistor. Current to the IRED must be limited to a maximum of 500 mA (20% duty cycle maximum). The maximum voltage on this pad is limited to +5.5 volts or  $V_{CC}$ .

## Recommended Application Circuit

Figure 1 shows applications for the ZHX10x0 Family of transceivers.

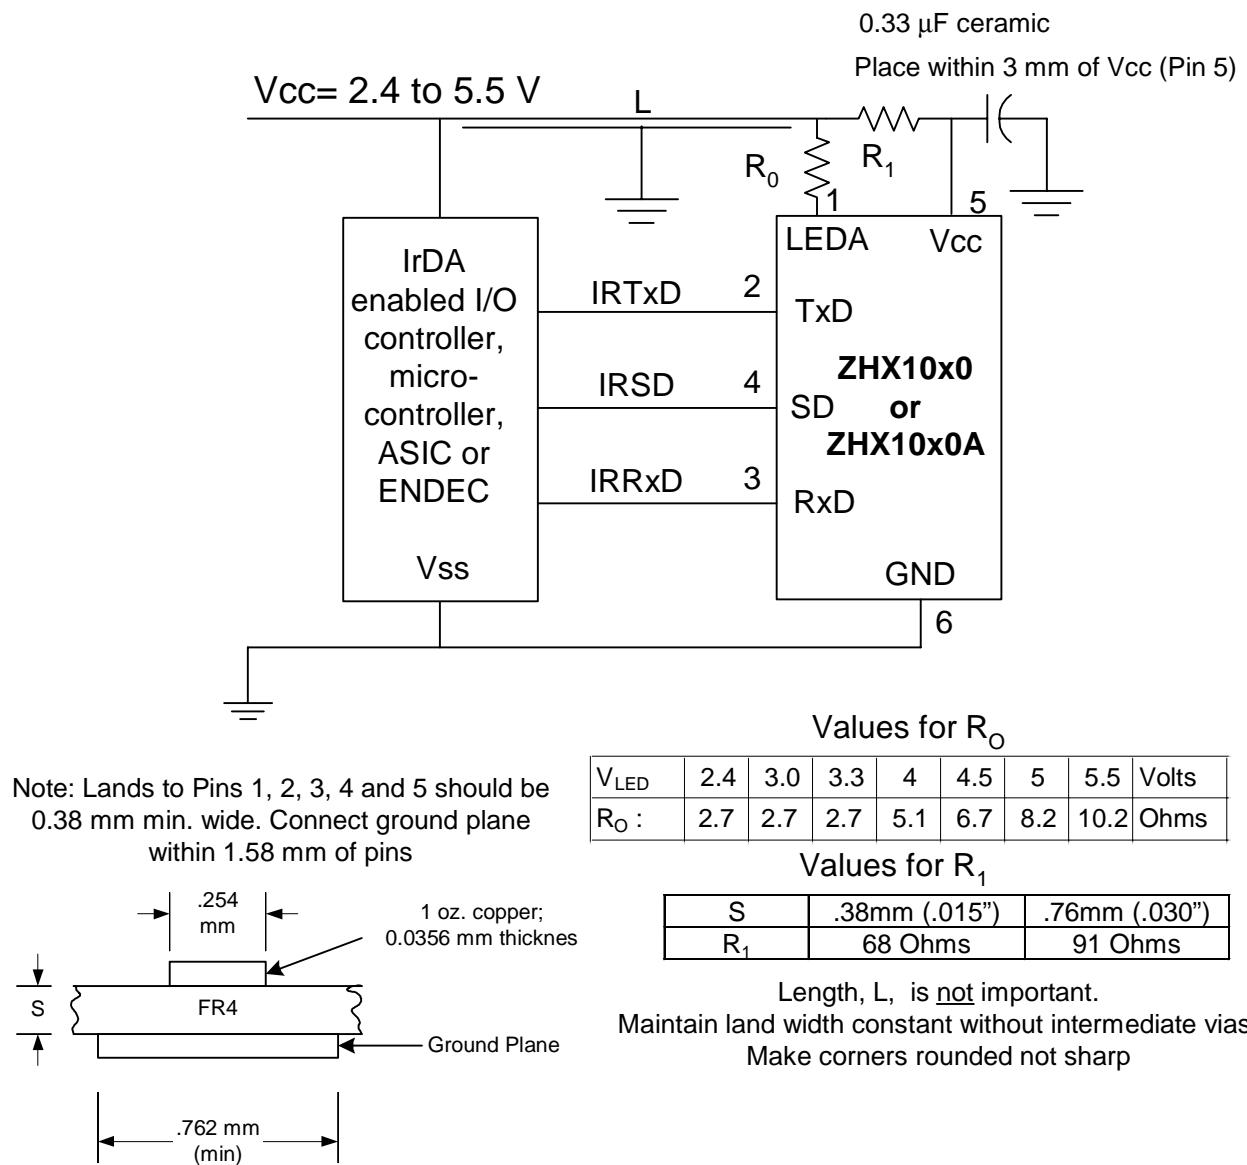


Figure 1. Application Block Diagrams

## Electrical and Timing Specifications

Table 2 through Table 4 present the electrical and timing specifications for the ZHX10x0 Family of transceivers.

**Table 2. Absolute Maximum Ratings**

Parameter	Symbol	Minimum	Maximum	Unit	Comment
Supply Voltage	V <sub>CC</sub>	–0.3	6.0	V	
Power Dissipation	P <sub>D</sub>		500	mW	
Junction Temperature	T <sub>J</sub>		125	°C	
Storage Temperature		–55	85	°C	
Solder Temperature (10 seconds)			230	°C	
IRED Current			700	mA	20% duty cycle
Any Pin Voltage		–0.5	V <sub>CC</sub> +0.5	V	

**Table 3. Recommended Operating Conditions**

Parameter	Symbol	Minimum	Maximum	Unit
Supply Voltage	V <sub>CC</sub>	2.4	5.5	V
Ambient Operating Temperature	T <sub>A</sub>	–30	85	°C

**Table 4. Electrical Characteristics**

Parameter	Condition	Min	Typical	Max	Unit
Operating Current (I <sub>CC</sub> )	No load, SD = TXD = “0” 3.0 V; T = 25 °C		120	200	µA
Shutdown Current (I <sub>SD</sub> )	SD = “V <sub>CC</sub> ”, Photodiode input current = 0		0.001	1	µA
Peak Current Transmit (I <sub>IRED</sub> ) Transmitter				300	mA
Radiant Intensity (I <sub>E</sub> )(±15°)	LED Peak I <sub>F</sub> = 300 mA, TXD Logic “High”	40		100	mW/sr
Radiant Intensity	TXD Logic “Low”			0.3	mW/sr

Unless otherwise noted: V<sub>CC</sub>/LEDA=2.4 V to 5.5 V, GND= 0 V, T<sub>A</sub>= –30 °C to 85 °C

Table 4. Electrical Characteristics (Continued)

Parameter	Condition	Min	Typical	Max	Unit
Angle of Half Intensity		20			°
Optical Rise/Fall time		40			ns
Peak Wavelength		850	875	900	nm
Optical Overshoot			3		%
Receiver					
Detection Threshold Irradiance	±15 °		2.5	3.5	µW/cm <sup>2</sup>
Overload Irradiance		500			µW/cm <sup>2</sup>
Sunlight Ambient Rejection	No modulation	500			µW/cm <sup>2</sup>
Digital Input/Output					
Input High (Logic 1) Voltage, V <sub>IH</sub>	TXD, SD	0.6 V <sub>CC</sub>	V <sub>CC</sub> + 0.5 V		V
Input Low (Logic 0) Voltage, V <sub>IL</sub>	TXD, SD	-0.5	0.2 V <sub>CC</sub>		V
Output High (Logic 1) Voltage, V <sub>OH</sub>	RXD/ = -250 mA @ 1.8 V	2.2			V
Output Low (Logic 0) Voltage, V <sub>OL</sub>	RXD/ = 1 mA		0.4		V
Output Leakage (RXD, Anode)	SD = "1"	-1	+1		µA
Input Leakage	SD, TXD = "0"	-1	+1		µA
Input Current	TXD = "1", SD = "0"	4	100		µA
AC Parameters	(C <sub>LOAD</sub> = 25 pF)				
Transmit Output Pulse Width	TXD = 1 > 200 ms	18	150		µs
Recovery Delay from Shutdown to Full Sensitivity (T <sub>RECOVERY</sub> )	SD = "1" → "0"		200		µs
Receiver Latency (T <sub>L</sub> )		50	100		µs
Rise Time (T <sub>R</sub> )	V <sub>CC</sub> = 1.8–5.5 V	100			ns
Fall Time (T <sub>F</sub> )	V <sub>CC</sub> = 1.8–5.5 V	100			ns
Pulse Width (T <sub>W</sub> ) (RXD)	I <sub>DET</sub> = 1 µA, 1.6-ms pulse	1.1	1.6	3.9	µs
Pulse Jitter (T <sub>J</sub> ) (RXD)	Irradiance = 3.5 mW/cm <sup>2</sup> –500 mW/cm <sup>2</sup>		400		ns
Pulse Delay (T <sub>D</sub> ) (RXD)	Irradiance = 3.5 mW/cm <sup>2</sup> –500 mW/cm <sup>2</sup>		1.8		µs
Unless otherwise noted: V <sub>CC</sub> /LEDA=2.4 V to 5.5 V, GND= 0 V, T <sub>A</sub> = -30 °C to 85 °C					

## Transceiver Performance

Figure 2 and Figure 3 show the performance of the ZHX10x0 Family of transceivers.

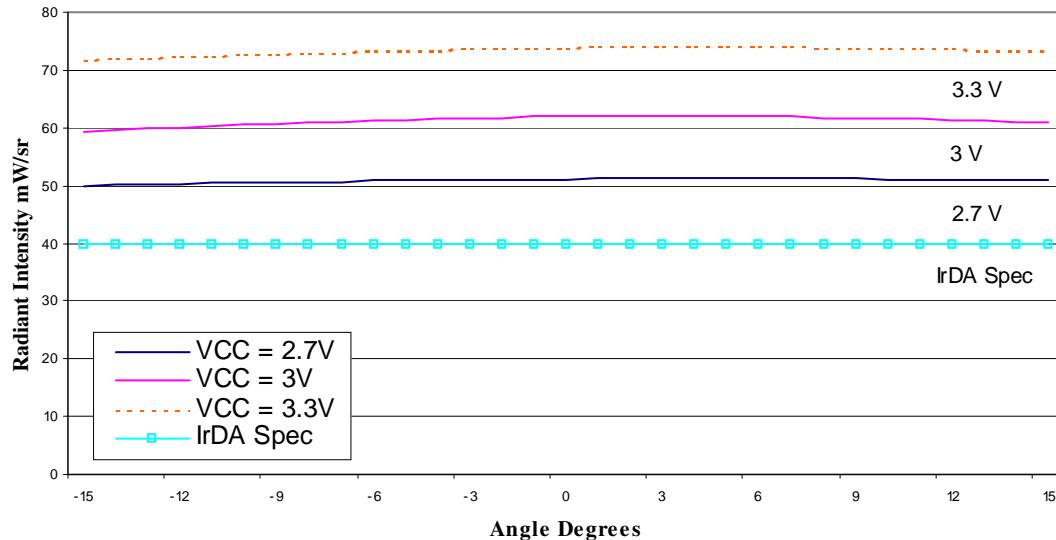


Figure 2. Typical Radiant Intensity ( $I_E$ ) Versus Angle

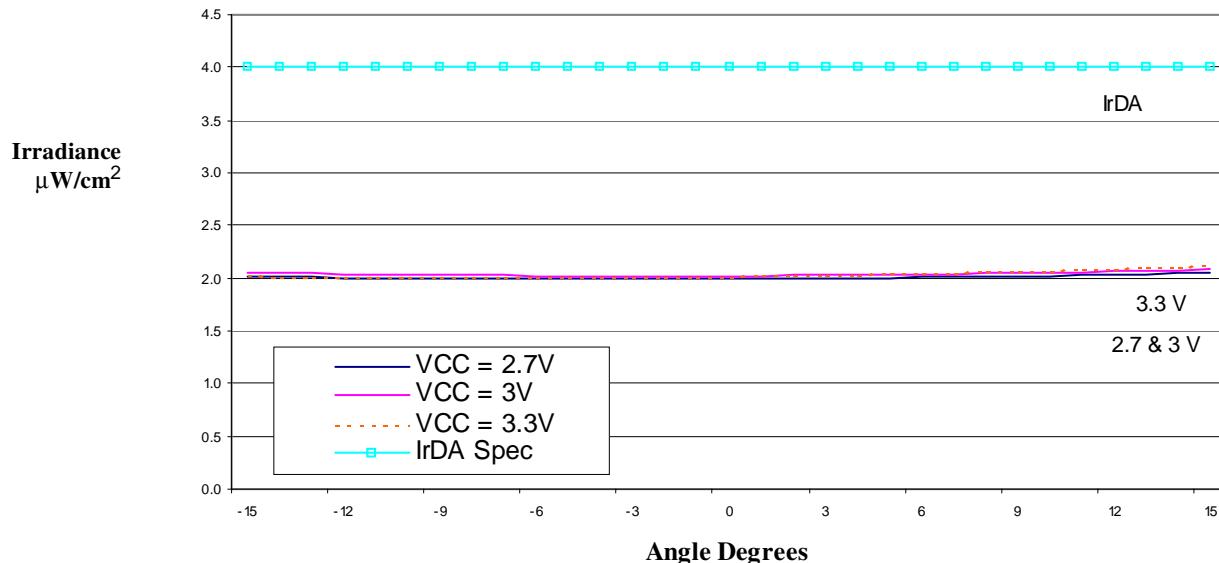


Figure 3. Typical Irradiance ( $E_e$ ) Versus Angle at  $\text{BER} = 1 \text{ in } 10^{-8}$

## Mechanical Drawings

Figure 4 and Figure 5 show the mechanical drawings for the ZHX1000 and ZHX1010, respectively.

- ▶ **Note:** The Zilog ZHX10x0 Family of transceivers will continue to show the original Calibre part number.

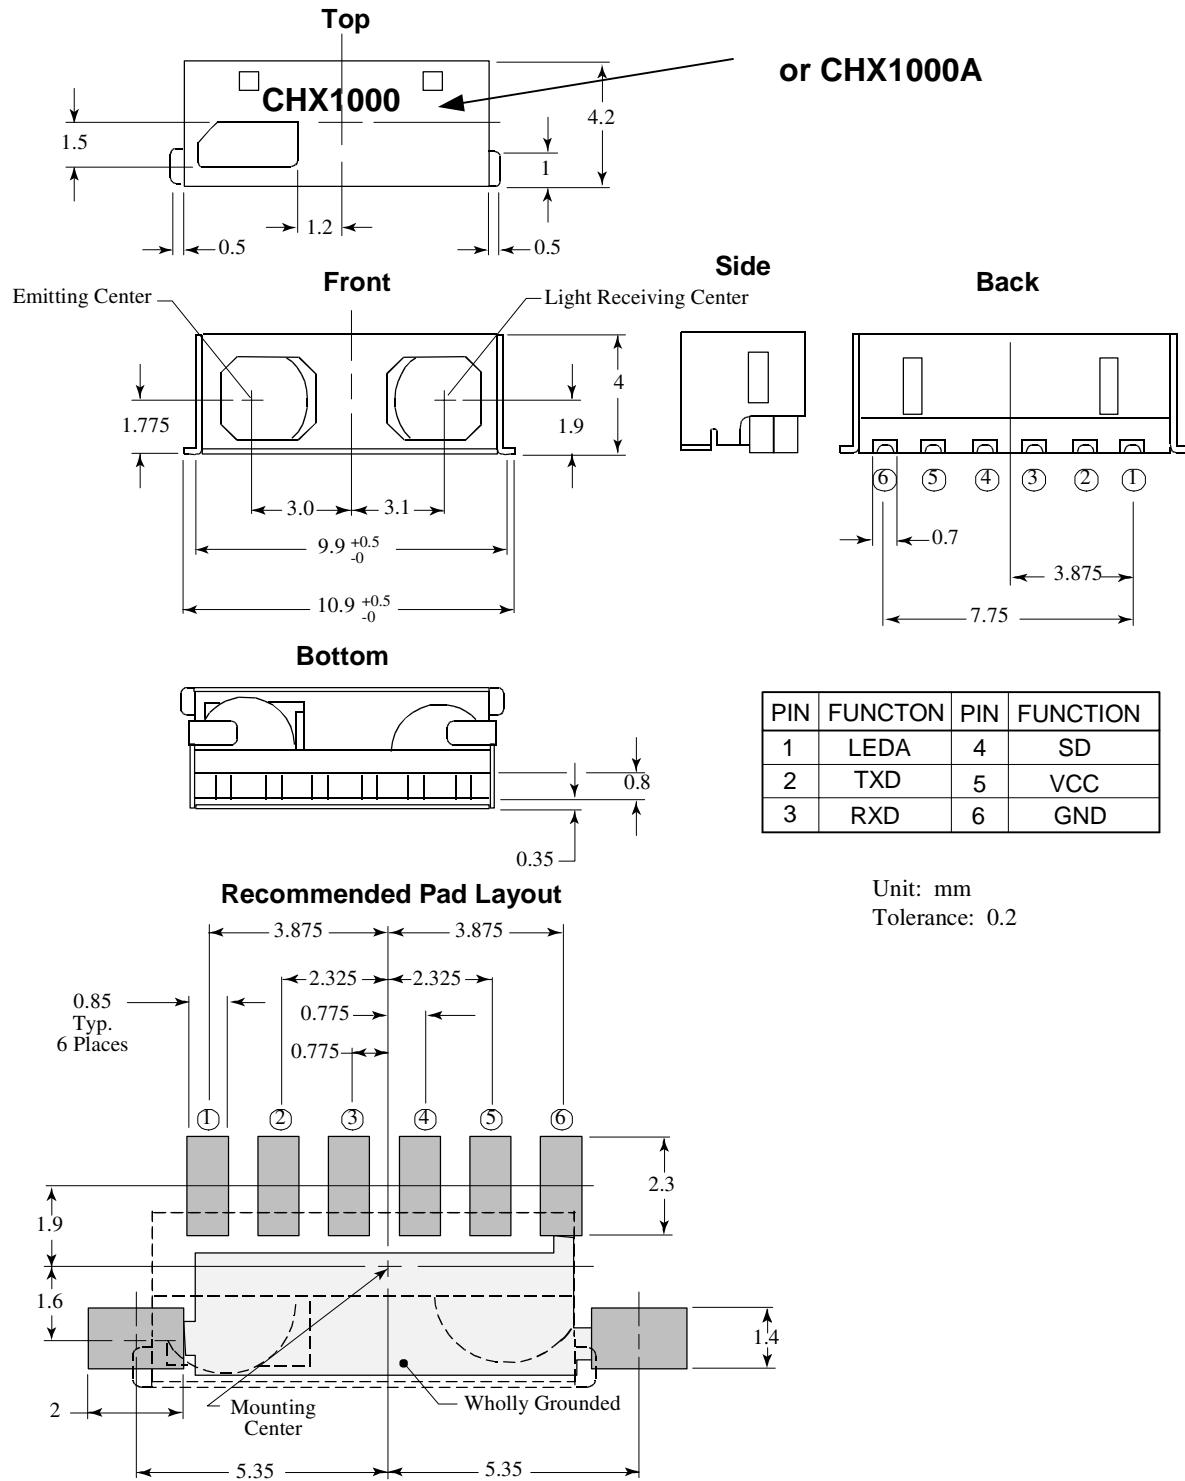


Figure 4. ZHX1000 Mechanical Drawing

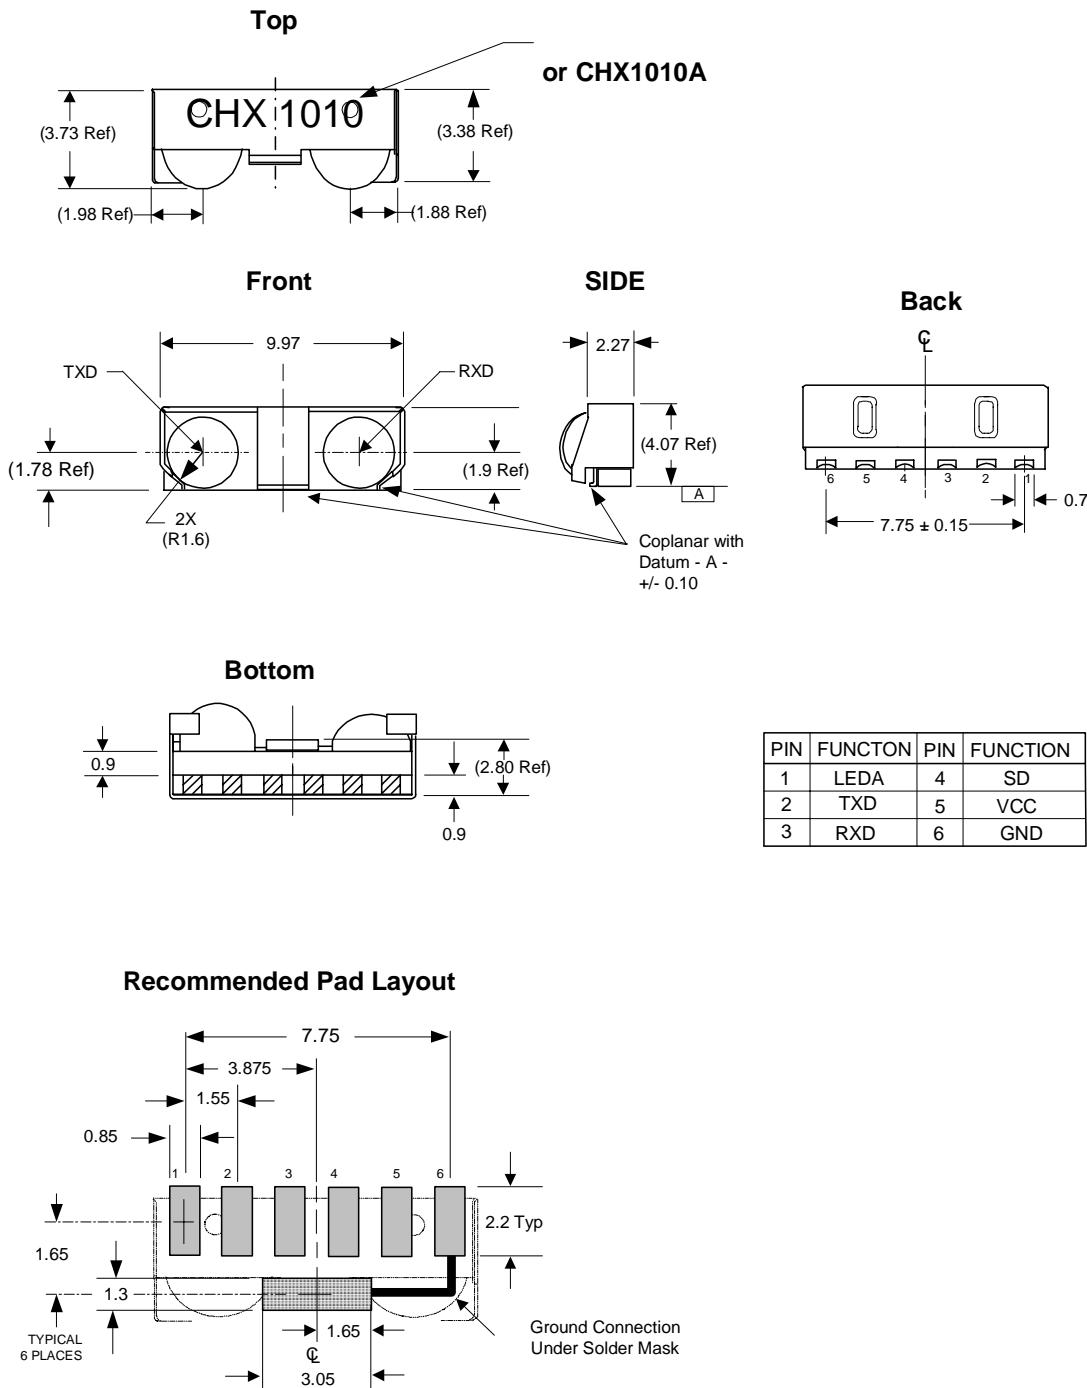


Figure 5. ZHX1010 Mechanical Drawing

## ZHX10x0 Soldering and Cleaning Recommendations

Follow these recommendations to maintain the performance of the ZHX10x0 Family of transceivers.

### Reflow Soldering

- Reflow soldering paste is recommended:
  - Melting temperature: 178 °C ~ 192 °C
  - Composition: Sn 63%, Pb 37%
- The recommended thickness of the metal mask is between 0.2 mm and 0.25 mm for screen printing.
- Number of soldering times: 2 times maximum
- The temperature profile at the top surface of ZHX10x0, shown in Figure 6, is recommended.

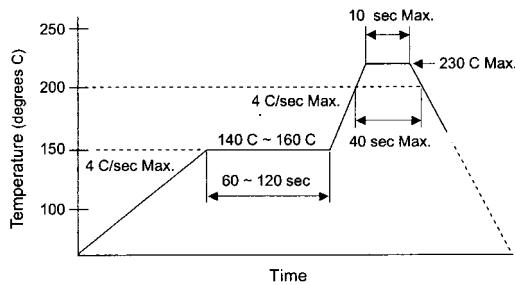


Figure 6. Temperature Profile at the Top Surface of ZHX10x0

### Manual Soldering

- Use 63/37 or silver solder.
- Use a soldering iron of 25 W or smaller. Adjust the temperature of the soldering iron below 300 °C.
- Finish soldering within 3 seconds.
- Handle only after ZHX10x0 has cooled off.

## Cleaning

Perform cleaning after soldering under the following conditions:

- Cleaning agent: Alcohol
- Temperature and time: 30 seconds below 50 °C or 3 minutes below 30 °C
- Ultrasonic cleaning: Below 20 W

## ZHX10x0 Packing, Storage, and Baking Recommendations

Follow these recommendations to maintain the performance of the ZHX10x0 Family of transceivers.

### Storage

To avoid moisture absorption, ZHX10x0 reels must remain in the original, unopened moisture-proof packing. Parts must be soldered within 48 hours after unpacking. Reels that have been unpacked, but will not be soldered within 48 hours, must be stored in a desiccator.

### Baking

Parts that have been stored over 6 months or unpacked over 48 hours must be baked under the following guidelines.

#### Reels

60 °C for 48 hours or more

#### Loose Parts


- 100 °C for 4 hours or more
  - or
- 125 °C for 2 hours or more
  - or
- 150 °C for 1 hour or more

### Moisture-Proof Packing


In order to avoid moisture absorption during transportation and storage, ZHX10x0 reels are packed in aluminum envelopes that contain a desiccant with a humidity indicator. The indicator changes color from blue to pink as moisture is absorbed.

## Taping Specifications

Figure 7 and Figure 8 show the reel dimensions and tape dimensions and configuration for the ZHX1000.

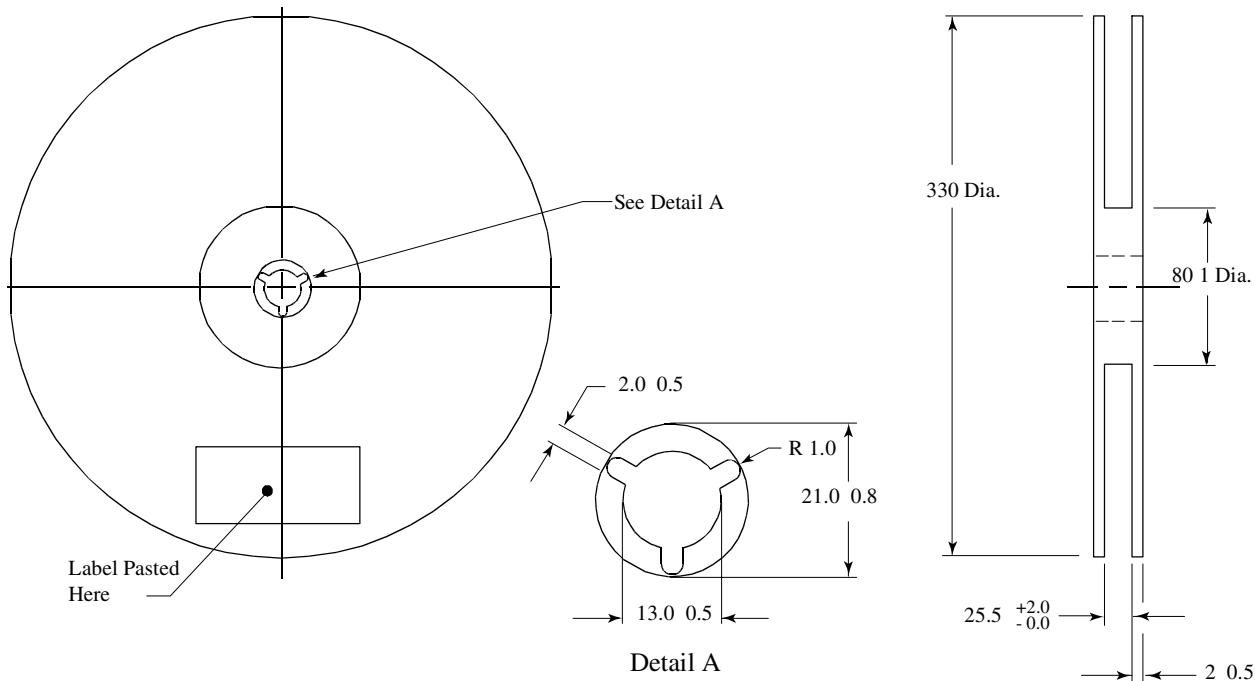


**Figure 7. ZHX1000 Reel Dimensions (Unit: mm)**

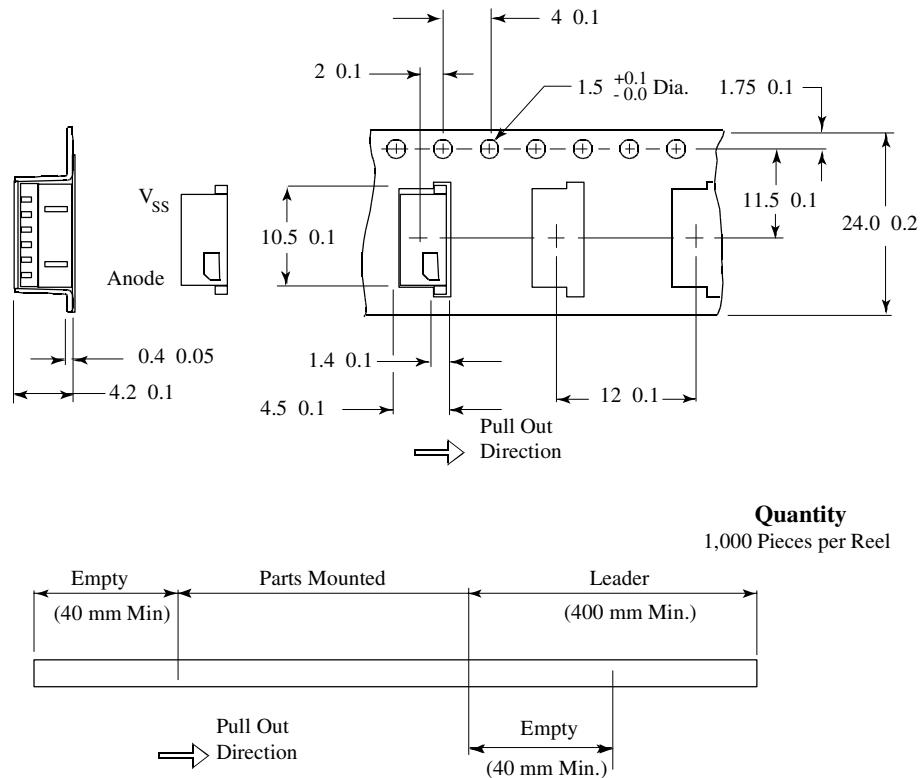

**Figure 8. ZHX1000 Tape Dimensions and Configuration (Unit: mm)**

Figure 9 and Figure 10 show the reel dimensions and tape dimensions and configuration for the ZHX1010.

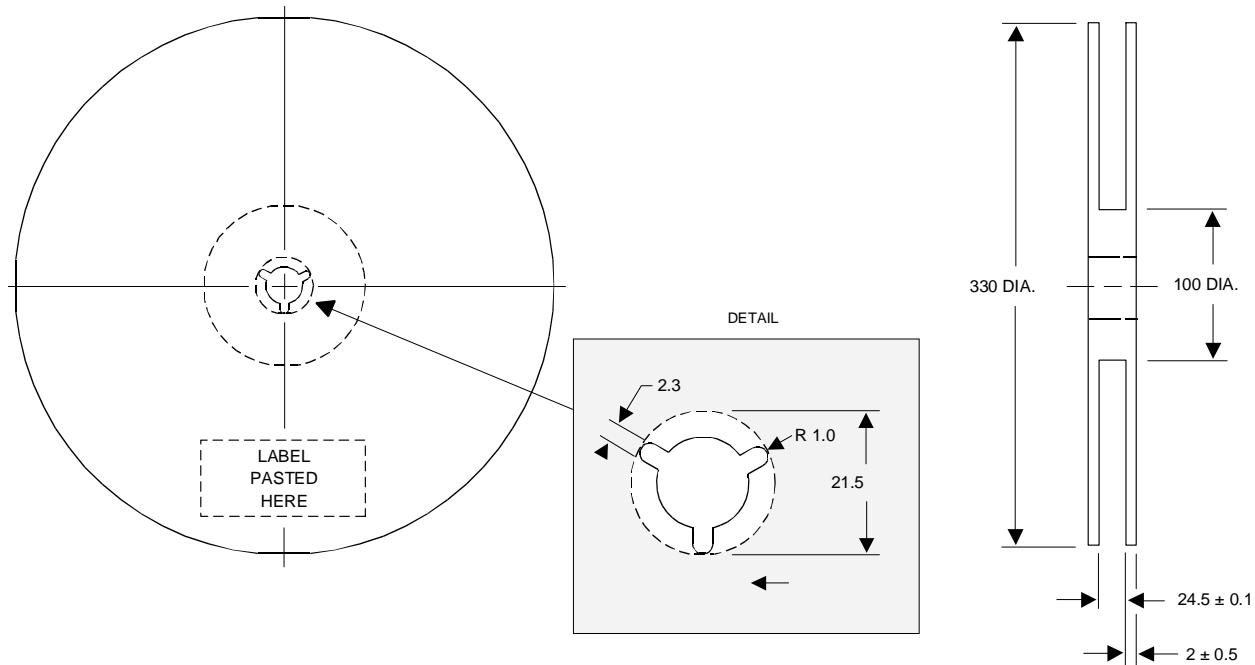

**Figure 9. ZHX1010 Reel Dimensions (Unit: mm)**

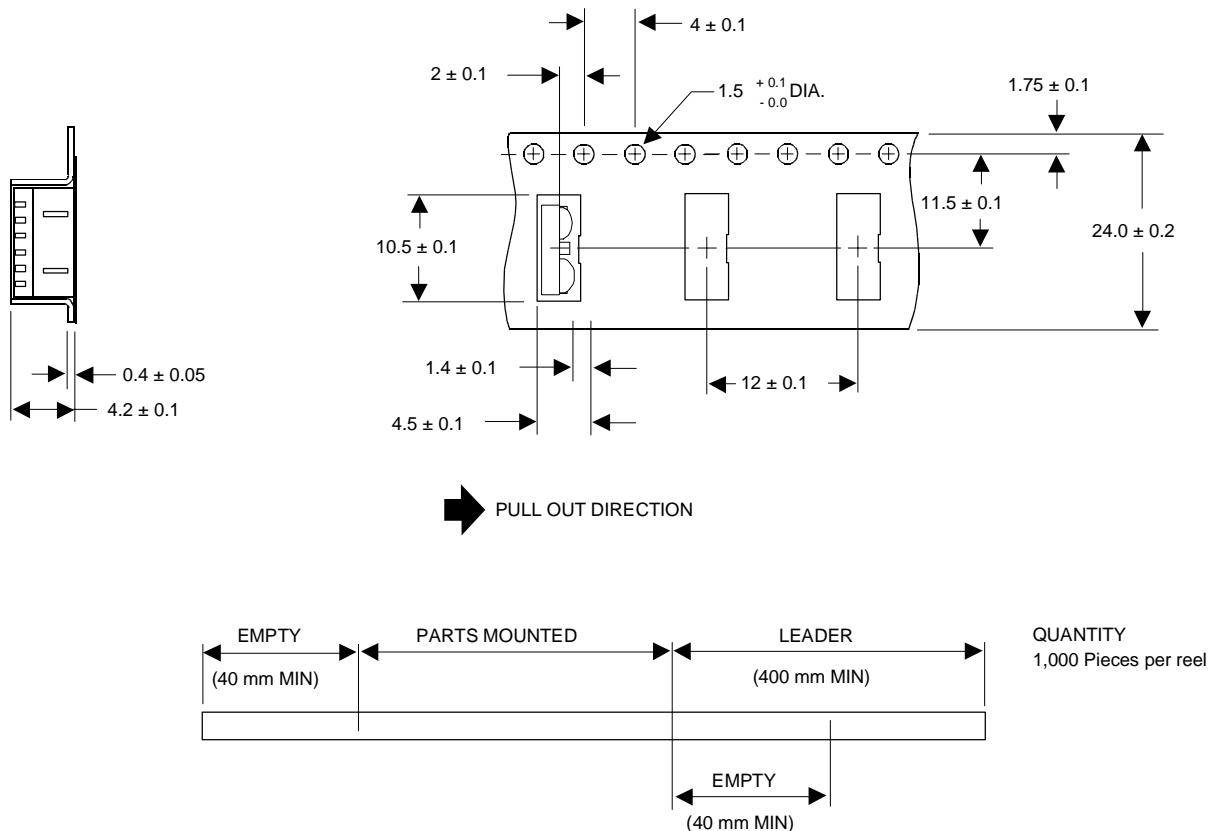


Figure 10. ZHX1010 Tape Dimensions and Configuration (Unit: mm)

## Ordering Information

To order ZHX1000 (formerly Calibre CHX1000 or CHX1000A), use ZiLOG part number ZHX1000MV115THTR.

To order ZHX1010 (formerly Calibre CHX1010 or CHX1010A), use ZiLOG part number ZHX1010MV115THTR.

- **Notes:** In order to ensure the lowest possible lead times, ZiLOG uses two different fab sources for the transceiver IC. Both of these ICs have been extensively tested and qualified to meet the ZHX10x0 Family of transceivers specifications.

When you order ZHX1000MV115THTR, ZiLOG reserves the right to ship ZHX1000MQ115THTR if the availability will better meet your requested ship date.

When you order ZHX1010MV115THTR, ZiLOG reserves the right to ship ZHX1010MQ115THTR if the availability will better meet your requested ship date.

## Document Number Description

The Document Control Number that appears in the footer of each page of this document contains unique identifying attributes, as indicated in the following table:

PS	Product Specification
NNNN	Unique Document Number
RR	Revision Number
MMYY	Month and Year Published

## Customer Feedback Form

If you experience any problems while operating the ZHX10x0 Family of transceivers, or if you note any inaccuracies while reading this product specification, please copy and complete this form, then mail or fax it to ZiLOG (see "Return Information," below). We also welcome your suggestions!

### Customer Information

Name	Country
Company	Phone
Address	Fax
City/State/Zip	email

### Product Information

Serial # or Board Fab #/Rev #
Software Version
Document Number
Host Computer Description/Type

### Return Information

ZiLOG  
System Test/Customer Support  
910 E. Hamilton Avenue, Suite 110, MS 4-3  
Campbell, CA 95008  
Fax: (408) 558-8536  
Email: tools@zilog.com

### Problem Description or Suggestion

Provide a complete description of the problem or your suggestion. If you are reporting a specific problem, include all steps leading up to the occurrence of the problem. Attach additional pages as necessary.

---

---

---

---