

To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.)

Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

M51951A,B/M51952A,B**VOLTAGE DETECTING, SYSTEM RESETTNG IC SERIES****DESCRIPTION**

M51951A,B/M51952A,B are semiconductor integrated circuits suited for detecting supply voltage and resetting all types of logic circuits such as CPUs.

They include a built-in delay circuit to provide a retardation time (200 μ sec typ.).

They find extensive applications, including circuits for battery checking, level detecting and waveform shaping.

FEATURES



- Few external parts
- Low threshold operating voltage (Supply voltage to keep low-state at low supply voltage
..... 0.6V (TYP.) at $R_L = 22k\Omega$)
- Wide supply voltage range 2 ~ 17V
- Sudden change in power supply has minimal effect on the ICs
- Wide application range
- SIL package of the same height as DIP (5-pin SIP)
- Extra-small 3-pin package (3-pin FLAT)

APPLICATION

Reset circuit of Pch, Nch, CMOS, microcomputer, CPU and microcomputer, Reset of logic circuit, Battery check circuit, Switching circuit back-up voltage, Level detecting circuit, Waveform shaping circuit, Delay waveform generating circuit, DC-DC converter, Over voltage protection circuit.

RECOMMENDED OPERATING CONDITION



Supply voltage range 2 ~ 17V

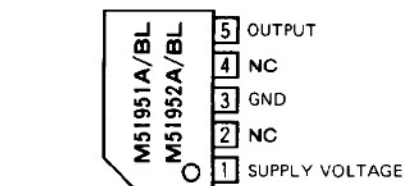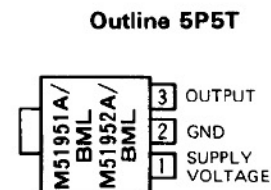PIN CONFIGURATION (TOP VIEW)**Outline 5P5T****Outline SOT-89**

- ① SUPPLY VOLTAGE
② GND
③ OUTPUT


Outline TO-92L

NC: NO CONNECTION

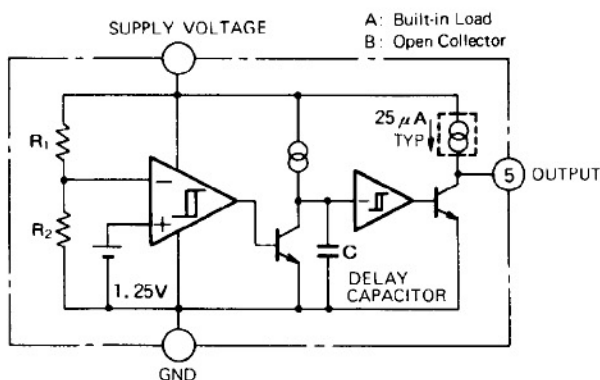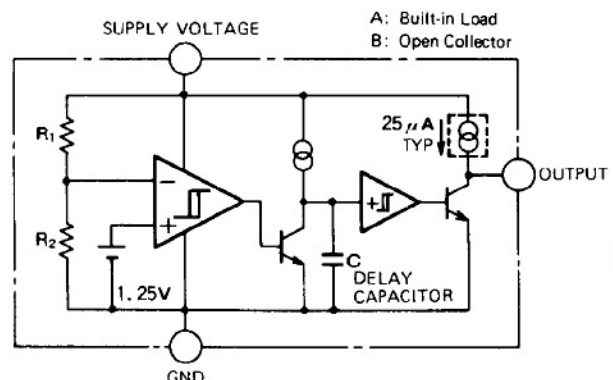BLOCK DIAGRAM**M51951A, B****M51952A, B**

VOLTAGE DETECTING, SYSTEM RESETTIC IC SERIES

FUNCTION DIAGRAM

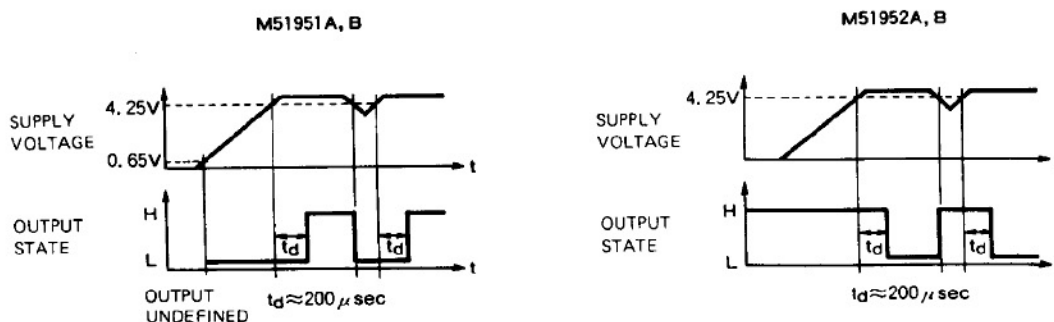

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Rating	Unit
V_{CC}	Supply voltage		18	V
I_{sink}	Output Sink Current		6	mA
V_O	Output voltage	A Type (Output with constant current load)	V_{CC}	V
		B Type (Open collector output)	18	
P_d	Power dissipation	5P SIL	450	mW
		3P SIL	700	
		3P FLAT	500	
K_θ	Thermal Derating	$T_a \geq 25^\circ\text{C}$	5P SIL: 4.5 3P SIL: 7 3P FLAT: 5	mW/°C
T_{opr}	Operating temperature		$-30 \sim +85$	°C
T_{stg}	Storage temperature		$-40 \sim +125$	°C

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$, unless otherwise noted)

"L" reset type	"H" reset type
M51951A	M51952A
M51951B	M51952B


Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_S	Detecting voltage		4.05	4.25	4.45	V
ΔV_S	Hysteresis voltage		30	50	80	mV
$V_S/\Delta T$	Detecting voltage Temperature Coefficient		—	0.01	—	%/°C
I_{CC}	Circuit Current	Type A $V_{CC} = 5V$	—	450	680	μA
		Type B $V_{CC} = 5V$	—	420	630	
t_{pd}	Delay Time	$T_a = -30 \sim +85^\circ\text{C}$ (Note)	80	200	500	μs
V_{sat}	Output Saturation Voltage	L reset type $V_{CC} = 4V, I_{sink} = 4mA$	—	0.2	0.4	V
		H reset type $V_{CC} = 5V, I_{sink} = 4mA$	—	—	—	
V_{OPL}	Threshold Operating Voltage	L reset type Minimum supply voltage for IC operation	—	0.67	0.8	V
		$R_L = 2.2k\Omega, V_{sat} \leq 0.4V$	—	0.55	0.7	
		$R_L = 100k\Omega, V_{sat} \leq 0.4V$	—	—	—	
I_{OH}	Output Leak Current	Type B	—	—	30	nA
		Type B, $T_a = -30 \sim +85^\circ\text{C}$	—	—	1	μA
I_{OC}	Output Load Current	Type A $V_{CC} = 5V, V_O = 1/2V_{CC}$	—40	—25	—17	μA
V_{OH}	Output High Voltage	Type A	$V_{CC} - 0.2$	$V_{CC} - 0.06$	—	V

Note: Delay time can be changed by changing delay capacitor for external capacitor types.
(Please refer to typical characteristics)


VOLTAGE DETECTING, SYSTEM RESETTIC IC SERIES

TYPICAL CHARACTERISTICS


**TYPICAL CHARACTERISTICS
THERMAL DERATING
(MAXIMUM RATING)**

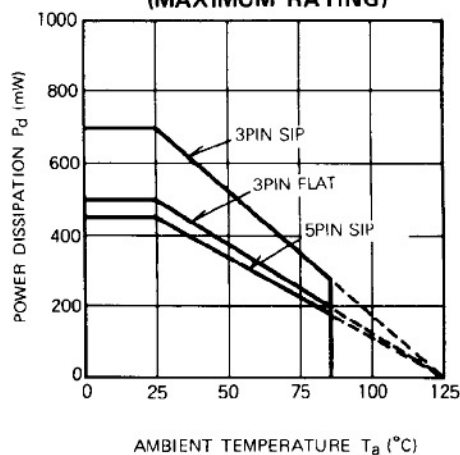


**DETECTING VOLTAGE VS.
AMBIENT TEMPERATURE
(Supply voltage detecting series)**

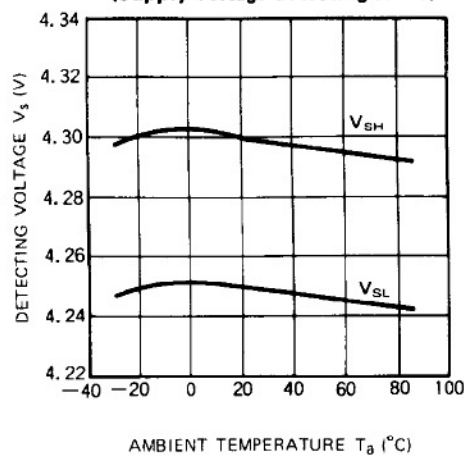


**DELAY TIME VS.
AMBIENT TEMPERATURE
(M5195XX, Built-in capacitor type)**

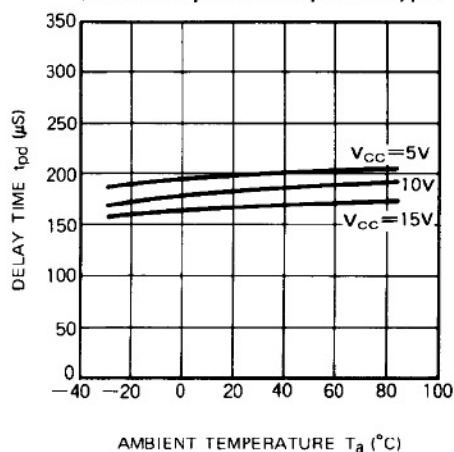


**THRESHOLD OPERATING VOLTAGE
([L] reset type)**

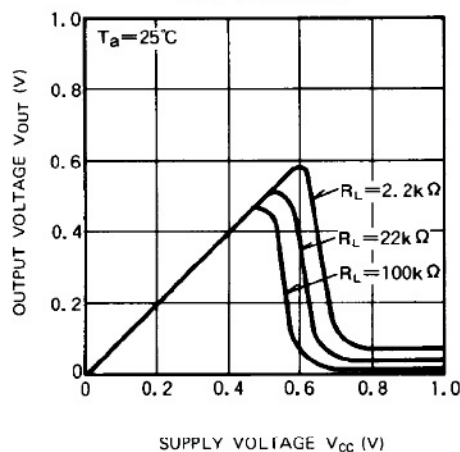

**OUTPUT SATURATION VOLTAGE VS.
OUTPUT SINK CURRENT**

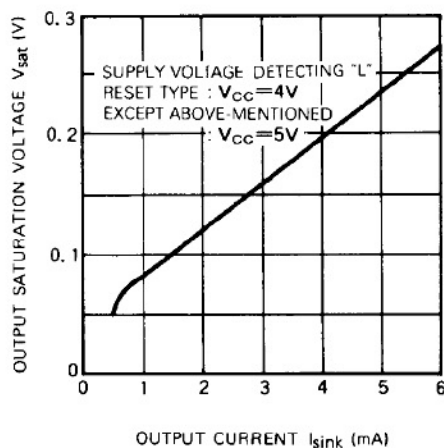


**OUTPUT LOAD CURRENT VS.
OUTPUT VOLTAGE
(M519XXA)**

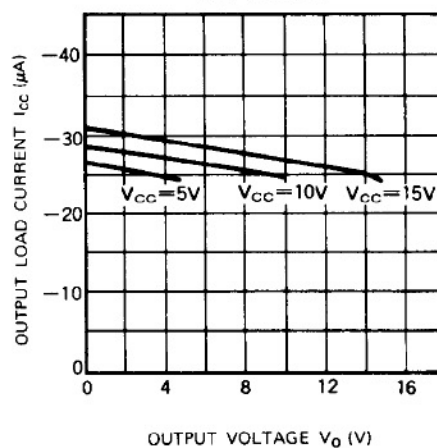


M51951A,B/M51952A,B

VOLTAGE DETECTING, SYSTEM RESETTIC IC SERIES

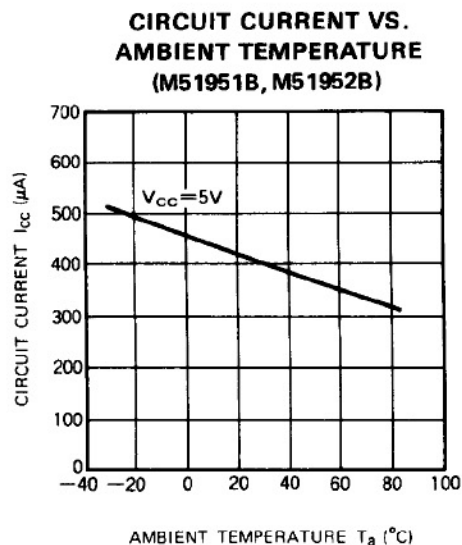

EXAMPLE OF APPLICATION CIRCUIT M5195XX Series Reset Circuit

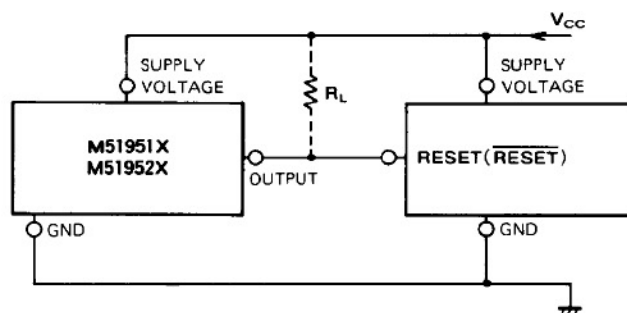

Note 1. When the detecting supply voltage is 4.25V, M51951, M51952, M51953 and M51954 are used.

When the voltage is anything except 4.25V, M51955, M51956, M51957 and M51958 are used.

Note 2. When the delay time is short, M51951, M51952, M51955 and M51956 are available. These ICs have a delay capacity and the delay time is about 200μs.

If a longer delay time is necessary, M51953, M51954, M51957 and M51958 are used.

Note 3. If M5195XX and the logic circuit have a common power supply, type A (built-in load type) can be applied whether a pull-up resistor is included in the logic circuit or not.

Note 4. The logic circuit preferably should not have a pull-down resistor, but if one is present, add load resistor R_L to overcome the pull-down resistor.

Note 5. When the reset terminal in the logic circuit is of the low reset type, M51951, M51953, M51955 and M51957 are used and when the terminal is of the high reset type, M51952, M51954, M51956 and M51958 are used.

Note 6. When a negative supply voltage is used, supply voltage side of M5195XX and the GND side are connected to negative supply voltage respectively.