

UPA

Miniature Sized, Low Impedance,
High Reliability For
Switching Power Supplies



Smaller



Low Impedance



Long Life




Anti-Solvent
Feature

- Lower impedance than UPW.
- Smaller case size and high ripple current.
- Compliant to the RoHS directive (2011/65/EU).

UPA

Low
Impedance


UPW

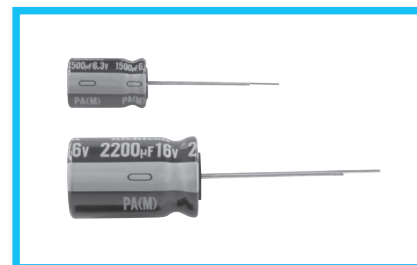

Specifications

Item	Performance Characteristics												
Category Temperature Range	-55 to +105℃												
Rated Voltage Range	6.3 to 35V												
Rated Capacitance Range	180 to 10000μF												
Capacitance Tolerance	±20% at 120Hz, 20℃												
Leakage Current	After 1 minute's application of rated voltage at 20℃, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.												
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35	120Hz 20℃						
	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12							
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.												
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	120Hz						
	Impedance ratio ZT / Z20 (MAX.)	Z-55℃ / Z+20℃	3	3	3	3							
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20℃ after D.C. bias plus rated ripple current is applied for 5000 hours (3000 hours for φD=8, 4000 hours for φD=10) at 105℃, the peak voltage shall not exceed the rated voltage.												
								Capacitance change	Within ±20% of the initial capacitance value (6.3V, 10V : ±30%)				
								tan δ	200% or less than the initial specified value (6.3V, 10V : 300%)				
Shelf Life	After storing the capacitors under no load at 105℃ for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20℃, they shall meet the specified values for the endurance characteristics listed above.												
								Leakage current	Less than or equal to the initial specified value				
Marking	Printed with white color letter on dark brown sleeve.												

Radial Lead Type

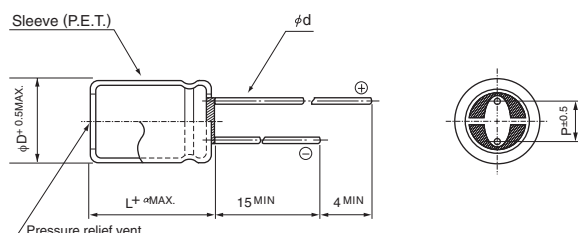


α	(L < 20)	1.5
	(L ≥ 20)	2.0

	φD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5	
φd	0.6	0.6	*0.6	0.8	0.8	

※ : In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm.

Type numbering system (Example : 10V 470µF)

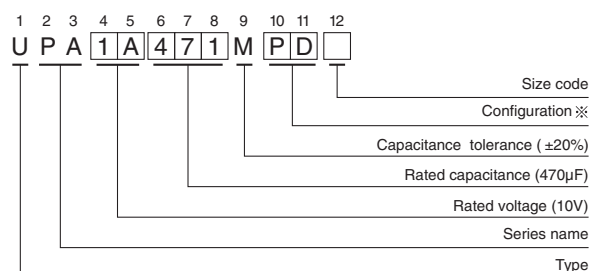

※ Configuration

φD	Pb-free leadwire Pb-free PET sleeve
8 · 10	PD
12.5 to 18	HD

Frequency coefficient of rated ripple current

Cap. (µF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
180 to 330		0.55	0.65	0.75	0.85	1.00
390 to 1000		0.70	0.75	0.80	0.90	1.00
1200 to 10000		0.80	0.85	0.90	0.95	1.00

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

UPA

■ Dimensions

Cap.(μF) Code		V (Code) Item		6.3 (0J)			10 (1A)			16 (1C)						
				Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C/100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C/100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C/100kHz	
					20°C / 100kHz	−10°C / 100kHz			20°C / 100kHz	−10°C / 100kHz			20°C / 100kHz	−10°C / 100kHz		
330	331												8 × 11.5	0.090	0.180	630
390	391												8 × 11.5	0.090	0.180	630
470	471						8 × 11.5	0.090	0.180	630			10 × 12.5	0.063	0.126	900
560	561	8 × 11.5	0.090	0.180	630		8 × 11.5	0.090	0.180	630						
680	681	8 × 11.5	0.090	0.180	630								8 × 15	0.062	0.124	860
													▲10 × 12.5	0.063	0.126	900
820	821						8 × 15	0.062	0.124	860			8 × 20	0.044	0.088	1220
							▲10 × 12.5	0.063	0.126	900			▲10 × 16	0.049	0.098	1240
							8 × 20	0.044	0.088	1220			10 × 16	0.049	0.098	1240
1000	102	8 × 15	0.062	0.124	860		▲10 × 12.5	0.063	0.126	900			●10 × 20	0.035	0.070	1490
		▲10 × 12.5	0.063	0.126	900		●10 × 16	0.049	0.098	1240						
1200	122	10 × 12.5	0.063	0.126	900		8 × 20	0.044	0.088	1220			10 × 20	0.035	0.070	1490
		●10 × 16	0.049	0.098	1240		▲10 × 16	0.049	0.098	1240						
		8 × 20	0.044	0.088	1220											
1500	152	▲10 × 16	0.049	0.098	1240		10 × 20	0.035	0.070	1490			10 × 25	0.033	0.066	1680
		●10 × 20	0.035	0.070	1490											
1800	182						10 × 20	0.035	0.070	1490						
							▲10 × 25	0.033	0.066	1680						
2200	222	10 × 20	0.035	0.070	1490		10 × 25	0.033	0.066	1680			12.5 × 20	0.029	0.058	1890
		●10 × 25	0.033	0.066	1680		●12.5 × 20	0.029	0.058	1890			●12.5 × 25	0.022	0.044	2280
2700	272	10 × 25	0.033	0.066	1680		12.5 × 20	0.029	0.058	1890			12.5 × 25	0.022	0.044	2280
3300	332	12.5 × 20	0.029	0.058	1890		12.5 × 25	0.022	0.044	2280			12.5 × 31.5	0.018	0.036	2720
													▲16 × 20	0.026	0.052	2330
3900	392	12.5 × 25	0.022	0.044	2280		12.5 × 25	0.022	0.044	2280			12.5 × 35.5	0.016	0.032	2940
4700	472	12.5 × 25	0.022	0.044	2280		12.5 × 31.5	0.018	0.036	2720			16 × 25	0.019	0.038	2760
							▲16 × 20	0.026	0.052	2330			▲18 × 20	0.025	0.050	2640
5600	562	12.5 × 31.5	0.018	0.036	2720		12.5 × 35.5	0.016	0.032	2940			16 × 31.5	0.017	0.035	2810
		▲16 × 20	0.026	0.052	2330								▲18 × 25	0.018	0.036	2850
6800	682	12.5 × 35.5	0.016	0.032	2940		16 × 25	0.019	0.038	2760			18 × 25	0.018	0.036	2850
8200	822	16 × 25	0.019	0.038	2760		16 × 31.5	0.017	0.034	2810						
		▲18 × 20	0.025	0.050	2640		▲18 × 25	0.018	0.036	2850						
10000	103	16 × 31.5	0.017	0.034	2810											
		▲18 × 25	0.018	0.036	2850											

V (Code) Cap.(μF) Code		Item		25 (1E)			35 (1V)			
				Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.	
		20°C / 100kHz	−10°C / 100kHz		20°C / 100kHz	−10°C / 100kHz				
180	181						8 × 11.5	0.090	0.180	630
270	271	8 × 11.5	0.090	0.180	630	8 × 15 ▲10 × 12.5	0.062 0.063	0.124 0.126	860 900	
330	331	8 × 11.5	0.090	0.180	630					
390	391	8 × 15	0.062	0.124	860	8 × 20 ▲10 × 16	0.044 0.049	0.088 0.098	1220 1240	
470	471	8 × 15 ▲10 × 12.5	0.062 0.063	0.124 0.126	860 900					
560	561	8 × 20 ▲10 × 16	0.044 0.049	0.088 0.098	1220 1240	10 × 20	0.035	0.070	1490	
680	681	10 × 16	0.049	0.098	1240	10 × 25	0.033	0.066	1680	
820	821	10 × 20	0.035	0.070	1490	12.5 × 20	0.029	0.058	1890	
1000	102	10 × 25 ●12.5 × 20	0.033 0.029	0.066 0.058	1680 1890	12.5 × 20	0.029	0.058	1890	
1200	122	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280	
1500	152					12.5 × 31.5 ▲16 × 20	0.018 0.026	0.036 0.052	2720 2330	
1800	182	12.5 × 25	0.022	0.044	2280	12.5 × 35.5 ▲16 × 20	0.016 0.026	0.032 0.052	2940 2330	
2200	222	12.5 × 31.5 ▲16 × 20	0.018 0.026	0.036 0.052	2720 2330	16 × 25 ▲18 × 20	0.019 0.025	0.038 0.050	2760 2640	
2700	272	12.5 × 35.5	0.016	0.032	2940	16 × 31.5 ▲18 × 25	0.017 0.018	0.035 0.036	2810 2850	
3300	332	16 × 25 ▲18 × 20	0.019 0.025	0.038 0.050	2760 2640	18 × 31.5	0.016	0.032	2910	
4700	472	18 × 25	0.018	0.036	2850					

▲ : In this case, [6] will be put at 12th digit of type numbering system.

● : In this case, [3] will be put at 12th digit of type numbering system.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UPA0J102MPD](#) [UPA0J103MHD](#) [UPA0J152MPD](#) [UPA1A392MHD](#) [UPA0J122MPD](#) [UPA1A152MPD](#)
[UPA1A182MPD](#) [UPA1A222MPD](#) [UPA1A332MHD](#) [UPA1A471MPD](#) [UPA1A472MHD](#) [UPA1A561MPD](#)
[UPA1A562MHD](#) [UPA1A682MHD](#) [UPA1A821MPD](#) [UPA1A272MHD](#) [UPA0J561MPD](#) [UPA0J222MPD](#) [UPA0J272MPD](#)
[UPA0J332MHD](#) [UPA1A122MPD](#) [UPA0J472MHD](#) [UPA0J562MHD](#) [UPA0J681MPD](#) [UPA0J682MHD](#)
[UPA0J822MHD](#) [UPA1A102MPD](#) [UPA1A822MHD](#) [UPA1C682MHD](#) [UPA1C821MPD](#) [UPA1E102MPD](#)
[UPA1E122MHD](#) [UPA1C681MPD](#) [UPA1E222MHD](#) [UPA1E271MPD](#) [UPA1E331MPD](#) [UPA1E391MPD](#)
[UPA1E471MPD](#) [UPA1E182MHD](#) [UPA1C332MHD](#) [UPA1C102MPD](#) [UPA1C122MPD](#) [UPA1C152MPD](#)
[UPA1C222MHD](#) [UPA1C331MPD](#) [UPA1E332MHD](#) [UPA1C391MPD](#) [UPA1C392MHD](#) [UPA1C471MPD](#)
[UPA1C472MHD](#) [UPA1C562MHD](#) [UPA1C272MHD](#) [UPA1V391MPD](#) [UPA1V561MPD](#) [UPA1V681MPD](#)
[UPA1E472MHD](#) [UPA1V332MHD](#) [UPA1E272MHD](#) [UPA1E821MPD](#) [UPA1E561MPD](#) [UPA1E681MPD](#)
[UPA1V102MHD](#) [UPA1V122MHD](#) [UPA1V152MHD](#) [UPA1V271MPD](#) [UPA1V272MHD](#) [UPA1V222MHD](#)
[UPA1V182MHD](#) [UPA1V181MPD](#) [UPA1A222MHD6](#) [UPA1E102MHD6](#) [UPA1V821MPD](#) [UPA1C472MHD6TN](#)
[UPA1A821MPD1TD](#) [UPA1A122MPD1TD](#) [UPA1E332MHD1TN](#) [UPA1V391MPD1TD](#) [UPA1E182MHD1TO](#)
[UPA0J222MPD6TD](#) [UPA1C391MPD1TD](#) [UPA1V561MPD1TD](#) [UPA1C681MPD6TD](#) [UPA1E561MPD6TD](#)
[UPA1A182MPD1TD](#) [UPA1A222MHD6TO](#) [UPA1C222MHD6TO](#) [UPA0J822MHD1TN](#) [UPA1V271MPD1TD](#)
[UPA0J152MPD1TD](#) [UPA0J332MHD1TO](#) [UPA1V272MHD6TN](#) [UPA1A471MPD1TD](#) [UPA1V102MHD1TO](#)
[UPA1E561MPD1TD](#) [UPA1C102MPD6TD](#) [UPA0J561MPD1TD](#) [UPA1E471MPD6TD](#) [UPA1E681MPD1TD](#)
[UPA1V681MPD1TD](#) [UPA1C122MPD1TD](#)