

■ Features

Design basis

The 16mm dia. series of compact size pushbuttons are 'finger-size', and consequently take up little panel space. AH165-2 series operators are about twice as large as the AH164 and AH165 series operators for easier operation. With many types of operator available, the most suitable switch can be identified by color, shape and legend, and have a smooth, quality "snap-action". In spite of their small size they have a highly reliable mechanism, and are eminently suited for solid state and other electronic circuits. AH164, AH165 and AH165-2 series contact block holders can easily be removed manually. Moreover, the contact block can be easily attached or detached without using any special tools, thus facilitating addition or replacement of contact.

Selector switches

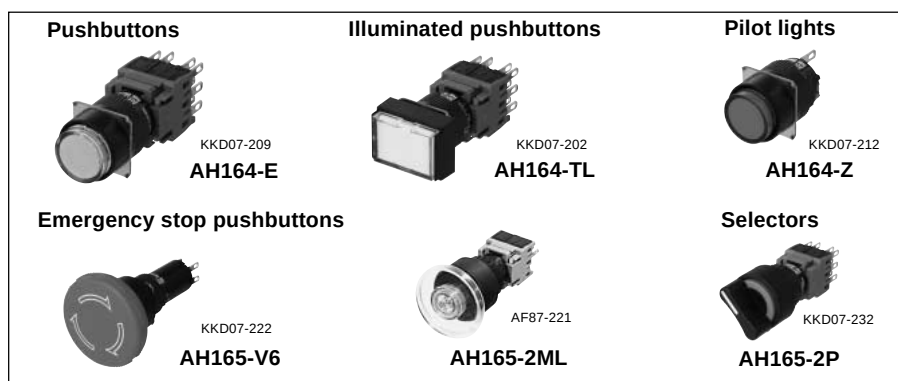
Selector switches can also be supplied in either knob-handle operated or key operated types.

Strong construction

The operator and contact blocks are molded from an excellent thermal resistance resin and can withstand the heat at the time of soldering. Since these pushbuttons are manufactured to industrial standards they can withstand vibration or shock thus eliminating lamp failure due to such causes as loose bases. With regard to the degree of protection, standard types which met the requirements of IP40 of IEC 60529, and oil tight types which meet the requirements of IP65 of the said, are available. This permits the application to various fields, from machine tools to OA (Office Automation) facilities.


Quality feel tough

Both the operator and contact block are precisely engineered. There is no fear of the switch malfunction even after long use and it continues to operate smoothly for its service life of about 1,000,000 operations.



Easy color change


Color lenses fit over the inner button. The lens can easily be removed using a small screwdriver



Note: The luminous color of LEDs and neon illumination types varies with the body color of the product.

Visible inscription

Button legends are printed on legend sheet, which is stuck to the legend plate on the inner button. The lettering is back lit by the switch lamp and the inscription is highly visible through the color lens. Contact FUJI for your lettering requirements.




Excellent switch reliability

The switch uses a snap-action mechanism. The pushbuttons are available with either momentary or alternative actions. The snap-action switch has a double break movement which operates independently of the speed of switching. The contacts are made from gold-flashed silver. High contact reliability of 1mA at 5V AC/DC is assured. Contact blocks are available in 1NO+1NC to 3NO+3NC arrangement.

Large terminals

Solder/tab terminal is provided as standard. Wire-wrap terminal is available on request.




Safety

FUJI's original Trigger Action mechanism is used in the emergency stop pushbuttons. They are suitable for emergency stop and safety. This mechanism prevents the contacts from moving until the button is pushed and locked.

- Provided with a trigger action mechanism conforming to EN418.
- Provided with direct opening action (approved by TÜV) conforming to EN60947-5-1 and EN60947-5-5.

Alternate action

In the case of alternate action when the button is depressed the contacts are maintained and remain so even if the finger is removed. The button will not return to its free position. In order to remove the lock, the button must be given a second pressure before the button will return to its free position. This makes it most suitable as the switch for a power source.



Pushbutton with finger guards

Finger guards are provided for square or rectangular type pushbuttons (SF, TF, SL and TL types) in order to prevent operational error of adjacent buttons.

Approvals



For further information related to approved type, see page 04/187 to 04/190.

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2

Quick reference guide

AH164 (standard) / AH165 (oil-tight)

■ Illuminated pushbutton switches

Operator	Type	Operator	Type	Operator	Type
Extended round head	AH164-L, L5 AH165-L, L5	Flush square head	AH164-SL, SL5 AH165-SL, SL5	Flush rectangular head	AH164-TL, TL5 AH165-TL, TL5
See page 04/195	 KKD07-205	See page 04/195	 KKD07-204	See page 04/195	 KKD07-202
Flush rectangular head with guard	AH164-TGL, TGL5 AH165-TGL, TGL5	Flush square head with guard	AH164-SGL, SGL5 AH165-SGL, SGL5		
See page 04/196	 KKD07-203	See page 04/196	 KKD05-075b		

Note: Spot LED and red/green LED types: Not approved standard

■ Pushbutton switches

Operator	Type	Operator	Type	Operator	Type
Extended round head	AH164-E, E5 AH165-E, E5	Mushroom head	AH164-M, M5 AH165-M, M5	Flush square head	AH164-SF, SF5 AH165-SF, SF5
See page 04/199	 KKD07-209	See page 04/199	 KKD07-210	See page 04/199	 KKD07-208
Flush rectangular head	AH164-TF, TF5 AH165-TF, TF5	Flush rectangular head with guard	AH164-TGF, TGF5 AH165-TGF, TGF5	Flush square head with guard	AH164-SGF, SGF5 AH165-SGF, SGF5
See page 04/199	 KKD07-206	See page 04/199	 KKD05-176	See page 04/199	 KKD05-075b
Convex square head	AH164-SM, SM5 AH165-SM, SM5	Convex rectangular head	AH164-TM, TM5 AH165-TM, TM5	Push-lock, turn-reset (32mm dia.) ⊖ (Direct opening action)	AH165-VR
See page 04/199	 KKD05-081b	See page 04/199	 KKD05-082b	See page 04/200	 AF91-584
Push-lock, turn-reset (40mm dia.) ⊖ (Direct opening action)	AH165-V1R				
See page 04/200	 AF91-583				

■ Emergency stop pushbutton switches ⊖ (Direct opening action), conform to EN418

Operator	Type	Operator	Type
Push-lock, turn-reset (32mm dia.)	AH165-V5R	Push-lock, turn-reset (40mm dia.)	AH165-V6R
See page 04/200	 KKD07-221	See page 04/200	 KKD07-222

Note: (CCC): See page 04/292

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2

Quick reference guide

■ Selector switches

Operator	Type	Operator	Type	Operator	Type
Knob with rectangular bezel	AH164-P AH165-P	Knob with square bezel	AH164-SP AH165-SP	Key with rectangular bezel	AH164-J AH165-J
<i>See page 04/201</i>	 KKD07-213	<i>See page 04/201</i>	 KKD07-215	<i>See page 04/201</i>	 KKD09-001L
Key with square bezel	AH164-SJ AH165-SJ	Key with rectangular bezel	AH165-JM	Key	AH165-RJM
<i>See page 04/201, 04/204</i>	 KKD09-001R	⊖ (Direct opening action) <i>See page 04/202</i>	 KKD09-006	⊖ (Direct opening action) <i>See page 04/202</i>	 KKD09-007

■ Pilot lights

Lens	Type	Lens	Type	Lens	Type
Extended round	AH164-Z AH165-Z	Flush square	AH164-ZS AH165-ZS	Flush rectangular	AH164-ZT AH165-ZT
<i>See page 04/206</i>	 KKD07-212	<i>See page 04/206</i>	 KKD05-094b	<i>See page 04/206</i>	 KKD07-211
Dome	AH165-ZM				
<i>See page 04/206</i>	 AF87-45				

■ Buzzers

Sound	Type	Sound	Type	Sound	Type
Standard	AH164-TX	Loud sound	AH164-TX1	Loud sound with volume control	AH164-TX2B
<i>See page 04/208</i>	 AF87-317	<i>See page 04/208</i>	 AF87-44	<i>See page 04/208</i>	 KKD07-223
Standard sound with volume control (IP54)	AH165-X				
<i>See page 04/208</i>	 KKD05-096b				

Note: (CCC): *See page 04/292*

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2

Quick reference guide

AH165-2 (oil-tight)

■ Illuminated pushbutton switches

Operator	Type	Operator	Type	Operator	Type
Flush round head	AH165-2FL, 2FL5	Extended round head	AH165-2EL, 2EL5	Mushroom head	AH165-2ML
See page 04/213	 AF87-211	See page 04/213	 AF87-210	See page 04/213	 AF87-221
Mushroom head with square bezel	AH165-2YML	Flush square head	AH165-2SFL, 2SFL5	Extended square head	AH165-2SEL, 2SEL5
See page 04/213	 AF87-220	See page 04/214	 AF87-201	See page 04/214	 AF87-200
Concave square head	AH165-2SCL, 2SCL5	Push-lock, turn-reset	AH165-2VL	Push-lock, turn-reset with square bezel	AH165-2YVL
See page 04/214	 AF87-199	See page 04/215	 AF87-219	See page 04/215	 AF87-218

Note: (CCC): See page 04/292

■ Pushbutton switches

Operator	Type	Operator	Type	Operator	Type
Flush round head	AH165-2F, 2F5	Extended round head	AH165-2E, 2E5	Mushroom head	AH165-2M
See page 04/216	 AF87-211	See page 04/216	 AF87-210	See page 04/216	 AF87-215
Mushroom head with square bezel	AH165-2YM	Flush square head	AH165-2SF, 2SF5	Concave square head	AH165-2SCE, 2SCE5
See page 04/216	 AF87-214	See page 04/216	 AF87-201	See page 04/216	 AF87-199
Extended square head	AH165-2SE, 2SE5	With selector ring	AH165-2S2	With selector ring with square bezel	AH165-2YS2
See page 04/216	 AF87-200	See page 04/217	 AF87-207	See page 04/217	 AF87-206
Push-lock, turn-reset	AH165-2V	Push-lock, turn-reset with square bezel	AH165-2YV		
See page 04/217	 AF87-217	See page 04/217	 AF87-216		

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2

Quick reference guide

■ Selector switches

Operator	Type	Operator	Type	Operator	Type
Knob	AH165-2P	Knob with square bezel	AH165-2YP	Key	AH165-2J
See page 04/218	 KKD07-232	See page 04/218	 KKD07-234	See page 04/218	 KKD09-003L
Key with square bezel	AH165-2YJ	Lever	AH165-2H	Lever with square bezel	AH165-2SH
See page 04/218	 KKD09-003R	See page 04/219	 AF87-209	See page 04/219	 AF87-203

■ Illuminated selector switches

Operator	Type
Knob	AH165-2PL
See page 04/221	 KKD07-240

■ Pilot lights

Lens	Type	Lens	Type	Lens	Type
Flush round	AH165-2Z	Extended round	AH165-2ZE	Flush square	AH165-2SZ
See page 04/222	 AF87-213	See page 04/222	 AF87-212	See page 04/222	 AF87-205
Extended square	AH165-2SZE				
See page 04/222	 AF87-204				

Note: (CCC): See page 04/292

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164 and AH165

Type number nomenclature

■ Type number nomenclature

Pushbuttons, illuminated pushbuttons and pilot lights

AH165 - L R 11 E 3 - W
 ① ② ③ ④ ⑤ ⑥ ⑦

① Product category

AH164: Standard (IP40)

AH165: Oil-tight (IP65)

② Operator or lens

• Operator for illuminated pushbutton

SL: Flush square head

SL5: Flush square head (Alternate)

TL: Flush rectangular head

TL5: Flush rectangular head (Alternate)

L: Extended round head

L5: Extended round head (Alternate)

TGL: Flush rectangular head with guard

TGL5: Flush rectangular head with guard (Alternate)

SGL: Flush square head with guard

SGL5: Flush square head with guard (Alternate)

• Operator for pushbuttons

SF: Flush square head

SF5: Flush square head (Alternate)

TF: Flush rectangular head

TF5: Flush rectangular head (Alternate)

E: Extended round head

E5: Extended round head (Alternate)

TGF: Flush rectangular head with guard

TGF5: Flush rectangular head with guard (Alternate)

SGF: Flush square head with guard

SGF5: Flush square head with guard (Alternate)

M: Mushroom head

M5: Mushroom head (Alternate)

SM: Convex square head

SM5: Convex square head (Alternate)

TM: Convex rectangular head

TM5: Convex rectangular head (Alternate)

V: Push-lock, turn-reset (32mm dia.)*¹ *²

V1: Push-lock, turn-reset (40mm dia.)*¹ *²

• Operator for emergency stop pushbuttons

V5: Push-lock, turn-reset (32mm dia.)*²

V6: Push-lock, turn-reset (40mm dia.)*²

• Lens for pilot lights

Z: Extended round

ZS: Flush square

ZT: Flush rectangular

ZM: Dome

Note: *¹ Product with no trigger action mechanism

*² AH165 type only, direct opening action

③ Color of button or lens

Code	color	Button	LED	Incandescent	Neon
G	Green	○	○	○	○
R	Red	○	○	○	○ (Orange)
B	Black*	○	—	—	—
Y	Yellow	○	○	○	○ (Orange)
W	White	○	○ (Orange)	○	○ (Orange)
S	Blue	○	○	○	○ (Green)
O	Orange	○	○ (Amber)	○	○
RG	Red/Green	—	○	—	—

Notes: • (): indicates luminous color

• AH165-V, V1, V5, V6: Red only

* Not available for illuminated types

④ Contact arrangement

01: 1NC*¹ 22: 2NO+2NC

02: 2NC*¹ 33: 3NO+3NC*²

11: 1NO+1NC

Notes: *¹ Available for AH165-V, V1, V5, V6

*² Not available for with transformer types

⑤ Lamp voltage

Code	LED	Incandescent* ²	Neon* ²
AA	5V DC* ²	—	—
A	6V DC* ²	5V AC/DC	—
B	12V DC	12V AC/DC	—
E	24V DC	24V AC/DC	—
H	100-110V AC* ¹ * ²	100-110V AC* ¹	110V AC
K	—	—	120V AC
M	200-220V AC* ¹ * ²	200-220V AC* ¹	220V AC
P	—	—	240V AC

Notes: *¹ With transformer (LED: 24V, Incandescent: 28V)

*² Not available AH165-ZM

• ZM type: LED lamp only (12, 24V DC)

⑥ Type of lamp

Blank: Incandescent

1: Neon

2: Spot LED, LED (ZM types)

3: Flat LED

⑦ Terminal

Blank: Solder/tab

W: Wire-wrap

S: Soder (AH165-V, V1, V5, V6 types only)

Note: ZM types: wire-wrap terminal only (Code is blank)

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164 and AH165

Type number nomenclature

■ Type number nomenclature

Selector switches

AH165 - J 2 B 11 A - W
① ② ③ ④ ⑤ ⑥ ⑦

① Product category

AH164: Standard (IP40)
AH165: Oil-tight (IP65)

② Operator

• 2-position, 3-position (operating angle 90°)
SP: Knob with square bezel
P: Knob with rectangular bezel
SJ: Key with square bezel
J: Key with rectangular bezel
JM: Key with rectangular bezel (Direct opening action) *
RJM: Key (Direct opening action) *
Note: * AH165 types (2-position) only

• 3-position (operating angle 45°)
SPK: Knob with square bezel
PK: Knob with rectangular bezel
SJK: Key with square bezel
JK: Key with rectangular bezel

③ Operation

2: 2-position, maintained
0: 2-position, spring return*
3: 3-position, maintained
6: 3-position, spring/manual return (Left to center)
7: 3-position, spring/manual return (Right to center)
1: 3-position, spring return
Note: * Except for JM and RJM types

④ Color of knob or key removable position

• Color of knob
B: Black

• Key removable position

Code	2-position		3-position (operating angle 90°)				3-position (operating angle 45°)			
	2	0	1	3	6	7	1	3	6	7
A	⌚	⌚	—	↶	—	↶	—	⌚	—	⌚
B	⊗	—	—	↶	—	—	—	⊗	—	—
C	—	—	—	⊕	—	—	—	⊗	—	—
D	⌚	—	—	↶	—	—	—	⌚	—	—
E	—	—	⌚	—	—	—	⌚	—	—	—
F	—	—	—	—	—	—	—	⌚	—	—
G	—	—	—	—	—	—	—	⌚	—	⌚

⑤ Contact arrangement

11: 1NO+1NC
22: 2NO+2NC
33: 3NO+3NC*

Note: * Except for JM and RJM types.

⑥ Key type No.

A (standard), B, C, D, E, F

⑦ Terminal

Blank: Solder/tab
W: Wire-warp

Note: JM, RJM types: Solder/tab terminal only

Buzzers

AH164 - T X B E
① ② ③ ④

① Product category

AH164: Standard (IP00)
AH165: Splash-proof (IP54)

② Sound

TX: Standard (AH164)
TX1: Loud sound (AH164)
TX2: Loud sound with volume control (AH164)
X: Standard sound with volume control (AH165)

③ Color of head

B: Black

④ Operating voltage

AAC: 6V AC*2
ADC: 6V DC*2
A: 6V AC/DC*1
E: 12 to 24V AC/DC
F: 35 to 48V AC/DC

Notes: *1 Except for TX and TX1 types
*2 Except for TX2 and X types

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164 and AH165

Ratings and specifications

■ Standards approved

UL508	File No. E44592
CSA C22.2 No.14	File No. LR20479 (except for AH165-ZM) File No. LR84365 (for AH165-ZM)
TÜV: EN60947-5-1	Pushbutton (except for AH165-V, V1), Illuminated pushbutton: R9250087 Pushbutton (for AH165-V, V1): J9551059 Selector (except for AH165-JM, RJM): R9250088 Selector (for AH165-JM, RJM): J9551059 Pilot lights: R9250089 Buzzer: J9950092 (for AH164-TX2, AH165-X)
TÜV: EN60947-5-1 EN60947-5-5	Emergency stop pushbutton: R9950093

■ Specifications (Indoor use)

- Pushbutton switches, illuminated pushbutton switches
selector switches, pilot lights

Item	AH164	AH165
Rated insulation voltage	250V AC/DC	
Ambient temperature (no condensation or no icing)	−20 to +70°C *1	−10 to +70°C *2
Humidity	45 to 85%RH (at −5 to +40°C), no condensation or no icing	
Durability (operations)	Mechanical	Pushbutton switch Momentary action: 1 million Alternate action: 250,000 Push-lock, turn-reset: 100,000 Selector switch: 250,000 *3
	Electrical	100,000 (220V AC 0.7A)
Dielectric strength	2000V AC, 1 minute (Between lamp and contact terminals: 1500V AC, 1 minute)	
Conditional short-circuit current	1000A	
Short-circuit protective device	Fuse 1A *4	
Pollution degree	3	
Vibration	Resonance: 10 to 55Hz, double amplitude 0.1mm *5 Constant: 16.7Hz, double amplitude 3mm	
Shock	Malfunction durability: 100m/s ² *6 Mechanical durability: 500m/s ²	
Operating frequency	1200 operation/hour (on-load factor: 40%)	
Insulation resistance	100MΩ or more (500V DC megger)	
Degree of protection	IP40	IP65

Notes: *1 For illuminated pushbutton switch and pilot light: −20 to +55°C

*2 For illuminated pushbutton switch and pilot light: −10 to +55°C

*3 Key insertion/removal durability for selector switch key types: 10,000

*4 AH165-V, V1, JM, RJM, V5, V6 types: Fuse 5A

*5 Emergency stop type: 10 to 500Hz, double amplitude 0.7mm
(acceleration 50m/s²), according to the test condition of EN60947-5-5
(1998)

*6 Emergency stop type: 150m/s²

• Buzzers

Item	AH164-TX	AH164-TX1
Rated insulation voltage	60V AC/DC	
Operating voltage	6V AC, 6V DC, 12 to 24V AC/DC 35 to 48V AC/DC	
Sound level	80dB (0.1m) 60dB(1m)	90dB (0.1m) 70dB(1m)
Durability	1000h	
Frequency	2 ±0.5kHz	2.4 to 3.3kHz
Intermittent cycle	Approx. 170 cycle/minute	
Current consumption	7mA(24, 48V DC) 15mA(6V DC) 20mA (6, 24V AC) 30mA (48V AC)	15mA (24, 48V DC) 25mA (6V DC) 30mA (24V AC) 40mA (48V AC) 50mA (6V AC)
Dielectric strength	1000V AC, 1 minute	
Insulation resistance	100MΩ or more (500V DC megger)	
Ambient temperature	−20 to +60°C (no condensation or no icing)	
Humidity	45 to 85%RH (at −5 to +40°C)	
Operator protection	IP00	
Item	AH164-TX2	AH165-X
Rated insulation voltage	60V AC/DC	
Operating voltage	6V AC/DC, 12 to 24V AC/DC 35 to 48V AC/DC	
Sound level	70dB to 90dB (0.1m) 50dB to 70dB (1m)	60dB to 80dB (0.1m) 40dB to 60dB (1m)
Durability	1000h	
Frequency	2 ±0.5kHz	2.4 to 3.3kHz
Intermittent cycle	Approx. 170 cycle/minute	
Current consumption	30mA (6V DC) 20mA (24, 48V DC) 40mA (6, 24, 48V AC)	
Dielectric strength	1000V AC, 1 minute	
Insulation resistance	100MΩ or more (500V DC megger)	
Ambient temperature	−20 to +60°C (no condensation or no icing)	
Humidity	45 to 85%RH (at −5 to +40°C)	
Degree of protection	IP00	IP54

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164 and AH165

Ratings and specifications

■ Contact ratings

• UL/CSA standards

Rated thermal current	Rated operational voltage	Maximum current	
		AC (Res. load)	DC (Res. load)
5A	24V 125V 250V	— — 5.0A	1.0A 0.2A —

• EN standards (TÜV approved)

Rated thermal current	Rated operational voltage	Rated operational current				
		AC 15 (Ind. load)	AC 13 (Ind. load)	AC 12 (Res. load)	DC 13 (Ind. load)	DC 12 (Res. load)
5A	24V 100 to 120V 100 to 125V 200 to 240V	— 0.3A — 0.3A	— 1.0A — 0.7A	— 1.5A — 1.0A	0.7A — 0.15A —	1.0A — 0.2A —

■ Lamp ratings

Rated operational voltage	Consumption		
	LED DC	Incandescent AC/DC	Neon AC
5V	7mA (Yellow: 28mA)	0.45W (6V)	—
6V	7mA (Yellow: 28mA)	—	—
12V	7mA	0.55W (14V)	—
24V	7mA	0.55W (28V)	—
110V	—	—	0.19VA
120V	—	—	0.21VA
220V	—	—	0.38VA
240V	—	—	0.42VA

Notes: • With transformer (LED): 2.6VA/110, 220V

• With transformer (Incandescent): 2VA/110, 220V

• For the incandescent lamps, the values in parentheses indicate the rated voltage of the lamps.

■ Contact reliability

FUJI has confirmed that the unit can be used in 1mA circuit conditions at 5V AC or DC. The operable range may vary depending on the ambient conditions and type of load.

■ Illuminated pushbutton switches/without transformer

Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (Oil-tight) type	AH164 type	AH165 (Oil-tight) type
Extended round head  KKD07-205	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11E3 AH164-L□22E3 AH164-L□33E3	AH165-L□11E3 AH165-L□22E3 AH165-L□33E3	AH164-L5□11E3 AH164-L5□22E3 AH164-L5□33E3	AH165-L5□11E3 AH165-L5□22E3 AH165-L5□33E3
	Spot LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11E2 AH164-L□22E2 AH164-L□33E2	AH165-L□11E2 AH165-L□22E2 AH165-L□33E2	AH164-L5□11E2 AH164-L5□22E2 AH164-L5□33E2	AH165-L5□11E2 AH165-L5□22E2 AH165-L5□33E2
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11E AH164-L□22E AH164-L□33E	AH165-L□11E AH165-L□22E AH165-L□33E	AH164-L5□11E AH164-L5□22E AH164-L5□33E	AH165-L5□11E AH165-L5□22E AH165-L5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11H1 AH164-L□22H1 AH164-L□33H1	AH165-L□11H1 AH165-L□22H1 AH165-L□33H1	AH164-L5□11H1 AH164-L5□22H1 AH164-L5□33H1	AH165-L5□11H1 AH165-L5□22H1 AH165-L5□33H1
		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11M1 AH164-L□22M1 AH164-L□33M1	AH165-L□11M1 AH165-L□22M1 AH165-L□33M1	AH164-L5□11M1 AH164-L5□22M1 AH164-L5□33M1	AH165-L5□11M1 AH165-L5□22M1 AH165-L5□33M1
Flush square head  KKD07-204	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□11E3 AH164-SL□22E3 AH164-SL□33E3	AH165-SL□11E3 AH165-SL□22E3 AH165-SL□33E3	AH164-SL5□11E3 AH164-SL5□22E3 AH164-SL5□33E3	AH165-SL5□11E3 AH165-SL5□22E3 AH165-SL5□33E3
	Spot LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□11E2 AH164-SL□22E2 AH164-SL□33E2	AH165-SL□11E2 AH165-SL□22E2 AH165-SL□33E2	AH164-SL5□11E2 AH164-SL5□22E2 AH164-SL5□33E2	AH165-SL5□11E2 AH165-SL5□22E2 AH165-SL5□33E2
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□11E AH164-SL□22E AH164-SL□33E	AH165-SL□11E AH165-SL□22E AH165-SL□33E	AH164-SL5□11E AH164-SL5□22E AH164-SL5□33E	AH165-SL5□11E AH165-SL5□22E AH165-SL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□11H1 AH164-SL□22H1 AH164-SL□33H1	AH165-SL□11H1 AH165-SL□22H1 AH165-SL□33H1	AH164-SL5□11H1 AH164-SL5□22H1 AH164-SL5□33H1	AH165-SL5□11H1 AH165-SL5□22H1 AH165-SL5□33H1
		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□11M1 AH164-SL□22M1 AH164-SL□33M1	AH165-SL□11M1 AH165-SL□22M1 AH165-SL□33M1	AH164-SL5□11M1 AH164-SL5□22M1 AH164-SL5□33M1	AH165-SL5□11M1 AH165-SL5□22M1 AH165-SL5□33M1
Flush rectangular head  KKD07-202	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□11E3 AH164-TL□22E3 AH164-TL□33E3	AH165-TL□11E3 AH165-TL□22E3 AH165-TL□33E3	AH164-TL5□11E3 AH164-TL5□22E3 AH164-TL5□33E3	AH165-TL5□11E3 AH165-TL5□22E3 AH165-TL5□33E3
	Spot LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□11E2 AH164-TL□22E2 AH164-TL□33E2	AH165-TL□11E2 AH165-TL□22E2 AH165-TL□33E2	AH164-TL5□11E2 AH164-TL5□22E2 AH164-TL5□33E2	AH165-TL5□11E2 AH165-TL5□22E2 AH165-TL5□33E2
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□11E AH164-TL□22E AH164-TL□33E	AH165-TL□11E AH165-TL□22E AH165-TL□33E	AH164-TL5□11E AH164-TL5□22E AH164-TL5□33E	AH165-TL5□11E AH165-TL5□22E AH165-TL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□11H1 AH164-TL□22H1 AH164-TL□33H1	AH165-TL□11H1 AH165-TL□22H1 AH165-TL□33H1	AH164-TL5□11H1 AH164-TL5□22H1 AH164-TL5□33H1	AH165-TL5□11H1 AH165-TL5□22H1 AH165-TL5□33H1
		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□11M1 AH164-TL□22M1 AH164-TL□33M1	AH165-TL□11M1 AH165-TL□22M1 AH165-TL□33M1	AH164-TL5□11M1 AH164-TL5□22M1 AH164-TL5□33M1	AH165-TL5□11M1 AH165-TL5□22M1 AH165-TL5□33M1

Note: Replace the □ mark by the button color code, see page 04/196.


Illuminated Pushbuttons

AH164 and AH165


Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (oil-tight) type	AH164 type	AH165 (oil-tight) type
Flush rectangular head with guard  KKD07-203	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11E3 AH164-TGL□22E3 AH164-TGL□33E3	AH165-TGL□11E3 AH165-TGL□22E3 AH165-TGL□33E3	AH164-TGL5□11E3 AH164-TGL5□22E3 AH164-TGL5□33E3	AH165-TGL5□11E3 AH165-TGL5□22E3 AH165-TGL5□33E3
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11E AH164-TGL□22E AH164-TGL□33E	AH165-TGL□11E AH165-TGL□22E AH165-TGL□33E	AH164-TGL5□11E AH164-TGL5□22E AH164-TGL5□33E	AH165-TGL5□11E AH165-TGL5□22E AH165-TGL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11H1 AH164-TGL□22H1 AH164-TGL□33H1	AH165-TGL□11H1 AH165-TGL□22H1 AH165-TGL□33H1	AH164-TGL5□11H1 AH164-TGL5□22H1 AH164-TGL5□33H1	AH165-TGL5□11H1 AH165-TGL5□22H1 AH165-TGL5□33H1
		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11M1 AH164-TGL□22M1 AH164-TGL□33M1	AH165-TGL□11M1 AH165-TGL□22M1 AH165-TGL□33M1	AH164-TGL5□11M1 AH164-TGL5□22M1 AH164-TGL5□33M1	AH165-TGL5□11M1 AH165-TGL5□22M1 AH165-TGL5□33M1
	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11E3 AH164-SGL□22E3 AH164-SGL□33E3	AH165-SGL□11E3 AH165-SGL□22E3 AH165-SGL□33E3	AH164-SGL5□11E3 AH164-SGL5□22E3 AH164-SGL5□33E3	AH165-SGL5□11E3 AH165-SGL5□22E3 AH165-SGL5□33E3
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11E AH164-SGL□22E AH164-SGL□33E	AH165-SGL□11E AH165-SGL□22E AH165-SGL□33E	AH164-SGL5□11E AH164-SGL5□22E AH164-SGL5□33E	AH165-SGL5□11E AH165-SGL5□22E AH165-SGL5□33E
Flush square head with guard  KKD05-075b	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11H1 AH164-SGL□22H1 AH164-SGL□33H1	AH165-SGL□11H1 AH165-SGL□22H1 AH165-SGL□33H1	AH164-SGL5□11H1 AH164-SGL5□22H1 AH164-SGL5□33H1	AH165-SGL5□11H1 AH165-SGL5□22H1 AH165-SGL5□33H1
		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11M1 AH164-SGL□22M1 AH164-SGL□33M1	AH165-SGL□11M1 AH165-SGL□22M1 AH165-SGL□33M1	AH164-SGL5□11M1 AH164-SGL5□22M1 AH164-SGL5□33M1	AH165-SGL5□11M1 AH165-SGL5□22M1 AH165-SGL5□33M1

■ Dimensions, mm

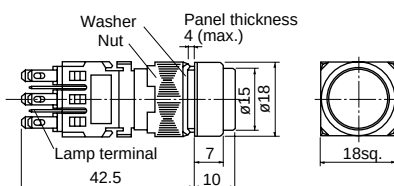
L, L5



SL, SL5

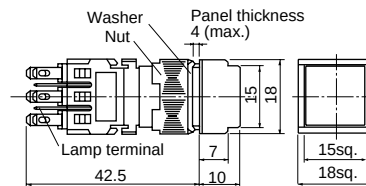


TL, TL5

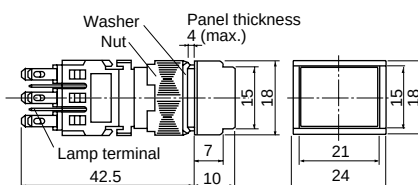

TGL, TGL5

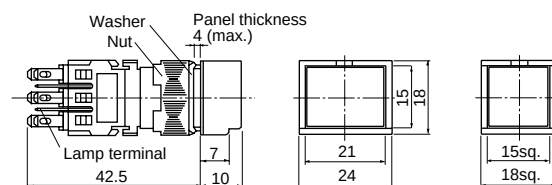SGL, SGL5



• Button color

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Y	S	O

- The color lens is made of a tinted transparent material.
- A white illuminated pushbutton is fitted with a transparent color lens.(Except the neon lamp)
- With wire-wrap pin terminals have a depth of 47mm.

• Lamp voltage

Voltages other than above are available

Code	LED	Incandescent	Neon
AA	5V DC	—	—
A	6V DC	5V AC/DC	—
B	12V DC	12V AC/DC	—
K	—	—	120V AC
P	—	—	240V AC

■ Illuminated pushbutton switches/with transformer


Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (oil-tight) type	AH164 type	AH165 (oil-tight) type
Extended round head  AF90-945	Flat LED	■ Voltage code H: 100-110V AC M: 200-220V AC	1NO+1NC	AH164-L□11■3	AH165-L□11■3	AH164-L5□11■3	AH165-L5□11■3
			2NO+2NC	AH164-L□22■3	AH165-L□22■3	AH164-L5□22■3	AH165-L5□22■3
	Incandes-cent		1NO+1NC	AH164-L□11■	AH165-L□11■	AH164-L5□11■	AH165-L5□11■
			2NO+2NC	AH164-L□22■	AH165-L□22■	AH164-L5□22■	AH165-L5□22■
Flush square head  AF90-946	Flat LED		1NO+1NC	AH164-SL□11■3	AH165-SL□11■3	AH164-SL5□11■3	AH165-SL5□11■3
			2NO+2NC	AH164-SL□22■3	AH165-SL□22■3	AH164-SL5□22■3	AH165-SL5□22■3
	Incandes-cent		1NO+1NC	AH164-SL□11■	AH165-SL□11■	AH164-SL5□11■	AH165-SL5□11■
			2NO+2NC	AH164-SL□22■	AH165-SL□22■	AH164-SL5□22■	AH165-SL5□22■
Flush rectangular head  AF90-947	Flat LED	1NO+1NC	AH164-TL□11■3	AH165-TL□11■3	AH164-TL5□11■3	AH165-TL5□11■3	
		2NO+2NC	AH164-TL□22■3	AH165-TL□22■3	AH164-TL5□22■3	AH165-TL5□22■3	
	Incandes-cent	1NO+1NC	AH164-TL□11■	AH165-TL□11■	AH164-TL5□11■	AH165-TL5□11■	
		2NO+2NC	AH164-TL□22■	AH165-TL□22■	AH164-TL5□22■	AH165-TL5□22■	
Flush rectangular head with guard  AF90-941	Flat LED	1NO+1NC	AH164-TGL□11■3	AH165-TGL□11■3	AH164-TGL5□11■3	AH165-TGL5□11■3	
		2NO+2NC	AH164-TGL□22■3	AH165-TGL□22■3	AH164-TGL5□22■3	AH165-TGL5□22■3	
	Incandes-cent	1NO+1NC	AH164-TGL□11■	AH165-TGL□11■	AH164-TGL5□11■	AH165-TGL5□11■	
		2NO+2NC	AH164-TGL□22■	AH165-TGL□22■	AH164-TGL5□22■	AH165-TGL5□22■	
Flush square head with guard  AF90-948	Flat LED	1NO+1NC	AH164-SGL□11■3	AH165-SGL□11■3	AH164-SGL5□11■3	AH165-SGL5□11■3	
		2NO+2NC	AH164-SGL□22■3	AH165-SGL□22■3	AH164-SGL5□22■3	AH165-SGL5□22■3	
	Incandes-cent	1NO+1NC	AH164-SGL□11■	AH165-SGL□11■	AH164-SGL5□11■	AH165-SGL5□11■	
		2NO+2NC	AH164-SGL□22■	AH165-SGL□22■	AH164-SGL5□22■	AH165-SGL5□22■	

Note: Replace the □ mark by the button color code, see page 04/198.

Illuminated Pushbuttons

AH164 and AH165

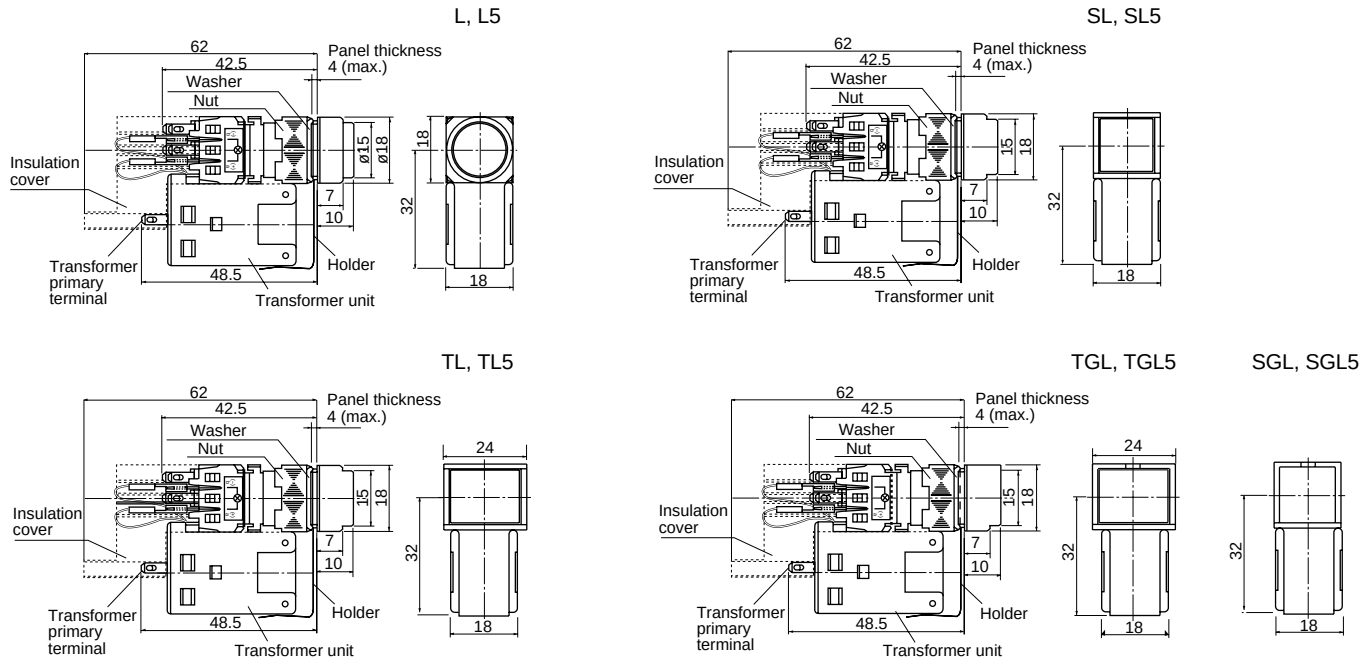■ Dimensions, mm












• Button color

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Y	S	O

- The color lens is made of a tinted transparent material.

■ Pushbutton switches

Operator	Contact	Momentary action		Alternate action		Dimensions, mm
		AH164 type	AH165 (oil-tight) type	AH164 type	AH165 (oil-tight) type	
Extended round head  KKD07-209	1NO+1NC	AH164-E□11	AH165-E□11	AH164-E5□11	AH165-E5□11	
	2NO+2NC	AH164-E□22	AH165-E□22	AH164-E5□22	AH165-E5□22	
	3NO+3NC	AH164-E□33	AH165-E□33	AH164-E5□33	AH165-E5□33	
Flush square head  KKD07-208	1NO+1NC	AH164-SF□11	AH165-SF□11	AH164-SF5□11	AH165-SF5□11	
	2NO+2NC	AH164-SF□22	AH165-SF□22	AH164-SF5□22	AH165-SF5□22	
	3NO+3NC	AH164-SF□33	AH165-SF□33	AH164-SF5□33	AH165-SF5□33	
Flush rectangular head  KKD07-206	1NO+1NC	AH164-TF□11	AH165-TF□11	AH164-TF5□11	AH165-TF5□11	
	2NO+2NC	AH164-TF□22	AH165-TF□22	AH164-TF5□22	AH165-TF5□22	
	3NO+3NC	AH164-TF□33	AH165-TF□33	AH164-TF5□33	AH165-TF5□33	
Flush rectangular head with guard  KKD05-176	1NO+1NC	AH164-TGF□11	AH165-TGF□11	AH164-TGF5□11	AH165-TGF5□11	
	2NO+2NC	AH164-TGF□22	AH165-TGF□22	AH164-TGF5□22	AH165-TGF5□22	
	3NO+3NC	AH164-TGF□33	AH165-TGF□33	AH164-TGF5□33	AH165-TGF5□33	
Flush square head with guard  KKD05-075b	1NO+1NC	AH164-SGF□11	AH165-SGF□11	AH164-SGF5□11	AH165-SGF5□11	
	2NO+2NC	AH164-SGF□22	AH165-SGF□22	AH164-SGF5□22	AH165-SGF5□22	
	3NO+3NC	AH164-SGF□33	AH165-SGF□33	AH164-SGF5□33	AH165-SGF5□33	
Mushroom head  KKD07-210	1NO+1NC	AH164-M□11	AH165-M□11	AH164-M5□11	AH165-M5□11	
	2NO+2NC	AH164-M□22	AH165-M□22	AH164-M5□22	AH165-M5□22	
	3NO+3NC	AH164-M□33	AH165-M□33	AH164-M5□33	AH165-M5□33	
Convex square head  KKD05-081b	1NO+1NC	AH164-SM□11	AH165-SM□11	AH164-SM5□11	AH165-SM5□11	
	2NO+2NC	AH164-SM□22	AH165-SM□22	AH164-SM5□22	AH165-SM5□22	
	3NO+3NC	AH164-SM□33	AH165-SM□33	AH164-SM5□33	AH165-SM5□33	
Convex rectangular head  KKD05-082b	1NO+1NC	AH164-TM□11	AH165-TM□11	AH164-TM5□11	AH165-TM5□11	
	2NO+2NC	AH164-TM□22	AH165-TM□22	AH164-TM5□22	AH165-TM5□22	
	3NO+3NC	AH164-TM□33	AH165-TM□33	AH164-TM5□33	AH165-TM5□33	

● Button color

Replace the □ mark by the following color code



Color	Green	Red	Black	White	Blue	Yellow	Orange
Code	G	R	B	W	S	Y	O

- The color lens is made of a tinted transparent material. (Except the M, SM, TM types)
- A white pushbutton is fitted with a transparent color lens. (Except the M, SM, TM types) A black pushbutton consists of a transparent color lens and an attached black legend plate. (Except M, SM, TM types)
- With wire-wrap pin terminals have a depth of 47mm.

Pushbuttons
AH165

■ Pushbutton switches



⊖ (Direct opening action)

Operator	Button color	Contact	Terminal	AH165 (oil-tight) type	Dimensions, mm
Push-lock, turn-reset (32mm dia.)  AF91-584	Red	1NC	Solder/Tab Solder	AH165-VR01 (AH165-VR01-S)	
		2NC		AH165-VR02 (AH165-VR02-S)	
Push-lock, turn-reset (40mm dia.)  AF91-583	Red	1NC		AH165-V1R01 (AH165-V1R01-S)	
		2NC		AH165-V1R02 (AH165-V1R02-S)	

Notes: * () For switch with solder terminal.
• Contact arrangements indicated in the table can be supplied.
• Product with no trigger action mechanism.





■ Emergency stop pushbutton switches

⊖ (Direct opening action), conform to EN418


Operator	Button color	Contact	Terminal	AH165 (oil-tight) type	Dimensions, mm
Push-lock, turn-reset (32mm dia.)  KKD07-221	Red	1NC	Solder/Tab Solder	AH165-V5R01 (AH165-V5R01-S)	
		2NC		AH165-V5R02 (AH165-V5R02-S)	
Push-lock, turn-reset (40mm dia.)  KKD07-222	Red	1NC		AH165-V6R01 (AH165-V6R01-S)	
		2NC		AH165-V6R02 (AH165-V6R02-S)	

Notes: * () For switch with solder terminal.
• Contact arrangements indicated in the table can be supplied.

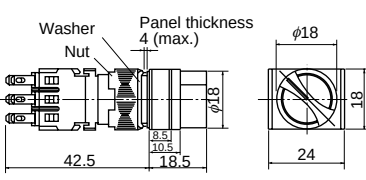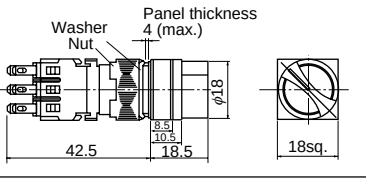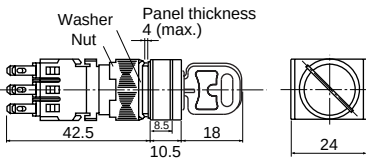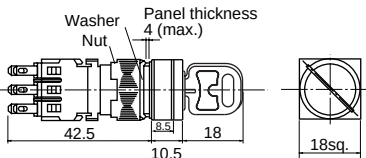
■ Selector switches/2-position (90-degree)

Operator	Operation	Key removable position	Contact	AH164 type	AH165 (oil-tight) type	Dimensions, mm
Knob with rectangular bezel  KKD07-213	Maintained	—	1NO+1NC 2NO+2NC 3NO+3NC	AH164-P2B11 AH164-P2B22 AH164-P2B33	AH165-P2B11 AH165-P2B22 AH165-P2B33	
	Spring return	—	1NO+1NC 2NO+2NC 3NO+3NC	AH164-P0B11 AH164-P0B22 AH164-P0B33	AH165-P0B11 AH165-P0B22 AH165-P0B33	
Knob with square bezel  KKD07-215	Maintained	—	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SP2B11 AH164-SP2B22 AH164-SP2B33	AH165-SP2B11 AH165-SP2B22 AH165-SP2B33	
	Spring return	—	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SP0B11 AH164-SP0B22 AH164-SP0B33	AH165-SP0B11 AH165-SP0B22 AH165-SP0B33	
Key with rectangular bezel  KKD09-001L	Maintained	A	1NO+1NC	AH164-J2A11A	AH165-J2A11A	
			2NO+2NC	AH164-J2A22A	AH165-J2A22A	
			3NO+3NC	AH164-J2A33A	AH165-J2A33A	
		B	1NO+1NC	AH164-J2B11A	AH165-J2B11A	
			2NO+2NC	AH164-J2B22A	AH165-J2B22A	
			3NO+3NC	AH164-J2B33A	AH165-J2B33A	
		D	1NO+1NC	AH164-J2D11A	AH165-J2D11A	
			2NO+2NC	AH164-J2D22A	AH165-J2D22A	
			3NO+3NC	AH164-J2D33A	AH165-J2D33A	
	Spring return	A	1NO+1NC 2NO+2NC 3NO+3NC	AH164-J0A11A AH164-J0A22A AH164-J0A33A	AH165-J0A11A AH165-J0A22A AH165-J0A33A	
Key with square bezel  KKD09-001R	Maintained	A	1NO+1NC	AH164-SJ2A11A	AH165-SJ2A11A	
			2NO+2NC	AH164-SJ2A22A	AH165-SJ2A22A	
			3NO+3NC	AH164-SJ2A33A	AH165-SJ2A33A	
		B	1NO+1NC	AH164-SJ2B11A	AH165-SJ2B11A	
			2NO+2NC	AH164-SJ2B22A	AH165-SJ2B22A	
			3NO+3NC	AH164-SJ2B33A	AH165-SJ2B33A	
		D	1NO+1NC	AH164-SJ2D11A	AH165-SJ2D11A	
			2NO+2NC	AH164-SJ2D22A	AH165-SJ2D22A	
			3NO+3NC	AH164-SJ2D33A	AH165-SJ2D33A	
	Spring return	A	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SJ0A11A AH164-SJ0A22A AH164-SJ0A33A	AH165-SJ0A11A AH165-SJ0A22A AH165-SJ0A33A	

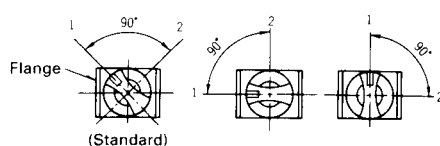- The operating angle range can be changed as shown below by setting the attached flange shifted by 45° in combination with the contact block.
In this case, the minimum mounting pitch is 26mm because the contact block is shifted by 45° from the flange.



• Contact block position

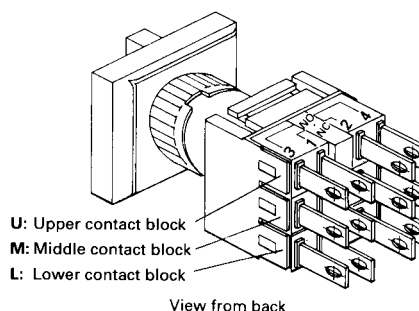

• Contact arrangement and operator position: 2-position selector switch

Contact arrangement	1NO+1NC	2NO+2NC	3NO+3NC
Operator position	Left M 1 0 1 0 2 3 0 0 4	U 1 0 1 0 2 3 0 0 4 L	U 1 0 1 0 2 3 0 0 4 M 1 0 1 0 2 3 0 0 4 L
Right M 1 0 1 0 2 3 0 0 4	U 1 0 1 0 2 3 0 0 4 L	U 1 0 1 0 2 3 0 0 4 M 1 0 1 0 2 3 0 0 4 L	U 1 0 1 0 2 3 0 0 4 M 1 0 1 0 2 3 0 0 4 L





3-position selector switch

Contact arrangement	2NO+2NC	3NO+3NC
Operator position	Left U 1 0 1 0 2 3 0 0 4 L Center 1 0 1 0 2 3 0 0 4 Right 1 0 1 0 2 3 0 0 4	U 1 0 1 0 2 3 0 0 4 M 1 0 1 0 2 3 0 0 4 L U 1 0 1 0 2 3 0 0 4 M 1 0 1 0 2 3 0 0 4 L

- There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
- With wire-wrap pin terminals have a depth of 47mm.

Selector Switches
AH165





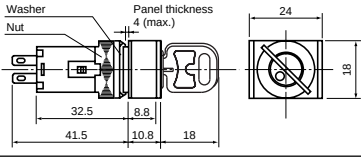
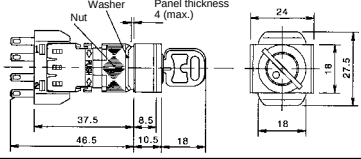
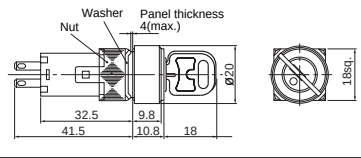
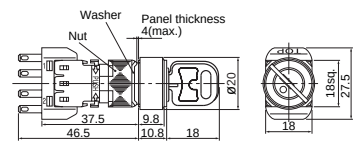
■ Selector switches/2-position (90-degree)
⊖ (Direct opening action)

Operator	Operation	Key removable position	Contact	AH165 (oil-tight) type	Dimensions, mm
Key with rectangular bezel  KKD09-005L  KKD09-005R	Maintained	A 	1NO+1NC	AH165-JM2A11A	
		B 		AH165-JM2B11A	
		D 		AH165-JM2D11A	
		A 	2NO+2NC	AH165-JM2A22A	
		B 		AH165-JM2B22A	
		D 		AH165-JM2D22A	
Key with round bezel  KKD09-005L  KKD09-007R	Maintained	A 	1NO+1NC	AH165-RJM2A11A	
		B 		AH165-RJM2B11A	
		D 		AH165-RJM2D11A	
		A 	2NO+2NC	AH165-RJM2A22A	
		B 		AH165-RJM2B22A	
		D 		AH165-RJM2D22A	


• There are 6 available key types; A, B, C, D, E and F.
Standard key code is A.

• Contact arrangement and operator positions:
2-position selector switch





Contact arrangement	1NO+1NC	
Operator position	Left	
	Right	

Contact arrangement		2NO+2NC			
Operator position	Left	U		L	
					
	Right				
					

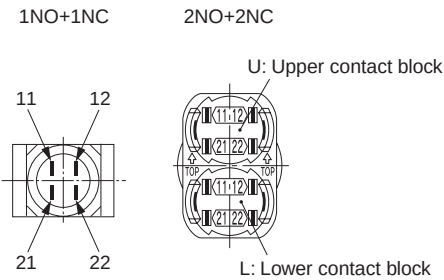• Terminal number



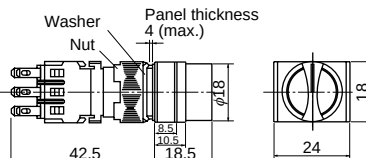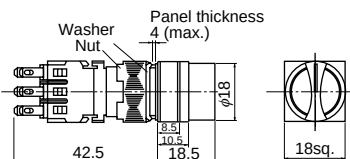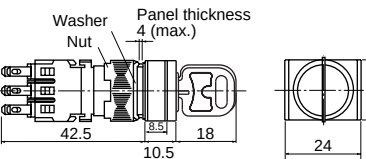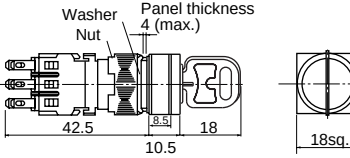■ Selector switches/3-position (90-degree)




Operator	Operation	Key removable position	Contact	AH164 type	AH165 (oil-tight) type	Dimensions, mm
Knob with rectangular bezel  KKD07-214	Maintained	—	2NO+2NC 3NO+3NC	AH164-P3B22 AH164-P3B33	AH165-P3B22 AH165-P3B33	
	Spring/  manual return	—	2NO+2NC 3NO+3NC	AH164-P6B22 AH164-P6B33	AH165-P6B22 AH165-P6B33	
	Spring/  manual return	—	2NO+2NC 3NO+3NC	AH164-P7B22 AH164-P7B33	AH165-P7B22 AH165-P7B33	
	Spring return 	—	2NO+2NC 3NO+3NC	AH164-P1B22 AH164-P1B33	AH165-P1B22 AH165-P1B33	
Knob with square bezel  KKD07-216	Maintained	—	2NO+2NC 3NO+3NC	AH164-SP3B22 AH164-SP3B33	AH165-SP3B22 AH165-SP3B33	
	Spring/  manual return	—	2NO+2NC 3NO+3NC	AH164-SP6B22 AH164-SP6B33	AH165-SP6B22 AH165-SP6B33	
	Spring/  manual return	—	2NO+2NC 3NO+3NC	AH164-SP7B22 AH164-SP7B33	AH165-SP7B22 AH165-SP7B33	
	Spring return 	—	2NO+2NC 3NO+3NC	AH164-SP1B22 AH164-SP1B33	AH165-SP1B22 AH165-SP1B33	
Key with rectangular bezel  KKD09-002L	Maintained*	⊖ A	2NO+2NC 3NO+3NC	AH164-J3A22A AH164-J3A33A	AH165-J3A22A AH165-J3A33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-J3E22A AH164-J3E33A	AH165-J3E22A AH165-J3E33A	
		⊖ D	2NO+2NC 3NO+3NC	AH164-J3D22A AH164-J3D33A	AH165-J3D22A AH165-J3D33A	
		⊕ C	2NO+2NC 3NO+3NC	AH164-J3C22A AH164-J3C33A	AH165-J3C22A AH165-J3C33A	
	Spring/ manual return 	⓪ E	2NO+2NC 3NO+3NC	AH164-J6E22A AH164-J6E33A	AH165-J6E22A AH165-J6E33A	
		⊖ D	2NO+2NC 3NO+3NC	AH164-J6D22A AH164-J6D33A	AH165-J6D22A AH165-J6D33A	
	Spring/ manual return 	⊖ A	2NO+2NC 3NO+3NC	AH164-J7A22A AH164-J7A33A	AH165-J7A22A AH165-J7A33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-J7E22A AH164-J7E33A	AH165-J7E22A AH165-J7E33A	
	Spring return 	⓪ E	2NO+2NC 3NO+3NC	AH164-J1E22A AH164-J1E33A	AH165-J1E22A AH165-J1E33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-J1E22A AH164-J1E33A	AH165-J1E22A AH165-J1E33A	
	Maintained*	⊖ A	2NO+2NC 3NO+3NC	AH164-SJ3A22A AH164-SJ3A33A	AH165-SJ3A22A AH165-SJ3A33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-SJ3E22A AH164-SJ3E33A	AH165-SJ3E22A AH165-SJ3E33A	
		⊖ D	2NO+2NC 3NO+3NC	AH164-SJ3D22A AH164-SJ3D33A	AH165-SJ3D22A AH165-SJ3D33A	
		⊕ C	2NO+2NC 3NO+3NC	AH164-SJ3C22A AH164-SJ3C33A	AH165-SJ3C22A AH165-SJ3C33A	
Key with square bezel  KKD09-002R	Spring/ manual return 	⓪ E	2NO+2NC 3NO+3NC	AH164-SJ6E22A AH164-SJ6E33A	AH165-SJ6E22A AH165-SJ6E33A	
		⊖ D	2NO+2NC 3NO+3NC	AH164-SJ6D22A AH164-SJ6D33A	AH165-SJ6D22A AH165-SJ6D33A	
		⊖ A	2NO+2NC 3NO+3NC	AH164-SJ7A22A AH164-SJ7A33A	AH165-SJ7A22A AH165-SJ7A33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-SJ7E22A AH164-SJ7E33A	AH165-SJ7E22A AH165-SJ7E33A	
	Spring/ manual return 	⊖ A	2NO+2NC 3NO+3NC	AH164-SJ7A22A AH164-SJ7A33A	AH165-SJ7A22A AH165-SJ7A33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-SJ7E22A AH164-SJ7E33A	AH165-SJ7E22A AH165-SJ7E33A	
	Spring return 	⓪ E	2NO+2NC 3NO+3NC	AH164-SJ1E22A AH164-SJ1E33A	AH165-SJ1E22A AH165-SJ1E33A	
		⓪ E	2NO+2NC 3NO+3NC	AH164-SJ1E22A AH164-SJ1E33A	AH165-SJ1E22A AH165-SJ1E33A	

- There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
- Contact arrangement and operator position: *See page 04/201.*
- Spring return, spring/manual return (spring return): Operation angle 70-degree

- * Available key removable position: Code B ⊖
- With wire-wrap pin terminals have a depth of 47mm.

Selector Switches AH164 and AH165

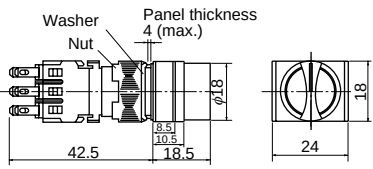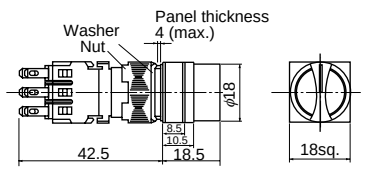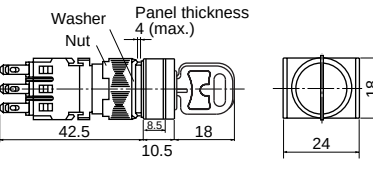■ Selector switches/3-position (45-degree)

Operator	Operation	Key removable position	Contact	AH164 type	AH165 (oil-tight) type	Dimensions, mm
Knob with rectangular bezel  KKD07-214	Maintained	—	2NO+2NC 3NO+3NC	AH164-PK3B22 AH164-PK3B33	AH165-PK3B22 AH165-PK3B33	
	Spring/ manual return	—	2NO+2NC 3NO+3NC	AH164-PK6B22 AH164-PK6B33	AH165-PK6B22 AH165-PK6B33	
	Spring/ manual return	—	2NO+2NC 3NO+3NC	AH164-PK7B22 AH164-PK7B33	AH165-PK7B22 AH165-PK7B33	
	Spring return	—	2NO+2NC 3NO+3NC	AH164-PK1B22 AH164-PK1B33	AH165-PK1B22 AH165-PK1B33	
Knob with square bezel  KKD07-216	Maintained	—	2NO+2NC 3NO+3NC	AH164-SPK3B22 AH164-SPK3B33	AH165-SPK3B22 AH165-SPK3B33	
	Spring/ manual return	—	2NO+2NC 3NO+3NC	AH164-SPK6B22 AH164-SPK6B33	AH165-SPK6B22 AH165-SPK6B33	
	Spring/ manual return	—	2NO+2NC 3NO+3NC	AH164-SPK7B22 AH164-SPK7B33	AH165-SPK7B22 AH165-SPK7B33	
	Spring return	—	2NO+2NC 3NO+3NC	AH164-SPK1B22 AH164-SPK1B33	AH165-SPK1B22 AH165-SPK1B33	
Key with rectangular bezel  KKD09-002L	Maintained	⊖ A	2NO+2NC 3NO+3NC	AH164-JK3A22A AH164-JK3A33A	AH165-JK3A22A AH165-JK3A33A	
		Ⓜ E	2NO+2NC 3NO+3NC	AH164-JK3E22A AH164-JK3E33A	AH165-JK3E22A AH165-JK3E33A	
		⊘ D	2NO+2NC 3NO+3NC	AH164-JK3D22A AH164-JK3D33A	AH165-JK3D22A AH165-JK3D33A	
		⊗ C	2NO+2NC 3NO+3NC	AH164-JK3C22A AH164-JK3C33A	AH165-JK3C22A AH165-JK3C33A	
	Spring/ manual return	Ⓜ E	2NO+2NC 3NO+3NC	AH164-JK6E22A AH164-JK6E33A	AH165-JK6E22A AH165-JK6E33A	
		⊘ D	2NO+2NC 3NO+3NC	AH164-JK6D22A AH164-JK6D33A	AH165-JK6D22A AH165-JK6D33A	
		⊗ C	2NO+2NC 3NO+3NC	AH164-JK6C22A AH164-JK6C33A	AH165-JK6C22A AH165-JK6C33A	
	Spring/ manual return	⊖ A	2NO+2NC 3NO+3NC	AH164-JK7A22A AH164-JK7A33A	AH165-JK7A22A AH165-JK7A33A	
		Ⓜ E	2NO+2NC 3NO+3NC	AH164-JK7E22A AH164-JK7E33A	AH165-JK7E22A AH165-JK7E33A	
	Spring return	Ⓜ E	2NO+2NC 3NO+3NC	AH164-JK1E22A AH164-JK1E33A	AH165-JK1E22A AH165-JK1E33A	
	Maintained	⊖ A	2NO+2NC 3NO+3NC	AH164-SJK3A22A AH164-SJK3A33A	AH165-SJK3A22A AH165-SJK3A33A	
		Ⓜ E	2NO+2NC 3NO+3NC	AH164-SJK3E22A AH164-SJK3E33A	AH165-SJK3E22A AH165-SJK3E33A	
		⊘ D	2NO+2NC 3NO+3NC	AH164-SJK3D22A AH164-SJK3D33A	AH165-SJK3D22A AH165-SJK3D33A	
		⊗ C	2NO+2NC 3NO+3NC	AH164-SJK3C22A AH164-SJK3C33A	AH165-SJK3C22A AH165-SJK3C33A	
Key with square bezel  KKD09-002R	Spring/ manual return	Ⓜ E	2NO+2NC 3NO+3NC	AH164-SJK6E22A AH164-SJK6E33A	AH165-SJK6E22A AH165-SJK6E33A	
		⊘ D	2NO+2NC 3NO+3NC	AH164-SJK6D22A AH164-SJK6D33A	AH165-SJK6D22A AH165-SJK6D33A	
		⊗ C	2NO+2NC 3NO+3NC	AH164-SJK6C22A AH164-SJK6C33A	AH165-SJK6C22A AH165-SJK6C33A	
	Spring/ manual return	⊖ A	2NO+2NC 3NO+3NC	AH164-SJK7A22A AH164-SJK7A33A	AH165-SJK7A22A AH165-SJK7A33A	
		Ⓜ E	2NO+2NC 3NO+3NC	AH164-SJK7E22A AH164-SJK7E33A	AH165-SJK7E22A AH165-SJK7E33A	
	Spring return	Ⓜ E	2NO+2NC 3NO+3NC	AH164-SJK1E22A AH164-SJK1E33A	AH165-SJK1E22A AH165-SJK1E33A	
	Maintained	⊖ A	2NO+2NC 3NO+3NC	AH164-SJK3A22A AH164-SJK3A33A	AH165-SJK3A22A AH165-SJK3A33A	
		Ⓜ E	2NO+2NC 3NO+3NC	AH164-SJK3E22A AH164-SJK3E33A	AH165-SJK3E22A AH165-SJK3E33A	

- There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
- Contact arrangement and operator position: See page 04/205.

• Key removable positions (JK, SJK)


Remvable position							
Code	A	B	C	D	E	F	G

Operation code	Key removable position
3	A, B, C, D, E, F, G
6	D, E, F
7	A, E, G
1	E

• Key code No.

There are 6 available key types; A, B, C, D, E and F.
Standard key code is A.

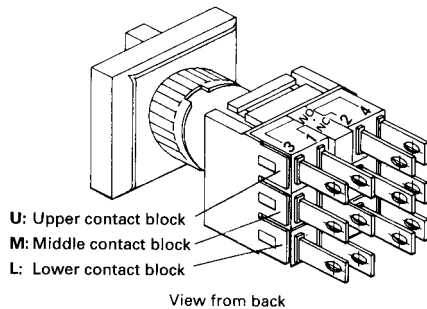• Contact block position







• Contact arrangement and operator position:
3-position selector switch

Contact arrange- ment		2NO+2NC	3NO+3NC
Operator position	Left ⌚	$\begin{matrix} \text{U} & & \text{L} \\ 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 \\ 3\text{O} \text{ } 04 3\text{O} \text{ } 04 \end{matrix}$	$\begin{matrix} \text{U} & & \text{M} & & \text{L} \\ 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 \\ 3\text{O} \text{ } 04 3\text{O} \text{ } 04 & 3\text{O} \text{ } 04 3\text{O} \text{ } 04 & 3\text{O} \text{ } 04 3\text{O} \text{ } 04 \end{matrix}$
	Center ⓪	$\begin{matrix} 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 \\ 3\text{O} \text{ } 04 3\text{O} \text{ } 04 \end{matrix}$	$\begin{matrix} 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 \\ 3\text{O} \text{ } 04 3\text{O} \text{ } 04 & 3\text{O} \text{ } 04 3\text{O} \text{ } 04 & 3\text{O} \text{ } 04 3\text{O} \text{ } 04 \end{matrix}$
	Right ⌚	$\begin{matrix} 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 \\ 3\text{O} \text{ } 04 3\text{O} \text{ } 04 \end{matrix}$	$\begin{matrix} 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 & 1\text{O} \text{ } 1\text{Q} 2 \\ 3\text{O} \text{ } 04 3\text{O} \text{ } 04 & 3\text{O} \text{ } 04 3\text{O} \text{ } 04 & 3\text{O} \text{ } 04 3\text{O} \text{ } 04 \end{matrix}$

Pilot Lights

AH164 and AH165

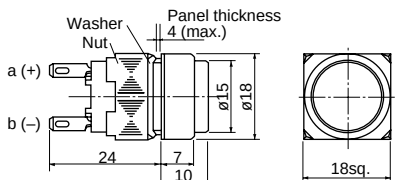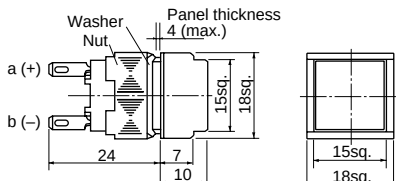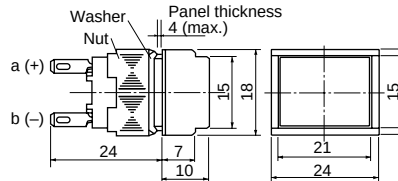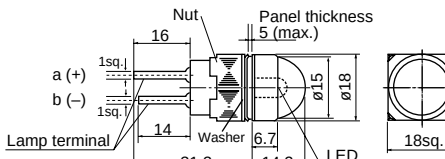■ Pilot lights/without transformer

Lens	Lamp	Voltage	AH164 type	AH165 (oil-tight) type	Dimensions, mm
 SK-1139	Flat LED	24V DC	AH164-Z□E3	AH165-Z□E3	
	Spot LED	24V DC	AH164-Z□E2	AH165-Z□E2	
	Incandescent	24V AC/DC	AH164-Z□E	AH165-Z□E	
	Neon	110V AC 220V AC	AH164-Z□H1 AH164-Z□M1	AH165-Z□H1 AH165-Z□M1	
 SK-1138	Flat LED	24V DC	AH164-ZS□E3	AH165-ZS□E3	
	Spot LED	24V DC	AH164-ZS□E2	AH165-ZS□E2	
	Incandescent	24V AC/DC	AH164-ZS□E	AH165-ZS□E	
	Neon	110V AC 220V AC	AH164-ZS□H1 AH164-ZS□M1	AH165-ZS□H1 AH165-ZS□M1	
 SK-1137	Flat LED	24V DC	AH164-ZT□E3	AH165-ZT□E3	
	Spot LED	24V DC	AH164-ZT□E2	AH165-ZT□E2	
	Incandescent	24V AC/DC	AH164-ZT□E	AH165-ZT□E	
	Neon	110V AC 220V AC	AH164-ZT□H1 AH164-ZT□M1	AH165-ZT□H1 AH165-ZT□M1	
 AF87-45	LED	12V DC	—	AH165-ZM□B2	
		24V DC	—	AH165-ZM□E2	

• Lens color

Replace the □ mark by the following lens color code

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Y	S	O

- The color lens is made of a tinted transparent material.
- A white pilot lights is fitted with a transparent color lens. (Except the neon lamp and dome).
- With wire-wrap pin terminals have a depth of 29mm. (Except for ZM type)

• Lamp voltage

Voltages other than above are available

Code	LED	Incandescent	Neon
AA	5V DC	—	—
A	6V DC	5V AC/DC	—
B	12V DC	12V AC/DC	—
K	—	—	120V AC
P	—	—	240V AC

Note: Except for ZM types and red/green LED types

Lens	Lamp	Voltage	AH164 type	AH165 (oil-tight) type	Dimensions, mm
AF90-944	Flat LED	■ Voltage H: 100-110V AC	AH164-Z □ ■3	AH165-Z □ ■3	
	Incandescent	M: 200-220V AC	AH164-Z □ ■	AH165-Z □ ■	
AF90-943	Flat LED	■ Voltage H: 100-110V AC	AH164-ZS □ ■3	AH165-ZS □ ■3	
	Incandescent	M: 200-220V AC	AH164-ZS □ ■	AH165-ZS □ ■	
AF90-942	Flat LED	■ Voltage H: 100-110V AC	AH164-ZT □ ■3	AH165-ZT □ ■3	
	Incandescent	M: 200-220V AC	AH164-ZT □ ■	AH165-ZT □ ■	

Replace the ☐ mark by the following lens color code





Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Y	S	O

- The color lens is made of a tinted transparent material.
- A white pilot lights is fitted with a transparent color lens.

Buzzers

AH164 and AH165

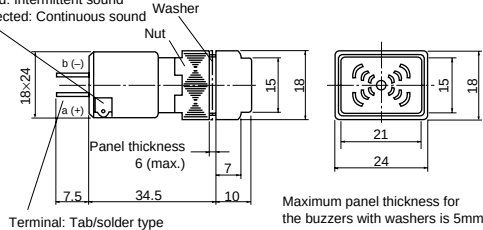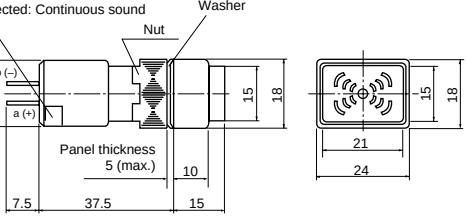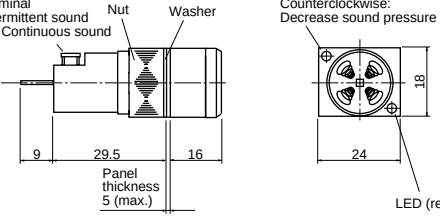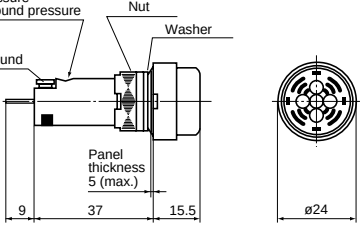■ Buzzers


Sound	Operating voltage	Type	Dimensions, mm
Standard  AF87-317	6V AC 6V DC 12 to 24V AC/DC 35 to 48V AC/DC	AH164-TXBAAC AH164-TXBADC AH164-TXBE AH164-TXBF	Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound  Maximum panel thickness for the buzzers with washers is 5mm
Loud sound  AF87-44	6V AC 6V DC 12 to 24V AC/DC 35 to 48V AC/DC	AH164-TX1BAAC AH164-TX1BADC AH164-TX1BE AH164-TX1BF	Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound 
Loud sound with volume control  KKD07-223	6V AC/DC 12 to 24V AC/DC 35 to 48V AC/DC	AH164-TX2BA AH164-TX2BE AH164-TX2BF	Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound  Volume Clockwise: Increase sound pressure Counterclockwise: Decrease sound pressure LED (red)
Standard sound with volume control (IP54)  KKD05-096b	6V AC/DC 12 to 24V AC/DC 35 to 48V AC/DC	AH165-XBA AH165-XBE AH165-XBF	Volume Clockwise: Increase sound pressure Counterclockwise: Decrease sound pressure Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound 

Pushbuttons/Selectors/Pilot Lights/Buzzers


AH164 and AH165

Mounting space

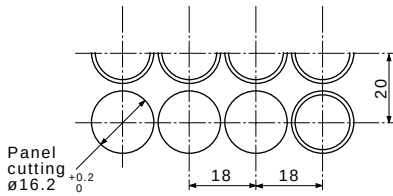
- Mounting space, mm
- Pushbuttons and pilot lights
- Extended round head or lens




Flush square head or lens

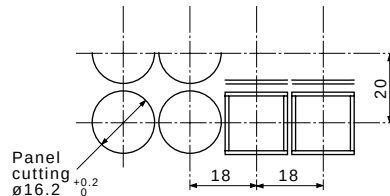


Flush rectangular head or lens

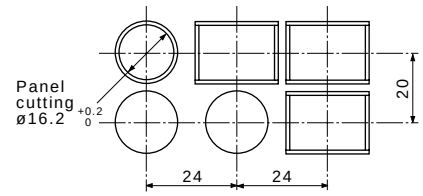


Mushroom head




Convex square head




Convex rectangular head



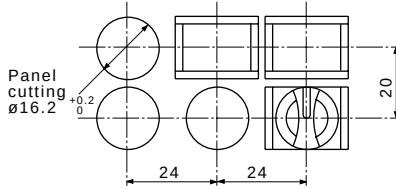
- Selector switches
- When mounting the selector switches near the pilot light



- When mounting the selector switches near each other




- With transformer




Note: * () For switch with flush rectangular head

- When mounting the JM or RJM selector switches near each other (2NO+2NC only)




- When mounting the JM or RJM selector switches near the other selector switch, pushbutton switch and pilot lights




Note: * Mushroom, convex square, convex rectangular: 27

- AH165-V, V1, V5, V6



- AH165-JM, RJM



- Terminal number
- AH164, 165

Type	Wiring	Terminal position
Illuminated pushbuttons	a (+) b (-)	Type number display side
Pushbuttons Selector switches (except for JM, RJM types)		
Pilot lights (without transformer)	a (+) b (-)	Type number display side

Pushbuttons/Selectors/Pilot Lights/Buzzers

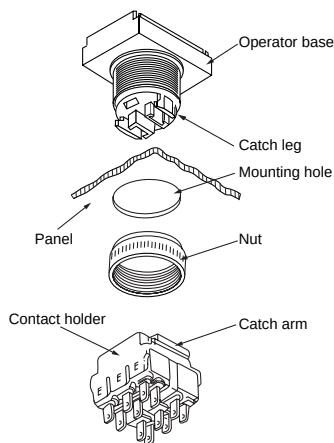
AH164, AH165 and AH165-2

Notes on use

Notes on use


■ Installation on panel

- For installation, use dedicated wrench AHX601. The appropriate tightening torque is 0.6 to 1N·cm.
- The installation sequence is as follows:
Pass the operator base through the hole in the panel and secure it by tightening the bezel. Properly position the catch arms of the contact holder and the catch legs of the operator base and push the contact holder onto the operator base. To remove the contact holder, pull it while pressing the catch arms inward.



■ Mounting steps of switch with transformer

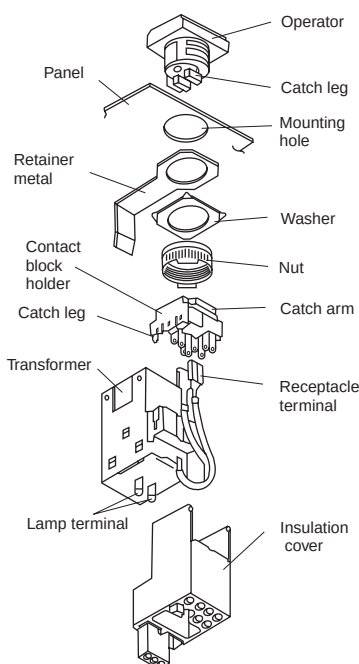- Pass the switch operator through the panel hole and secure with a nut by way of the retainer metal from the front of the panel.
- Align the position of the catch arm of the contact block holder with that of the catch leg of the switch operator. Engage these two catches by pushing them together.
- Insert and secure the transformer unit while assembling the contact block holder with the retainer metal.
- Connect the receptacle terminal with lead wires extending from the transformer to the lamp terminal of the contact block holder. (Be care on the polarity of the LED. Red: +, Black: -)
- Push in and secure the standard accessory insulation cover by aligning its position with each terminal. To replace the transformer, remove the transformer by widening the catch leg of the contact block holder. Pay attention not to excessively widen the catch leg. Mounting steps are the same as the above steps ③, ④, and ⑤.



■ Installing the protection cover / dust-tight cover, guard-ring

Be careful that the panel thickness does not exceed the following:
Panel thickness
Protection cover: 2.6mm max.
Dust-tight cover: 2.0mm max.
Guard ring: 2.5mm max.


■ Operating voltage and rated voltage of incandescent lamps

Rated voltage	Operating voltage
6V	4 to 5V
14V	10 to 12V
28V (Standard)	20 to 24V


Incandescent lamps should be operated at the operating voltages if a lamp service life of 5,000 to 10,000 hours are needed. The ambient temperature must not exceed 30°C if the lamp is used at the rated voltage continuously.

■ Method of replacing lamp


- Incandescent lamps/LED lamps/neon lamps
Remove the color lens and inner button with a remover AHX618.
Then draw out the lamp with a lamp changer AHX672.
When installing lamps, do it manually and in the reverse order of removing.
- Products with blue and green LEDs
The LED devices on products with high-brightness (blue and green) LEDs are very sensitive to static electricity. When replacing LED lamps do not allow static electricity to come into direct contact with the metal frame on the upper side of the LED lamp. The LED device may be damaged if this part is subjected to static electricity. When installing or removing an LED lamp, it is recommended that you use the lamp changer (AHX672).



- To replace the lamp of a AH165-2 illuminated pushbutton switch (ML, VL), remove the button and draw out the oil-tight cap.



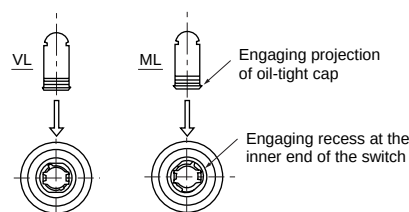
- Then, replace the lamp using a lamp changer (AHX672) and push the oil-tight cap into its original position with its engaging projection properly adjusted (see the figure below).




Note: Lamp of AH165-ZM type can not be replaced.

■ Method of replacing color lens

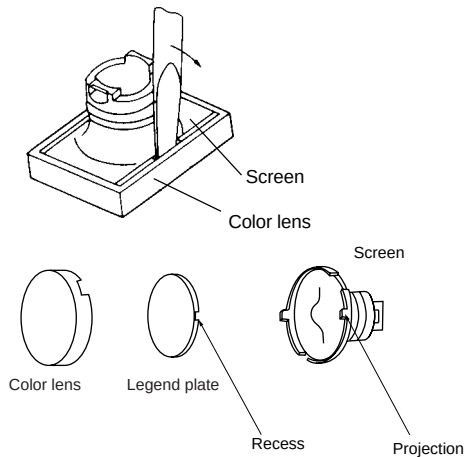- To remove the color lens, insert a small screwdriver into the color lens and twist in direction of the arrow.



- For an AH165-2, use a small standard screwdriver or a similar tool with a flat end. If one side of the color lens is removed from the screen, insert the screwdriver or a similar tool deeper and remove the color lens together with the screen.



■ Replacing pushbuttons

In the case of alternative action type pushbutton switches and illuminated pushbutton switches, be sure not to replace the pushbuttons in their locked state. This could result in internal damage to the mechanism.

■ Description sheet

The Fuji description sheet is 25μm thick. If preparing custom description sheets, make sure that the thickness is 0.1mm or less.

■ Contact block

To replace a contact block, use removing tool AGX012. If excessive force is applied when attempting to open the support legs for the contact block holder, deformation or damage may occur.

■ Handling precautions

- Do not apply torque in excess of 1.0 N•m to operate the selectors switch (Type "P"). Required operating force of switches is less than 0.1 N•m.
- Do not tap on a pushbutton to turn it ON or OFF, such handling may damage it. Be sure to operate the pushbutton by hand.

■ Key type selector switch

- Five key types (Type B to Type F) are available besides Type A, which is the standard key type.



Symbol on the key



Symbol on the main unit

Be sure to use a key with a symbol which is matched with the symbol on the main unit.

- Fully insert the key into the main unit before turning the key.
- The key turning force should not exceed 0.1 N•m.
- Do not pull out or insert the key forcibly.

■ Wiring connections

- Use a soldering iron with a wattage of not more than 30W and a tip length of more than 20mm.

Use a rosin-core solder

With a 30W iron complete soldering within 5 seconds, or 10 seconds with a 20W iron. Do not apply external force to the terminals. Do not deform the terminals.

Because lead-free solder's melting point is slightly high, soldering work may be difficult. Use a soldering iron whose tip is rather large or whose calorie is rather high.

- Wires that can be connected

Two solid wires with a maximum diameter of 0.8mm (solder)
 One stranded wire with a maximum area of 0.75mm² (solder)

Flat connection terminal

(2.8□-1.25-5) 0.5 to 1.25mm²

(2.8□-0.5-5) 0.2 to 0.5mm²

- Using contact blocks

When using NO and NC contacts in the same contact block, avoid connection that involves opposite polarity or wiring from different types of power supply.

- For wiring to adjacent terminals, use insulated tubing to prevent short-circuit and to assure isolation. For solder terminals, be careful when connecting thick wires. Do not use too much solder.
- Wiring to wire-wrap pin terminals
 Select the appropriate wire sizes and tools from the table below.

Wire size	Bit	Sleeve	Number of effective wraps
0.4mm dia.	3-A	1-B	About 8
0.5mm dia.	1-A	1-B	About 6
(0.65mm dia.)	(2-A)	(2-B)	(About 6)

Use ordinary wrapping for connection.

Wires of 0.65mm dia. must not be used on adjacent terminals. However, 0.65mm dia. wire can be mixed with 0.4 and 0.5mm dia. wires.

- Wiring to tab terminals
 Use receptacles, No. 110.

■ Installing lamps in close order

When continuously lighting pilot lights or pressing illuminated pushbuttons installed in close order, care must be taken that the ambient temperature does not exceed the rated value.

■ LEDs


• LED Lamp Malfunctioning

The LED lamp is lit by a very small level of current (approximately 0.01mA). Therefore, the it may be erroneously lit by a current leaking from the surge absorption circuit or semiconductor circuit or due to stray capacitance between cables. In that case, provide a countermeasure (e.g., connect a resistor in parallel with the LED lamp).

• Countermeasure for Malfunctioning


Shunt Resistor R or CR elements connected in parallel
Lamp malfunctions can be prevented by connecting a shunt resistor (R) or CR elements (a capacitor and resistor) in parallel with the LED lamp terminal. The resistance and CR values vary depending on the model and the operating conditions.

Example 1



- 24V DC
R: 10k Ω (1W)

Example 2



- 110V AC
C: 0.33 μ F (250V AC)
R: 120 Ω (0.25W)
- 220V AC
C: 0.33 μ F (250V AC)
R: 120 Ω (0.25W)

• Incoming surge

Be careful that since high luminance LED products use an element sensitive to static electricity, they may not be lit by an abnormal voltage like surge.

■ Using a flat LED in 48V DC circuit

When a flat LED lamps having a rated voltage of 24V DC is used with 48V DC circuit, connect an external resistor of 3,500 Ω (1W).

■ Preventing the neon lamp from incorrectly turning ON

The neon lamp may incorrectly turn ON due to current leakage or voltage induction. In such a case, connect a shunt resistor in parallel with the lamp.

Example) 110V AC: 100k (0.25W)
220V AC: 50k (2W)

If an external surge of 3kV or more may occur, connect a surge absorption element in parallel with the lamp.

■ Operation

Do not use a hitting or bouncing action to operate the button, or the switch may break. Always operate the switch by hand.

■ Storage and operation site

- Use the unit within the rated operating ambient temperature and humidity ranges.
- Do not use the enclosed type in places where oil or water is sprayed or where dust accumulates. In places such as these, use the oil-tight type or provide a dust cover.
- The oil-tight type is evaluated with standard cutting oil and cooling oil applied. The oil-tight type cannot be used with some special oils.

■ Buzzer

• Noise

If the application circuit is likely to generate excessively strong noise, connect a surge absorber (e.g., FUJI'S ENC390D, provided that the switch is a 24V type) in parallel with the buzzer.


• Place of Use

The buzzer does not have a drip-proof construction. Do not use the buzzer in places where oil or water is sprayed or where dust accumulates. If the buzzer is a splash-proof type, it will resist sprays of water.

- Do not use the buzzer in places that are subject to an excessive amount of corrosive gas.
- Be careful that the buzzer is likely to sound erroneously due to leakage current or the like.

■ Accessories for AH164 and AH165


Description	Type	
Color chips (Round)	Color	Type
 L, L5, E E5, Z	Green Red White (For Neon) Blue Yellow Orange Clear	AHX631-G AHX631-R AHX631-W AHX631-S AHX631-Y AHX631-O AHX631-C
SF-682 For LED, Neon	Green	AHX653-G
Color chips (Square)	Color	Type
 SL, SL5, SGL, SGL5, SF, SF5, SGF, SGF5, ZS	Green Red White (For Neon) Blue Yellow Orange Clear	AHX632-G AHX632-R AHX632-W AHX632-S AHX632-Y AHX632-O AHX632-C
SF-681 For LED, Neon	Green	AHX653-SG
Color chips (Rectangular)	Color	Type
 TL, TL5, TGL TGL5, TF, TF5 TGF, TGF5, ZT	Green Red White (For Neon) Blue Yellow Orange Clear	AHX633-G AHX633-R AHX633-W AHX633-S AHX633-Y AHX633-O AHX633-C
SF-680 For LED, Neon	Green	AHX653-TG
Mushroom head button	Color	Type
 M, M5	Green Red White Blue Yellow Orange Black	AHX682-G AHX682-R AHX682-W AHX682-S AHX682-Y AHX682-O AHX682-B
SI-40		
Convex square head button	Color	Type
 SM, SM5	Green Red White Blue Yellow Orange Black	AHX683-G AHX683-R AHX683-W AHX683-S AHX683-Y AHX683-O AHX683-B
SI-43		
Convex rectangular head button	Color	Type
 TM, TM5	Green Red White Blue Yellow Orange Black	AHX684-G AHX684-R AHX684-W AHX684-S AHX684-Y AHX684-O AHX684-B
SI-44		

Description	Type	
Legend sheet	Round Type: AHX615-□ Legend: ON, OFF, UP, DOWN	
	Square Type: AHX616-□ Legend: ON, OFF, UP, DOWN START, STOP, OPEN CLOSE, AUTO, MAN, RESET, POWER, REV, FWD, HIGH, LOW	
	Rectangular Type: AHX617-□ Legend: ON, OFF, UP, DOWN START, STOP, AUTO, MAN, FOWARD, REVERSE	
	When ordering, specify desired legend in the □ at the end of ordering code, Transparent blank sheets are also available. Use black oil ink.	
SH-165		
Legend plate (Acrylic resin)	Type	Color Dimensions, mm
	Round	AHX665 White ø12.2 x 0.9 AHX665-C Transparent AHX665-B Black
	Square	AHX666 White 12.2sq. x 0.9 AHX666-C Transparent AHX666-B Black
	Rectangular	AHX667 White 12.2 x 18.2 x 0.9 AHX667-C Transparent AHX667-B Black
SH-164		
Legend plate for spot LED (Acrylic resin)	Type	Dimensions, mm
	Round Square Rectangular	AHX650 ø12.2 x 0.9 AHX651 12.2sq. x 0.9 AHX652 12.2 x 18.2 x 0.9
SP-113		
Legend plate for selector switch (2-position)	Type: AHX664 Legend: ON-OFF Legend: Blank	Dimensions, mm: 24sq. x 0.5
		
SH-226A		
Legend plate for symbol mark	Mark	Type
	Square Rectangular	AHX666-E AHX667-E
	Square Rectangular	AHX666-H AHX667-H
	Square Rectangular	AHX666-T AHX667-T
AF87-74		





Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164 and AH165

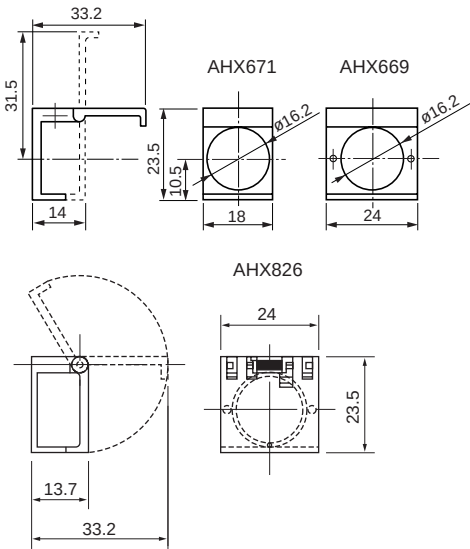Accessories


Description	Type		
Protection cover	For round and square head button Type: AHX671 For rectangular head button Type: AHX669 AHX826 This cover protect against accidental operation. Note: Not used for illuminated pushbuttons with guard. Applicable panel thickness is 2.6mm max. Dimensions, mm 		
 KKD07-246 KKD07-248 KKD07-247			
Dust-tight cover	For round and square head button Type: AHX822 Dimensions, mm: 24sq. x 14.2 For rectangular head button Type: AHX668 Dimensions, mm: 24 x 30 x 14.2 For mushroom head button Type: AHX649 Dimensions, mm: $\varnothing 30$ x 18 These covers protect against dust. Note: Applicable panel thickness is 2.0mm max.		
 AF91-123, SI-41			
Guard ring	Type	Color	Dimensions, mm
 SI-42	AHX676-B	Black	$\varnothing 21$ x 12
	AHX676-GY	Gray	
This guard ring is used in combination with an extended round head pushbutton (L or E). Note: Applicable panel thickness is 2.5mm max. Please place an order for a packing (AHX685) separately when you intend to use for AH165 series.			
Transformer	Voltage	Type	Lamp
 AF90-949	100 to 110V AC	AHX805-H	LED
	200 to 220V AC	AHX805-M	
	100 to 110V AC	AHX806-H	Incandescent
	200 to 220V AC	AHX806-M	

■ Accessories for AH165-2

Description	Type													
Color lens (Round) 	For flush head (Used with 2F, 2F5, 2FL, 2FL5, 2Z)													
	<table> <tr><th>Color</th><th>Type</th></tr> <tr><td>Green</td><td>AHX2604-G</td></tr> <tr><td>Red</td><td>AHX2604-R</td></tr> <tr><td>Yellow</td><td>AHX2604-Y</td></tr> <tr><td>Blue</td><td>AHX2604-S</td></tr> <tr><td>Orange</td><td>AHX2604-O</td></tr> <tr><td>Clear</td><td>AHX2604-C</td></tr> </table>	Color	Type	Green	AHX2604-G	Red	AHX2604-R	Yellow	AHX2604-Y	Blue	AHX2604-S	Orange	AHX2604-O	Clear
Color	Type													
Green	AHX2604-G													
Red	AHX2604-R													
Yellow	AHX2604-Y													
Blue	AHX2604-S													
Orange	AHX2604-O													
Clear	AHX2604-C													
Color lens (Square) 	For extended head (Used with 2E, 2E5, 2EL, 2EL5, 2ZE)													
	<table> <tr><th>Color</th><th>Type</th></tr> <tr><td>Green</td><td>AHX2605-G</td></tr> <tr><td>Red</td><td>AHX2605-R</td></tr> <tr><td>Yellow</td><td>AHX2605-Y</td></tr> <tr><td>Blue</td><td>AHX2605-S</td></tr> <tr><td>Orange</td><td>AHX2605-O</td></tr> <tr><td>Clear</td><td>AHX2605-C</td></tr> </table>	Color	Type	Green	AHX2605-G	Red	AHX2605-R	Yellow	AHX2605-Y	Blue	AHX2605-S	Orange	AHX2605-O	Clear
Color	Type													
Green	AHX2605-G													
Red	AHX2605-R													
Yellow	AHX2605-Y													
Blue	AHX2605-S													
Orange	AHX2605-O													
Clear	AHX2605-C													
Color lens (Square) 	For flush head (Used with 2SF, 2SF5, 2SFL, 2SFL5, 2SZ)													
	<table> <tr><th>Color</th><th>Type</th></tr> <tr><td>Green</td><td>AHX2606-G</td></tr> <tr><td>Red</td><td>AHX2606-R</td></tr> <tr><td>Yellow</td><td>AHX2606-Y</td></tr> <tr><td>Blue</td><td>AHX2606-S</td></tr> <tr><td>Orange</td><td>AHX2606-O</td></tr> <tr><td>Clear</td><td>AHX2606-C</td></tr> </table>	Color	Type	Green	AHX2606-G	Red	AHX2606-R	Yellow	AHX2606-Y	Blue	AHX2606-S	Orange	AHX2606-O	Clear
Color	Type													
Green	AHX2606-G													
Red	AHX2606-R													
Yellow	AHX2606-Y													
Blue	AHX2606-S													
Orange	AHX2606-O													
Clear	AHX2606-C													
Color lens (Square) 	For extended head (Used with 2SE, 2SE5, 2SEL, 2SEL5, 2SEZ)													
	<table> <tr><th>Color</th><th>Type</th></tr> <tr><td>Green</td><td>AHX2607-G</td></tr> <tr><td>Red</td><td>AHX2607-R</td></tr> <tr><td>Yellow</td><td>AHX2607-Y</td></tr> <tr><td>Blue</td><td>AHX2607-S</td></tr> <tr><td>Orange</td><td>AHX2607-O</td></tr> <tr><td>Clear</td><td>AHX2607-C</td></tr> </table>	Color	Type	Green	AHX2607-G	Red	AHX2607-R	Yellow	AHX2607-Y	Blue	AHX2607-S	Orange	AHX2607-O	Clear
Color	Type													
Green	AHX2607-G													
Red	AHX2607-R													
Yellow	AHX2607-Y													
Blue	AHX2607-S													
Orange	AHX2607-O													
Clear	AHX2607-C													
Color lens (Square) 	For concave head (Used with 2SCE, 2SCE5, 2SCL, 2SCL5)													
	<table> <tr><th>Color</th><th>Type</th></tr> <tr><td>Green</td><td>AHX2608-G</td></tr> <tr><td>Red</td><td>AHX2608-R</td></tr> <tr><td>Yellow</td><td>AHX2608-Y</td></tr> <tr><td>Blue</td><td>AHX2608-S</td></tr> <tr><td>Orange</td><td>AHX2608-O</td></tr> <tr><td>Clear</td><td>AHX2608-C</td></tr> </table>	Color	Type	Green	AHX2608-G	Red	AHX2608-R	Yellow	AHX2608-Y	Blue	AHX2608-S	Orange	AHX2608-O	Clear
Color	Type													
Green	AHX2608-G													
Red	AHX2608-R													
Yellow	AHX2608-Y													
Blue	AHX2608-S													
Orange	AHX2608-O													
Clear	AHX2608-C													

AF87-631

AF87-632

Description	Type		
Legend plate 	For flush head		
	Color Type Used with		
	White AHX2609-W Incandescent lamp, LED lamp, Pushbutton ^{*1}		
	Clear AHX2609-C Neon lamp ^{*2}		
	Black AHX2609-B Pushbutton ^{*3}		
	Dimensions, mm: ø18 ^{*4} x 0.9		
	For extended head		
	Color Type Used with		
	White AHX2610-W Incandescent lamp, LED lamp, Pushbutton ^{*1}		
	Clear AHX2610-C Neon lamp ^{*2}		
Black AHX2610-B Pushbutton ^{*3}			
Dimensions, mm: ø18 ^{*4} x 4.4			
For flush square 	Color Type Used with		
	White AHX2611-W Incandescent lamp, LED lamp, Pushbutton ^{*1}		
	Clear AHX2611-C Neon lamp ^{*2}		
	Black AHX2611-B Pushbutton ^{*3}		
	Dimensions, mm: 17sq. x 0.9		
	For extended square, concave square		
	Color Type Used with		
	White AHX2612-W Incandescent lamp, LED lamp, Pushbutton ^{*1}		
	Clear AHX2612-C Neon lamp ^{*2}		
	Black AHX2612-B Pushbutton ^{*3}		
Dimensions, mm: 17sq. x 4.4			
^{*1} Illuminated pushbutton switches and pilot lights with incandescent lamps or LED lamps, Pushbutton switches (excluding).			
^{*2} Illuminated pushbutton switches and pilot lights with neon lamps.			
^{*3} Pushbutton switches (black)			
^{*4} Engraved range: 17mm dia.			
Mushroom head button	For illuminated pushbuttons (Used with 2ML, 2YML)		
	Color Type		
	Green AHX2614-G		
	Red AHX2614-R		
	White AHX2614-W		
	Yellow AHX2614-Y		
	Blue AHX2614-S		
	Orange AHX2614-O		
	For non-illuminated pushbuttons (Used with 2M, 2YM)		
	Color Type		
	Green AHX2613-G		
Red AHX2613-R			
White AHX2613-W			
Yellow AHX2613-Y			
Blue AHX2613-S			
Orange AHX2613-O			
Black AHX2613-B			

AF87-631

AF87-630

AF87-633



AF87-631
AF87-630

AF87-633

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH165-2

Accessories

Description	Type
Push-lock, turn-reset button  AF87-634	For illuminated pushbuttons (Used with 2VL, 2YVL) Color Type Green AHX2616-G Red AHX2616-R White AHX2616-W Yellow AHX2616-Y For pushbuttons (Used with 2V, 2YV) Color Type Green AHX2615-G Red AHX2615-R Yellow AHX2615-Y Black AHX2615-B
Dust-tight cover  AF87-636	For flush round (Used with 2F, 2FL, 2F5, 2FL5) Type: AHX2603-2 For flush square (Used with 2SF, 2SFL, 2SF5, 2SFL5) Type: AHX2603-2S These covers protect against dust.
Key washer  AF87-635	Type: AHX2601 Mounting hole, mm 


■ Accessories for AH164, AH165 and AH165-2

Description	Type		
Incandescent lamp  KKD06-333	Voltage	Type	
	6V, 0.6W	AHX641	
	14V, 0.7W	AHX642	
	28V, 0.7W	AHX643	
LED lamp  KKD06-206	Voltage	Type	
	5V DC	AHX695-5 □	
	6V DC	AHX695-6 □	
	12V DC	AHX695-12 □	
	24V DC	AHX695-24 □	
	Replace the □ mark by the luminous color code Red (R), Green (G), Orange (O), Amber (A), Yellow (Y), Blue (S)		
Neon lamp  KKD06-306	Voltage	Type	Luminous color
	110V AC	AHX655-H AHX654-H	Green Orange
	120V AC	AHX655-K AHX654-K	Green Orange
	220V AC	AHX655-M AHX654-M	Green Orange
	240V AC	AHX655-P AHX654-P	Green Orange
Panel plug  KKD07-262 Round	Color	Type	
	Black	AHX622-B	IP40
	Gray	AHX622-GY	IP40
 KKD07-261 Square	Black	AHX644-B	IP40
	Gray	AHX644-GY	IP40
 KKD07-260 Rectangular	Black	AHX645-B	IP40
	Gray	AHX645-GY	IP40
	Black	AHX850-B	IP65
Lamp changer  KKD07-259	Type: AHX672		
	If the switch is fitted with a lamp, use this tool to remove the lamp. The tool is unnecessary when installing a lamp.		
Remover  KKD07-258	Type: AHX618		
	This tool is used for replacing the color chips or screens.		
Contact holder remover  SP-522	Type: AHX699		
	This tool is used to remove a contact holder when switches are densely installed.		

Description	Type
Wrench	Type: AHX601
	When installing a command switch on a panel, this tool is useful for tightening the switch firmly and efficiently.
KKD07-257	
Terminal cover	Type: AHX2602
	This cover is used with AH164 and AH165 and AH165-2 (except pilot lights). Pass the wires through the cover, then mount the cover in position.
AF87-637	
Contact block	Terminal Type
	Solder/Tab AGX001
KKD06-305, KKD06-304	Wire-wrap AGX001-W
Dummy unit	Type: AGX002
	A dummy unit is used to fill the space where no contact blocks are installed. For example, two dummy units are used if 1NO+1NC contact block is installed, and one dummy unit is used if 2NO+2NC contact blocks are installed.
SK-1141	
Remover	Type: AGX012
	This tool is used for replacing the contact blocks or dummy units.
SM-334	

Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2 Accessories

Description	Type		
Sockets	Terminal	Type	Used with
	Solder/Tab	AHX697-S	Pushbuttons
	Wire-wrap	AHX697-W	
	PC board	AHX697-P	
	Solder/Tab	AHX697-SL	Illuminated pushbuttons
	Wire-wrap	AHX697-WL	
PC board		AHX697-PL	
Contact arrangement is 2NO+2NC only. Except for AH165-2PL types			
SM-1097			
Sockets for LED	Terminal	Type	
	Solder/Tab	AHX697-SH3	
	Wire-wrap	AHX697-WH3	
	• Contact arrangement is 2NO+2NC only. • These sockets are used only when LED lamps rated for 24V DC are used under 110V AC/DC. • Except for AH164, 165 and 165-2 series pilot lights or AH165-2PL type. • When side-by-side mounting and continuous lighting, note that a socket has higher temperature over the ambient temperature.		
SM-1098			

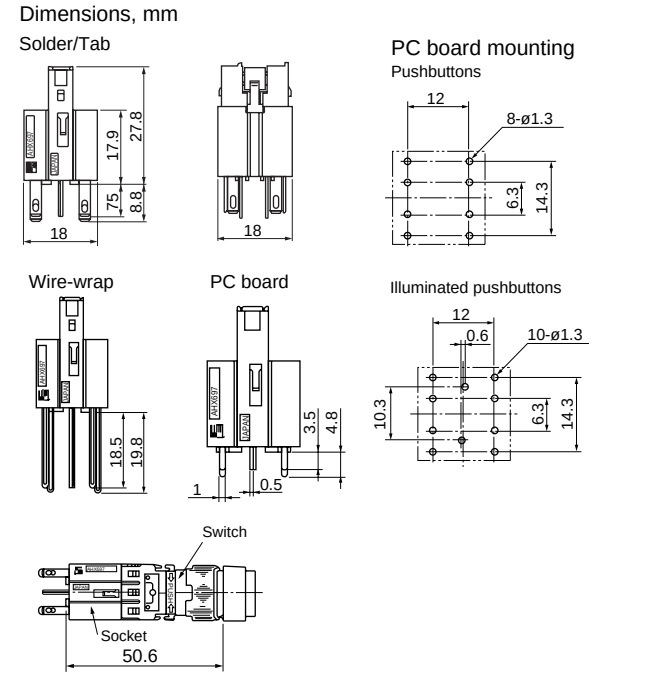

For wiring to wire-wrap pin terminals, select appropriate wire sizes and tool from the table below.

Wire size	Bit	Sleeve	Number of effective wraps
0.4mm dia.	3-A	1-B	About 8
0.5mm dia.	1-A	1-B	About 6
(0.65mm dia.)	(2-A)	(2-B)	(About 6)

Use ordinary wrapping for connection. Wires of 0.65mm dia. must not be used on adjacent terminals. However, 0.65mm dia. wire can be mixed with 0.4mm and 0.5mm dia. wires.

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2

Mass

■ Mass, gram

AH164 series

Type	1NO + 1NC	2NO + 2NC	3NO + 3NC
AH164-L,L5 (Without transformer)	12.5	13.5	14.5
L,L5 (With transformer)	53.5	54.5	-
SL,SL5 (Without transformer)	13.1	14.1	15.1
SL,SL5 (With transformer)	54.1	55.1	-
TL,TL5 (Without transformer)	13.9	14.9	15.9
TL,TL5 (With transformer)	54.9	55.9	-
TGL,TGL5 (Without transformer)	13.9	14.9	15.9
TGL,TGL5 (With transformer)	54.9	55.9	-
SGL,SGL5 (Without transformer)	13.1	14.1	15.1
SGL,SGL5 (With transformer)	54.1	55.1	-
AH164-E,E5	10.5	11.5	12.5
M,M5	12.5	13.5	14.5
SF,SF5	11.1	12.1	13.1
TF,TF5	11.9	12.9	13.9
TGF,TGF5	11.9	12.9	13.9
SGF,SGF5	11.1	12.1	13.1
SM,SM5	13.4	14.4	15.4
TM,TM5	13.1	14.1	15.1
AH164-P2,P0	16.1	17.1	18.1
P3,P6,P7,P1	-	17.1	18.1
PK3,PK6,PK7,PK1	-	17.1	18.1
SP2,SP0	15.8	16.8	17.8
SP3,SP6,SP7,SP1	-	16.8	17.8
SPK3,SPK6,SPK7,SPK1	-	16.8	17.8
J2,J0	30.6	31.6	32.6
J3,J6,J7,J1	-	31.6	32.6
JK3,JK6,JK7,JK1	-	31.9	32.9
SJ2,SJ0	30.3	31.3	32.3
SJ3,SJ6,SJ7,SJ1	-	31.3	32.3
SJK3,SJK6,SJK7,SJK1	-	31.6	32.6
AH164-Z (Without transformer)	6.9		
Z (With transformer)	50.9		
ZS (Without transformer)	7.5		
ZS (With transformer)	51.5		
ZT (Without transformer)	8.2		
ZT (With transformer)	52.2		
AH164-TX	16		
TX1	17.5		
TX2B	13		

AH165 series

Type	1NO + 1NC	2NO + 2NC	3NO + 3NC
AH165-L,L5 (Without transformer)	12.5	13.5	14.5
L,L5 (With transformer)	53.5	54.5	-
SL,SL5 (Without transformer)	13.1	14.1	15.1
SL,SL5 (With transformer)	54.1	55.1	-
TL,TL5 (Without transformer)	13.9	14.9	15.9
TL,TL5 (With transformer)	54.9	55.9	-
TGL,TGL5 (Without transformer)	13.9	14.9	15.9
TGL,TGL5 (With transformer)	54.9	55.9	-
SGL,SGL5 (Without transformer)	13.1	14.1	15.1
SGL,SGL5 (With transformer)	54.1	55.1	-
AH165-E,E5	10.5	11.5	12.5
M,M5	12.5	13.5	14.5
SF,SF5	11.1	12.1	13.1
TF,TF5	11.9	12.9	13.9
TGF,TGF5	11.9	12.9	13.9
SGF,SGF5	11.1	12.1	13.1
SM,SM5	13.4	14.4	15.4
TM,TM5	13.1	14.1	15.1
VR	13.4 *1	14 *2	-
V1R	14.4 *1	15 *2	-
AH165-V5R	18.1 *1	18.7 *2	-
V6R	18.9 *1	19.5 *2	-
AH165-P2,P0	16.7	17.7	18.7
P3,P6,P7,P1	-	17.7	18.7
PK3,PK6,PK7,PK1	-	17.7	18.7
SP2,SP0	16.1	17.1	18.1
SP3,SP6,SP7,SP1	-	17.1	18.1
SPK3,SPK6,SPK7,SPK1	-	17.1	18.1
J2,J0	31.2	32.2	33.2
J3,J6,J7,J1	-	32.2	33.2
JK3,JK6,JK7,JK1	-	32.5	33.5
SJ2,SJ0	30.6	31.6	32.6
SJ3,SJ6,SJ7,SJ1	-	31.6	32.6
SJK3,SJK6,SJK7,SJK1	-	31.9	32.9
AH165-JM2	30	33.9	-
RJM2	29.6	34	-
AH165-Z (Without transformer)	6.9		
Z (With transformer)	50.9		
ZS (Without transformer)	7.5		
ZS (With transformer)	51.5		
ZT (Without transformer)	8.2		
ZT (With transformer)	52.2		
ZM (Without transformer)	5.4		
AH165-X	13.7		

Note: *1 For 1NC
*2 For 2NC

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2

Mass

■ Mass, gram

AH165-2 series

Type	1NO + 1NC	2NO + 2NC	3NO + 3NC
AH165-2FL,FL5	15.3	16.3	17.3
2EL,EL5	15.8	16.8	17.8
2ML	18.7	19.7	20.7
2YML	20.2	21.2	22.2
2SFL,SFL5	16.6	17.6	18.6
2SEL,SEL5	17.4	18.4	19.4
2SCL,SCL5	17.6	18.6	19.6
2VL	20.7	21.7	22.7
2YVL	21.4	22.4	23.4
AH165-2F,F5	13.4	14.4	15.4
2E,E5	13.9	14.9	15.9
2M	17.8	18.8	19.8
2YM	18.2	19.2	20.2
2SF,SF5	14.6	15.6	16.6
2SE,SE5	15.4	16.4	17.4
2SCE,SCE5	15.6	16.6	17.6
2S2	-	19	-
2YS2	-	20.6	-
2V	18	19	20
2YV	19.4	20.4	21.4
AH165-2P2,P0	16.6	17.6	18.6
2P3,P6,P7,P1	-	17.6	18.6
2YP2,YP0	18.3	19.3	20.3
2YP3,YP6,YP7,YP1	-	19.3	20.3
2J2,J0	40.9	41.9	42.9
2J3,J6,J7,J1	-	41.9	42.9
2YJ2	42.6	43.6	44.6
2YJ3,YJ6,YJ7,YJ1	-	43.6	44.6
2H	14.3	15.3	16.3
2SH	16.1	17.1	18.1
AH165-2PL2	17.4	18.4	-
2PL3	-	18.4	-
AH165-2Z	9.7		
2ZE	10.2		
2SZ	11		
2SZE	11.6		