

Adjustable Output TFT-LCD Triple Switching Regulator

FEATURES

- Complete Solution Under 1.2mm
- Develops Three Outputs from a 3.3V or 5V Supply
- Externally Programmable V_{ON} Delay
- Fixed Frequency Low Noise Outputs
- All Ceramic Capacitors
- 3MHz Switching Frequency
- Fast Transient Response
- Few External Components Required
- 2.7V to 8V Input Range
- Adjustable AV_{DD} and V_{ON} Voltages
- Tiny 10-Lead MSOP Package

APPLICATIONS


- TFT-LCD Notebook Display Panels
- TFT-LCD Desktop Monitor Display Panels
- Digital Cameras
- Handheld Computers

DESCRIPTION

The LT[®]1947 is a highly integrated multiple output DC/DC converter designed for use in TFT-LCD panels. The device contains two independent switching regulators. The main regulator has an adjustable output voltage with an internal 1.1A switch that can generate a boosted voltage as high as 30V. The second regulator's output is also adjustable up to 30V and can deliver 10mA for positive bias. A simple level-shift charge pump off the main switch node generates the negative bias voltage. An external capacitor sets the delay time from AV_{DD} 's final value to the rising edge at the V_{ON} pin. The 3MHz switching frequency allows the use of tiny low profile chip inductors and capacitors throughout, providing a low noise, low cost total solution with all components under 1.2mm in height. The device operates from an input range of 2.7V to 8V and is available in a 10-lead MSOP package.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

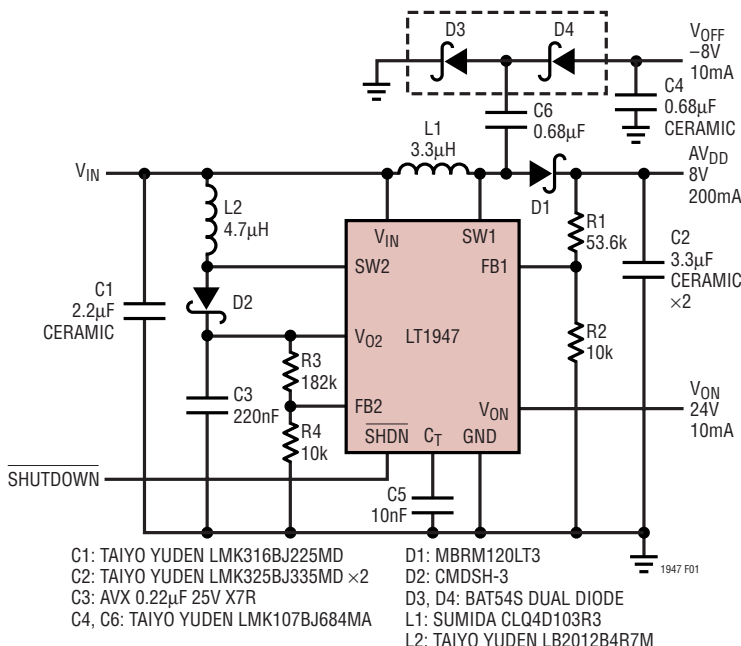

Start-Up Waveforms

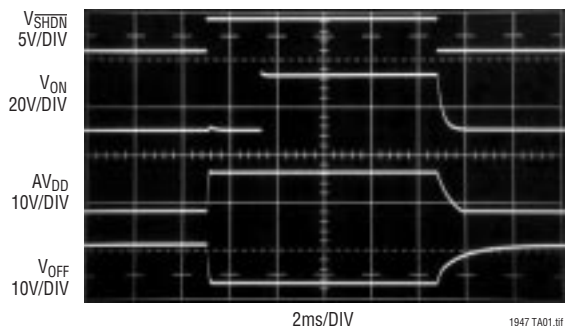



Figure 1. 3.3V Powered TFT-LCD Bias Generator

ABSOLUTE MAXIMUM RATINGS

(Note 1)

V_{IN} Voltage	8V
C_T Voltage	6V
SW1, SW2 Voltage	36V
V_{ON} , V_{O2} Voltage	30V
FB1, FB2	3V
SHDN	8V
Operating Temperature Range (Note 2) ..	–40°C to 85°C
Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

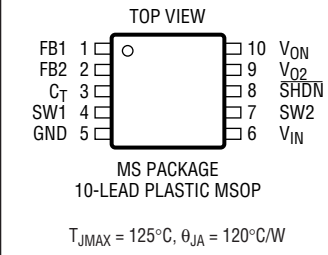	ORDER PART NUMBER
	LT1947EMS
	MS PART MARKING
	LTUE

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. $V_{IN} = 3.3\text{V}$, $V_{SHDN} = 3.3\text{V}$ unless otherwise specified.

SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range		2.7		8	V
Supply Current	$\overline{\text{SHDN}} = 2.4\text{V}$ $\text{SHDN} = 0\text{V}$		9.5	12.5	mA
				1	μA
FB1 Voltage		● 1.240	1.26	1.280	V
		1.225		1.295	V
FB2 Voltage		● 1.225	1.26	1.295	V
		1.210		1.310	V
Reference Line Regulation	$V_{IN} = 2.7\text{V}$ to 8V		0.01	0.05	%/V
Error Amplifier Voltage Gain	EA1 and EA2		100		V/V
C_T Current Source	$V_{FB1} = 1.3\text{V}$	4	5.5	6.5	μA
C_T Threshold to Turn On Q3		1.25	1.28	1.30	V
FB1 Voltage to Begin C_T Charge		1.17	1.2	1.23	V
SW1 Current Limit	(Note 3)	1.1	1.4	2	A
SW2 Current Limit	(Note 3)	0.35	0.6	1	A
SW1 Saturation Voltage	$I_{SW1} = 800\text{mA}$		0.230	0.280	V
SW2 Saturation Voltage	$I_{SW2} = 300\text{mA}$		0.3	0.36	V
SW1 Maximum Duty Cycle		82			%
SW2 Maximum Duty Cycle			85		%
Oscillator Frequency		● 2.3	3	3.5	MHz
V_{ON} Switch Drop	$I_{Q3} = 7\text{mA}$		160	200	mV
SW1 Leakage Current	Switch Off, $\text{SW1} = 3.3\text{V}$		0.01	5	μA
SW2 Leakage Current	Switch Off, $\text{SW2} = 3.3\text{V}$		0.01	5	μA
SHDN Pin Bias Current	$V_{SHDN} = 2.4\text{V}$		10	25	μA
SHDN Pin High	Active Mode	2.4			V
SHDN Pin Low	Shutdown Mode			0.4	V

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.


Note 2: The LT1947 is guaranteed to meet performance specifications from 0°C to 70°C. Specifications over the –40°C to 85°C operating

temperature range are assured by design, characterization and correlation with statistical process controls.

Note 3: Switch current limit guaranteed by design and/or correlation to static tests.


TYPICAL PERFORMANCE CHARACTERISTICS

3.3V TFT-LCD Converter Efficiency

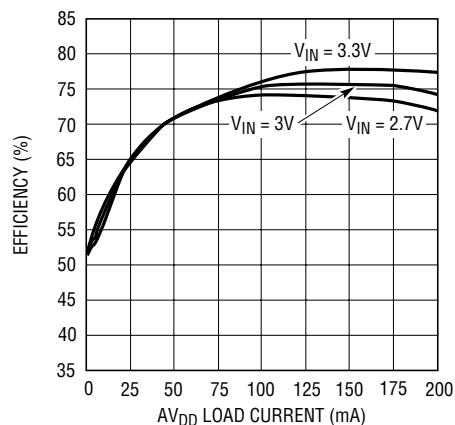


1947 G01

Supply Current

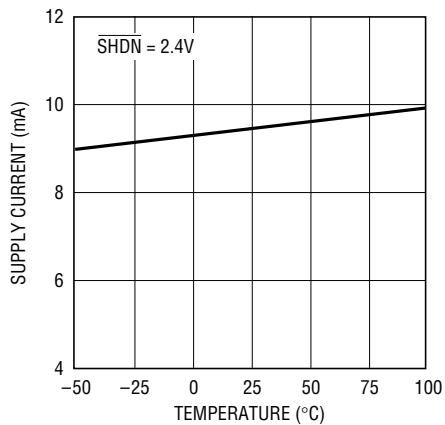


1947 G02

CT Current Source

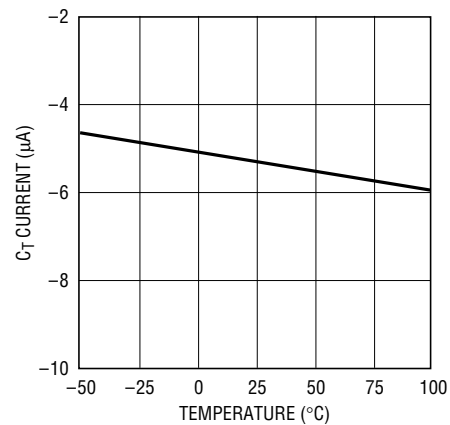


1947 G03

SW1 Current Limit

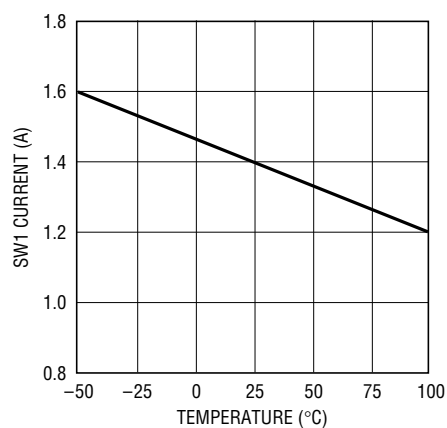


1947 G04

SW2 Current Limit

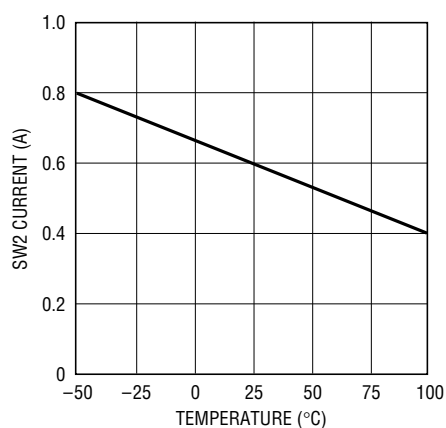


1947 G05

Switch 1 Saturation Voltage

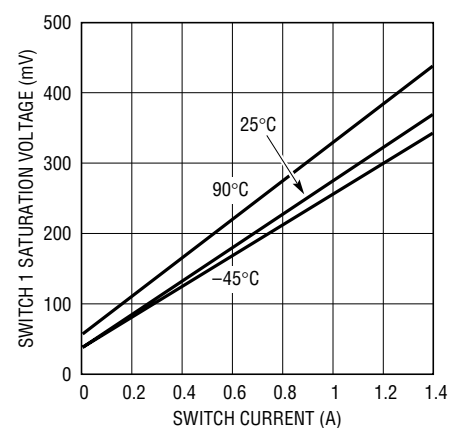


1947 G06

Switch 2 Saturation Voltage

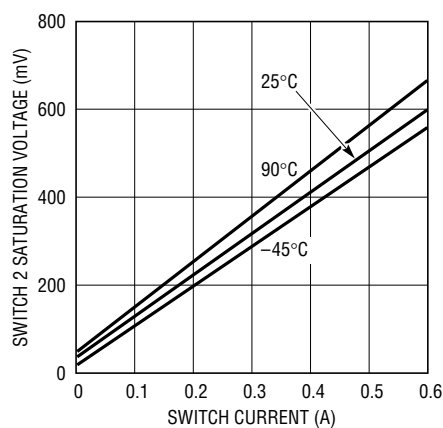


1947 G07

SW1 Maximum Duty Cycle

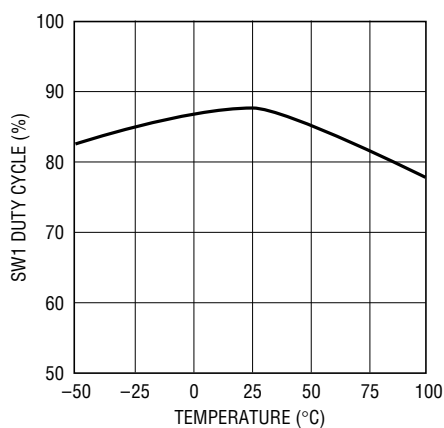

1947 G08

Oscillator Frequency

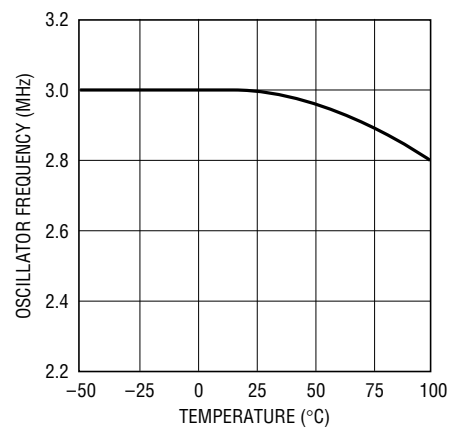

1947 G09

PIN FUNCTIONS

FB1 (Pin 1): Feedback Pin for First Switcher. Connect resistor divider tap here. Set AV_{DD} according to: $AV_{DD} = 1.26V(1 + R1/R2)$.

FB2 (Pin 2): Feedback Pin for Second Switcher. Connect resistor divider 2 here and set V_{ON} using: $V_{ON} = 1.26V(1 + R3/R4) - 160mV$.

C_T (Pin 3): Timing Capacitor Pin. Connect a 10nF capacitor from C_T to ground to program a 2.3ms delay from FB1 reaching 1.26V to V_{ON} turning on.

SW1 (Pin 4): AV_{DD} Switch Node. Connect L1 and D1 here (see Figure 1). Minimize trace area at this pin to keep EMI down.

GND (Pin 5): Ground. Connect directly to local ground plane.

V_{IN} (Pin 6): Input Supply Pin. Must be bypassed with a ceramic capacitor close to the pin.


SW2 (Pin 7): V_{O2} Switch Node. Connect L2 and D2 here. Minimize trace area at this pin to keep EMI down.

SHDN (Pin 8): Pull this pin low for shutdown mode. For normal operation, tie to a voltage between 2.4V and 8V.

V_{O2} (Pin 9): SW2 Output. This node is also internally connected to the emitter of Q3 (see Block Diagram), the high side switch between V_{O2} and V_{ON} .

V_{ON} (Pin 10): This is the delayed output for SW2. V_{ON} reaches its programmed voltage after the internal timer times out.

BLOCK DIAGRAM

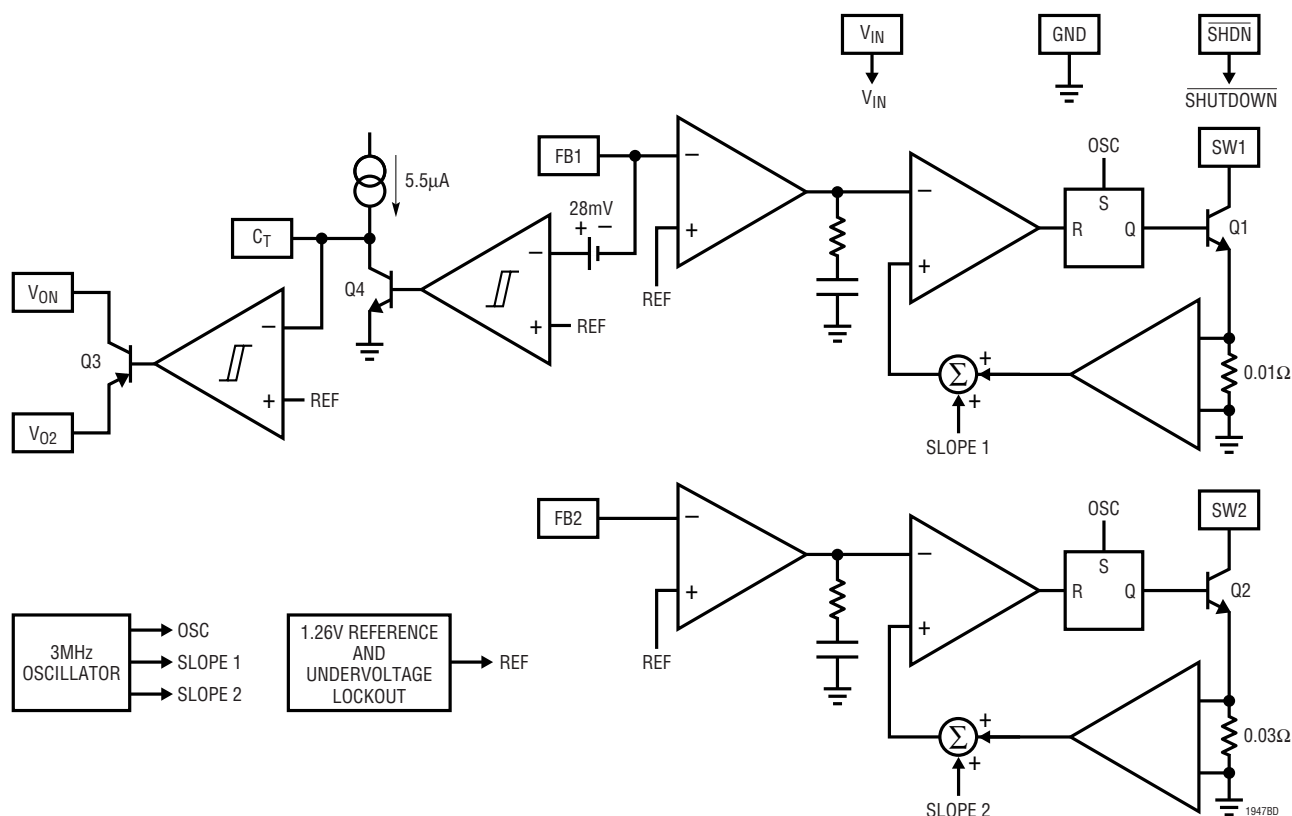

When AV_{DD} is less than its final voltage, Q4 is turned on, holding the C_T pin at ground. When AV_{DD} reaches final value, Q4 lets go of the C_T pin, allowing the $5.5\mu A$ current source to charge the external capacitor, C_T . When the voltage on the C_T pin reaches $1.28V$, Q3 turns on,

For applications requiring soft-start, a circuit consisting of R_{SS} and C_{SS} tied to the SHDN pin can be used, as shown in Figure 3. For a combination of 33.2k/33nF, AV_{DD} rises to its final value in approximately 3ms.

Figure 2. Recommended Component Placement

OPERATION

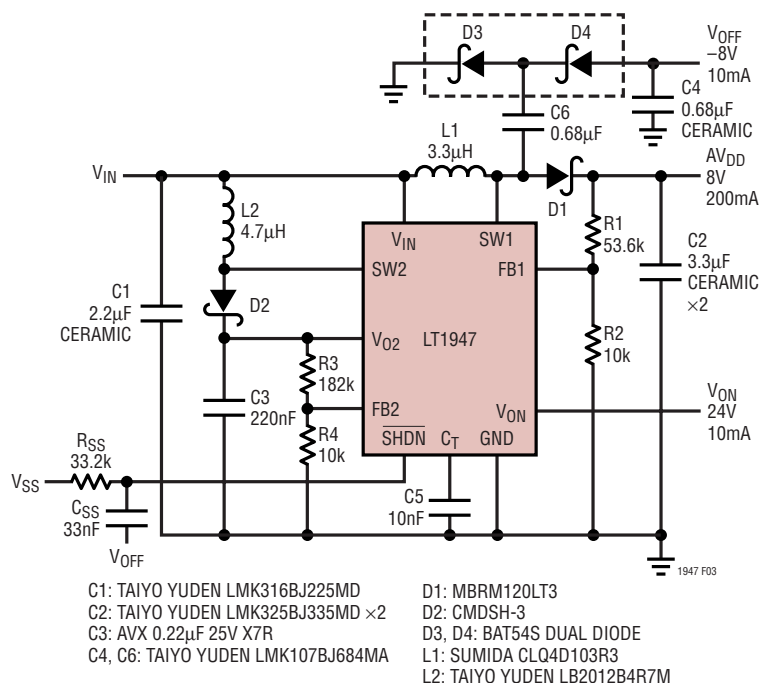


Figure 3. R_{SS} and C_{SS} at \overline{SHDN} Pin Provide Soft-Start


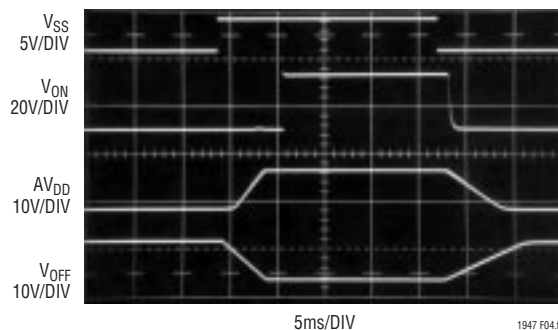


Figure 4. Start-Up Waveforms with Soft-Start Circuit Added


TYPICAL APPLICATIONS

TFT-LCD Bias Generator: 10V, 24V, -6V Output

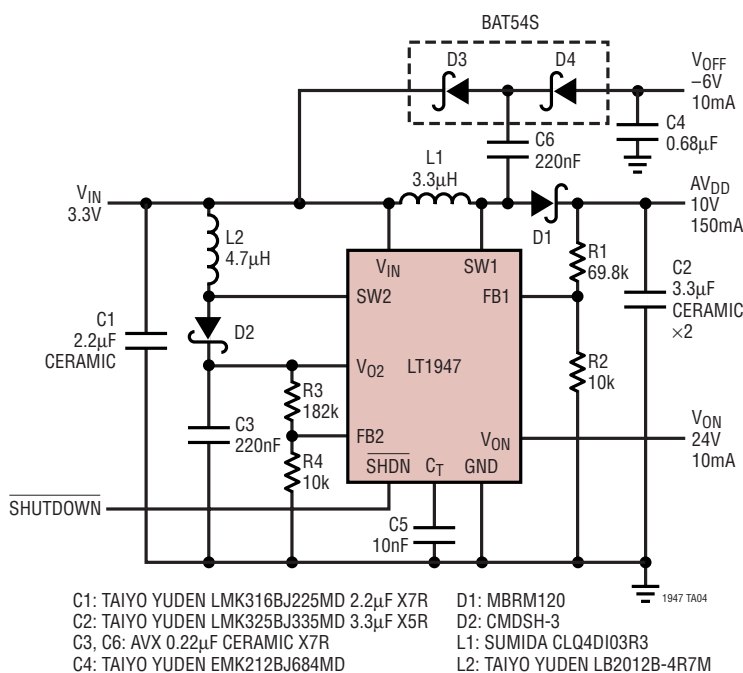


TYPICAL APPLICATIONS

TFT-LCD Bias Generator: 12V, 20V, -6V Output

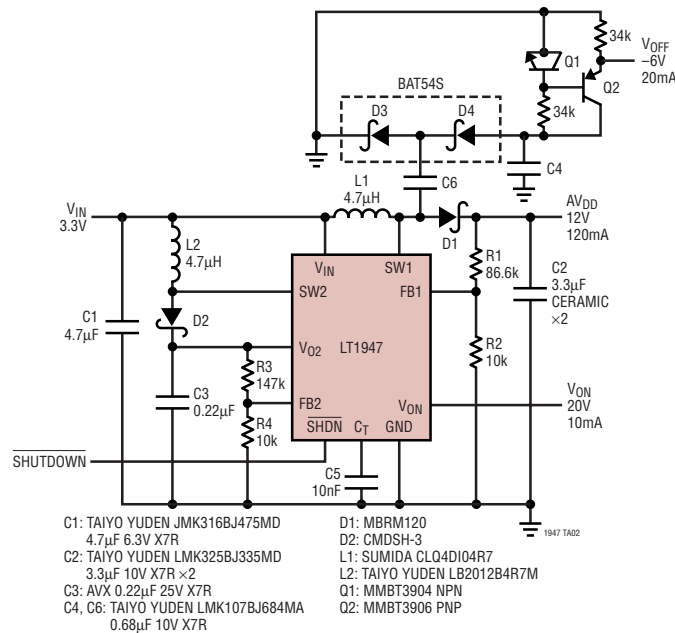


PACKAGE DESCRIPTION

MS Package
10-Lead Plastic MSOP
 (Reference LTC DWG # 05-08-1661)

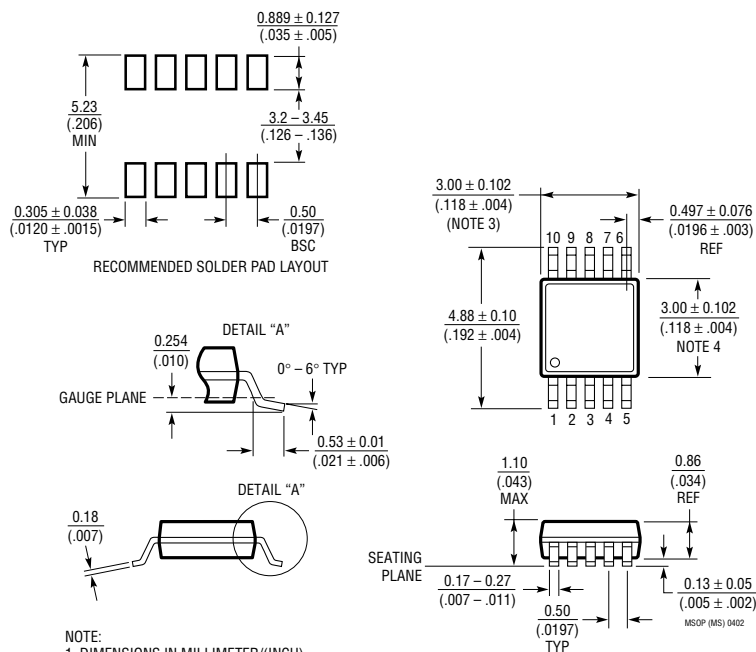

TYPICAL APPLICATION

TFT-LCD Bias Generator: 7.5V, 15V, -10V Output

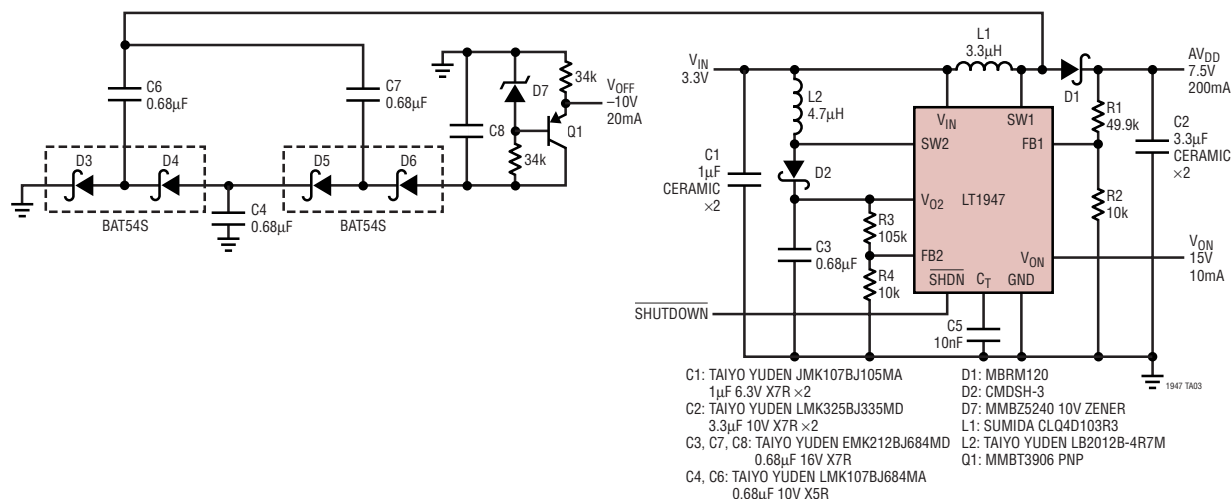

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1310	1.5A I_{SW} , 4.5MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 2.75V$ to 18V, V_{OUT} Max = 35V, $I_Q = 12mA$, $I_{SHDN} < 1\mu A$, MS10E
LT1613	550mA I_{SW} , 1.4MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 0.9V$ to 10V, V_{OUT} Max = 34V, $I_Q = 3mA$, $I_{SHDN} < 1\mu A$, ThinSOT
LT1615/LT1615-1	300mA/80mA I_{SW} , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, V_{OUT} Max = 34V, $I_Q = 20\mu A$, $I_{SHDN} < 1\mu A$, ThinSOT
LT1940	Dual Output 1.4A I_{OUT} , Constant 1.1MHz, High Efficiency Step-Down DC/DC Converter	$V_{IN} = 3V$ to 25V, V_{OUT} Min = 1.2V, $I_Q = 2.5mA$, $I_{SHDN} < 1\mu A$, TSSOP-16E
LT1944	Dual Output 350mA I_{SW} , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, V_{OUT} Max = 34V, $I_Q = 20\mu A$, $I_{SHDN} < 1\mu A$, MS10
LT1944-1	Dual Output 150mA I_{SW} , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, V_{OUT} Max = 34V, $I_Q = 20\mu A$, $I_{SHDN} < 1\mu A$, MS10
LT1945	Dual Output, Pos/Neg 350mA I_{SW} , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, V_{OUT} Max = $\pm 34V$, $I_Q = 20\mu A$, $I_{SHDN} < 1\mu A$, MS10
LT1946/LT1946A	1.5A I_{SW} , 1.2MHz/2.7MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 2.45V$ to 16V, V_{OUT} Max = 34V, $I_Q = 3.2mA$, $I_{SHDN} < 1\mu A$, MS8
LT1949/LT1949-1	550mA I_{SW} , 600kHz/1.1MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.5V$ to 12V, V_{OUT} Max = 28V, $I_Q = 4.5mA$, $I_{SHDN} < 25\mu A$, MS8, S8
LTC3400/LTC3400B	600mA I_{SW} , 1.2MHz, Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.85V$ to 5V, V_{OUT} Max = 5V, $I_Q = 19\mu A/300\mu A$, $I_{SHDN} < 1\mu A$, ThinSOT
LTC3401	1A I_{SW} , 3MHz, Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, V_{OUT} Max = 6V, $I_Q = 38\mu A$, $I_{SHDN} < 1\mu A$, MS10
LTC3402	2A I_{SW} , 3MHz, Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, V_{OUT} Max = 6V, $I_Q = 38\mu A$, $I_{SHDN} < 1\mu A$, MS10
LTC3423	1A I_{SW} , 3MHz, Low V_{OUT} , Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, V_{OUT} Max = 6V, $I_Q = 38\mu A$, $I_{SHDN} < 1\mu A$, MS10
LTC3424	2A I_{SW} , 3MHz, Low V_{OUT} , Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, V_{OUT} Max = 6V, $I_Q = 38\mu A$, $I_{SHDN} < 1\mu A$, MS10

1947f