

DATA SHEET

For a complete data sheet, please also download:

- The IC04 LOCMOS HE4000B Logic Family Specifications HEF, HEC
- The IC04 LOCMOS HE4000B Logic Package Outlines/Information HEF, HEC

HEF4508B **MSI** Dual 4-bit latch

Product specification
File under Integrated Circuits, IC04

January 1995

Dual 4-bit latch


HEF4508B
MSI

DESCRIPTION

The HEF4508B is a dual 4-bit latch, which consists of two identical independent 4-bit latches with separate strobe (ST), master reset (MR), output-enable input (\overline{EO}) and 3-state outputs (O).

With the ST input in the HIGH state, the data on the D inputs appear at the corresponding outputs provided \overline{EO} is LOW. Changing the ST input to the LOW state locks the

data into the latch. A HIGH on the reset line forces the outputs to a LOW level regardless of the state of the ST input. The 3-state outputs are controlled by the output-enable input. A HIGH on \overline{EO} causes the outputs to assume a high impedance OFF-state regardless of other input conditions. This allows the outputs to interface directly with bus orientated systems. When \overline{EO} is LOW the contents of the latches are available at the outputs.

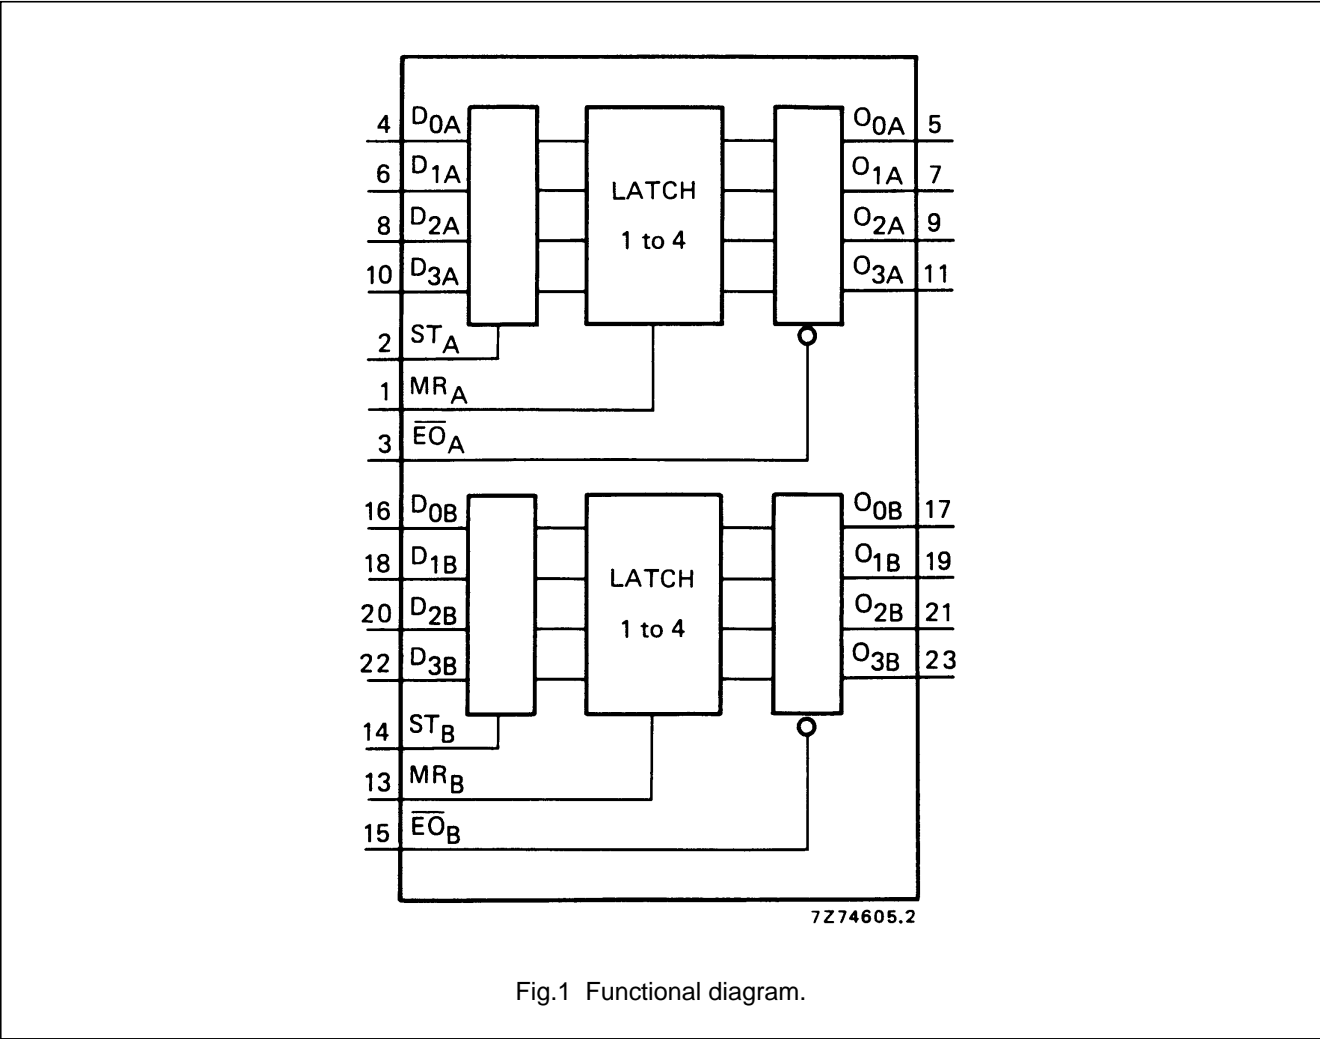


FAMILY DATA, I_{DD} LIMITS category MSI

See Family Specifications

Dual 4-bit latch

HEF4508B
MSI

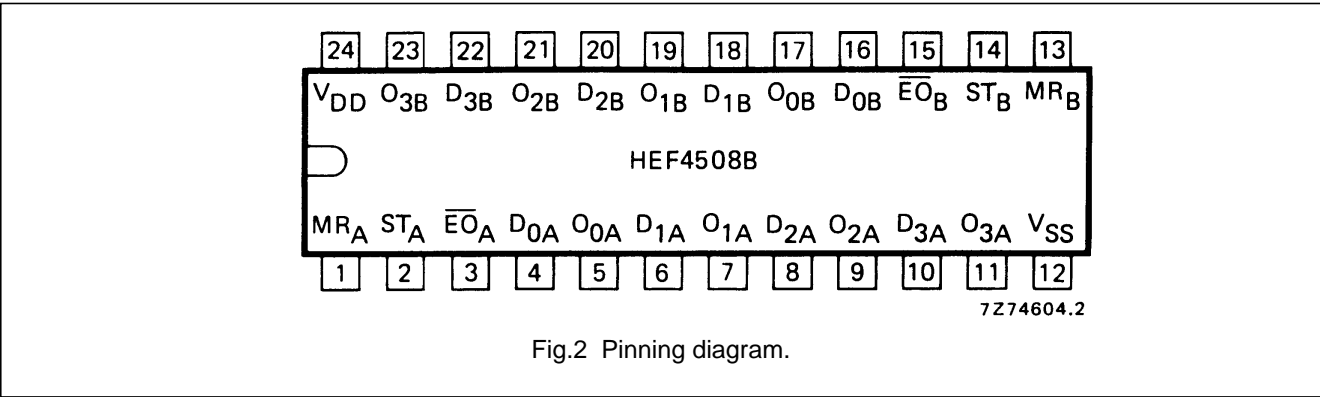

- HEF4508BP(N): 24-lead DIL; plastic
(SOT101-1)
- HEF4508BD(F): 24-lead DIL; ceramic (cerdip)
(SOT94)
- HEF4508BT(D): 24-lead SO; plastic
(SOT137-1)
- (): Package Designator North America

PINNING

- | | |
|---|----------------------|
| D _{0A} to D _{3A} , D _{0B} to D _{3B} | data inputs |
| ST _A , ST _B | strobe inputs |
| MR _A , MR _B | master reset inputs |
| EO _A , EO _B | output enable inputs |
| O _{0A} to O _{3A} , O _{0B} to O _{3B} | 3-state outputs |

FUNCTION TABLE

INPUTS				OUTPUT
MR	ST	EO	D _n	O _n
L	H	L	H	H
L	H	L	L	L
L	L	L	X	latched
H	X	L	X	L
X	X	H	X	Z

Notes

- H = HIGH state (the more positive voltage)
L = LOW state (the less positive voltage)
X = state is immaterial
Z = high impedance OFF state

Dual 4-bit latch

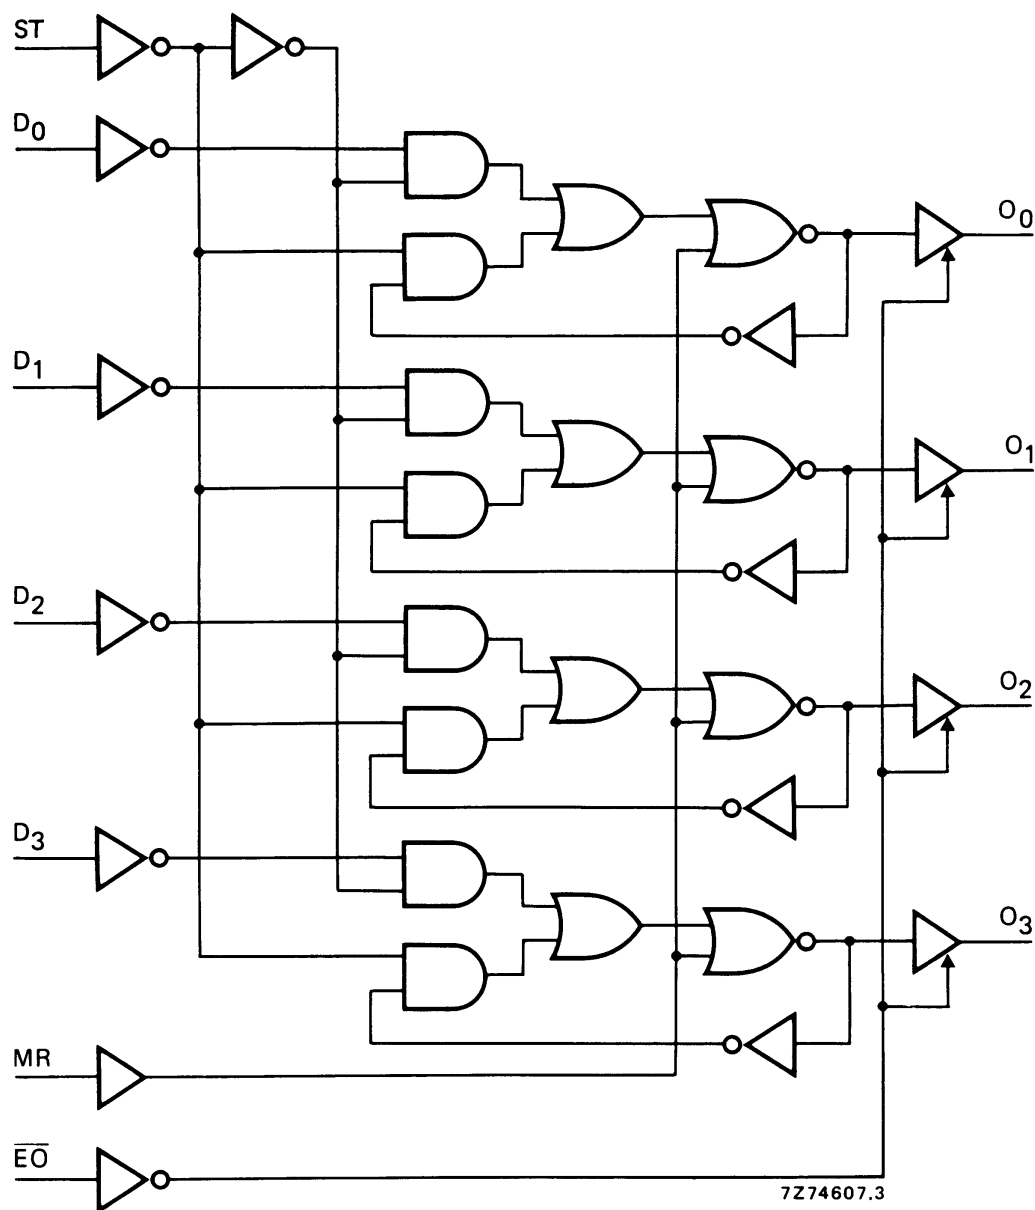
HEF4508B
MSI

Fig.3 Logic diagram (one 4-bit latch).

Dual 4-bit latch

HEF4508B
MSI

AC CHARACTERISTICS

 $V_{SS} = 0$ V; $T_{amb} = 25$ °C; $C_L = 50$ pF; input transition times ≤ 20 ns; see also waveforms Fig.4.

	V _{DD} V	SYMBOL	MIN.	TYP.	MAX.	TYPICAL EXTRAPOLATION FORMULA	
Propagation delays							
ST → O _n	5			115	230	ns	88 ns + (0,55 ns/pF) C _L
HIGH to LOW	10	t _{PHL}		50	100	ns	39 ns + (0,23 ns/pF) C _L
	15			35	70	ns	27 ns + (0,16 ns/pF) C _L
LOW to HIGH	5	t _{PLH}		115	230	ns	88 ns + (0,55 ns/pF) C _L
	10			50	100	ns	39 ns + (0,23 ns/pF) C _L
	15			35	70	ns	27 ns + (0,16 ns/pF) C _L
D _n → O _n	5			95	190	ns	68 ns + (0,55 ns/pF) C _L
HIGH to LOW	10	t _{PHL}		40	80	ns	29 ns + (0,23 ns/pF) C _L
	15			30	60	ns	22 ns + (0,16 ns/pF) C _L
LOW to HIGH	5	t _{PLH}		95	190	ns	68 ns + (0,55 ns/pF) C _L
	10			40	80	ns	29 ns + (0,23 ns/pF) C _L
	15			30	60	ns	22 ns + (0,16 ns/pF) C _L
MR → O _n	5			100	200	ns	73 ns + (0,55 ns/pF) C _L
HIGH to LOW	10	t _{PHL}		40	80	ns	29 ns + (0,23 ns/pF) C _L
	15			30	60	ns	22 ns + (0,16 ns/pF) C _L
Output transition times	5			60	120	ns	10 ns + (1,0 ns/pF) C _L
HIGH to LOW	10	t _{THL}		30	60	ns	9 ns + (0,42 ns/pF) C _L
	15			20	40	ns	6 ns + (0,28 ns/pF) C _L
LOW to HIGH	5	t _{TLH}		60	120	ns	10 ns + (1,0 ns/pF) C _L
	10			30	60	ns	9 ns + (0,42 ns/pF) C _L
	15			20	40	ns	6 ns + (0,28 ns/pF) C _L
3-state propagation delays							
Output enable times							
$\overline{EO} \rightarrow O_n$	5			45	90	ns	
HIGH	10	t _{PZH}		20	40	ns	
	15			18	36	ns	
LOW	5	t _{PZL}		45	90	ns	
	10			20	40	ns	
	15			18	36	ns	
Output disable times							
$\overline{EO} \rightarrow O_n$	5			35	70	ns	
HIGH	10	t _{PHZ}		20	40	ns	
	15			18	36	ns	
LOW	5	t _{PLZ}		45	90	ns	
	10			20	40	ns	
	15			18	36	ns	

Dual 4-bit latch

HEF4508B
MSI**AC CHARACTERISTICS** $V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$; $C_L = 50\text{ pF}$; input transition times $\leq 20\text{ ns}$

	V_{DD} V	SYMBOL	MIN.	TYP.	MAX.	
Minimum ST pulse width; HIGH	5	t_{WSTH}	50	25	ns	see also waveforms Fig.4
	10		30	15	ns	
	15		20	10	ns	
Minimum MR pulse width; HIGH	5	t_{WMRH}	40	20	ns	
	10		24	12	ns	
	15		20	10	ns	
Recovery time for MR	5	t_{RMR}	20	0	ns	
	10		20	0	ns	
	15		15	0	ns	
Set-up times $D_n \rightarrow ST$	5	t_{su}	35	10	ns	
	10		25	5	ns	
	15		20	0	ns	
Hold times $D_n \rightarrow ST$	5	t_{hold}	20	0	ns	
	10		20	0	ns	
	15		15	0	ns	

	V_{DD} V	TYPICAL FORMULA FOR P (μW)	
Dynamic power dissipation per package (P)	5	$2\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	where f_i = input freq. (MHz) f_o = output freq. (MHz) C_L = load capacitance (pF) $\sum (f_o C_L)$ = sum of outputs V_{DD} = supply voltage (V)
	10	$9\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	
	15	$25\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	

Dual 4-bit latch

HEF4508B
MSI

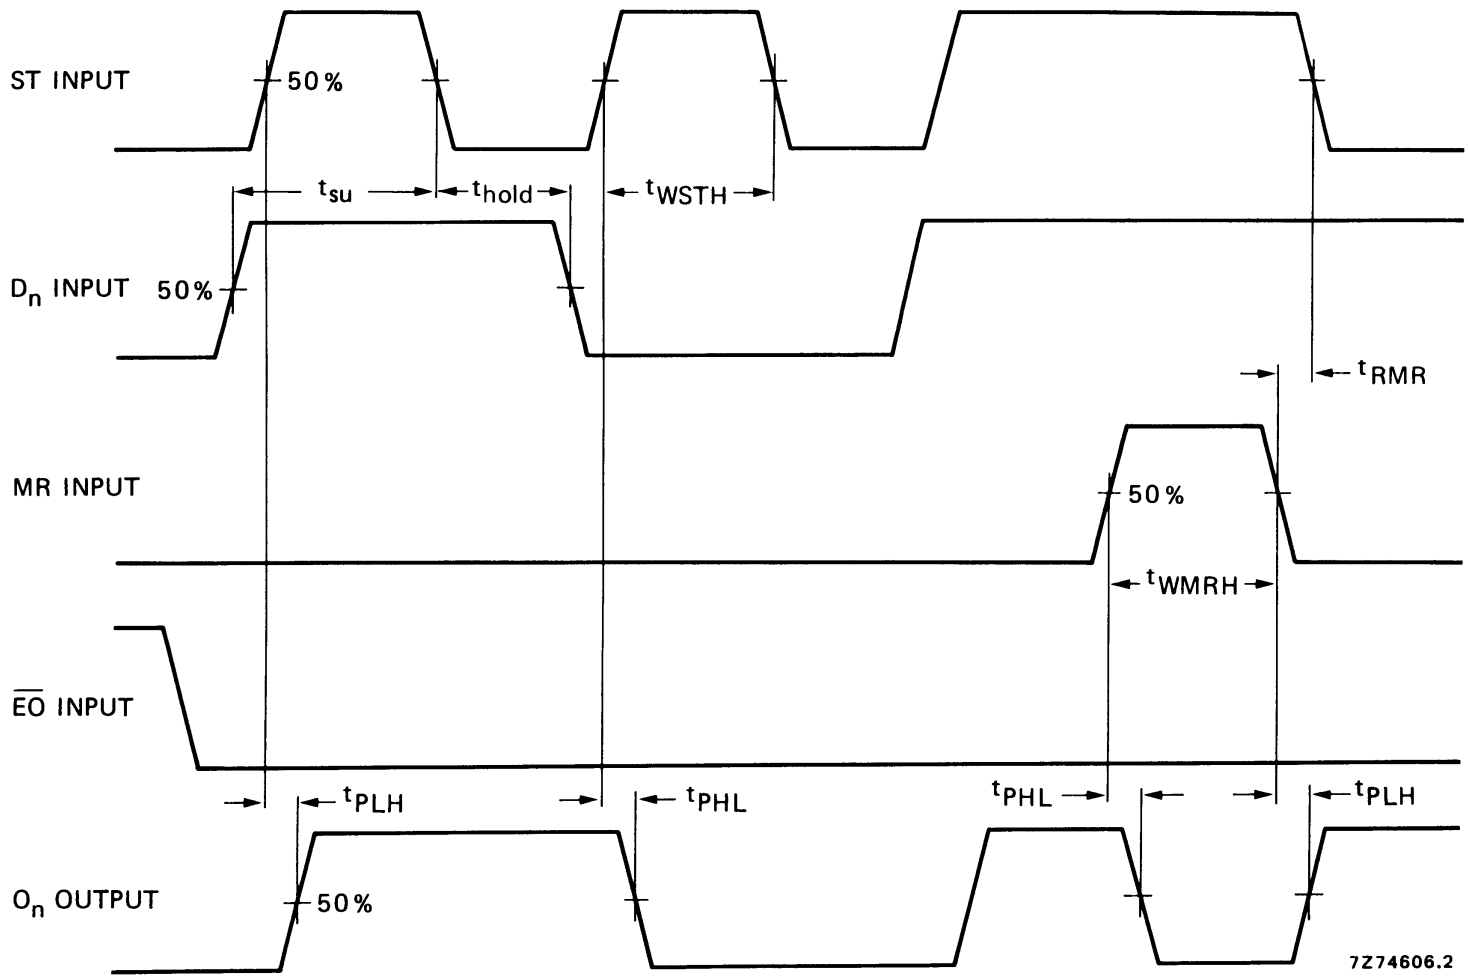


Fig.4 Waveforms showing minimum ST and MR pulse widths, set-up and hold times for D_n to ST, recovery time for MR and propagation delays from ST to O_n , to D_n to O_n and MR to O_n .

Dual 4-bit latch

HEF4508B
MSI

APPLICATION INFORMATION

Some examples of application for the HEF4508B are:

- Buffer storage
- Holding registers
- Data storage and multiplexing

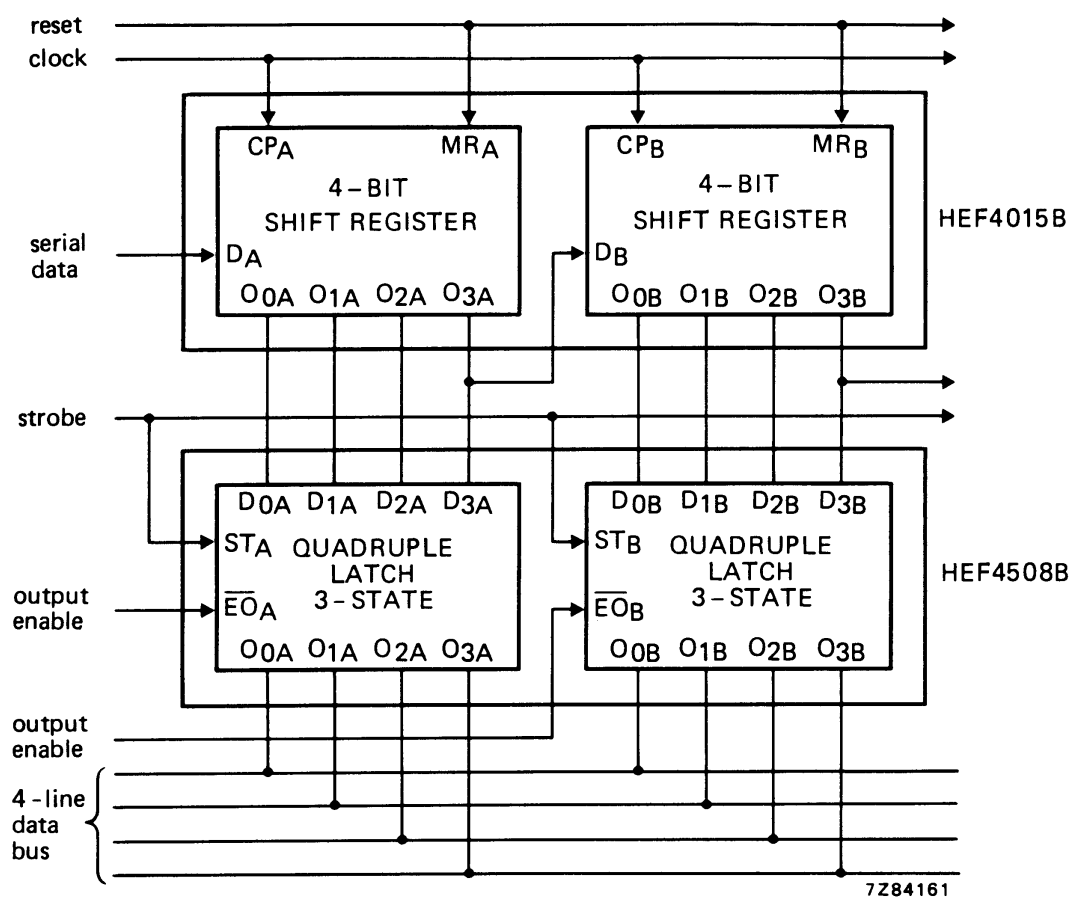


Fig.5 Example of a bus register using HEF4508B and HEF4015B.

Dual 4-bit latch

HEF4508B
MSI

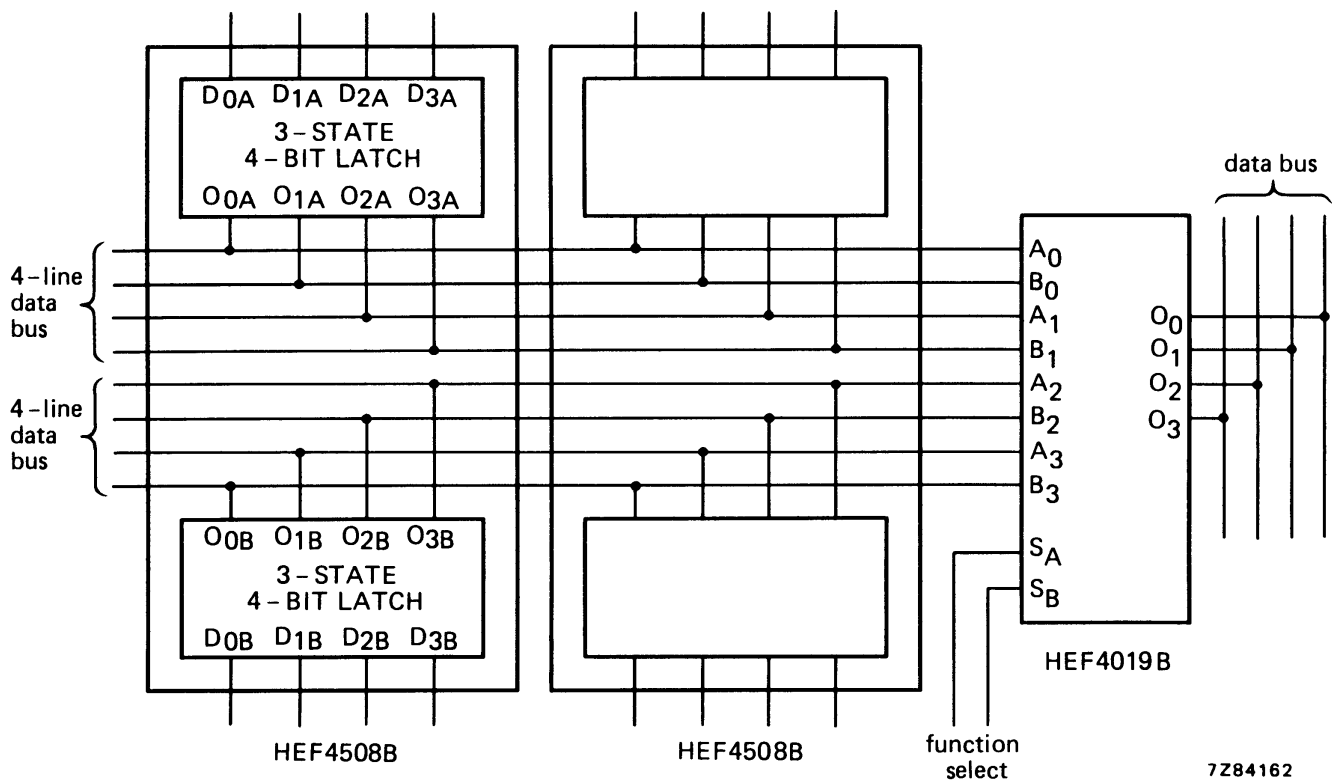


Fig.6 Example of a dual multiplexed bus register with function select using two HEF4508B and one HEF4019B.

FUNCTION SELECT

S _A	S _B	FUNCTION
L	L	inhibit (all L)
H	L	select A bus
L	H	select B bus
H	H	A ₁ + B ₁