

10G DWDM TRANSPORT PROCESSOR WITH 10GigE SUPPORT

BCM8512 FEATURES

- G.709 digital wrapper
- Provides FEC statistics: total corrected bits, corrected bytes and uncorrectable blocks
- G.975 Reed-Solomon RS(255,239) FEC
- Extracts and inserts OTU and SONET/SDH section and line overhead bytes
- Extracts and inserts DCC and GCC bytes
- Bidirectional SONET/SDH Performance Monitor
- Performs frame and byte alignment on received OTU and SONET/SDH frames
- Bidirectional 10 Gigabit Ethernet performance monitor
- Scrambles and unscrambles OTU and SONET/SDH frames
- Monitors and reports OOF/LOS/LOF/SD/SF/LOM/OOM or OTU and SONET/SDH frames
- Monitors K1/K2 to report APS/AIS/RDI conditions
- Inserts AIS on SONET/SDH frames
- Monitors M1 to report REI on SONET/SDH frames
- Monitors S1 for mismatch and inconsistent values
- Monitors and reports J0 byte messages
- Monitors B1/B2 to report parity errors on SONET/SDH frames
- Generates and inserts B1/B2 bytes on SONET/SDH frames
- Includes integrated 10 Gigabit Transceiver (9.953, 10.037, 10.312, 10.664, 10.709 and 11.09 Gbps) with limiting amp


KEY APPLICATIONS

- DWDM long haul transport
- DWDM metro transport
- Next-generation SONET/SDH multiplexers
- Digital cross connects
- Fiber-optic terminators and test equipment


SUMMARY OF BENEFITS

- The first and only 10G digital wrapper/FEC/PM chip with integrated 10G transceiver in the industry
- Integrated transceiver exceeds all SONET/SDH jitter specifications
- Single chip supporting both SONET/SDH and 10 Gigabit Ethernet data
- Bidirectional device with separate receive and transmit paths
- Transparent error correction and detection
- Integrated cleanup PLL with external VCXO
- Sample phase adjustment provides better noise immunity
- Seamless connection to Broadcom multiplexer/demultiplexer devices using SFI-4 interface
- Compact, low-profile package: 31 mm \times 31 mm, HSBGA
- Ultra low power consumption: 2W
- Standard 0.13 micron CMOS process
- SFI-4 parallel interface (622, 627, 644, 666, 669 and 692 Mbps)
- 16-bit microprocessor interface
- IEEE 1149.1 JTAG

10G DWDM Transport Line Card

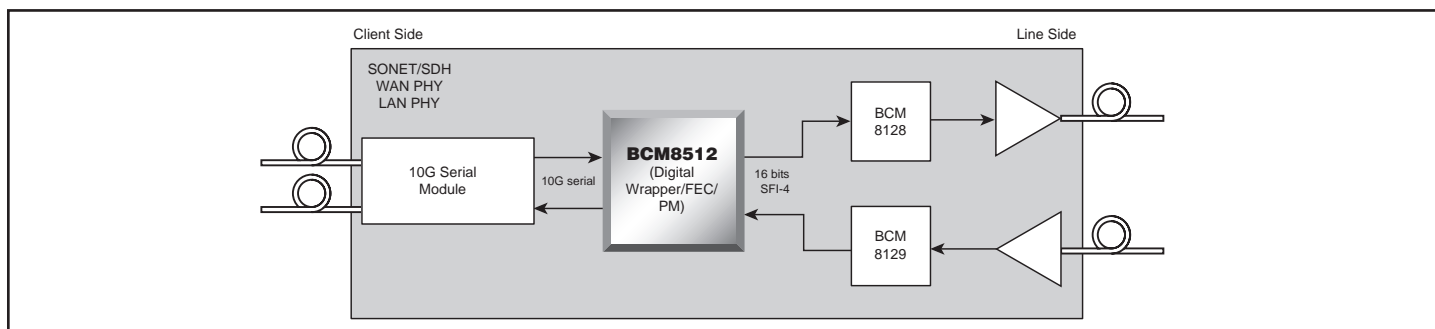

Top Level Block Diagram

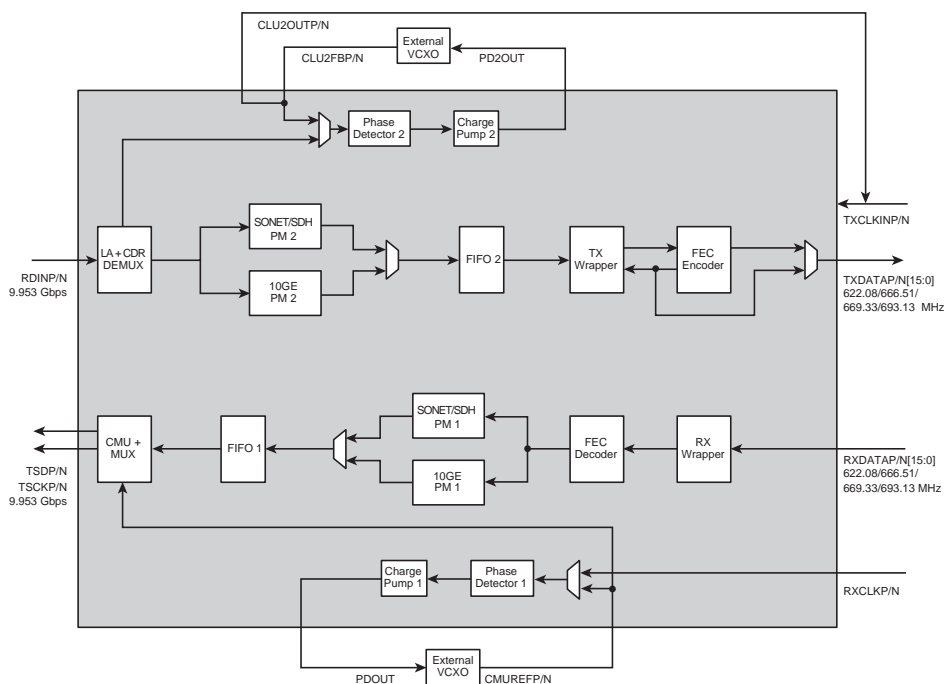

The **BCM8512** is an 10 Gigabit DWDM transport processor that supports all the major functions on a DWDM line card:

- G.709 digital wrapper (final draft)
- G.975 Reed-Solomon RS(255,239) FEC
- SONET/SDH Performance Monitor
- 10 Gigabit Ethernet performance monitor
- Integrated OC-192 transceiver

The **BCM8512** can operate in bidirectional mode and perform SONET/SDH or Ethernet performance monitoring in both the receive and transmit paths. All necessary performance monitor functions for SONET/SDH and 10 Gigabit Ethernet are provided for operations, administration, maintenance, and provisioning (OAM&P) so that no external performance monitor is required.

The G.709 digital wrapper allows a multitude of signals to be carried over the optical transport network. These signals include legacy SONET/SDH and PDH signals, along with packet-based

data such as IP, ATM, GbE and SDL.

The **BCM8512** is the first digital wrapper, FEC and performance monitor chip with an integrated 10 Gigabit transceiver in the industry. The transceiver is programmable to support OC-192 SONET/SDH, LAN PHY and WAN PHY rates with and without FEC. The transceiver performs the clock and data recovery (CDR) and demultiplexing functions on the serial input data and the clock multiplication (CMU) and multiplexing (MUX) functions to produce the serial output data.

Related Documents

- **BCM8512** data sheet
- **BCM8512** EVM user manual
- **BCM8512** EVM quick start guide
- BCM8511B to **BCM8512** migration application note
- Interfacing **BCM8512** to discrete MUX/DEMUX application note

Broadcom®, the pulse logo, and Connecting everything® are trademarks of Broadcom Corporation and/or its subsidiaries in the United States and certain other countries. All other trademarks are the property of their respective owners.

Connecting
everything®



BROADCOM CORPORATION
16215 Alton Parkway, P.O. Box 57013
Irvine, California 92619-7013

© 2002 by BROADCOM CORPORATION. All rights reserved.
8512-PB03-R-10.31.02

Phone: 949-450-8700
FAX: 949-450-8710
Email: info@broadcom.com
Web: www.broadcom.com