

HA1630S04/05/06 Series

Ultra-Small Low Voltage Operation CMOS Single Operational Amplifier

REJ03D0799-0100

Rev.1.00

Mar 10, 2006

Description

The HA1630S04/05/06 are high slew rate single CMOS Operational Amplifiers realizing low voltage operation, low input offset voltage and low supply current. In addition to a low operating voltage from 1.8V, these device output can achieve full swing output voltage capability extending to either supply. Available in an ultra-small CMPAK-5 package that occupies only 1/8 the area of the SOP-8 package.


Features

- Low power and single supply operation $V_{DD} = 1.8$ to 5.5 V
- Low input offset voltage $V_{IO} = 4.0$ mV Max
- Low supply current $I_{DD} = 200$ μ A Typ (HA1630S04)
 $I_{DD} = 400$ μ A Typ (HA1630S05)
 $I_{DD} = 800$ μ A Typ (HA1630S06)
- High slew rate $SR = 2$ V/ μ s Typ (HA1630S04)
 $SR = 4$ V/ μ s Typ (HA1630S05)
 $SR = 8$ V/ μ s Typ (HA1630S06)
- Maximum output voltage $V_{OH} = 2.9$ V Min (at $V_{DD} = 3.0$ V)
- Low input bias current $I_{IB} = 1$ pA Typ


Ordering Information

Type No.	Package Name	Package Code
HA1630S04CM	CMPAK-5	PTSP0005ZC-A
HA1630S04LP	MPAK-5	PLSP0005ZB-A
HA1630S05CM	CMPAK-5	PTSP0005ZC-A
HA1630S05LP	MPAK-5	PLSP0005ZB-A
HA1630S06CM	CMPAK-5	PTSP0005ZC-A
HA1630S06LP	MPAK-5	PLSP0005ZB-A

Pin Arrangement



Equivalent Circuit

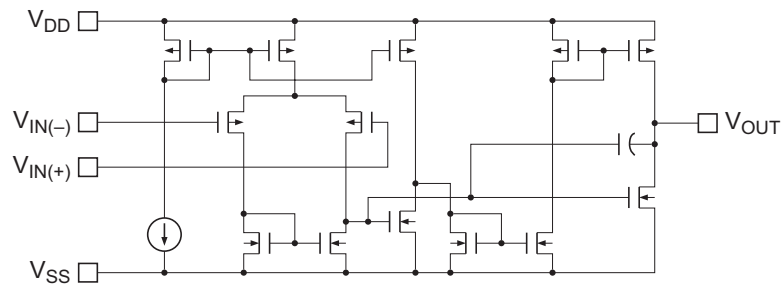

Absolute Maximum Ratings

(Ta = 25°C)

Items	Symbol	Ratings	Unit	Note
Supply voltage	V _{DD}	7	V	
Differential input voltage	V _{IN(diff)}	−V _{DD} to +V _{DD}	V	
Input voltage	V _{IN}	−0.3 to +V _{DD}	V	1
Power dissipation	P _T	200	mW	
Operating temp. Range	Topr	−40 to +85	°C	
Storage temp. Range	Tstg	−55 to +125	°C	

Note: 1. Do not apply Input Voltage exceeding V_{DD} or 7 V.

Electrical Characteristics

(V_{DD} = 3.0 V, Ta = 25°C)

Items	Symbol	Min	Typ	Max	Unit	Test Condition
Input offset voltage	V _{IO}	—	—	4.0	mV	V _{in} = 1.5 V
Input offset current	I _{IO}	—	(1.0)	—	pA	V _{in} = 1.5 V
Input bias current	I _{IB}	—	(1.0)	—	pA	V _{in} = 1.5 V
Output high voltage	V _{OH}	2.9	—	—	V	R _L = 100 kΩ
Output source current	I _{O SOURCE}	100	200	—	μA	V _{OH} = 2.5 V (HA1630S04)
		200	400	—		V _{OH} = 2.5 V (HA1630S05)
		400	800	—		V _{OH} = 2.5 V (HA1630S06)
Output low voltage	V _{OL}	—	—	0.1	V	R _L = 100 kΩ
Output sink current	I _{O SINK}	—	(5.0)	—	mA	V _{OL} = 0.5 V (HA1630S04)
		—	(6.0)	—		V _{OL} = 0.5 V (HA1630S05)
		—	(6.5)	—		V _{OL} = 0.5 V (HA1630S06)
Common mode input voltage range	V _{CM}	−0.05 to 2.1	—	—	V	(HA1630S04, HA1630S05)
		0 to 1.9	—	—		(HA1630S06)
Slew rate	SR	—	(2.0)	—	V/μs	C _L = 20 pF (HA1630S04)
		—	(4.0)	—		C _L = 20 pF (HA1630S05)
		—	(8.0)	—		C _L = 20 pF (HA1630S06)
Voltage gain	A _V	60	90	—	dB	
Gain bandwidth product	BW	—	(2.1)	—	MHz	C _L = 20 pF (HA1630S04)
		—	(3.3)	—		C _L = 20 pF (HA1630S05)
		—	(3.6)	—		C _L = 20 pF (HA1630S06)
Power supply rejection ratio	PSRR	50	70	—	dB	
Common mode rejection ratio	CMRR	50	70	—	dB	
Supply current	I _{DD}	—	200	400	μA	R _L = ∞ (HA1630S04)
		—	400	800		R _L = ∞ (HA1630S05)
		—	800	1700		R _L = ∞ (HA1630S06)






Notes: 1. In the case of continuous current flow, use a sink current of under 4 mA.

2. () : Design specification

Table of Graphs

Electrical Characteristics			HA1630S04 Figure	HA1630S05 Figure	HA1630S06 Figure	Test Circuit
Supply current	I_{DD}	vs Supply voltage	1-1	2-1	3-1	2
		vs Ambient temperature	1-2	2-2	3-2	
Output high voltage	V_{OH}	vs Output source current	1-3	2-3	3-3	4
		vs Supply voltage	1-4	2-4	3-4	
Output source current	$I_{O\ SOURCE}$	vs Ambient temperature	1-5	2-5	3-5	6
Output low voltage	V_{OL}	vs Output sink current	1-6	2-6	3-6	5
Output sink current	$I_{O\ SINK}$	vs Ambient temperature	1-7	2-7	3-7	6
Input offset voltage	V_{IO}	Distribution	1-8	2-8	3-8	1
		vs Supply voltage	1-9	2-9	3-9	
		vs Ambient temperature	1-10	2-10	3-10	
Common mode input voltage range	V_{CM}	vs Ambient temperature	1-11	2-11	3-11	7
Power supply rejection ratio	PSRR	vs Frequency	1-12	2-12	3-12	1
Common mode rejection ratio	CMRR	vs Frequency	1-13	2-13	3-13	7
Voltage gain & phase angle	A_v	vs Frequency	1-14	2-14	3-14	10
Input bias current	I_{IB}	vs Ambient temperature	1-15	2-15	3-15	3
		vs Input voltage	1-16	2-16	3-16	
Slew Rate (rising)	SRr	vs Ambient temperature	1-17	2-17	3-17	9
Slew Rate (falling)	SRf	vs Ambient temperature	1-18	2-18	3-18	
Slew rate		Large signal transient response	1-19	2-19	3-19	
		Small signal transient response	1-20	2-20	3-20	
Total harmonic distortion + noise	(0 dB)	vs. Output voltage p-p	1-21	2-21	3-21	8
	(40 dB)	vs. Output voltage p-p	1-22	2-22	3-22	
Maximum p-p output voltage		vs Frequency	1-23	2-23	3-23	
Voltage noise density		vs Frequency	1-24	2-24	3-24	

Main Characteristics (HA1630S04)

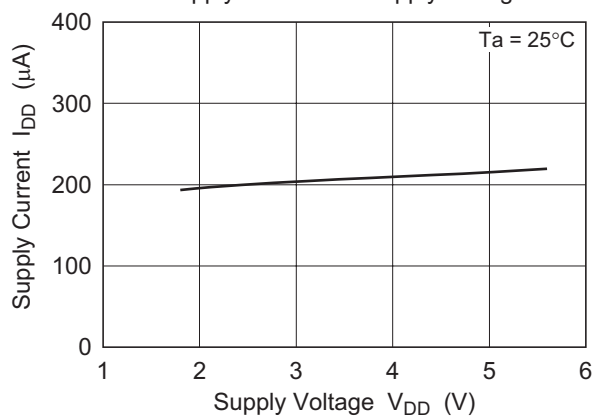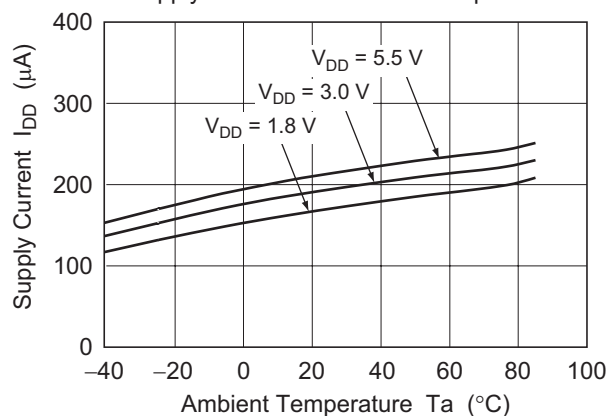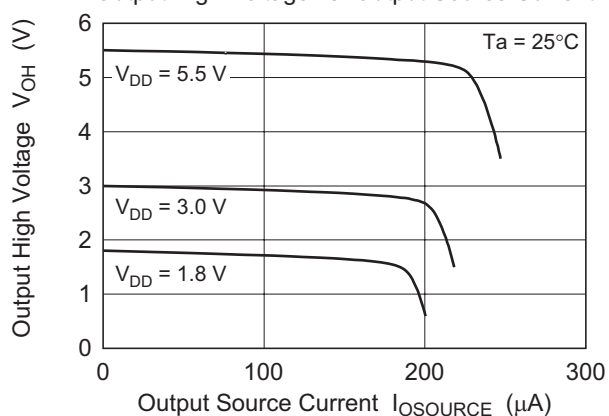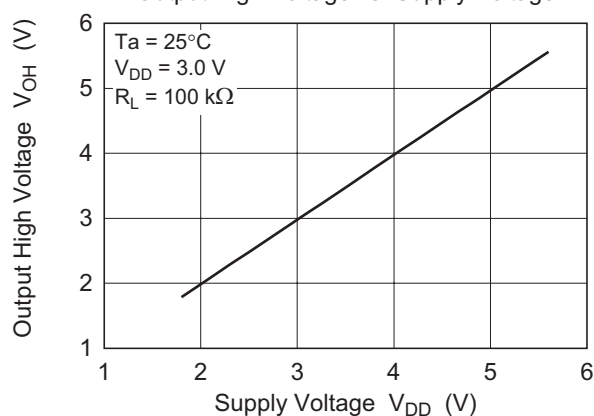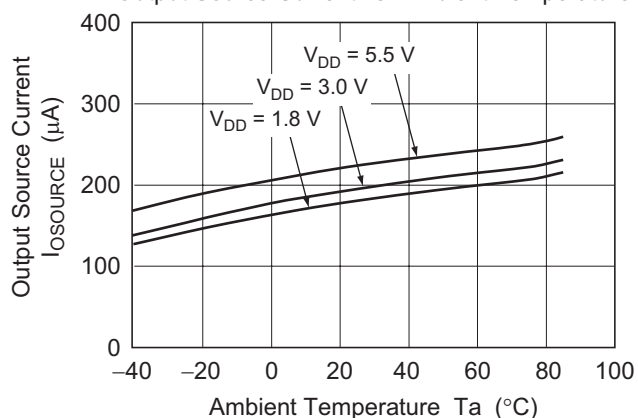Figure 1-1. HA1630S04
Supply Current vs. Supply VoltageFigure 1-2. HA1630S04
Supply Current vs. Ambient TemperatureFigure 1-3. HA1630S04
Output High Voltage vs. Output Source CurrentFigure 1-4. HA1630S04
Output High Voltage vs. Supply VoltageFigure 1-5. HA1630S04
Output Source Current vs. Ambient Temperature

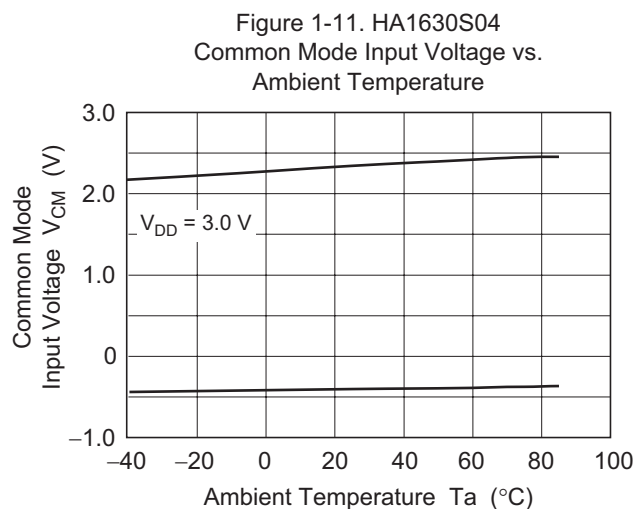
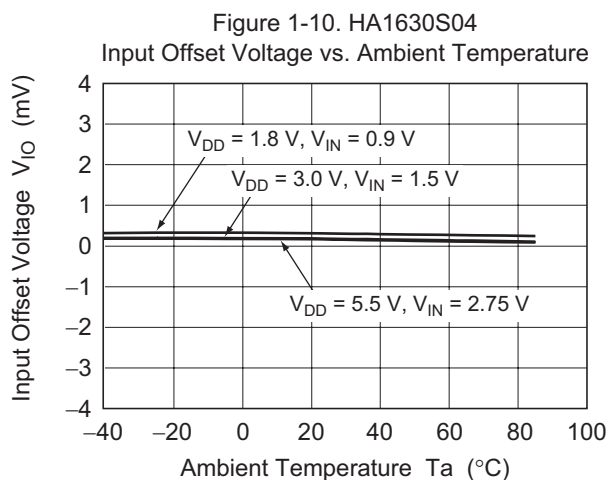
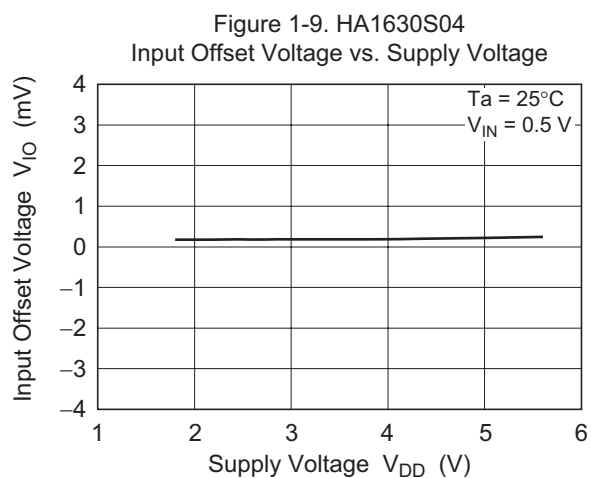
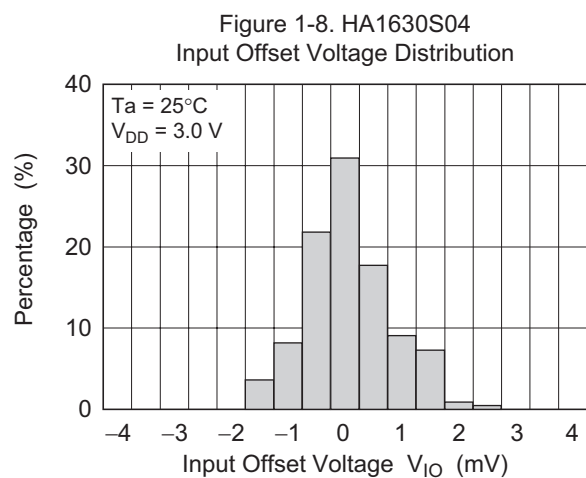
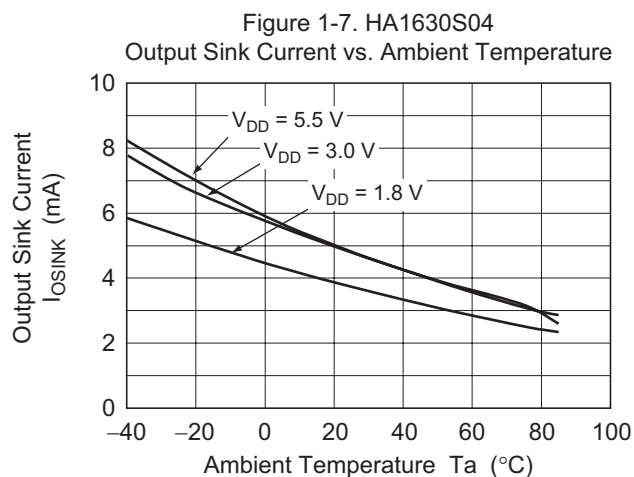
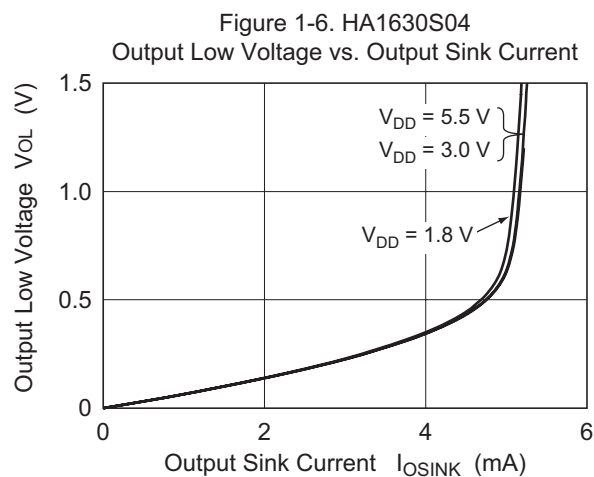


Figure 1-12. HA1630S04
Power Supply Rejection Ratio vs. Frequency

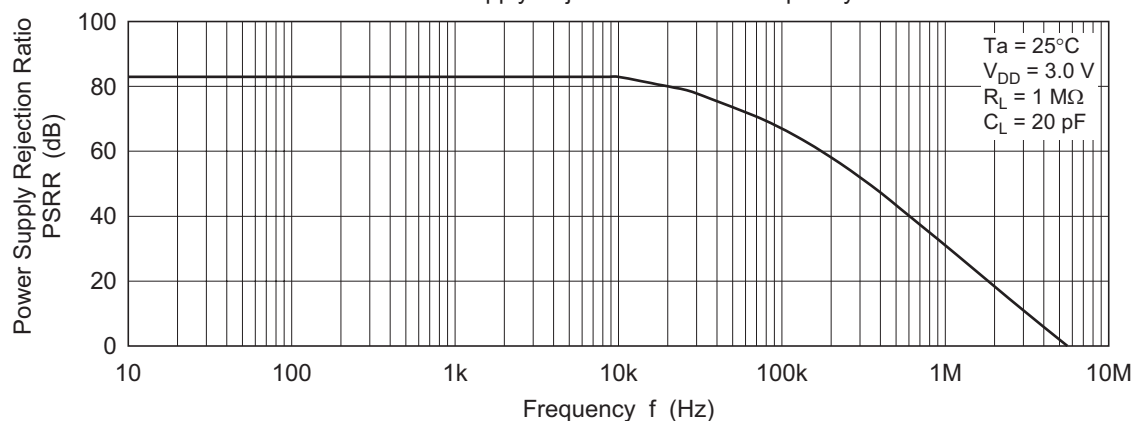


Figure 1-13. HA1630S04
Common Mode Rejection Ratio vs. Frequency

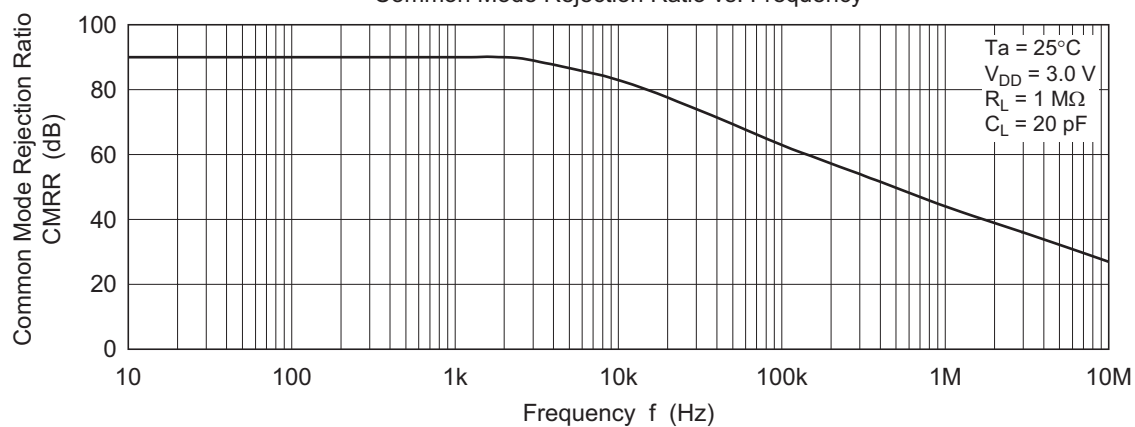
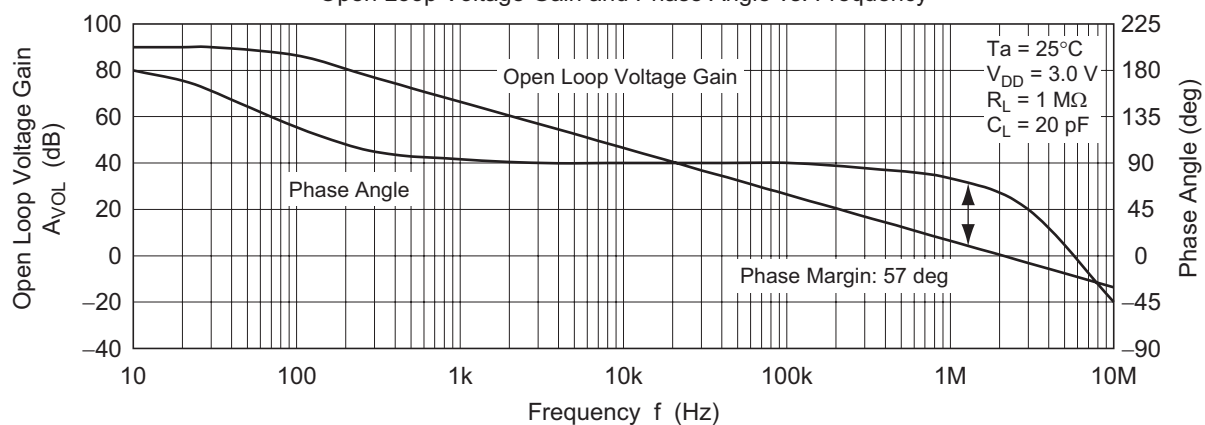


Figure 1-14. HA1630S04
Open Loop Voltage Gain and Phase Angle vs. Frequency



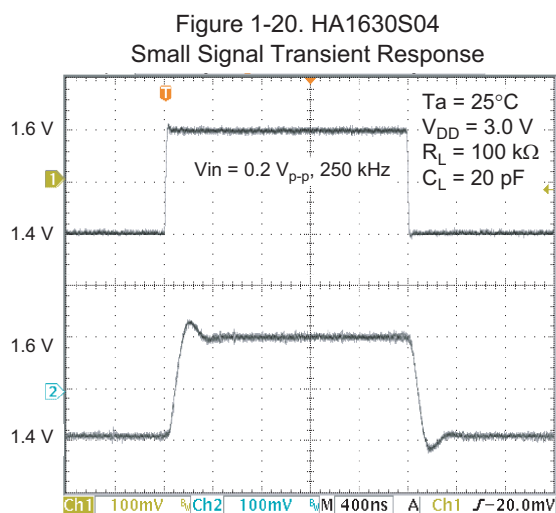
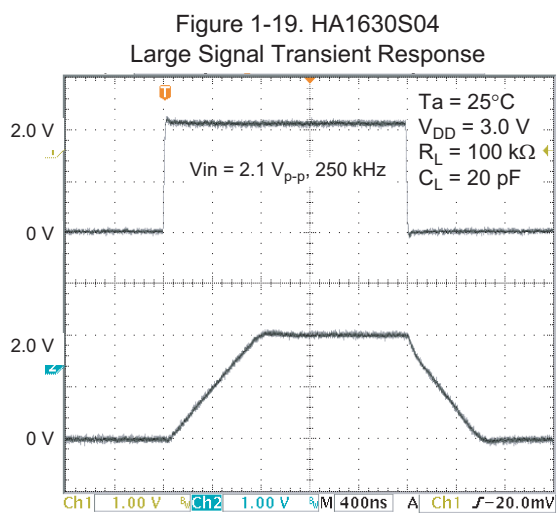
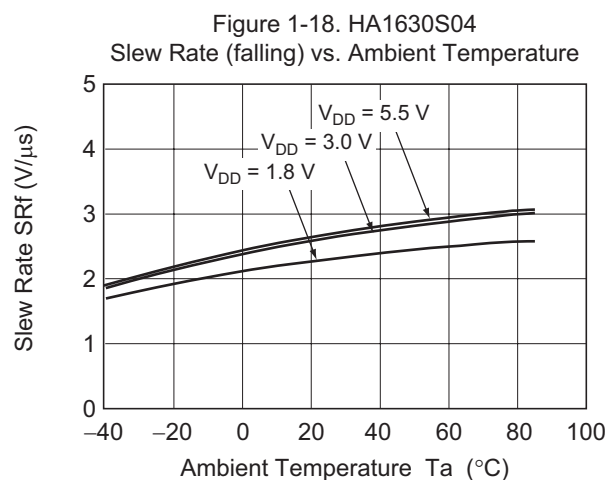
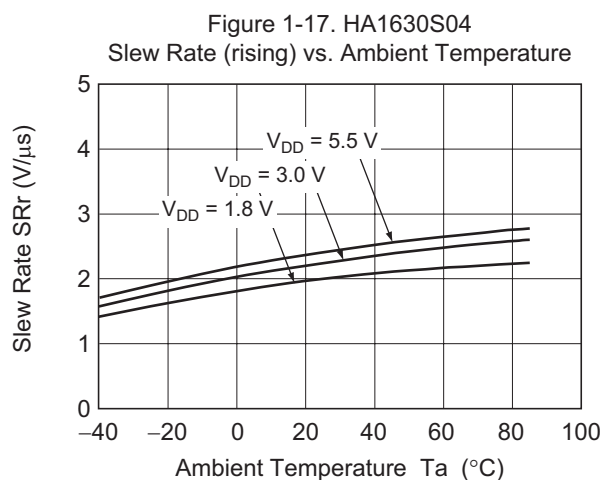
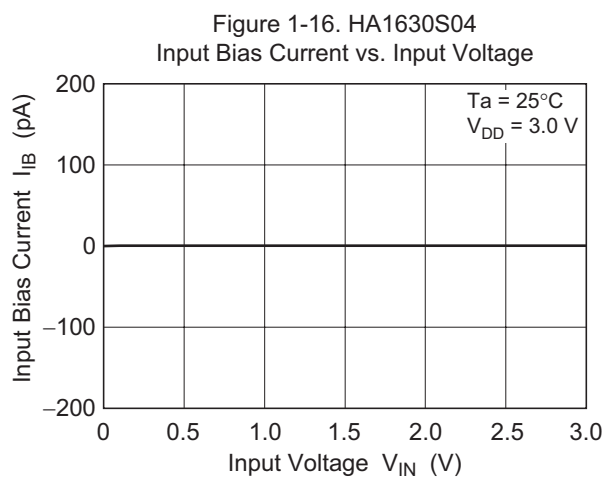
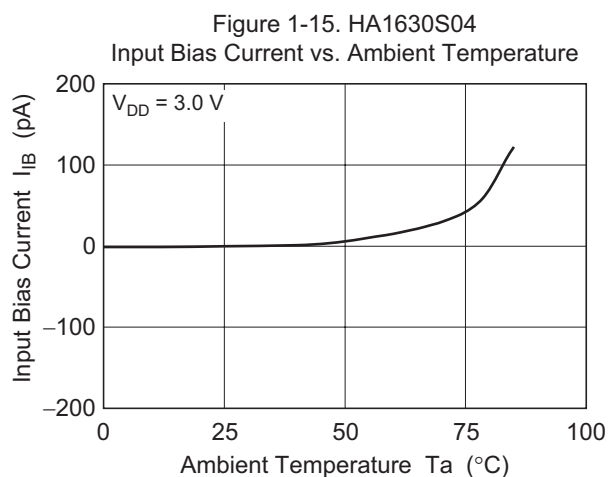


Figure 1-21. HA1630S04
Total Harmonic Distortion + Noise vs.
Output Voltage p-p

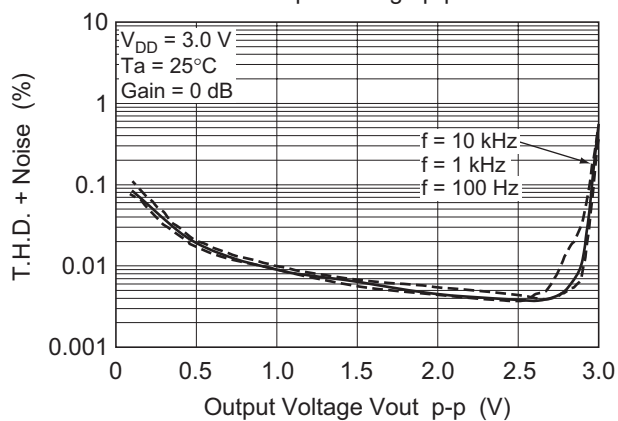


Figure 1-22. HA1630S04
Total Harmonic Distortion + Noise vs.
Output Voltage p-p

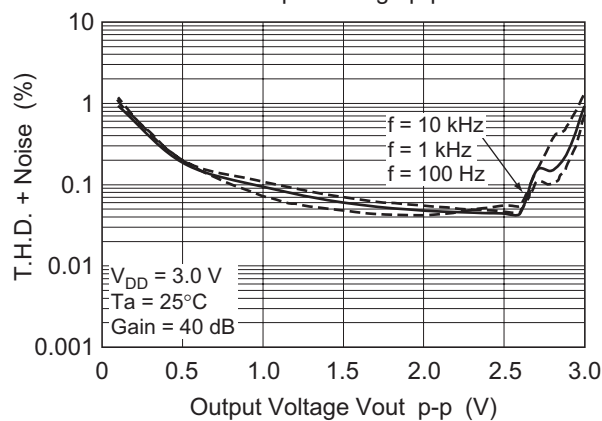


Figure 1-23. HA1630S04
Voltage Output p-p vs. Frequency







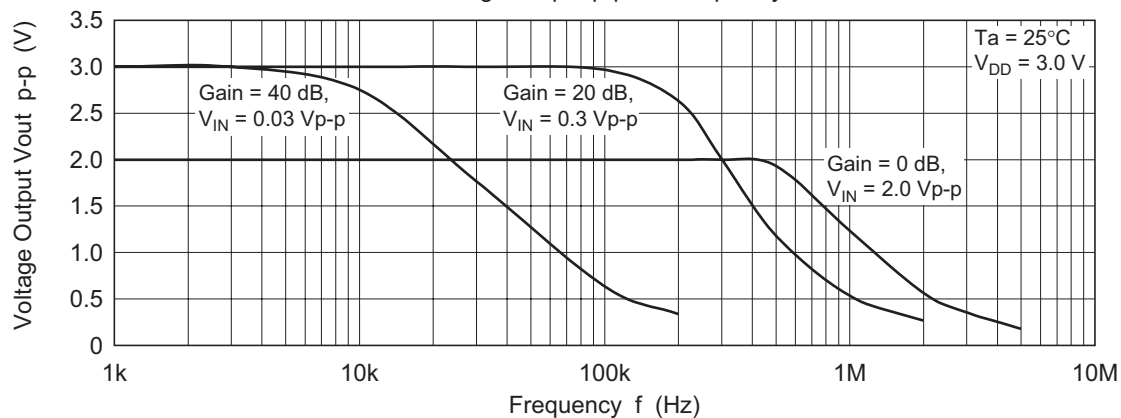


Figure 1-24. HA1630S04
Voltage Noise Density vs. Frequency

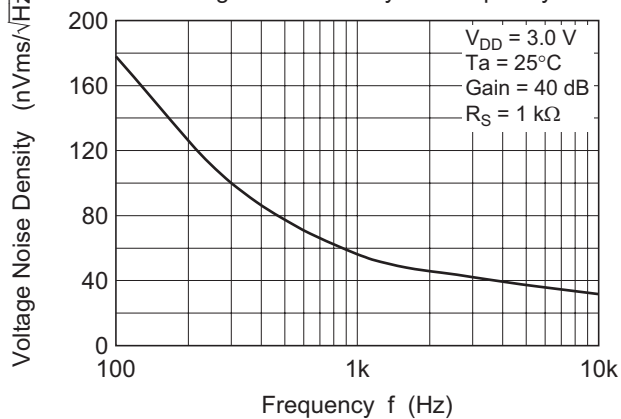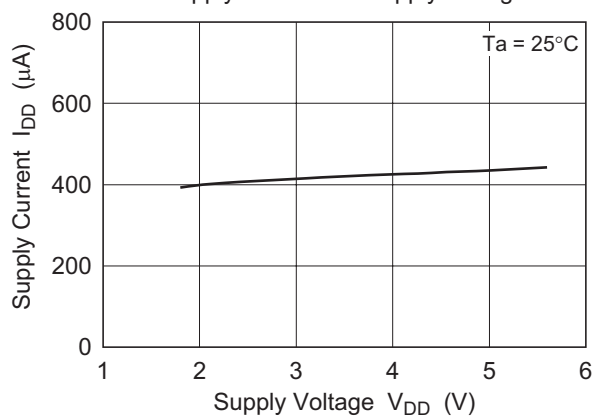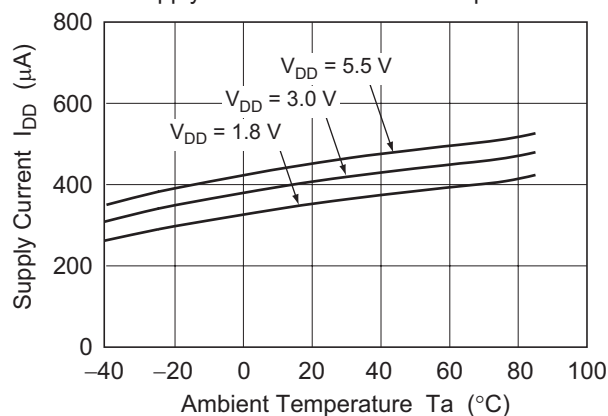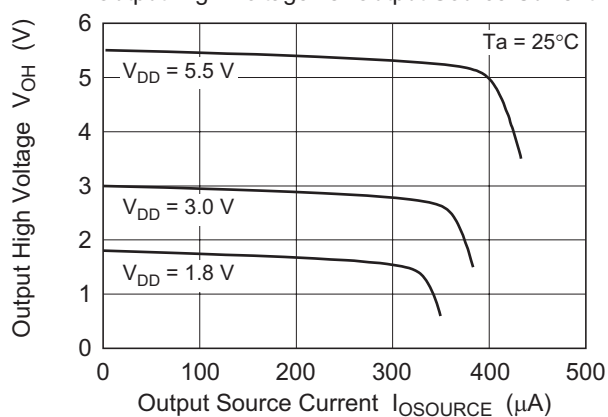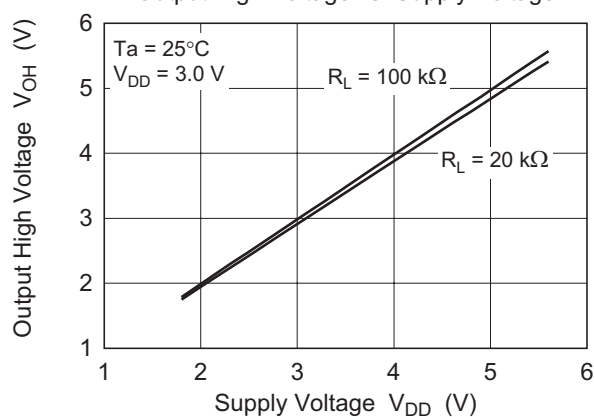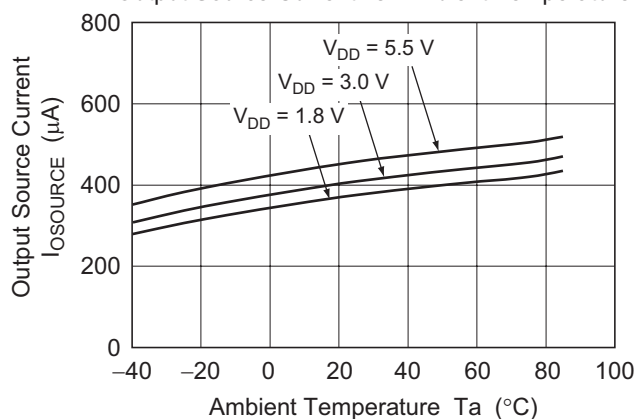

Main Characteristics (HA1630S05)

Figure 2-1. HA1630S05
Supply Current vs. Supply VoltageFigure 2-2. HA1630S05
Supply Current vs. Ambient TemperatureFigure 2-3. HA1630S05
Output High Voltage vs. Output Source CurrentFigure 2-4. HA1630S05
Output High Voltage vs. Supply VoltageFigure 2-5. HA1630S05
Output Source Current vs. Ambient Temperature

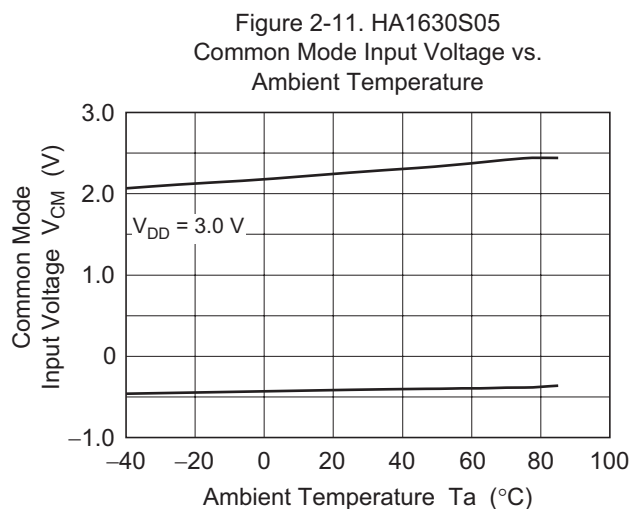
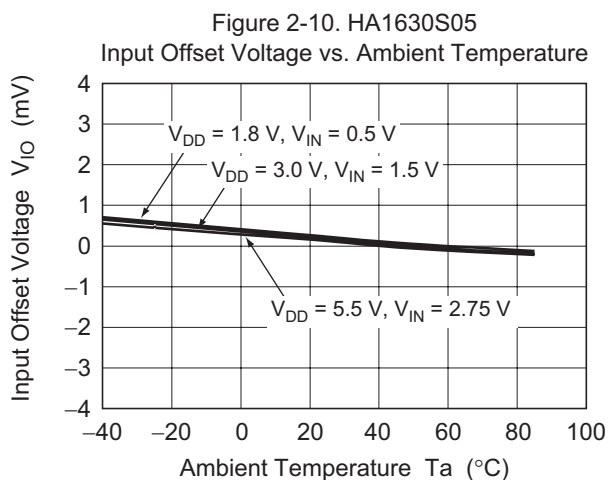
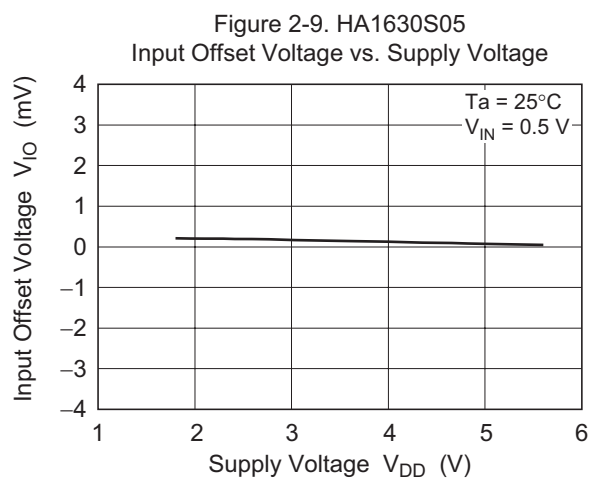
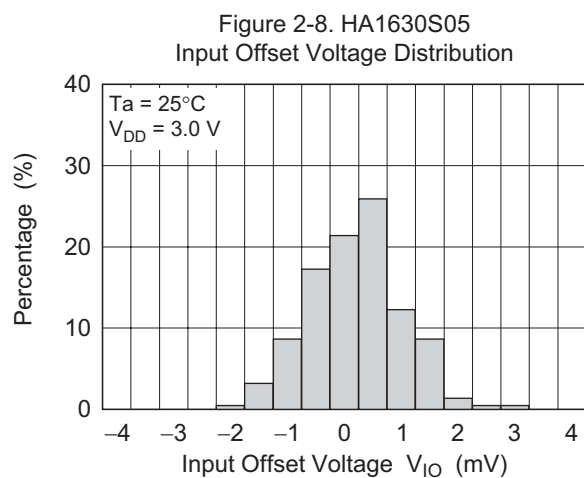
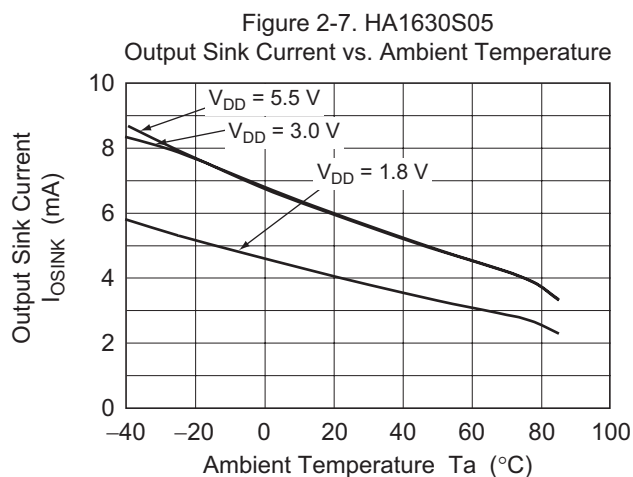
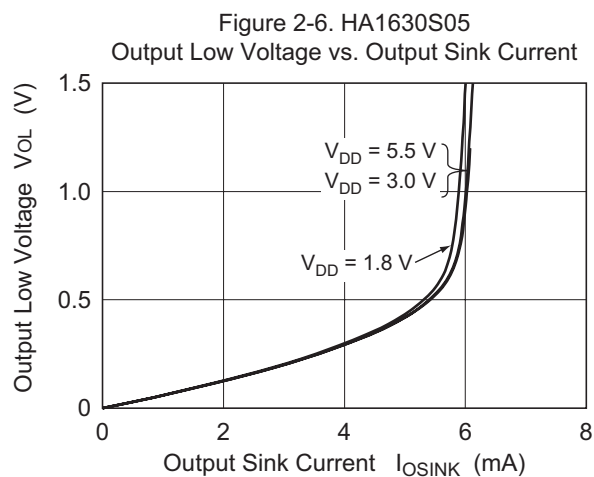


Figure 2-12. HA1630S05
Power Supply Rejection Ratio vs. Frequency

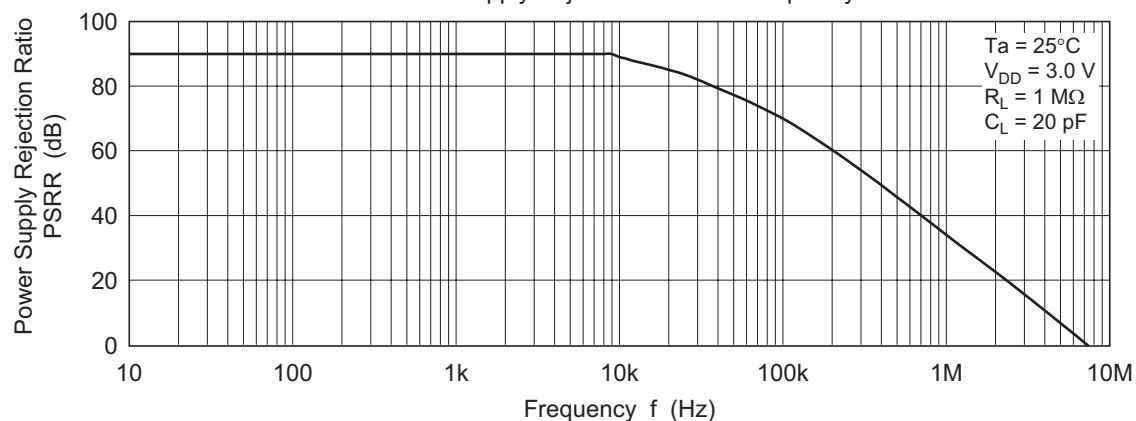


Figure 2-13. HA1630S05
Common Mode Rejection Ratio vs. Frequency

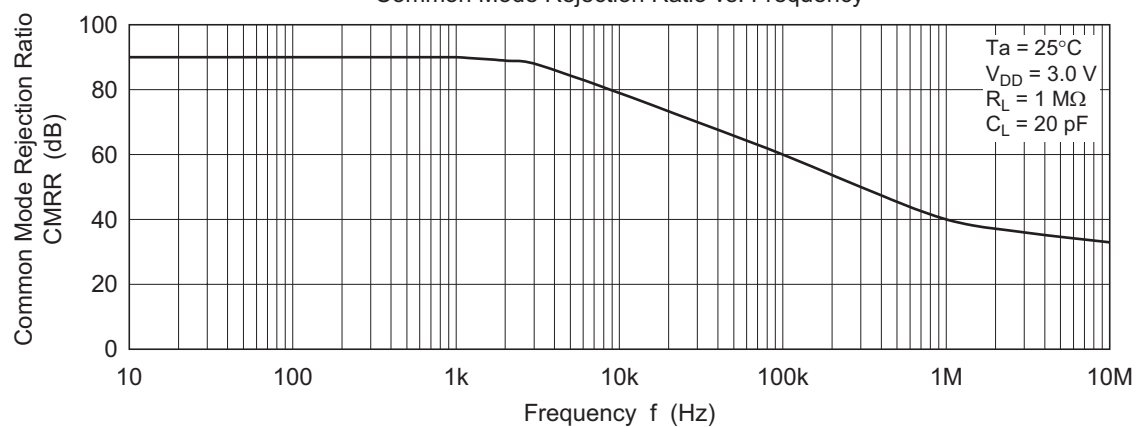
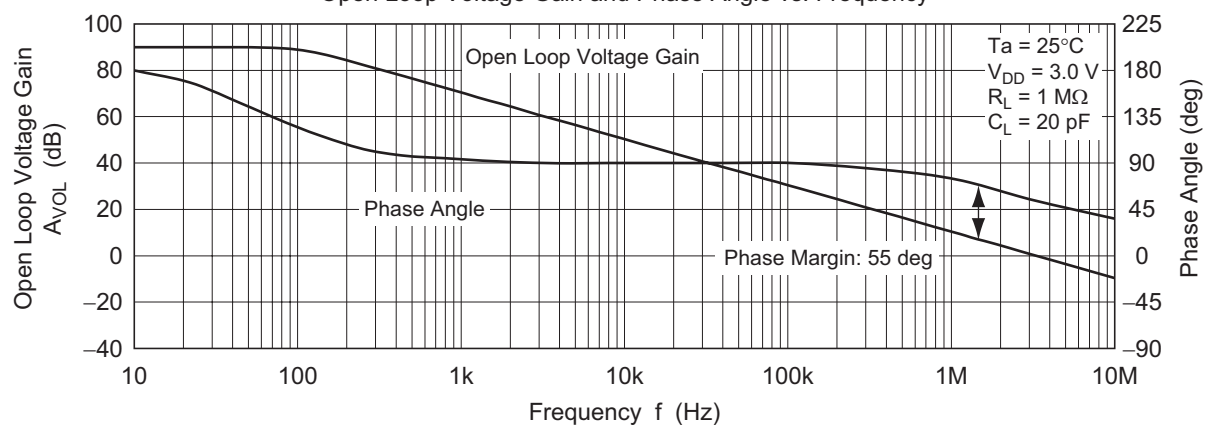


Figure 2-14. HA1630S05
Open Loop Voltage Gain and Phase Angle vs. Frequency



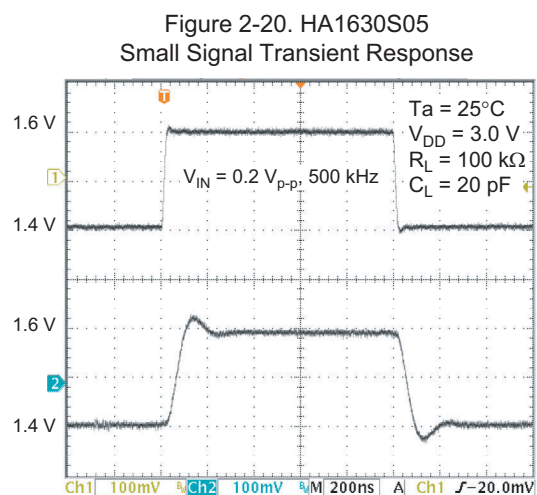
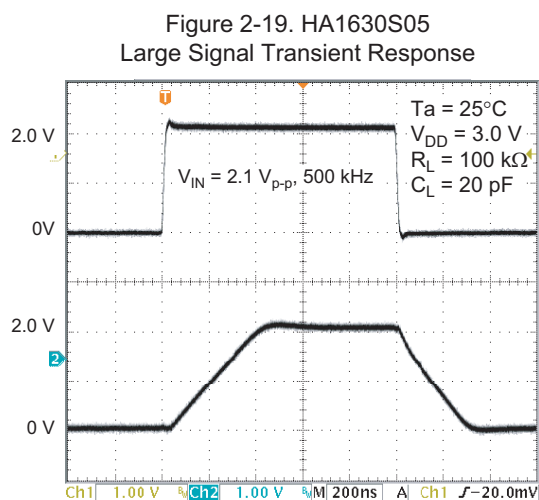
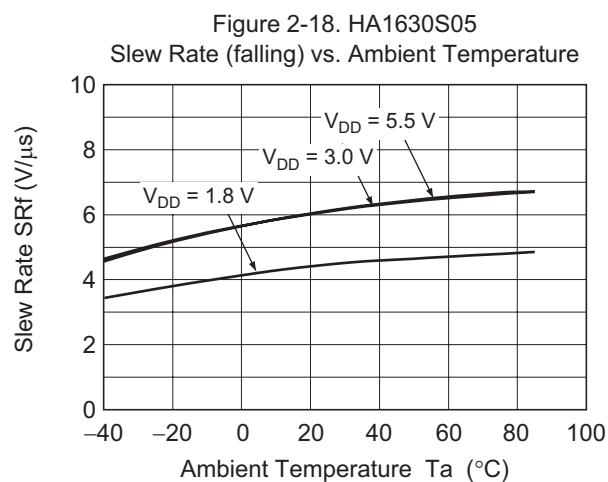
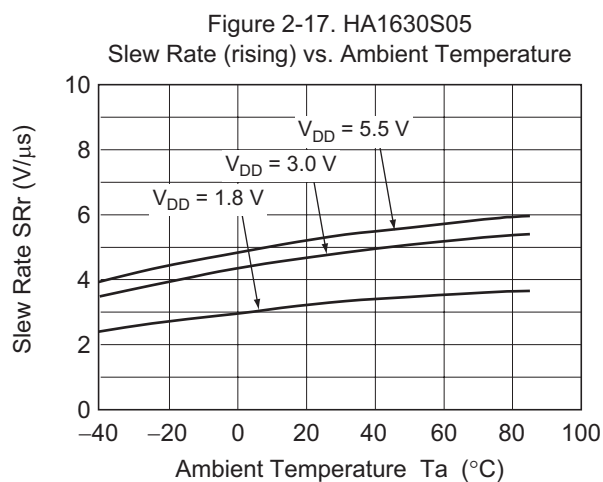
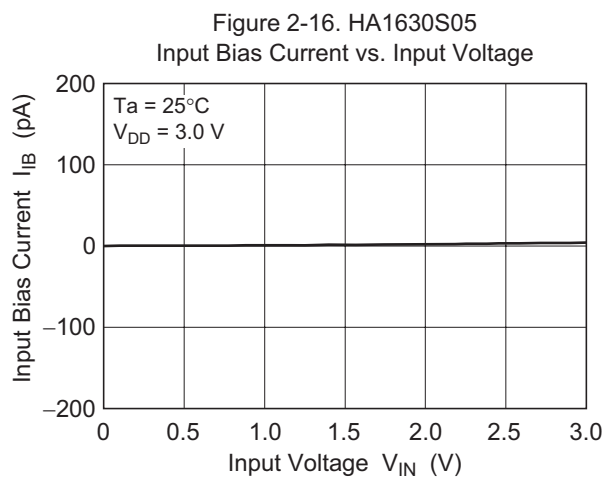
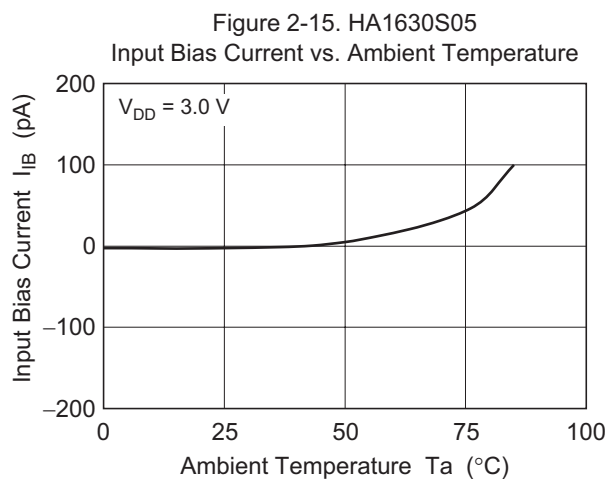


Figure 2-21. HA1630S05
Total Harmonic Distortion + Noise vs.
Output Voltage p-p

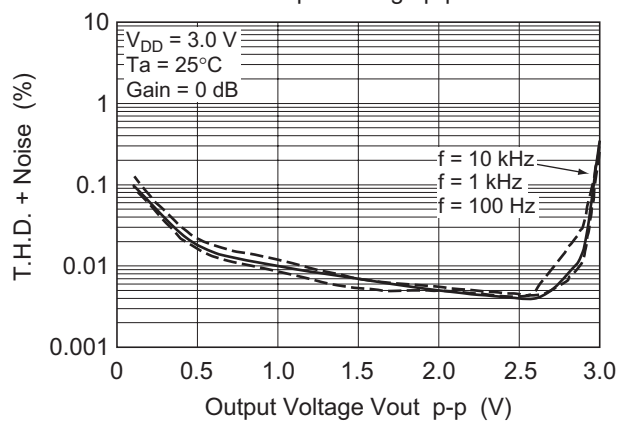


Figure 2-22. HA1630S05
Total Harmonic Distortion + Noise vs.
Output Voltage p-p

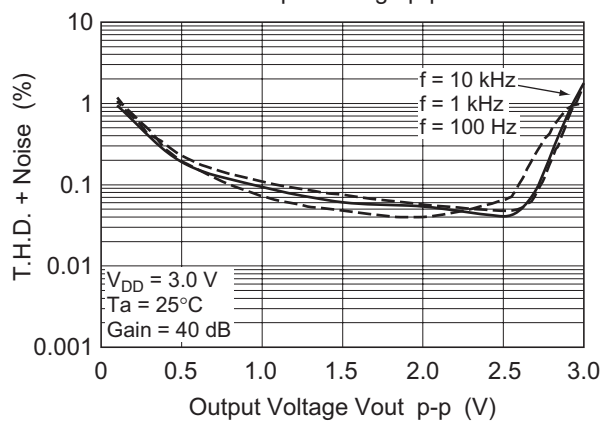


Figure 2-23. HA1630S05
Voltage Output p-p vs. Frequency







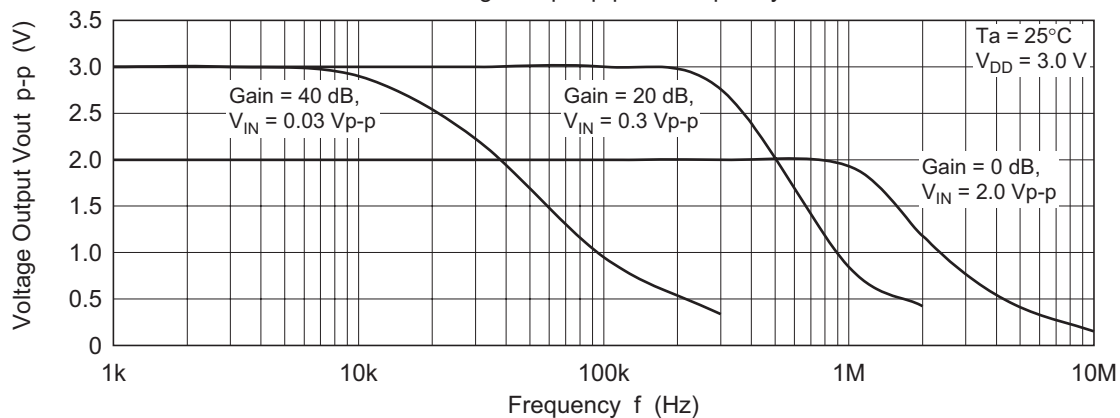


Figure 2-24. HA1630S05
Voltage Noise Density vs. Frequency

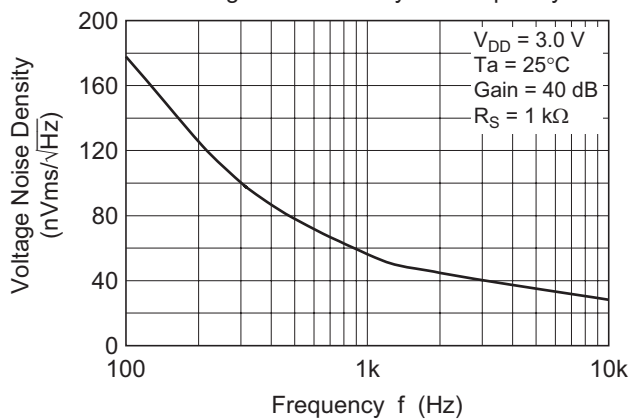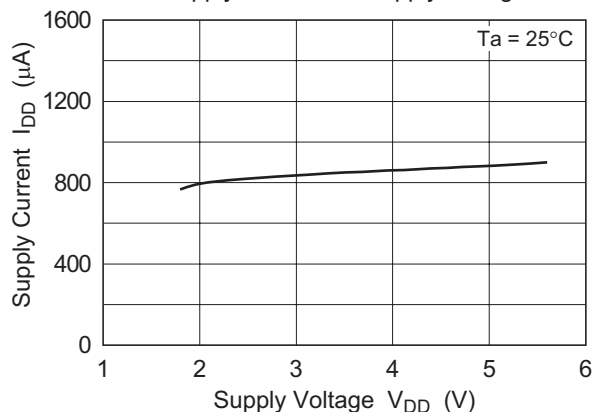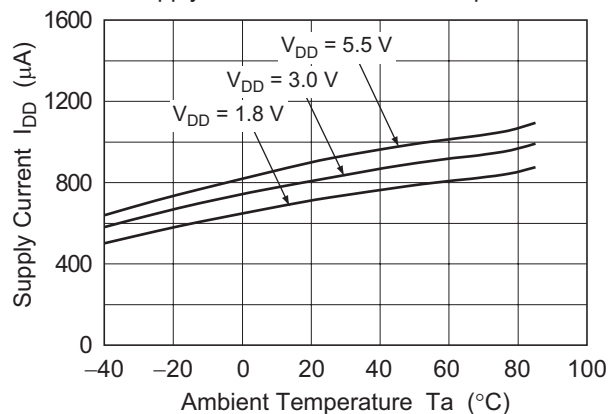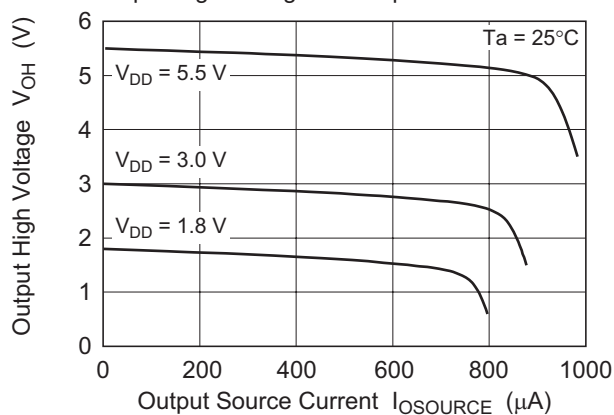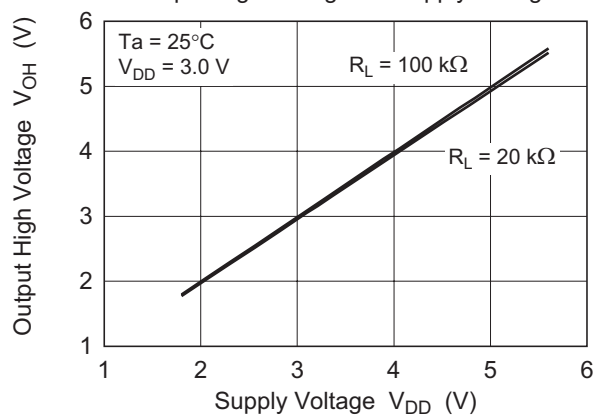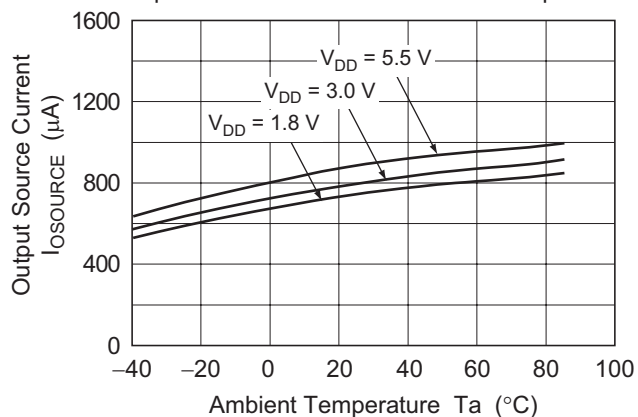

Main Characteristics (HA1630S06)

Figure 3-1. HA1630S06
Supply Current vs. Supply VoltageFigure 3-2. HA1630S06
Supply Current vs. Ambient TemperatureFigure 3-3. HA1630S06
Output High Voltage vs. Output Source CurrentFigure 3-4. HA1630S06
Output High Voltage vs. Supply VoltageFigure 3-5. HA1630S06
Output Source Current vs. Ambient Temperature

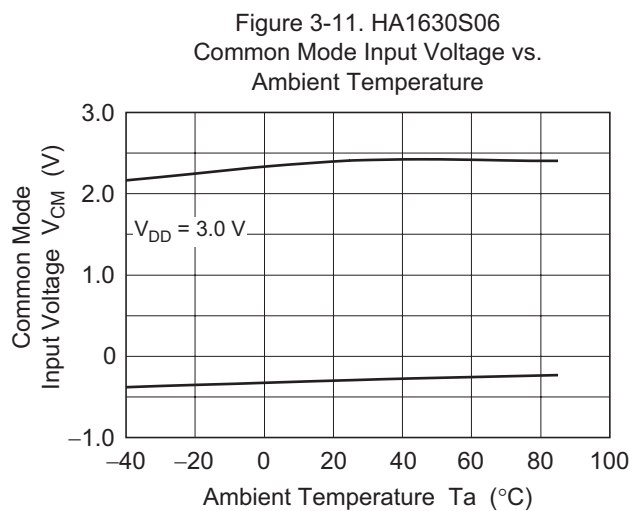
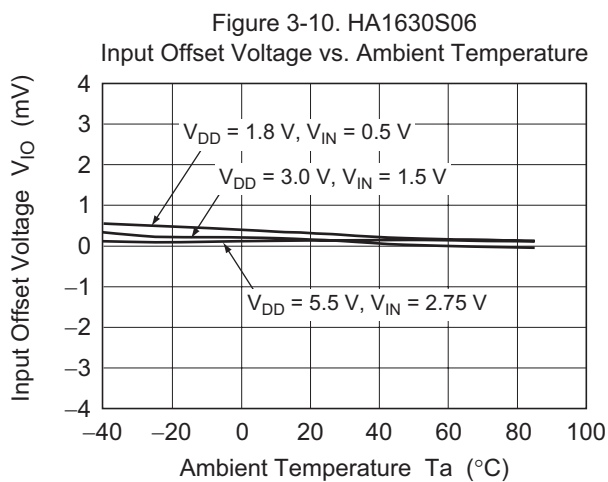
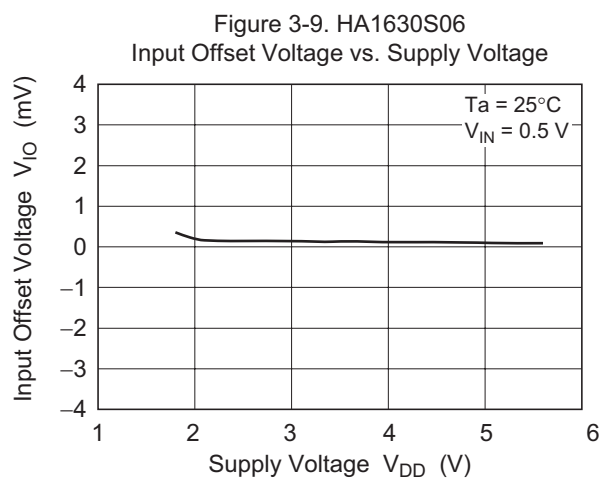
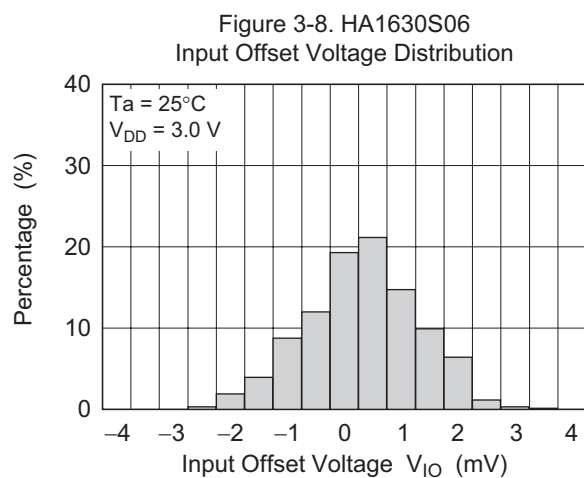
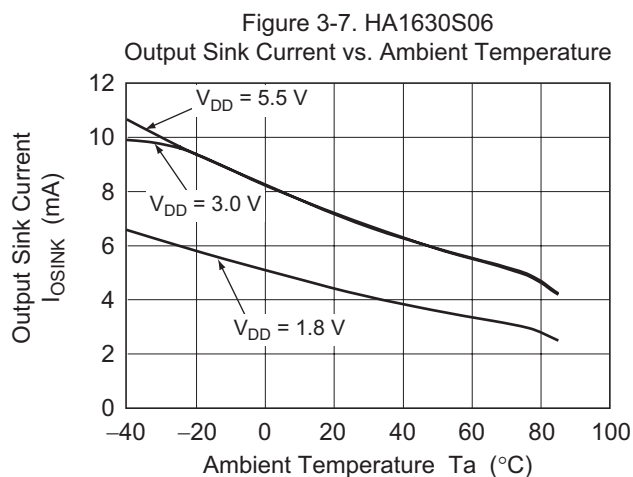
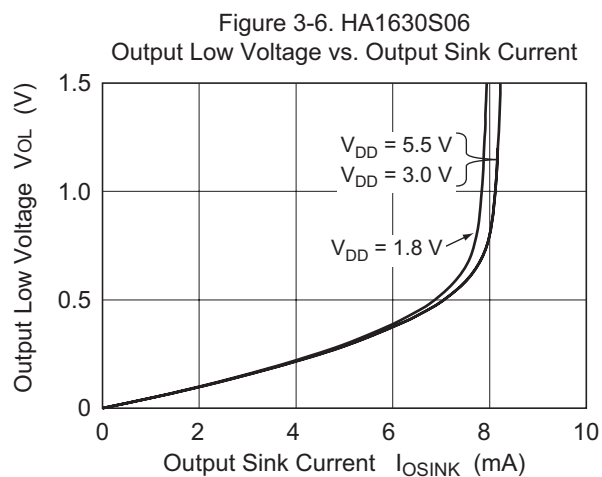


Figure 3-12. HA1630S06
Power Supply Rejection Ratio vs. Frequency

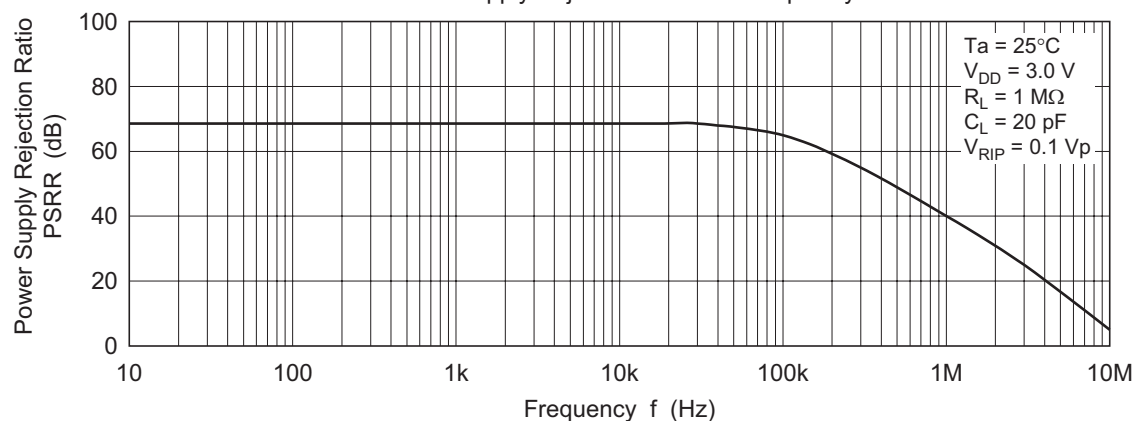


Figure 3-13. HA1630S06
Common Mode Rejection Ratio vs. Frequency

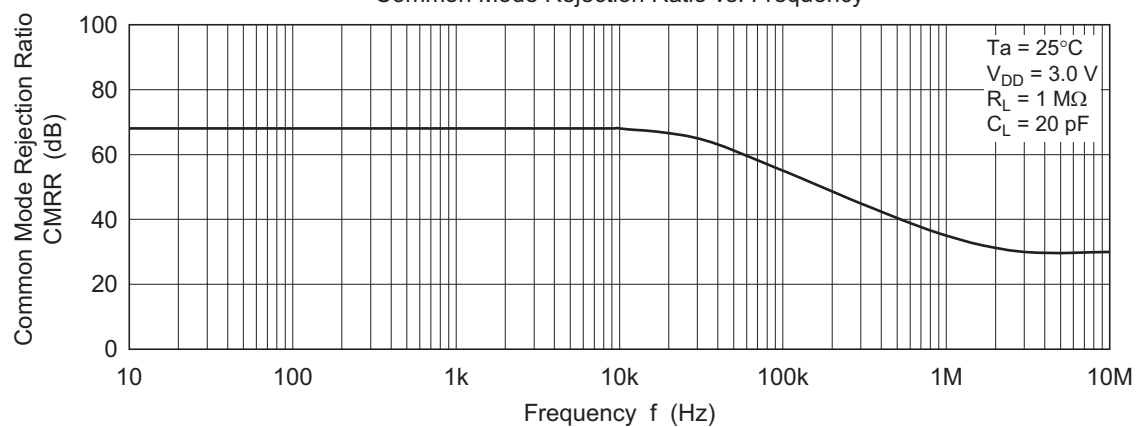
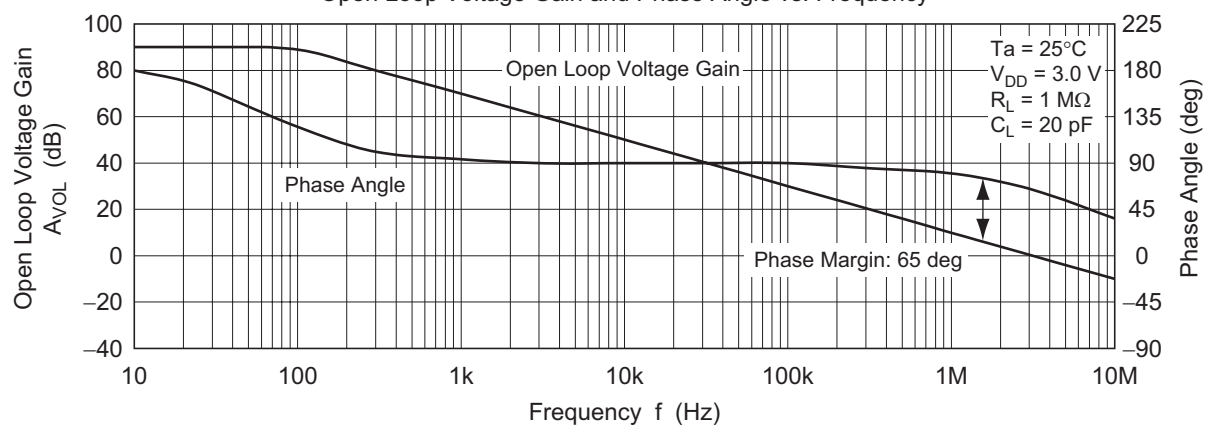


Figure 3-14. HA1630S06
Open Loop Voltage Gain and Phase Angle vs. Frequency



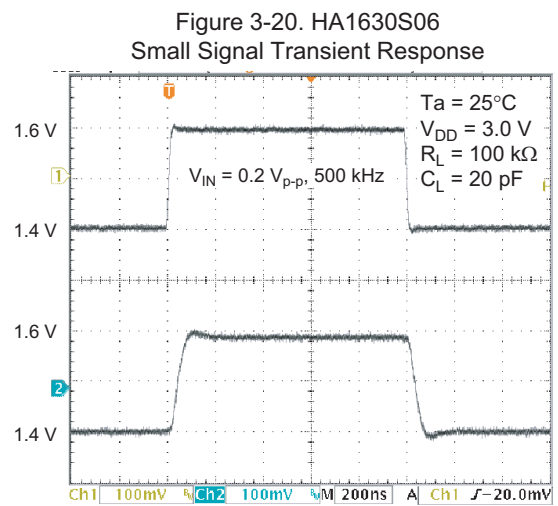
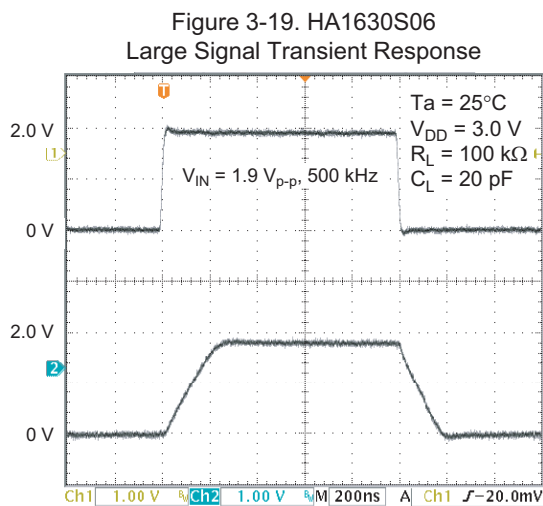
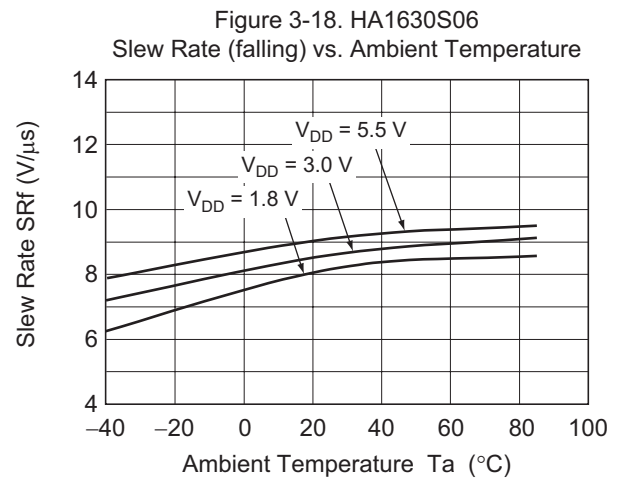
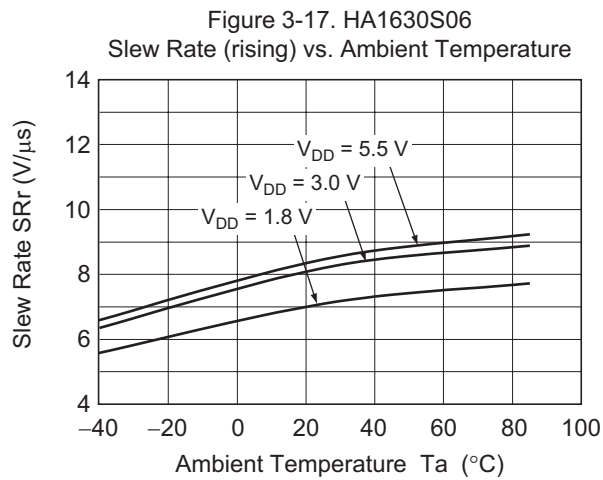
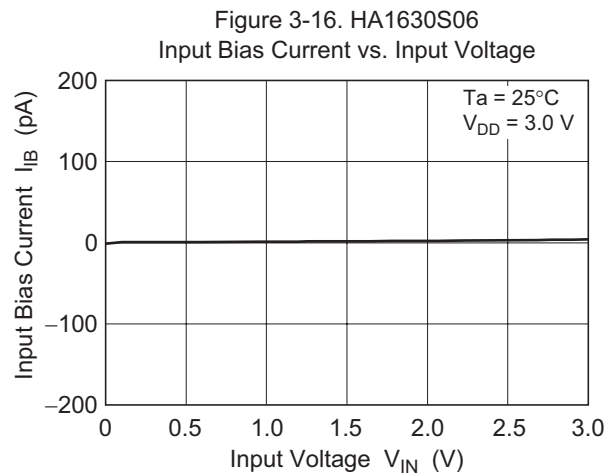
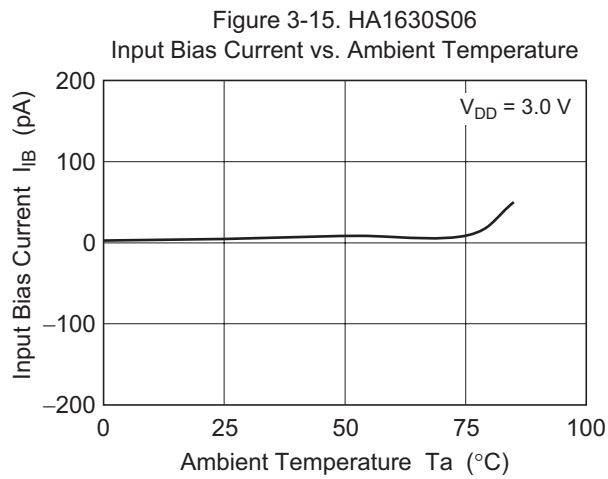


Figure 3-21. HA1630S06
Total Harmonic Distortion + Noise vs.
Output Voltage p-p

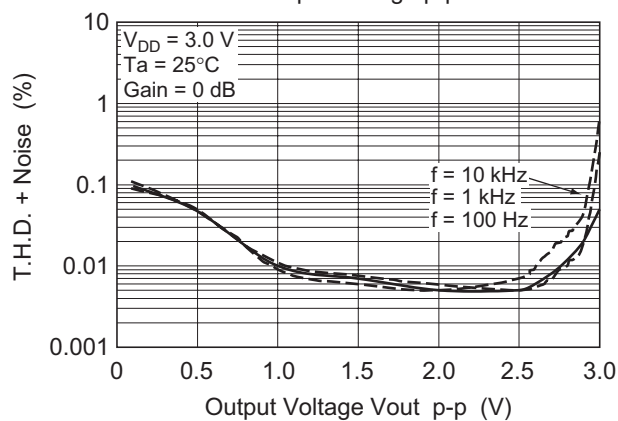


Figure 3-22. HA1630S06
Total Harmonic Distortion + Noise vs.
Output Voltage p-p

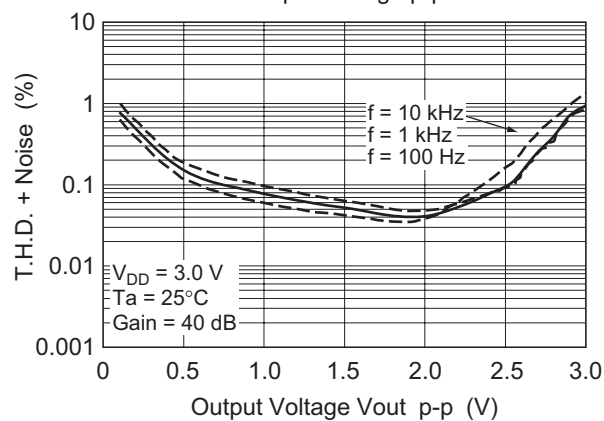


Figure 3-23. HA1630S06
Voltage Output p-p vs. Frequency



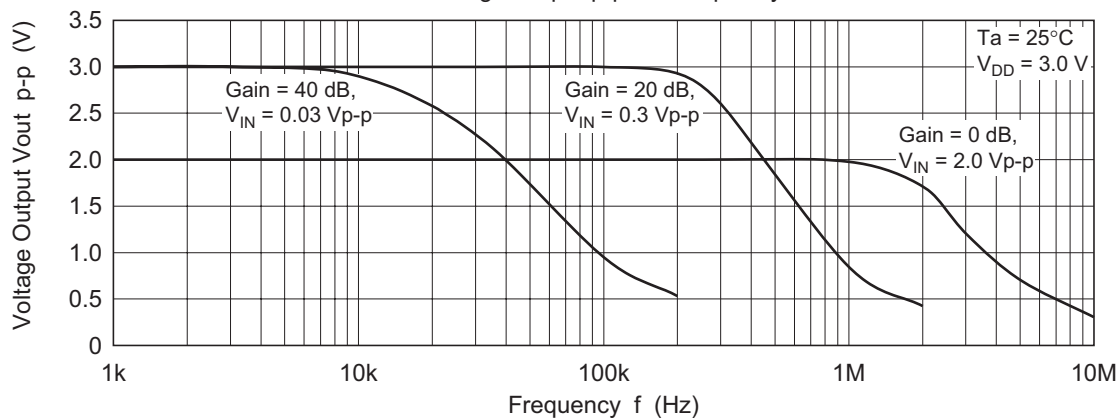


Figure 3-24. HA1630S06
Voltage Noise Density vs. Frequency

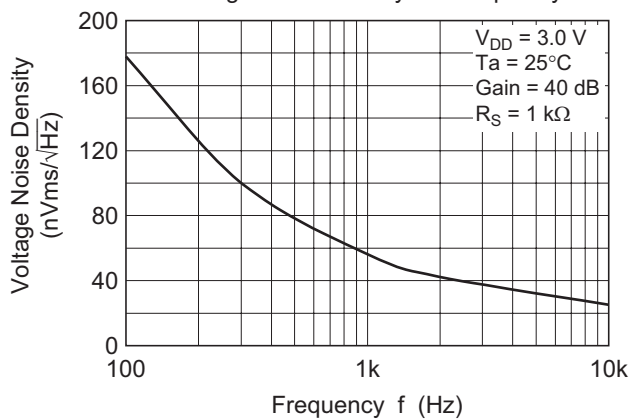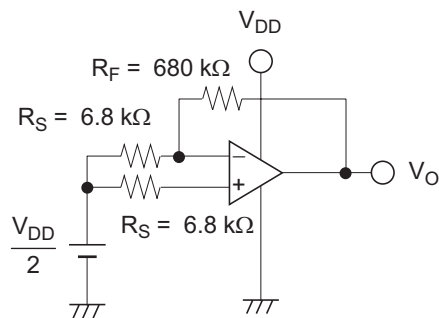

Test Circuits

1. Power Supply Rejection Ratio, PSRR & Voltage Offset, V_{IO} 




$$\underline{V_{IO}}$$

$$V_{IO} = \left(V_O - \frac{V_{DD}}{2} \right) \times \frac{R_S}{R_S + R_F}$$

$$\underline{PSRR}$$

$$PSRR = -20 \log \left(\left| \frac{V_{DD1} - V_{DD2}}{V_{O1} - V_{O2}} \right| \times \frac{R_S}{R_S + R_F} \right)$$


Measure V_O corresponding to $V_{DD1} = 2.95 \text{ V}$ and $V_{DD2} = 3.05 \text{ V}$

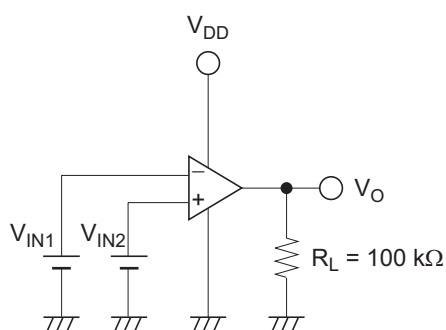2. Supply Current, I_{DD} 3. Input Bias Current, I_{IB} 4. Output High Voltage, V_{OH} 

$$\underline{V_{OH}}$$

$$V_{IN1} = V_{DD} / 2 - 0.05 \text{ V}$$


$$V_{IN2} = V_{DD} / 2 + 0.05 \text{ V}$$

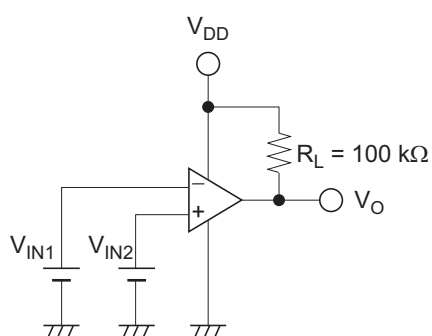5. Output Low Voltage, V_{OL} 

$$\underline{V_{OL}}$$

$$V_{IN1} = V_{DD} / 2 + 0.05 \text{ V}$$


$$V_{IN2} = V_{DD} / 2 - 0.05 \text{ V}$$

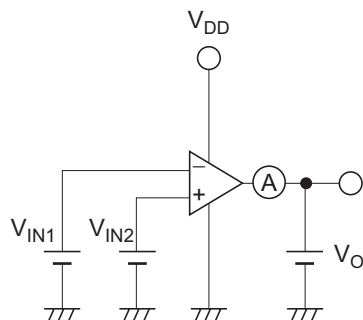6. Output Source Current, $I_{OSOURCE}$ & Output Sink Current, I_{OSINK}  $I_{OSOURCE}$

$$\begin{aligned} V_O &= V_{DD} - 0.5 \text{ V} \\ V_{IN1} &= V_{DD} / 2 - 0.05 \text{ V} \\ V_{IN2} &= V_{DD} / 2 + 0.05 \text{ V} \end{aligned}$$

 I_{OSINK}


$$\begin{aligned} V_O &= +0.5 \text{ V} \\ V_{IN1} &= V_{DD} / 2 + 0.05 \text{ V} \\ V_{IN2} &= V_{DD} / 2 - 0.05 \text{ V} \end{aligned}$$

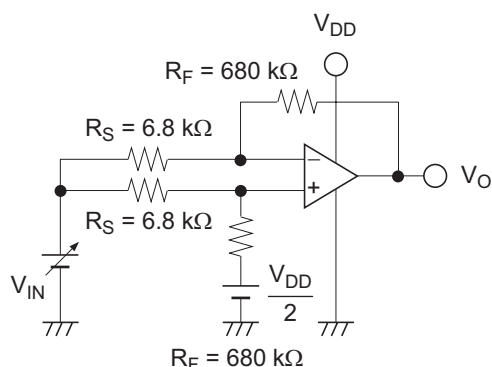7. Common Mode Input Voltage, V_{CM} & Common Mode Rejection Ratio, CMRRCMRR

$$CMRR = -20 \log \left(\left| \frac{V_{IN1} - V_{IN2}}{V_{O1} - V_{O2}} \right| \times \frac{R_S}{R_S + R_F} \right)$$

Measure V_O corresponding to $V_{IN1} = 1.45 \text{ V}$ and $V_{IN2} = 1.55 \text{ V}$



8. Total Harmonic Distortion, THD

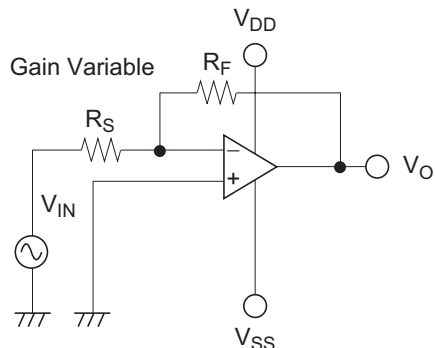THD



Gain Variable

$$\begin{aligned} R_F / R_S &= 20 \log (100 \text{ k}\Omega / 1 \text{ k}\Omega) = 40 \text{ dB} \\ R_F / R_S &= 20 \log (100 \text{ k}\Omega / 100 \text{ k}\Omega) = 0 \text{ dB} \\ \text{freq} &= 100 \text{ Hz}, 1 \text{ kHz}, 10 \text{ kHz} \\ 30 \text{ kHz LPF ON} \end{aligned}$$

9. Slew Rate, SR

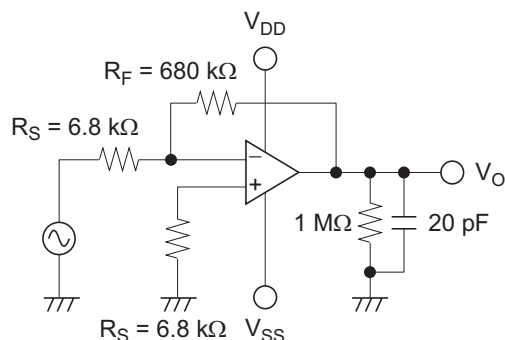10. Gain, A_V & Phase, GBW


Package Dimensions

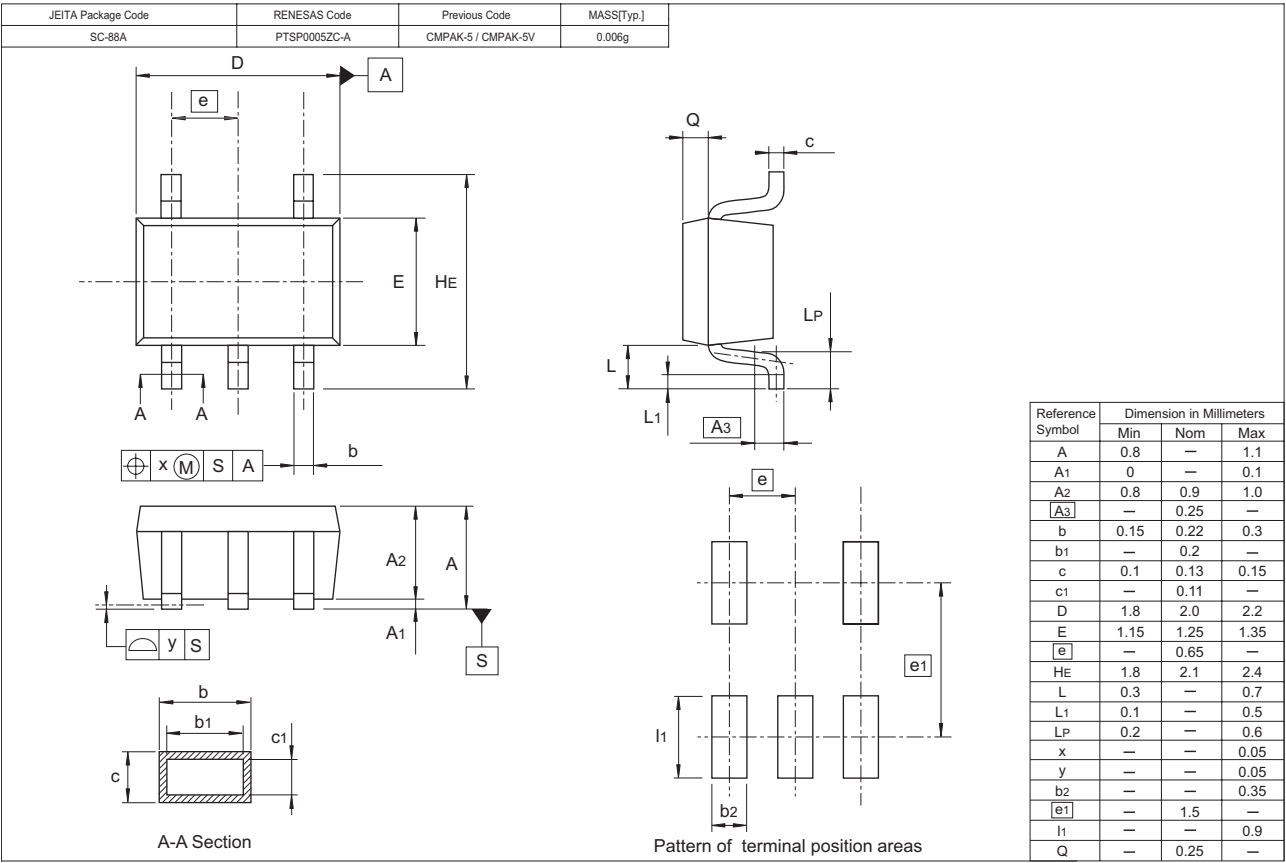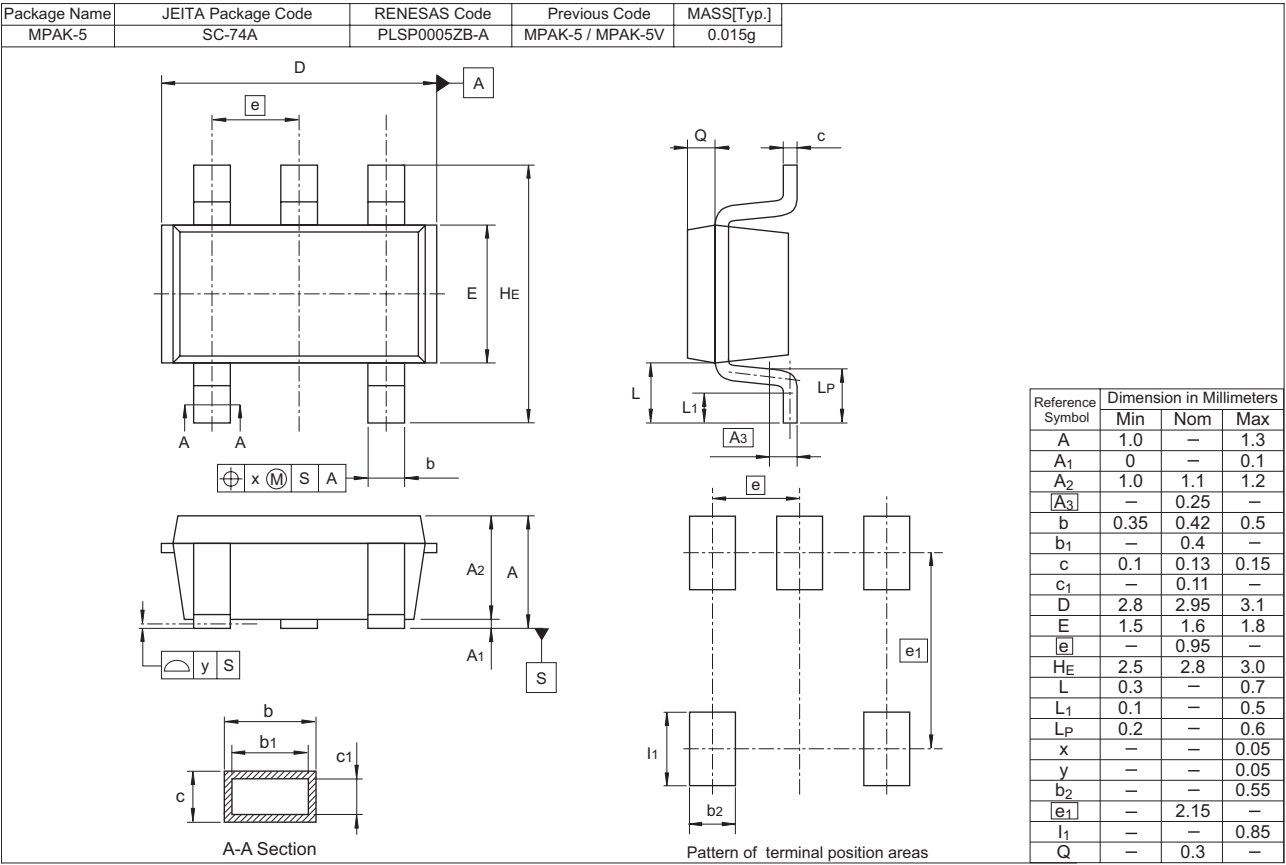

Taping & Reel Specification

[Taping]

Package Code	W	P	Ao	Bo	Ko	E	F	D1	Maximum Storage No.
MPAK-5	8	4	3.3	3.3	1.5	1.75	3.5	1.05	3,000 pcs/reel
CMPAK-5	8	4	2.25	2.45	1.1	1.75	3.5	1.05	3,000 pcs/reel

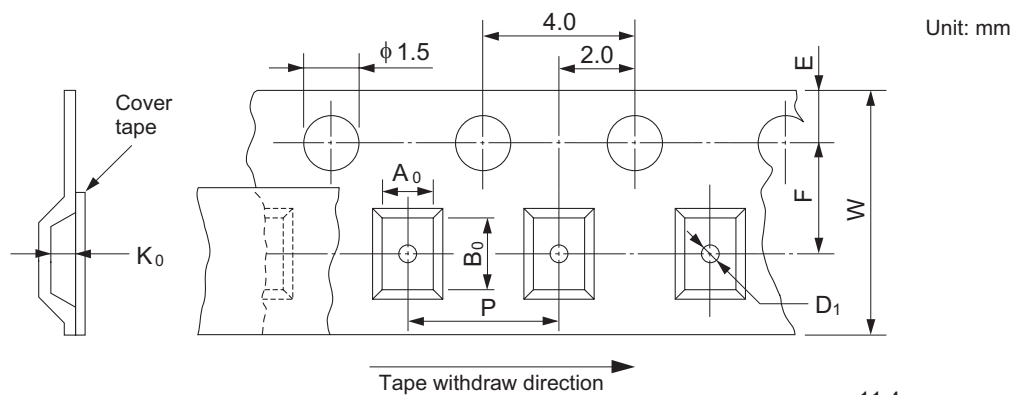


[Reel]


Package	Tape width	W1	W2
MPAK-5	8	11.4	9
CMPAK-5	8	11.4	9

[Ordering Information]

Ordering Unit
3,000 pcs

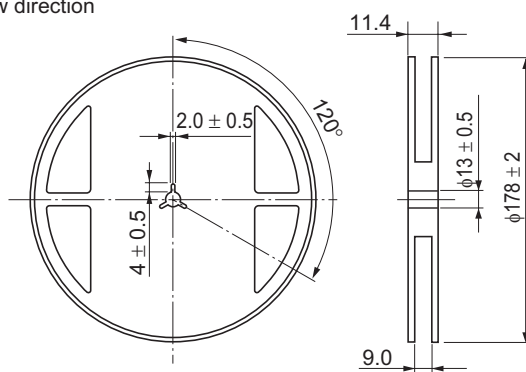

Mark Indication

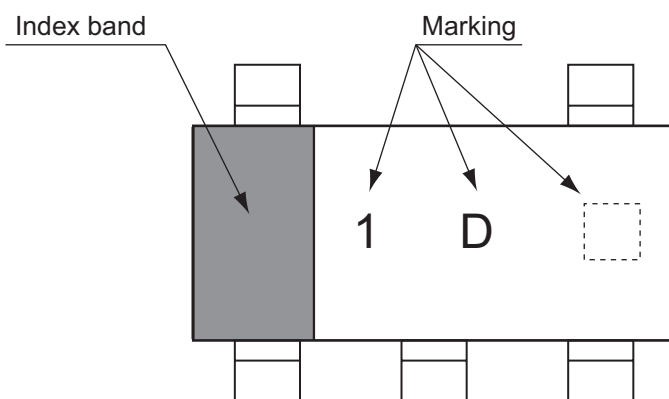

1 D □ : HA1630S04

1 E □ : HA1630S05

1 F □ : HA1630S06

□ = Control code
(— or blank)

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.

Unit 204, 205, AZIACenter, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7898

Renesas Technology Hong Kong Ltd.

7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd.

10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology Singapore Pte. Ltd.

1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.

Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jalan Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510