



# 82541 Family of Gigabit Ethernet Controllers

82541PI, 82541GI, and 82541EI

*Networking Silicon*

---

**Datasheet**

## Revision History

Date	Revision	Notes
Mar 2004	3.1	Included minor information for oscillator support in Section 3.5.1, "Crystal Signals." Revised regulator support in Table 4, "1.8V Supply Voltage Ramp" and Table 5, "1.8V Supply Voltage Ramp." Updated power specifications in Table 10, "Power Specifications - Complete Subsystem." Corrected minor typing errors throughout the document.
Jan 2004	3.0	Information for the 82541PI was added to the datasheet.
Aug 2003	2.0	Non-classified release.

Information in this document is provided in connection with Intel products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Intel's Terms and Conditions of Sale for such products, Intel assumes no liability whatsoever, and Intel disclaims any express or implied warranty, relating to sale and/or use of Intel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Intel products are not intended for use in medical, life saving, or life sustaining applications.

Intel may make changes to specifications and product descriptions at any time, without notice.

Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

The 82541PI/GI/EI Gigabit Ethernet Controller may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an ordering number and are referenced in this document, or other Intel literature may be obtained by calling 1-800-548-4725 or by visiting Intel's website at <http://www.intel.com>.

Copyright © 2004, Intel Corporation

\*Third-party brands and names are the property of their respective owners.

# Contents

<b>1.0</b>	<b>Introduction .....</b>	<b>1</b>
1.1	Document Scope .....	1
1.2	Reference Documents .....	2
1.3	Block Diagram .....	3
<b>2.0</b>	<b>Features of the 82541 Family of Gigabit Ethernet Controllers.....</b>	<b>5</b>
2.1	PCI Features .....	5
2.2	MAC Specific Features.....	5
2.3	PHY Specific Features .....	6
2.4	Host Offloading Features .....	6
2.5	Manageability Features .....	7
2.6	Additional Device Features .....	7
2.7	Technology Features.....	8
<b>3.0</b>	<b>Signal Descriptions.....</b>	<b>9</b>
3.1	Signal Type Definitions.....	9
3.2	PCI Bus Interface Signals (56) .....	9
3.2.1	PCI Address, Data and Control Signals (44) .....	10
3.2.2	Arbitration Signals (2) .....	11
3.2.3	Interrupt Signal (1) .....	11
3.2.4	System Signals (4) .....	11
3.2.5	Error Reporting Signals (2) .....	12
3.2.6	Power Management Signals (3) .....	12
3.2.7	SMB Signals (3) .....	12
3.3	EEPROM and Serial FLASH Interface Signals (9).....	13
3.4	Miscellaneous Signals.....	13
3.4.1	LED Signals (4) .....	13
3.4.2	Other Signals (4) .....	14
3.5	PHY Signals .....	14
3.5.1	Crystal Signals (2) .....	14
3.5.2	Analog Signals (10) .....	14
3.6	Test Interface Signals (6) .....	15
3.7	Power Supply Connections .....	15
3.7.1	Digital and Analog Supplies .....	15
3.7.2	Grounds, Reserved Pins and No Connects .....	16
3.7.3	Voltage Regulation Control Signals (2) .....	16
<b>4.0</b>	<b>Voltage, Temperature, and Timing Specifications .....</b>	<b>17</b>
4.1	Absolute Maximum Ratings.....	17
4.2	Targeted Recommended Operating Conditions.....	17
4.2.1	General Operating Conditions.....	17
4.2.2	Voltage Ramp and Sequencing Recommendations.....	18
4.3	DC Specifications .....	19
4.4	AC Characteristics.....	22
4.5	Timing Specifications .....	24



4.5.1	PCI Bus Interface .....	24
4.5.2	Link Interface Timing .....	28
4.5.3	EEPROM Interface .....	29
<b>5.0</b>	<b>Package and Pinout Information .....</b>	<b>31</b>
5.1	Package Information .....	31
5.2	Thermal Specifications .....	33
5.3	Pinout Information .....	34
5.4	Visual Pin Assignments .....	44

## 1.0 Introduction

---

The Intel® 82541PI/GI/EI Gigabit Ethernet is a single, compact component with an integrated Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) functions. For desktop, workstation and mobile PC Network designs with critical space constraints, the Intel® 82541PI/GI/EI allows for a Gigabit Ethernet implementation in a very small area that is footprint compatible with current generation 10/100 Mbps Fast Ethernet designs.

The Intel® 82541PI/GI/EI integrates fourth generation gigabit MAC design with fully integrated, physical layer circuitry to provide a standard IEEE 802.3 Ethernet interface for 1000BASE-T, 100BASE-TX, and 10BASE-T applications (802.3, 802.3u, and 802.3ab). The controller is capable of transmitting and receiving data at rates of 1000 Mbps, 100 Mbps, or 10 Mbps. In addition to managing MAC and PHY layer functions, the controller provides a 32-bit wide direct Peripheral Component Interconnect (PCI) 2.3 compliant interface capable of operating at 33 or 66 MHz.

The 82541PI/GI/EI also incorporates the CLKRUN protocol and hardware supported downshift capability to two-pair and three-pair 100 Mbps operation. These features optimize mobile applications.

The 82541PI/GI/EI on-board System Management Bus (SMB) port enables network manageability implementations required by information technology personnel for remote control and alerting via the Local Area Network (LAN). With SMB, management packets can be routed to or from a management processor. The SMB port enables industry standards, such as Intelligent Platform Management Interface (IPMI) and Alert Standard Forum (ASF) 2.0, to be implemented using the 82541PI/GI/EI. In addition, on chip ASF 2.0 circuitry provides alerting and remote control capabilities with standardized interfaces.

The 82541PI/GI/EI Gigabit Ethernet Controller Architecture is designed for high performance and low memory latency. Wide internal data paths eliminate performance bottlenecks by efficiently handling large address and data words. The 82541PI/GI/EI controller includes advanced interrupt handling features to limit PCI bus traffic and a PCI interface that maximizes efficient bus usage. The 82541PI/GI/EI uses efficient ring buffer descriptor data structures, with up to 64 packet descriptors cached on chip. A large 64-KByte onchip packet buffer maintains superior performance as available PCI bandwidth changes. In addition, using hardware acceleration, the controller offloads tasks from the host controller, such as TCP/UDP/IP checksum calculations and TCP segmentation.

The 82541PI/GI/EI is packaged in a 15 mm x 15 mm 196-ball grid array and is pin compatible with the 82551QM 10/100 Mbps Fast Ethernet Multifunction PCI/CardBus Controller, 82562EZ/82562EX Platform LAN Connect devices, the 82540EM Gigabit Ethernet Controller and the 82540EP Gigabit Ethernet Controller.

## 1.1 Document Scope

The 82541EI is the original device and is now being manufactured in a B-0 stepping. The 82541GI (B-1 stepping) and 82541PI (C-0 stepping) are pin compatible, however, a different Intel software driver is required from the 82541EI. This document contains datasheet specifications for the 82541PI/GI/EI Gigabit Ethernet Controllers including signal descriptions, DC and AC parameters, packaging data, and pinout information.

## 1.2 Reference Documents

This document assumes that the designer is acquainted with high-speed design and board layout techniques. The following documents provide additional information:

- 82540EP/82541EI & 82546EZ(EX) Dual Footprint Design Guide, AP-444. Intel Corporation.
- 82547GI(EI)/82541GI(EI)/82541ER EEPROM Map and Programming Information Guide, AP-446. Intel Corporation.
- PCI Local Bus Specification, Revision 2.3. PCI Special Interest Group (SIG).
- PCI Bus Power Management Interface Specification, Revision 1.1. PCI Special Interest Group (SIG).
- IEEE Standard 802.3, 2000 Edition. Incorporates various IEEE standards previously published separately. Institute of Electrical and Electronic Engineers (IEEE).
- 82559 Fast Ethernet Controllers Timing Device Selection Guide, AP-419. Intel Corporation.
- PCI Mobile Design Guide, Revision 1.1. PCI Special Interest Group (SIG).

Software driver developers should contact their local Intel representatives for programming information.

### 1.3 Block Diagram

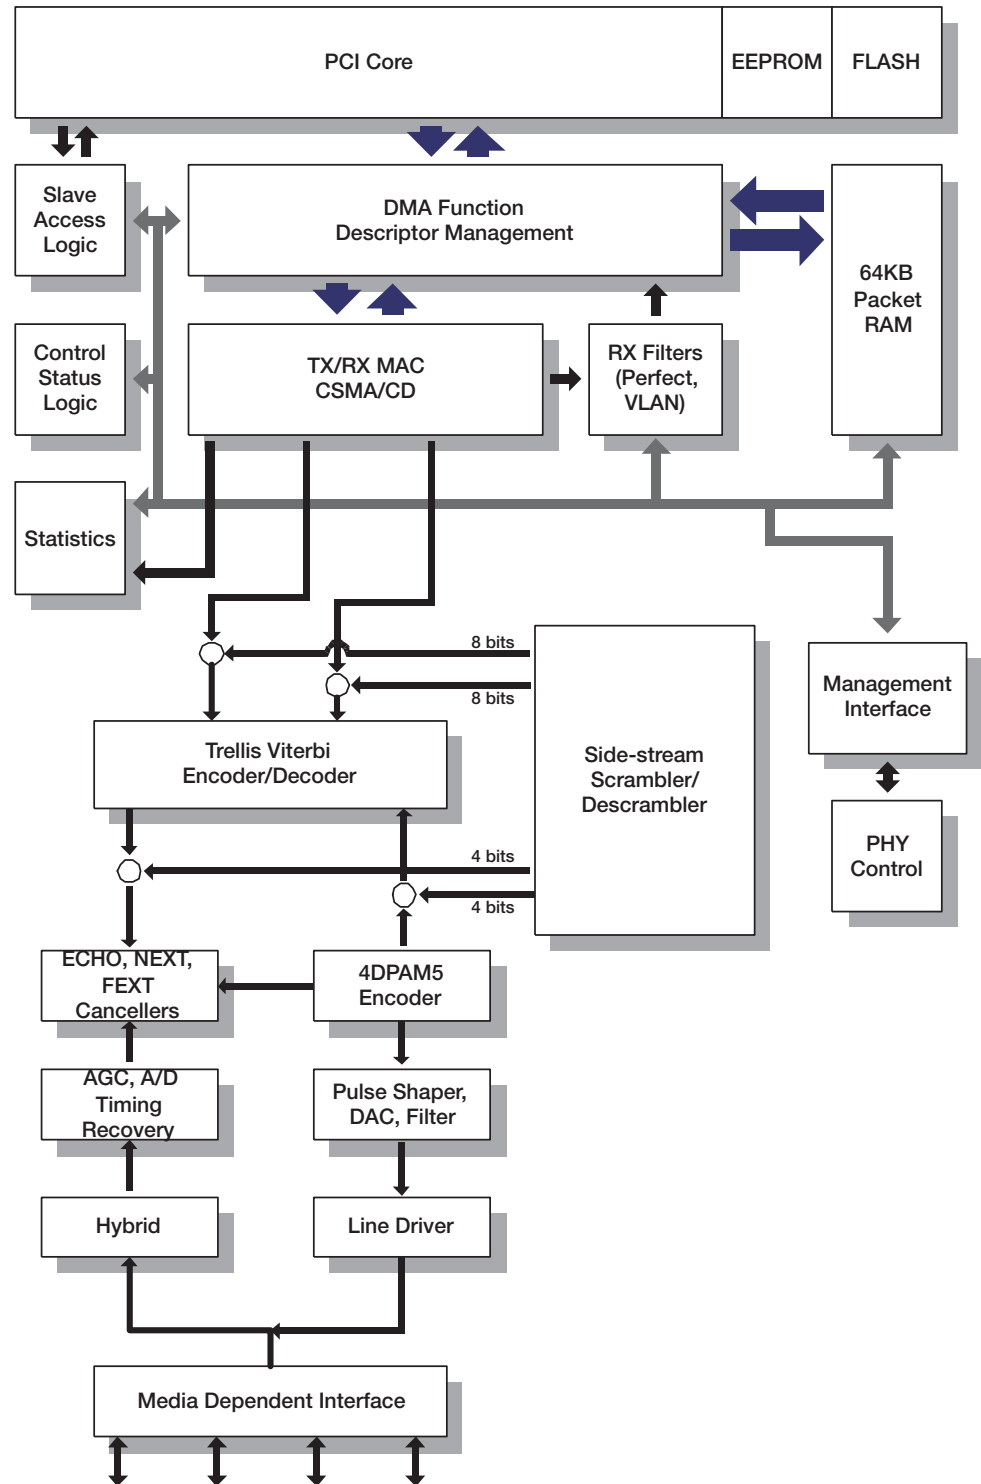


Figure 1. 82541PI/GI/EI Block Diagram



*Note: This page is intentionally left blank.*

## 2.0 Features of the 82541 Family of Gigabit Ethernet Controllers

### 2.1 PCI Features

Features	Benefits
PCI Revision 2.3 support for 32-bit wide interface at 33 MHz and 66 MHz	<ul style="list-style-type: none"> <li>Application flexibility for LAN on Motherboard (LOM) or embedded solutions</li> <li>64-bit addressing for systems with more than 4 Gigabytes of physical memory</li> <li>Support for new PCI 2.3 interrupt status/control</li> </ul>
Algorithms that optimally use advanced PCI, MWI, MRM, and MRL commands	<ul style="list-style-type: none"> <li>Efficient bus operations</li> </ul>
CLKRUN# Signal	<ul style="list-style-type: none"> <li>PCI clock suspension for low power mobile design</li> </ul>
3.3 V (5 V tolerant) PCI signaling.	<ul style="list-style-type: none"> <li>Flexible system design</li> </ul>

### 2.2 MAC Specific Features

Features	Benefits
Low-latency transmit and receive queues	<ul style="list-style-type: none"> <li>Network packets handled without waiting or buffer overflow</li> </ul>
IEEE 802.3x compliant flow control support with software controllable pause times and threshold values	<ul style="list-style-type: none"> <li>Control over the transmission of pause frames through software or hardware triggering</li> <li>Frame loss reduced from receive overruns</li> </ul>
Caches up to 64 packet descriptors in a single burst	<ul style="list-style-type: none"> <li>Efficient use of PCI bandwidth</li> </ul>
Programmable host memory receive buffers (256 Bytes to 16 KBytes) and cache line size (16 Bytes to 256 Bytes)	<ul style="list-style-type: none"> <li>Efficient use of PCI bandwidth</li> </ul>
Wide, optimized internal data path architecture	<ul style="list-style-type: none"> <li>Low latency data handling Superior DMA transfer rate performance</li> </ul>
64 KByte configurable Transmit and Receive FIFO buffers (default is 16 KB of transmit FIFO space and 24 KB of receive FIFO space).	<ul style="list-style-type: none"> <li>No external FIFO memory requirements</li> <li>FIFO size adjustable to application</li> </ul>
Descriptor ring management hardware for transmit and receive	<ul style="list-style-type: none"> <li>Simple software programming model</li> </ul>
Optimized descriptor fetching and write-back mechanisms	<ul style="list-style-type: none"> <li>Efficient system memory and use of PCI bandwidth</li> </ul>
Mechanism available for reducing interrupts generated by transmit and receive operations	<ul style="list-style-type: none"> <li>Maximizes system performance and throughput</li> </ul>
Support for transmission and reception of packets up to 16 KBytes	<ul style="list-style-type: none"> <li>Enables jumbo frames</li> </ul>

## 2.3 PHY Specific Features

Features	Benefits
Integrated PHY for 10/100/1000 Mbps operation	<ul style="list-style-type: none"> <li>Smaller footprint and lower power dissipation compared to other multi-chip MAC and PHY solutions</li> </ul>
IEEE 802.3ab Auto-Negotiation support	<ul style="list-style-type: none"> <li>Automatic link configuration including speed, duplex, and flow control</li> </ul>
IEEE 802.3ab PHY compliance and compatibility	<ul style="list-style-type: none"> <li>Robust operation over the installed base of Category-5 (CAT-5) twisted pair cabling</li> </ul>
State-of-the-art DSP architecture implements digital adaptive equalization, echo cancellation, and cross-talk cancellation	<ul style="list-style-type: none"> <li>Robust performance in noisy environments</li> <li>Tolerance of common electrical signal impairments</li> </ul>
Automatic polarity detection	<ul style="list-style-type: none"> <li>Easier network installation and maintenance</li> </ul>
Automatic detection of cable lengths and MDI versus MDI-X cable at all speeds	<ul style="list-style-type: none"> <li>End-to-end wiring tolerance</li> </ul>
Two-pair and three-pair cable downshift	<ul style="list-style-type: none"> <li>Assures link under adverse cable configurations</li> </ul>

## 2.4 Host Offloading Features

Features	Benefits
Transmit and receive IP, TCP, and UDP checksum off-loading capabilities	<ul style="list-style-type: none"> <li>Lower CPU utilization</li> </ul>
Transmit TCP segmentation	<ul style="list-style-type: none"> <li>Increased throughput and lower CPU utilization</li> <li>Large send offload feature (in Microsoft* Windows* XP) compatible</li> </ul>
Advanced packet filtering	<ul style="list-style-type: none"> <li>16 exact matched packets (unicast or multicast) 4096-bit hash filter for multicast frames</li> <li>Promiscuous (unicast and multicast) transfer mode support</li> <li>Optional filtering of invalid frames</li> </ul>
IEEE 802.1q VLAN support with VLAN tag insertion, stripping and packet filtering for up to 4096 VLAN tags	<ul style="list-style-type: none"> <li>Ability to create multiple virtual LAN segments</li> </ul>
Descriptor ring management hardware for transmit and receive	<ul style="list-style-type: none"> <li>Optimized fetching and write-back mechanisms for efficient system memory and PCI bandwidth usage</li> </ul>
16 KByte jumbo frame support (9KB jumbo frame also supported)	<ul style="list-style-type: none"> <li>High throughput for large data transfers on networks supporting jumbo frames</li> </ul>
Intelligent interrupt generation (multiple packets per interrupt)	<ul style="list-style-type: none"> <li>Increased throughput by reducing interrupts generated by transmit and receive operations</li> </ul>

## 2.5 Manageability Features

Features	Benefits
Manageability features: <ul style="list-style-type: none"> <li>• SMB port</li> <li>• Alerting Standards Format 1.0 and 2.0</li> <li>• Advanced Power Management (Wake on LAN)</li> <li>• Advanced Configuration and Power Interface (ACPI)</li> </ul>	<ul style="list-style-type: none"> <li>• Network management flexibility</li> </ul>
On-board SMB port	<ul style="list-style-type: none"> <li>• Enables IPMI and ASF implementations</li> <li>• Allows packets routing to and from either LAN port and a server management processor</li> </ul>
Compliance with PCI Power Management 1.1 and ACPI 2.0 register set compliant including: <ul style="list-style-type: none"> <li>• D0 and D3 power states</li> <li>• Network Device Class Power Management Specification 1.1</li> <li>• PCI Specification 2.3</li> </ul>	<ul style="list-style-type: none"> <li>• PCI power management capability requirements for PC and embedded applications</li> </ul>
SNMP and RMON statistic counters	<ul style="list-style-type: none"> <li>• Easy system monitoring with industry standard consoles</li> </ul>
SDG 3.0, WfM 2.0, and PC2001 compliance	<ul style="list-style-type: none"> <li>• Remote network management capabilities through DMI 2.0 and SNMP software</li> </ul>
Wake on LAN support	<ul style="list-style-type: none"> <li>• Packet recognition and wake-up for NIC and LOM applications without software configuration</li> </ul>

## 2.6 Additional Device Features

Features	Benefits
Four activity and link indication outputs that directly drive LEDs	<ul style="list-style-type: none"> <li>• Link and activity indications (10, 100, and 1000 Mbps)</li> </ul>
Programmable LED functionality	<ul style="list-style-type: none"> <li>• Software definable function (speed, link, and activity) and blinking allowing flexible LED implementations</li> </ul>
Single-pin LAN Disable Function	<ul style="list-style-type: none"> <li>• Allows LAN Port enabling/disabling through BIOS control (OS not needed)</li> </ul>
Internal PLL for clock generation can use a 25 MHz crystal	<ul style="list-style-type: none"> <li>• Lower component count and system cost</li> </ul>
JTAG (IEEE 1149.1) Test Access Port built in silicon	<ul style="list-style-type: none"> <li>• Simplified testing using boundary scan</li> </ul>
On-chip power control circuitry	<ul style="list-style-type: none"> <li>• Reduced number of on-board power supply regulators</li> <li>• Simplified power supply design in less power-critical applications</li> </ul>
Four software definable pins	<ul style="list-style-type: none"> <li>• Additional flexibility for LEDs or other low speed I/O devices</li> </ul>
Supports both little and big endian byte ordering for both 32 and 64 bit systems	<ul style="list-style-type: none"> <li>• Portable across application architectures</li> </ul>
Provides loopback capabilities	<ul style="list-style-type: none"> <li>• Validates silicon integrity</li> </ul>

## 2.7 Technology Features

Features	Benefits
196-pin Ball Grid Array (BGA) package	<ul style="list-style-type: none"><li>15 mm x 15 mm component occupies same board space as earlier products capable up to 10/100 Mbps operation.</li></ul>
Pin compatible with 82551QM, 82540EM and 82540EP controllers	<ul style="list-style-type: none"><li>Enables 10/100 Mbps Fast Ethernet or 1000 Mbps Gigabit Ethernet implementations on the same board with only minor stuffing option changes</li></ul>
Implemented in 0.13 $\mu$ CMOS process	<ul style="list-style-type: none"><li>Offers lowest geometry to minimize power and size while maintaining Intel quality reliability standards</li></ul>
0° C to 70° C (maximum) operating ambient temperature Heat sink or forced airflow not required	<ul style="list-style-type: none"><li>Simple thermal design</li></ul>
Typical targeted silicon power dissipation: <ul style="list-style-type: none"><li>1.1 W @ D0 1000 Mbps</li><li>300 mW @ D3 100 Mbps (wake up enabled)</li><li>25 mW @ D3 wakeup disabled</li></ul>	<ul style="list-style-type: none"><li>Minimize impact of power requirements for mobile, desktop and workstation applications</li></ul>

## 3.0 Signal Descriptions

### 3.1 Signal Type Definitions

The signals of the 82541PI/GI/EI controller are electrically defined as follows:

Name	Definition
I	<b>Input.</b> Standard input only digital signal.
O	<b>Output.</b> Standard output only digital signal.
TS	<b>Tri-state.</b> Bi-directional tri-state digital input/output signal.
STS	<b>Sustained Tri-state.</b> An active low tri-state signal owned and driven by only one agent at a time. The agent that drives an STS pin low must drive it high for at least one clock before letting it float. A new agent cannot start driving an STS signal any sooner than one clock after the previous owner tri-states it. A pullup is required to sustain the inactive state until another agent drives it, and must be provided by the central resource.
OD	<b>Open Drain.</b> Wired-OR with other agents. The signaling agent asserts the OD signal, but the signal is returned to the inactive state by a weak pull-up resistor. The pull-up resistor may require two or three clock periods to fully restore the signal to the de-asserted state.
A	<b>Analog.</b> PHY analog data signal.
P	<b>Power.</b> Power connection, voltage reference, or other reference connection.

### 3.2 PCI Bus Interface Signals (56)

When the Reset signal (RST#) is asserted, the 82541PI/GI/EI will not drive any PCI output or bi-directional pins. The Power Management Event signal (PME#) can be active by configuring manageability functions.

### 3.2.1 PCI Address, Data and Control Signals (44)

Symbol	Type	Name and Function
AD[31:0]	TS	<p><b>Address and Data.</b> Address and data signals are multiplexed on the same PCI pins. A bus transaction includes an address phase followed by one or more data phases.</p> <p>The address phase is the clock cycle when the Frame signal (FRAME#) is asserted low. During the address phase AD[31:0] contain a physical address (32 bits). For I/O, this is a byte address, and for configuration and memory, a DWORD address. The 82541PI/GI/EI device uses little endian byte ordering.</p> <p>During data phases, AD[7:0] contain the least significant byte (LSB) and AD[31:24] contain the most significant byte (MSB).</p>
CBE[3:0]#	TS	<p><b>Bus Command and Byte Enables.</b> Bus command and byte enable signals are multiplexed on the same PCI pins. During the address phase of a transaction, CBE[3:0]# define the bus command. In the data phase, CBE[3:0]# are used as byte enables. The byte enables are valid for the entire data phase and determine which byte lanes contain meaningful data.</p> <p>CBE0# applies to byte 0 (LSB) and CBE3# applies to byte 3 (MSB).</p>
PAR	TS	<p><b>Parity.</b> The Parity signal is issued to implement even parity across AD[31:0] and CBE[3:0]#. PAR is stable and valid one clock after the address phase. During data phases, PAR is stable and valid one clock after either IRDY# is asserted on a write transaction or TRDY# is asserted after a read transaction. Once PAR is valid, it remains valid until one clock after the completion of the current data phase.</p> <p>When the 82541PI/GI/EI controller is a bus master, it drives PAR for address and write data phases, and as a slave device, drives PAR for read data phases.</p>
FRAME#	STS	<p><b>Cycle Frame.</b> The Frame signal is driven by the 82541PI/GI/EI device to indicate the beginning and length of a bus transaction.</p> <p>While FRAME# is asserted, data transfers continue. FRAME# is de-asserted when the transaction is in the final data phase.</p>
IRDY#	STS	<p><b>Initiator Ready.</b> Initiator Ready indicates the ability of the 82541PI/GI/EI controller (as a bus master device) to complete the current data phase of the transaction. IRDY# is used in conjunction with the Target Ready signal (TRDY#). The data phase is completed on any clock when both IRDY# and TRDY# are asserted.</p> <p>During the write cycle, IRDY# indicates that valid data is present on AD[31:0]. For a read cycle, it indicates the master is ready to accept data. Wait cycles are inserted until both IRDY# and TRDY# are asserted together. The 82541PI/GI/EI controller drives IRDY# when acting as a master and samples it when acting as a slave.</p>
TRDY#	STS	<p><b>Target Ready.</b> The Target Ready signal indicates the ability of the 82541PI/GI/EI controller (as a selected device) to complete the current data phase of the transaction. TRDY# is used in conjunction with the Initiator Ready signal (IRDY#). A data phase is completed on any clock when both TRDY# and IRDY# are sampled asserted.</p> <p>During a read cycle, TRDY# indicates that valid data is present on AD[31:0]. For a write cycle, it indicates the target is ready to accept data. Wait cycles are inserted until both IRDY# and TRDY# are asserted together. The 82541PI/GI/EI device drives TRDY# when acting as a slave and samples it when acting as a master.</p>
STOP#	STS	<p><b>Stop.</b> The Stop signal indicates the current target is requesting the master to stop the current transaction. As a slave, the 82541PI/GI/EI controller drives STOP# to request the bus master to stop the transaction. As a master, the 82541PI/GI/EI controller receives STOP# from the slave to stop the current transaction.</p>

Symbol	Type	Name and Function
IDSEL#	I	<b>Initialization Device Select.</b> The Initialization Device Select signal is used by the 82541PI/GI/EI as a chip select signal during configuration read and write transactions.
DEVSEL#	STS	<b>Device Select.</b> When the Device Select signal is actively driven by the 82541PI/GI/EI, it signals notifies the bus master that it has decoded its address as the target of the current access. As an input, DEVSEL# indicates whether any device on the bus has been selected.
VIO	P	<b>VIO.</b> The VIO signal is a voltage reference for the PCI interface (3.3 V or 5 V PCI signaling environment). It is used as the clamping voltage. <b>Note:</b> VIO should be connected to 3.3V Aux or 5V Aux in order to be compatible with the PullUp clamps spec.

### 3.2.2 Arbitration Signals (2)

Symbol	Type	Name and Function
REQ#	TS	<b>Request Bus.</b> The Request Bus signal is used to request control of the bus from the arbiter. This signal is point-to-point.
GNT#	I	<b>Grant Bus.</b> The Grant Bus signal notifies the 82541PI/GI/EI that bus access has been granted. This is a point-to-point signal.

### 3.2.3 Interrupt Signal (1)

Symbol	Type	Name and Function
INTA#	TS	<b>Interrupt A.</b> Interrupt A is used to request an interrupt of the 82541PI/GI/EI. It is an active low, level-triggered interrupt signal.

### 3.2.4 System Signals (4)

Symbol	Type	Name and Function
CLK	I	<b>PCI Clock.</b> The PCI Clock signal provides timing for all transactions on the PCI bus and is an input to the 82541PI/GI/EI device. All other PCI signals, except the Interrupt A (INTA#) and PCI Reset signal (RST#), are sampled on the rising edge of CLK. All other timing parameters are defined with respect to this edge.
M66EN	I	<b>66 MHz Enable.</b> M66EN indicates whether the system bus is enabled for 66MHz
RST#	I	<b>PCI Reset.</b> When the PCI Reset signal is asserted, all PCI output signals, except the Power Management Event signal (PME#), are floated and all input signals are ignored. The PME# context is preserved, depending on power management settings. Most of the internal state of the 82541PI/GI/EI is reset on the de-assertion (rising edge) of RST#.
CLKRUN#	I/O OD	<b>Clock Run..</b> This signal is used by the system to pause the PCI clock signal. It is used by the 82541PI/GI/EI controller to request the PCI clock. When the CLKRUN# feature is disabled, leave this pin unconnected.

### 3.2.5 Error Reporting Signals (2)

Symbol	Type	Name and Function
SERR#	OD	<b>System Error.</b> The System Error signal is used by the 82541PI/GI/EI controller to report address parity errors. SERR# is open drain and is actively driven for a single PCI clock when reporting the error.
PERR#	STS	<b>Parity Error.</b> The Parity Error signal is used by the 82541PI/GI/EI controller to report data parity errors during all PCI transactions except by a Special Cycle. PERR# is sustained tri-state and must be driven active by the 82541PI/GI/EI controller two data clocks after a data parity error is detected. The minimum duration of PERR# is one clock for each data phase a data parity error is present.

### 3.2.6 Power Management Signals (3)

Symbol	Type	Name and Function
LAN_PWRGD	I	<b>Power Good (Power-on Reset).</b> The Power Good signal is used to indicate that stable power is available for the 82541PI/GI/EI. When the signal is low, the 82541PI/GI/EI holds itself in reset state and floats all PCI signals.
PME#	OD	<b>Power Management Event.</b> The 82541PI/GI/EI device drives this signal low when it receives a wake-up event and either the PME Enable bit in the Power Management Control/Status Register or the Advanced Power Management Enable (APME) bit of the Wake-up Control Register (WUC) is 1b.
AUXPWR	I	<b>Auxiliary Power.</b> If the Auxiliary Power signal is high, then auxiliary power is available and the 82541PI/GI/EI device should support the D3cold power state.

### 3.2.7 SMB Signals (3)

Symbol	Type	Name and Function
SMBCLK	TS OD	<b>SMB Clock.</b> The SMB Clock signal is an open drain signal for serial SMB interface.
SMBDATA	TS OD	<b>SMB Data.</b> The SMB Data signal is an open drain signal for serial SMB interface.
SMBALRT# /PCI_PWR GOOD	TS OD	<b>Multiplexed pin: SMB Alert, PWRGOOD.</b> The SMB Alert signal is open drain for serial SMB interface. The signal acts as an interrupt pin of a slave device on the SMBUS in TCO mode. (82559 mode). In ASF mode, this signal acts as PWRGOOD input.

**Note:** If the SMB is disconnected, then an external pullup should be used for these pins.

### 3.3 EEPROM and Serial FLASH Interface Signals (9)

Symbol	Type	Name and Function
EE_MODE	I	<b>EEPROM Mode.</b> The EEPROM Mode pin is used to select the interface and source of the EEPROM used to initialize the device. For a Microwire* EEPROM on the standard EEPROM pins, tie this pin to ground with a 1 K $\Omega$ pull-down resistor (for the 82541PI, use a 100 $\Omega$ pull-down resistor instead). For an Serial Peripheral Interface (SPI*) EEPROM attached to the Flash memory pins, leave this pin unconnected.
EE_DI	O	<b>EEPROM Data Input.</b> The EEPROM Data Input pin is used for output to the memory device.
EE_DO	I	<b>EEPROM Data Output.</b> The EEPROM Data Output pin is used for input from the memory device. The EE_DO includes an internal pull-up resistor.
EE_CS	O	<b>EEPROM Chip Select.</b> The EEPROM Chip Select signal is used to enable the device.
EE_SK	O	<b>EEPROM Serial Clock.</b> The EEPROM Shift Clock provides the clock rate for the EEPROM interface, which is approximately 1 MHz for Microwire* and 2MHZ for SPI.
FLSH_CE#	O	<b>FLASH Chip Enable Output.</b> Used to enable FLASH device.
FLSH_SCK	O	<b>FLASH Serial Clock Output.</b> The clock rate of the serial FLASH interface is approximately 1 MHz.
FLSH_SI	O	<b>FLASH Serial Data Input.</b> This pin is an output to the memory device.
FLSH_SO/ LAN_DISABLE#	I	<b>FLASH Serial Data Output / LAN Disable.</b> This pin is an input from the FLASH memory. Alternatively, the pin can be used to disable the LAN port from a system GP (General Purpose) port. It has an internal pullup device. If the 82541PI/GI/EI is not using Flash functionality, the pin should be connected to external pull-up resistor.  If this pin is used as LAN_DISABLE#, the device goes to low power state and the LAN port is disabled when the pin is sampled low on rising edge of PCI reset.

### 3.4 Miscellaneous Signals

#### 3.4.1 LED Signals (4)

Symbol	Type	Name and Function
LED0 / LINKUP#	O	<b>LED0 / LINK Up.</b> Programmable LED indication. Defaults to indicate link connectivity.
LED1 / ACT#	O	<b>LED1 / Activity.</b> Programmable LED indication. Defaults to flash to indicate transmit or receive activity.
LED2 / LINK100#	O	<b>LED2 / LINK 100.</b> Programmable LED indication. Defaults to indicate link at 100 Mbps.
LED3 / LINK1000#	O	<b>LED3 / LINK 1000.</b> Programmable LED indication. Defaults to indicate link at 1000 Mbps.

### 3.4.2 Other Signals (4)

Symbol	Type	Name and Function
SDP[3:0]	TS	<b>Software Defined Pin.</b> The Software Defined Pins are reserved and programmable with respect to input and output capability. These default to input signals upon power-up but may be configured differently by the EEPROM. The upper two bits may be mapped to the General Purpose Interrupt bits if they are configured as input signals.

## 3.5 PHY Signals

### 3.5.1 Crystal Signals (2)

Symbol	Type	Name and Function
XTAL1	I	<b>Crystal One.</b> The Crystal One pin is a 25 MHz +/- 30 ppm input signal. It should be connected to a crystal, and the other end of the crystal should be connected to XTAL2.
XTAL2	O	<b>Crystal Two.</b> Crystal Two is the output of an internal oscillator circuit used to drive a crystal into oscillation.

**Note:** The 82541 clock input circuit is optimized for use with an external crystal. However, an oscillator may also be used in place of the crystal with the proper design considerations. The 82540EP/82541 Family & 82562EZ(EX) Dual Footprint Design Guide (AP-444) should be consulted for further details.

### 3.5.2 Analog Signals (10)

Symbol	Type	Name and Function
MDI[0]+/-	A	<b>Media Dependent Interface [0].</b> <b>1000BASE-T:</b> In MDI configuration, MDI[0]+/- corresponds to BI_DA+/-, and in MDI-X configuration, MDI[0]+/- corresponds to BI_DB+/-. <b>100BASE_TX:</b> In MDI configuration, MDI[0]+/- is used for the transmit pair, and in MDI-X configuration, MDI[0]+/- is used for the receive pair. <b>10BASE-T:</b> In MDI configuration, MDI[0]+/- is used for the transmit pair, and in MDI-X configuration, MDI[0]+/- is used for the receive pair.
MDI[1]+/-	A	<b>Media Dependent Interface [1].</b> <b>1000BASE-T:</b> In MDI configuration, MDI[1]+/- corresponds to BI_DB+/-, and in MDI-X configuration, MDI[1]+/- corresponds to BI_DA+/-. <b>100BASE_TX:</b> In MDI configuration, MDI[1]+/- is used for the receive pair, and in MDI-X configuration, MDI[1]+/- is used for the transmit pair. <b>10BASE-T:</b> In MDI configuration, MDI[1]+/- is used for the receive pair, and in MDI-X configuration, MDI[1]+/- is used for the transmit pair.
MDI[2]+/-	A	<b>Media Dependent Interface [2].</b> <b>1000BASE-T:</b> In MDI configuration, MDI[2]+/- corresponds to BI_DC+/-, and in MDI-X configuration, MDI[2]+/- corresponds to BI_DD+/-. <b>100BASE_TX:</b> Unused. <b>10BASE-T:</b> Unused.

MDI[3]+/-	A	<b>Media Dependent Interface [3].</b> <b>1000BASE-T:</b> In MDI configuration, MDI[3]+/- corresponds to BI_DC+/-, and in MDI-X configuration, MDI[3]+/- corresponds to BI_DD+/-. <b>100BASE_TX:</b> Unused. <b>10BASE-T:</b> Unused.
IEEE_TEST-	A	<b>IEEE test pin output minus.</b> Used to gain access to the internal PHY clock for 1000BASE-T IEEE physical layer conformance testing.
IEEE_TEST+	A	<b>Analog test pin output plus.</b> Used to gain access to the internal PHY clock for 1000BASE-T IEEE physical layer conformance testing.

## 3.6 Test Interface Signals (6)

Symbol	Type	Name and Function
TEST	I	<b>Test Enable.</b> Enables test mode. Normal mode: connect to VSS.
JTAG_TCK	I	<b>JTAG Test Access Port Clock.</b>
JTAG_TDI	I	<b>JTAG Test Access Port Data In.</b>
JTAG_TDO	O	<b>JTAG Test Access Port Data Out.</b>
JTAG_TMS	I	<b>JTAG Test Access Port Mode Select.</b>
JTAG_TRST#	I	<b>JTAG Test Access Port Reset.</b> This is an active low reset signal for JTAG. To disable the JTAG interface, this signal should be terminated using pull-down resistor (1 K $\Omega$ for the 82541EI(GI) and 100 $\Omega$ for the 82541PI) to ground. It must not be left unconnected.

## 3.7 Power Supply Connections

### 3.7.1 Digital and Analog Supplies

Symbol	Type	Name and Function
3.3V	P	<b>3.3V I/O Power Supply.</b>
Analog_1.8V	P	<b>1.8V Analog Power Supply.</b>
CLKR_1.8V	P	<b>1.8V analog power supply for the clock recovery.</b>
XTAL_1.8V	P	<b>Input power for the XTAL regulator.</b>
1.2V	P	<b>1.2V Power supply.</b> For analog and digital circuits.
Analog_1.2V	P	<b>1.2V Analog Power Supply.</b>
PLL_1.2V	P	<b>Input power for the ICS regulator.</b>

### 3.7.2 Grounds, Reserved Pins and No Connects

Symbol	Type	Name and Function
VSS	P	<b>Ground.</b>
AVSS	P	<b>Shared analog Ground.</b>
RSVD_VSS	P	<b>Reserved Ground.</b> This pin is reserved by Intel and may have factory test functions. For normal operation, connect to ground.
RSVD_NC	P	<b>Reserved No connect.</b> This pin is reserved by Intel and may have factory test functions. For normal operation, do not connect any circuit to these pins. Do not connect pull-up or pull-down resistors.
NC	P	<b>No Connect.</b> This pin is not connected internally.

### 3.7.3 Voltage Regulation Control Signals (2)

Symbol	Type	Name and Function
CTRL_12	A	<b>1.2V Control.</b> LDO voltage regulator output to drive external PNP pass transistor. If 1.2V is already present in the system, leave output unconnected. To achieve optimal D3 power consumption, leave the output unconnected and use a high-efficiency external regulator.
CTRL_18	A	<b>1.8V Control.</b> LDO voltage regulator output to drive external PNP pass transistor. If 1.8V is already present in the system, leave output unconnected. To achieve optimal D3 power consumption, leave the output unconnected and use a high-efficiency external regulator.

## 4.0 Voltage, Temperature, and Timing Specifications

### 4.1 Absolute Maximum Ratings

Table 1. Absolute Maximum Ratings<sup>a</sup>

Symbol	Parameter	Min	Max	Unit
VDD (3.3)	DC supply voltage on 3.3 V pins with respect to VSS	VSS - 0.5	4.6	V
VDD (1.8)	DC supply voltage on 1.8 V pins with respect to VSS	VSS - 0.5	2.5 or VDD(1.8) + 0.5 <sup>b</sup>	V
VDD (1.2)	DC supply voltage on 1.2 V pins with respect to VSS	VSS - 0.5	1.7 or VDD(1.2) + 0.5 <sup>c</sup>	V
VDD	DC supply voltage	VSS - 0.5	4.6	V
VI / VO	Input voltage	VSS - 0.5	4.6 <sup>d</sup>	V
IO	Output current		40	mA
TSTG	Storage temperature range	-40	125	°C
	ESD per MIL-STD-883 Test Method 3015, Specification 2001V Latchup Over/Undershoot: 150 mA, 125 C		VDD overstress: VDD(3.3) * (7.2 V)	V

- a. Maximum ratings are referenced to ground (VSS). Permanent device damage is likely to occur if the ratings in this table are exceeded. These values should not be used as the limits for normal device operations.
- b. The maximum value is the lesser value of 2.5 V or VDD(2.5) + 0.5 V. This specification applies to biasing the device to a steady state for an indefinite duration.
- c. The maximum value is the lesser value of 1.7 V or VDD(2.5) + 0.5 V.
- d. The maximum value must also be less than VIO.

### 4.2 Targeted Recommended Operating Conditions

#### 4.2.1 General Operating Conditions

Table 2. Recommended Operating Conditions (Sheet 1 of 2)<sup>a</sup>

Symbol	Parameter	Min	Max	Unit
VDD (3.3)	DC supply voltage on 3.3 V pins	3.0	3.6	V
VDD (1.8)	DC supply voltage on 1.8 V pins <sup>b</sup>	1.71 <sup>c</sup>	1.89	V
VDD (1.2)	DC supply voltage on 1.2 V pins	1.14 <sup>d</sup>	1.26	V
VIO	PCI bus reference voltage	3.0	5.25	V
tR / tF	Input rise/fall time (normal input)	0	200	ns

**Table 2. Recommended Operating Conditions (Sheet 2 of 2)<sup>a</sup>**

Symbol	Parameter	Min	Max	Unit
tr/ff	input rise/fall time (Schmitt input)	0	10	ms
T <sub>A</sub>	Operating temperature range (ambient)	0	70	°C
T <sub>J</sub>	Junction temperature		≤125	°C

- a. Sustained operation of the device at conditions exceeding these values, even if they are within the absolute maximum rating limits, might result in permanent damage.
- b. It is recommended for 3.3 V pins to be of a value greater than 1.8 V pins, with a value greater than 1.2 V pins, during power-up (3.3 V pins > 1.8 V pins > 1.2 V pins). However, voltage sequencing is not a strict requirement if the power supply ramp is faster than approximately 20 ms.
- c. The value listed in this table is for external voltage regulation. If the internal voltage regulator is used, the minimum value is 1.67 V.
- d. The value listed in this table is for external voltage regulation. If the internal voltage regulator is used, the minimum value is 1.12 V.

## 4.2.2 Voltage Ramp and Sequencing Recommendations

**Table 3. 3.3V Supply Voltage Ramp**

Parameter	Description	Min	Max	Unit
Rise Time	Time from 10% to 90% mark	0.1	100 <sup>a</sup>	ms
Monotonicity	Voltage dip allowed in ramp		0	mV
Slope	Ramp rate at any time between 10% to 90%		28800	V/s
Operational Range	Voltage range for normal operating conditions	3	3.6	V
Ripple	Maximum voltage ripple at a bandwidth equal to 50 MHz		70	mV
Overshoot	Maximum voltage allowed		4	V

- a. Good design practices achieve voltage ramps to within the regulation bands in approximately 20 ms or less.

**Table 4. 1.8V Supply Voltage Ramp**

Symbol	Parameter	Min	Max	Unit
Rise Time	Time from 10% to 90% mark	0.1	100 <sup>a</sup>	ms
Monotonicity	Voltage dip allowed in ramp		0	mV
Slope	Ramp rate at any time between 10% to 90%		57600	V/s
Operational Range	Voltage range for normal operating conditions	1.71	1.89	V
Ripple	Maximum voltage ripple at frequency below 1 MHz		280	mV <sub>pk-to-pk</sub>
Ripple	Minimum voltage ripple at frequency below 1 MHz	1.55		V
Overshoot	Maximum voltage allowed		2.2	V
Output Capacitance	Capacitance range when using PNP circuit	4.7	20	μF

**Table 4. 1.8V Supply Voltage Ramp**

Input Capacitance	Capacitance range when using PNP circuit	4.7	20	μF
Capacitance ESR	Equivalent series resistance of output capacitance <sup>b</sup>	5	100	mΩ
Ictrl_18	Maximum output current rating to CTRL_18		20	mA

- a. Good design practices achieve voltage ramps to within the regulation bands in approximately 20ms or less.  
b. Tantalum capacitors must not be used.

**Table 5. 1.2V Supply Voltage Ramp**

Symbol	Parameter	Min	Max	Unit
Rise Time	Time from 10% to 90% mark	0.025		ms
Monotonicity	Voltage dip allowed in ramp		0	mV
Slope	Ramp rate at any time between 10% to 90%		38400	V/s
Operational Range	Voltage range for normal operating conditions	1.14	1.26	V
Ripple	Maximum voltage ripple at frequency below 1 MHz		180	mV <sub>pk-to-pk</sub>
Ripple	Maximum voltage ripple at frequency below 1 MHz	1		V
Overshoot	Maximum voltage allowed		1.45	V
Output Capacitance	Capacitance range when using PNP circuit	4.7	20	μF
Input Capacitance	Capacitance range when using PNP circuit	4.7	20	μF
Capacitance ESR	Equivalent series resistance of output capacitance <sup>a</sup>	5	100	mΩ
Ictrl_12	Maximum output current rating to CTRL_12		20	mA

- a. Tantalum capacitors must not be used.

**Note:** In any case or time period (greater than 1 ns), the supply voltage should comply with 3.3V > 1.8V > 1.2V. This is important to avoid stress in the ESD protection circuits. After 3.3V reaches 10% of its final value, all voltage rails (1.8V and 1.2V) have 150 ms to reach their final operating values.

## 4.3 DC Specifications

**Table 6. DC Characteristics**

Symbol	Parameter	Condition	Min	Typ	Max	Units
VDD (3.3)	DC supply voltage on 3.3 V pins		3.00	3.3	3.60	V
VDD (1.8)	DC supply voltage on 1.8 V pins		1.71 <sup>a</sup>	1.8	1.89	V
VDD (1.2)	DC supply voltage on 1.2 V pins		1.14 <sup>b</sup>	1.2	1.26	V

- a. The value listed in this table is for external voltage regulation. If the internal voltage regulator is used, the minimum value is 1.67 V.  
b. The value listed in this table is for external voltage regulation. If the internal voltage regulator is used, the minimum value is 1.12 V.

**Table 7. Power Specifications - D0a**

	D0a							
	unplugged no link		@10 Mbps		@100 Mbps		@ 1000 Mbps	
	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>
<b>3.3V</b>	3 mA	5 mA	5 mA	10 mA	13 mA	15 mA	30 mA	40 mA
<b>1.8V</b>	14 mA	15 mA	85 mA	85 mA	110 mA	115 mA	315 mA	320 mA
<b>1.2V</b>	30 mA	35 mA	85 mA	90 mA	90 mA	100 mA	380 mA	400 mA
<b>Total Device Power</b>	75 mW	85 mW	270 mW	295 mW	350 mW	380 mW	1.1 W	1.2 W

- a. Typical conditions: operating temperature ( $T_A$ ) = 25 C, nominal voltages, moderate network traffic at full duplex, and PCI 33 MHz system interface.  
b. Maximum conditions: minimum operating temperature ( $T_A$ ) values, maximum voltage values, continuous network traffic at full duplex, and PCI 33 MHz system interface.

**Table 8. Power Specifications - D3cold**

	D3cold - wake-up enabled <sup>a</sup>						D3cold-wake disabled	
	unplugged link		@10 Mbps		@100 Mbps			
	Typ lcc (mA) <sup>b</sup>	Max lcc (mA) <sup>c</sup>	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>	Typ lcc (mA) <sup>a</sup>	Max lcc (mA) <sup>b</sup>
3.3V	2 mA	3 mA	2 mA	3 mA	2 mA	3 mA	4 mA	5 mA
1.8V	14 mA	15 mA	20 mA	25 mA	110 mA	115 mA	1 mA	2 mA
1.2V	21 mA	25 mA	30 mA	35 mA	80 mA	85 mA	7 mA	10 mA
Total Device Power	60 mW	70 mW	80 mW	100 mW	300 mW	320 mW	25 mW	35 mW

- a. At 1000 Mbps, power consumption is not shown since the controller switches to the 10/100 Mbps state before entering D3 to conserve power.  
b. Typical conditions: operating temperature ( $T_A$ ) = 25 C, nominal voltages, moderate network traffic at full duplex, and PCI 33 MHz system interface.  
c. Maximum conditions: minimum operating temperature ( $T_A$ ) values, maximum voltage values, continuous network traffic at full duplex, and PCI 33 MHz system interface.

Table 9. Power Specifications D(r) Uninitialized

	D(r) Uninitialized (FLSH_SO/LAN_DISABLE# = 0)	
	Typ Icc (mA)	Max Icc (mA)
3.3V	5 mA	10 mA
1.8V	1 mA	2 mA
1.2V	12 mA	15 mA
Total Device Power	35 mW	

Table 10. Power Specifications - Complete Subsystem

	Complete Subsystem (Reference Design) Including Magnetics, LED, Regulator Circuits											
	D3cold - wake disabled		D3cold wake-enabled @ 10 Mbps		D3cold wake-up enabled @ 100 Mbps		D0 @ 10 Mbps active		D0 @ 100 Mbps active		D0 @ 1000 Mbps active	
	Typ Icc (mA) <sup>a</sup>	Max Icc (mA) <sup>b</sup>	Typ Icc (mA) <sup>a</sup>	Max Icc (mA) <sup>b</sup>	Typ Icc (mA) <sup>a</sup>	Max Icc (mA) <sup>b</sup>	Typ Icc (mA) <sup>a</sup>	Max Icc (mA) <sup>b</sup>	Typ Icc (mA) <sup>a</sup>	Max Icc (mA) <sup>b</sup>	Typ Icc (mA) <sup>a</sup>	Max Icc (mA) <sup>b</sup>
3.3 V	4	5	2	3	6	7	7	12	19	21	36	46
1.8 V	1	2	20	25	110	115	85	85	110	115	315	320
1.2 V	7	10	30	35	80	85	85	90	90	100	380	400
Sub-system Power	40 mW	60 mW	175 mW	210 mW	650 mW	685 mW	585 mW	620 mW	725 mW	780 mW	2.4 W	2.5 W

a. Typical conditions: operating temperature ( $T_A$ ) = 25 C, nominal voltages, moderate network traffic at full duplex, and PCI 33 MHz system interface.

b. Maximum conditions: minimum operating temperature ( $T_A$ ) values, maximum voltage values, continuous network traffic at full duplex, and PCI 33 MHz system interface.

Table 11. I/O Characteristics (Sheet 1 of 2)

Symbol	Parameter	Condition	Min	Typ	Max	Units
VIH	Input high voltage	3.3 V PCI	0.5 * VDD(3.3)		VDD(3.3) or VIO	V
		SMB	2.1		VDD(3.3) or VIO	
VIL	Input low voltage	Non-SMB <sup>a</sup>	VSS		0.3 * VDD(3.3)	V
		SMB	VSS		0.8	

Table 11. I/O Characteristics (Sheet 2 of 2) (Continued)

Symbol	Parameter	Condition	Min	Typ	Max	Units
IIN	Input current	$0 < V_{IN} < V_{DD}(3.3)$	-10		10	$\mu A$
	Input with pull-down resistor (50 K $\Omega$ )	$V_{IN} = V_{DD}(3.3)$	28		191	
	Inputs with pull-up resistor (50 K $\Omega$ )	$V_{IN} = V_{SS}$	-28		-191	
IOL	Output low current	3.3 V PCI <sup>b</sup>			2.09	mA
		$0 \leq V_{OUT} \leq 3.6V$			$100 * V_{OUT}$	
		$0 \leq V_{OUT} \leq 1.3V$	$48 * V_{OUT}$			
		$1.3V \leq V_{OUT} \leq 3.6V$	$5.7 * V_{OUT} + 55$			
IOH	Output high current:	$0 \leq (V_{DD} - V_{OUT}) \leq 3.6V$			$-74 * (V_{DD} - V_{OUT})$	mA
		$0 \leq (V_{DD} - V_{OUT}) \leq 1.2V$	$-32 * (V_{DD} - V_{OUT})$			
		$1.2V \leq (V_{DD} - V_{OUT}) \leq 1.9V$	$-11 * (V_{DD} - V_{OUT}) - 25.2$			
		$1.9V \leq (V_{DD} - V_{OUT}) \leq 3.6V$	$-1.8 * (V_{DD} - V_{OUT}) - 42.7$			
VOH	Output high voltage: 3.3 V PCI	IOH = -500 mA	$0.9 * V_{DD}(3.3)$			V
VOL	Output low voltage: 3.3 V PCI	IOL = 1500 mA			$0.1 * V_{DD}(3.3)$	V
IOZ	Off-state output leakage current	VO = VDD or VSS	-10		10	$\mu A$
IOS	Output short circuit current				-250	
CIN	Input capacitance <sup>c</sup>	Input and bi-directional buffers		8		pF

a. This is only applicable to the 82541PI. The maximum VIL is 0.6 V for the following pins: A13, C5, C8, J4, L7, L13, L12, M8, M12, M13, N10, N11, N13, N14, P9, and P13.

b. This is only applicable to the 82541PI.

c.  $V_{DD}(3.3) = 0 V$ ;  $T_A = 25^\circ C$ ;  $f = 1 MHz$

## 4.4 AC Characteristics

Table 12. AC Characteristics: 3.3 V Interfacing

Symbol	Parameter	Min	Typ	Max	Unit
PCICLK	Clock frequency in PCI mode			66	MHz

**Table 13. 25 MHz Clock Input Requirements**

Symbol	Parameter	Specifications			Units
		Min	Typ	Max	
f0	Frequency		25		MHz
df0	Frequency variation	-50		+50	ppm
Dc	Duty cycle	40		60	%
tr	Rise time			5	ns
tf	Fall time			5	ns
Jptp	Clock jitter (peak-to-peak) <sup>a</sup>			250	ps
Cin	Input capacitance		20		pF
T	Operating temperature			70	° C
Aptp	Input clock amplitude (peak-to-peak)	1.0	1.2	1.3	V
Vcm	Clock common mode		0.6		V

a. Clock jitter is defined according to the recommendations of part 40.6.1.2.5 IEEE 1000BASE-T Standard (at least  $10^5$  clock edges, filtered by HPF with cut off frequency 5000 Hz).

**Table 14. Reference Crystal Specification Requirements**

Specification	Value
Vibrational Mode	Fundamental
Nominal Frequency	25.000 MHz at 25° C
Frequency Tolerance	±30 ppm
Temperature Stability	±30 ppm at 0° C to 70° C
Calibration Mode	Parallel
Load Capacitance	20 pF to 24 pF
Shunt Capacitance	6 pF maximum
Series Resistance, Rs	50 W maximum
Drive Level	0.5 mW maximum
Aging	±5.0 ppm per year maximum
Insulation Resistance	500 MΩ at DC 100 V

**Table 15. Link Interface Clock Requirements**

Symbol	Parameter	Min	Typ	Max	Unit
fGTX <sup>a</sup>	GTX_CLK frequency		125		MHz

a. GTX\_CLK is used externally for test purposes only.

Table 16. EEPROM Interface Clock Requirements

Symbol	Parameter	Min	Typ	Max	Unit
fSK	Microwire EEPROM Clock			1	MHz
	SPI EEPROM Clock			2	MHz

Table 17. AC Test Loads for General Output Pins

Symbol	Signal Name	Value	Units
CL	TDO	10	pF
CL	PME#, SDP[3:0]	16	pF
CL	EE_DI, EE_SK	18	pF
CL	LED[3:0]	20	pF




Figure 1. AC Test Loads for General Output Pins

## 4.5 Timing Specifications


### 4.5.1 PCI Bus Interface

#### 4.5.1.1 PCI Bus Interface Clock

Table 18. PCI Bus Interface Clock Parameters

Symbol	Parameter <sup>a</sup>	PCI 66 MHz		PCI 33 MHz		Units
		Min	Max	Min	Max	
TCYC	CLK cycle time	15	30	30		ns
TH	CLK high time	6		11		ns
TL	CLK low time	6		11		ns
	CLK slew rate	1.5	4	1	4	V/ns
	RST# slew rate <sup>b</sup>	50		50		mV/ns

- a. Rise and fall times are specified in terms of the edge rate measured in V/ns. This slew rate must be met across the minimum peak-to-peak portion of the clock waveform as shown.
- b. The minimum RST# slew rate applies only to the rising (de-assertion) edge of the reset signal and ensures that system noise cannot render a monotonic signal to appear bouncing in the switching range.

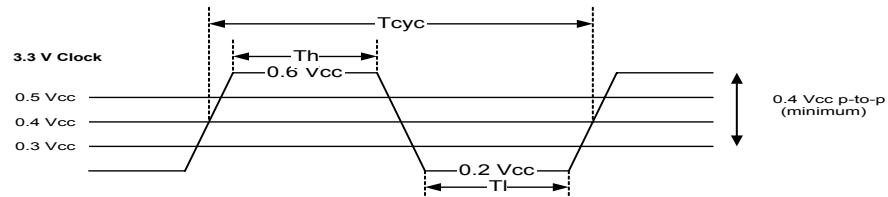

**Figure 1. PCI Timing Clock**


### 4.5.1.2 PCI Bus Interface Timing

**Table 19. PCI Bus Interface Timing Parameters**


Symbol	Parameter	PCI 66MHz		PCI 33 MHz		Units
		Min	Max	Min	Max	
TVAL	CLK to signal valid delay: bussed signals	2	6	2	11	ns
TVAL(ptp)	CLK to signal valid delay: point-to-point signals	2	6	2	12	ns
TON	Float to active delay	2		2		ns
TOFF	Active to float delay		14		28	ns
TSU	Input setup time to CLK: bussed signals	3		7		ns
TSU(ptp)	Input setup time to CLK: point-to-point signals	5		10, 12		ns
TH	Input hold time from CLK	0		0		ns

**NOTES:**

1. Output timing measurements are as shown.
2. REQ# and GNT# signals are point-to-point and have different output valid delay and input setup times than bussed signals. GNT# has a setup of 10 ns; REQ# has a setup of 12 ns. All other signals are bussed.
3. Input timing measurements are as shown.

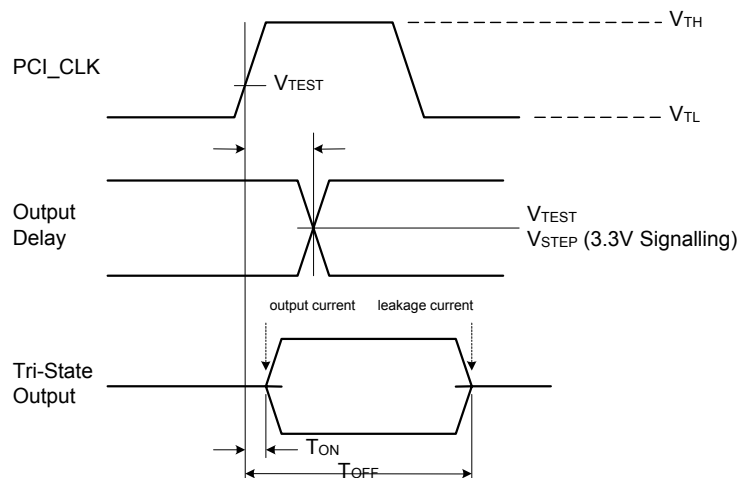

**Figure 2. PCI Bus Interface Output Timing Measurement**

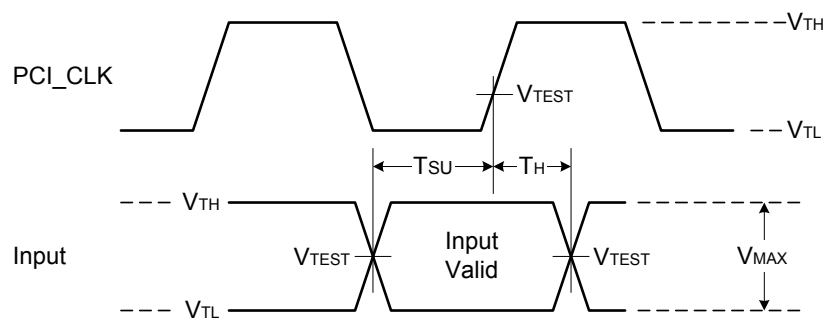

**Figure 3. PCI Bus Interface Input Timing Measurement Condition**

**Table 20. PCI Bus Interface Timing Measurement Conditions**

Symbol	Parameter	PCI 66 MHz 3.3 v	Unit
V <sub>TH</sub>	Input measurement test voltage (high)	0.6 * V <sub>CC</sub>	V
V <sub>TL</sub>	Input measurement test voltage (low)	0.2 * V <sub>CC</sub>	V
V <sub>TEST</sub>	Output measurement test voltage	0.4 * V <sub>CC</sub>	V
	Input signal slew rate	1.5	V/ns

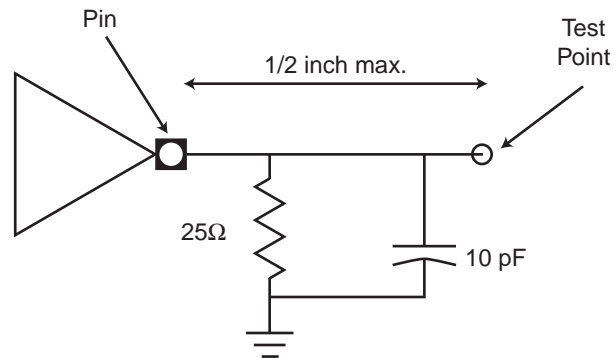


Figure 4. TVAL (max) Rising Edge Test Load

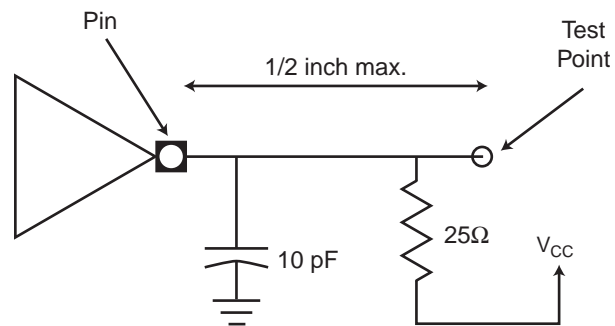


Figure 5. TVAL (max) Falling Edge Test Load


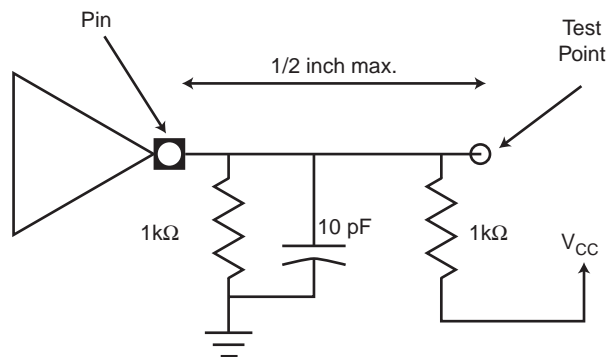


Figure 6. TVAL (minimum.) Test Load

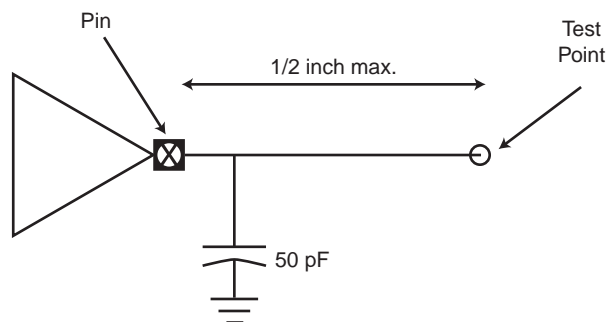


**NOTE:** 50 pF load used for maximum times. Minimum times are specified with 0 pF load.

**Figure 7. TVAL Test Load (PCI 5 V Signaling Environment)**

## 4.5.2 Link Interface Timing

**Table 21. Rise and Fall Times**

Symbol	Parameter	Condition	Min	Max	Unit
TR	Clock rise time	0.8 V to 2.0 V	0.7		ns
TF	Clock fall time	2.0 V to 0.8 V	0.7		ns
TR	Data rise time	0.8 V to 2.0 V	0.7		ns
TF	Data fall time	2.0 V to 0.8 V	0.7		ns

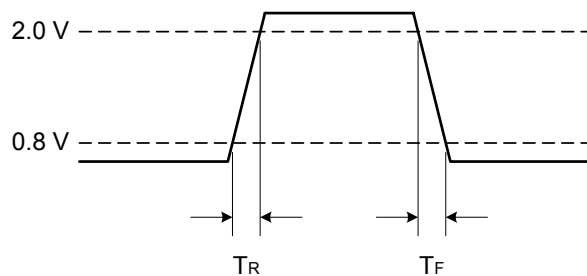

**Figure 8. Link Interface Rise/Fall Timing**

### 4.5.3 EEPROM Interface

**Table 22. Link Interface Clock Requirements**

Symbol	Parameter <sup>a</sup>	Min	Typ	Max	Unit
TPW	Microwire EE_SK pulse width		$T_{PERIOD} \times \frac{1}{64}$		ns
	SPI EE_SK pulse width		$T_{PERIOD} \times \frac{1}{32}$		ns

a. The EEPROM clock is derived from a 125 MHz internal clock.


**Table 23. Link Interface Clock Requirements**

Symbol	Parameter <sup>a</sup>	Min	Typ	Max	Unit
TDOS	EE_DO setup time	TCYC*2			ns
TDOH	EE_DO hold time	0			ns

a. The EE\_DO setup and hold time is a function of the PCI bus clock cycle time but is referenced to O\_EE\_SK.

*Note: This page is intentionally left blank.*



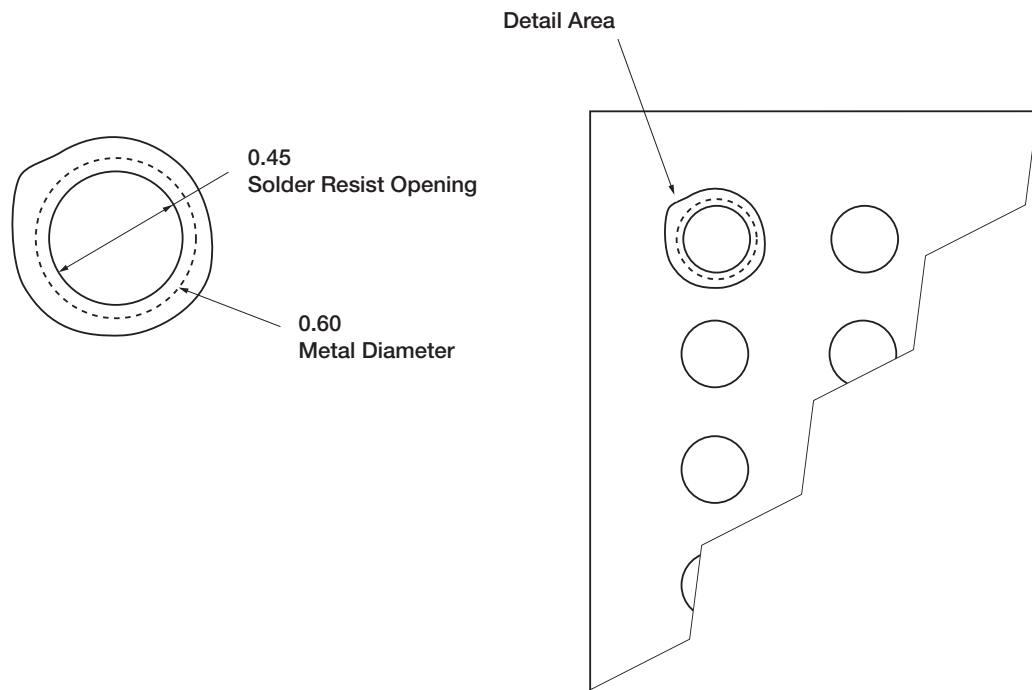

**Figure 12. 196 PBGA Package Pad Detail**

As illustrated in Figure 12, the Ethernet controller package uses solder mask defined pads. The copper area is 0.60mm and the opening in the solder mask is 0.45mm. The nominal ball sphere diameter is 0.50mm.

## 5.2 Thermal Specifications

The 82541PI/GI/EI device is specified for operation when the ambient temperature ( $T_A$ ) is within the range of 0° C to 70° C.

$T_C$  (case temperature) is calculated using the equation:

$$T_C = T_A + P (\theta_{JA} - \theta_{JC})$$

$T_J$  (junction temperature) is calculated using the equation:

$$T_J = T_A + P \theta_{JA}$$

P (power consumption) is calculated by using the typical  $I_{CC}$ , as indicated in [Table 7 of Section 4.0](#), and nominal  $V_{CC}$ . The preliminary thermal resistances are shown in [Table 13](#).

**Table 13. Thermal Characteristics**

Symbol	Parameter	Preliminary Value at specified airflow (m/s)			Units
		0	1	2	
$\theta_{JA}$	Thermal resistance, junction-to-ambient	29	25.0	23.5	C/Watt
$\theta_{JC}$	Thermal resistance, junction-to-case	11.1	11.1	11.1	C/Watt

Thermal resistances are determined empirically with test devices mounted on standard thermal test boards. Real system designs may have different characteristics due to board thickness, arrangement of ground planes, and proximity of other components. The case temperature measurements should be used to assure that the 82541PI/GI/EI device is operating under recommended conditions.

## 5.3 Pinout Information

**Table 14. PCI Address, Data and Control Signals**

Signal	Pin	Signal	Pin	Signal	Pin
PCI_AD[0]	N7	PCI_AD[16]	K1	CBE0#	M4
PCI_AD[1]	M7	PCI_AD[17]	E3	CBE1#	L3
PCI_AD[2]	P6	PCI_AD[18]	D1	CBE2#	F3
PCI_AD[3]	P5	PCI_AD[19]	D2	CBE3#	C4
PCI_AD[4]	N5	PCI_AD[20]	D3	PAR	J1
PCI_AD[5]	M5	PCI_AD[21]	C1	FRAME#	F2
PCI_AD[6]	P4	PCI_AD[22]	B1	IRDY#	F1
PCI_AD[7]	N4	PCI_AD[23]	B2	TRDY#	G3
PCI_AD[8]	P3	PCI_AD[24]	B4	STOP#	H1
PCI_AD[9]	N3	PCI_AD[25]	A5	DEVSEL#	H3
PCI_AD[10]	N2	PCI_AD[26]	B5	IDSEL	A4
PCI_AD[11]	M1	PCI_AD[27]	B6	VIO	G2
PCI_AD[12]	M2	PCI_AD[28]	C6		
PCI_AD[13]	M3	PCI_AD[29]	C7		
PCI_AD[14]	L1	PCI_AD[30]	A8		
PCI_AD[15]	L2	PCI_AD[31]	B8		

**Table 15. PCI Arbitration Signals**

Signal	Pin
REQ#	C3
GNT#	J3

**Table 16. Interrupt Signals**

Signal	Pin
INTA#	H2

**Table 17. System Signals**

Signal	Pin	Signal	Pin
CLK	G1	RST#	B9
M66EN	C2	CLKRUN#	C8

**Table 18. Error Reporting Signals**

Signal	Pin	Signal	Pin
SERR#	A2	PERR#	J2

**Table 19. Power Management Signals**

Signal	Pin	Signal	Pin
PME#	A6	AUX_PWR	J12
LAN_PWRGD	A9		

**Table 20. SMB Signals**

Signal	Pin	Signal	Pin	Signal	Pin
SMBCLK	A10	SMBDATA	C9	SMBALRT#	B10

**Table 21. Serial EEPROM Interface Signals**

Signal	Pin	Signal	Pin	Signal	Pin
EE_SK	M10	EE_DI	P10	EE_CS	P7
EE_DO	N10	EE_MODE	J4		

**Table 22. Serial FLASH Interface Signals**

Signal	Pin	Signal	Pin	Signal	Pin
FLSH_SCK	N9	FLSH_SI	M11	FLSH_CE#	M9
FLSH_SO/LAN_DISABLE#	P9				

**Table 23. LED Signals**

Signal	Pin	Signal	Pin
LED0 / LINKUP#	A12	LED2 / LINK100#	B11
LED1 / ACT#	C11	LED3 / LINK1000#	B12

**Table 24. Other Signals**

Signal	Pin	Signal	Pin
SDP0	N14	SDP2	N13
SDP1	P13	SDP3	M12

**Table 25. IEEE Test Signals**

Signal	Pin	Signal	Pin
IEEE_TEST-	D14	IEEE_TEST+	B14

**Table 26. PHY Signals**

Signal	Pin	Signal	Pin	Signal	Pin
MDI0-	C14	MDI2-	F14	XTAL1	K14
MDI0+	C13	MDI2+	F13	XTAL2	J14
MDI1-	E14	MDI3-	H14		
MDI1+	E13	MDI3+	H13		

**Table 27. Test Interface Signals**

Signal	Pin	Signal	Pin	Signal	Pin
JTAG_TCK	L14	JTAG_TDO	M14	JTAG_TRST#	L13
JTAG_TDI	M13	JTAG_TMS	L12	TEST	A13

**Table 28. Digital Power Signals (Sheet 1 of 2)**

Signal	Pin	Signal	Pin	Signal	Pin
3.3V	A3	1.2V	G5	1.2V	J9
3.3V	A7	1.2V	G6	1.2V	K10
3.3V	A11	1.2V	H5	1.2V	K11
3.3V	E1	1.2V	H6	1.2V	K5
3.3V	K3	1.2V	H7	1.2V	K6
3.3V	K4	1.2V	H8	1.2V	K7
3.3V	K13	1.2V	J10	1.2V	K8
3.3V	N6	1.2V	J11	1.2V	K9
3.3V	N8	1.2V	J5	1.2V	L10

Table 28. Digital Power Signals (Sheet 2 of 2) (Continued)

Signal	Pin	Signal	Pin	Signal	Pin
3.3V	P2	1.2V	J6	1.2V	L4
3.3V	P12	1.2V	J7	1.2V	L5
		1.2V	J8	1.2V	L9

Table 29. Analog Power Signals

Signal	Pin	Signal	Pin	Signal	Pin
Analog_1.2V	E11	Analog_1.8V	D11	CLKR_1.8V	D12
Analog_1.2V	E12	Analog_1.8V	G12	XTAL_1.8V	J13
Analog_1.2V	G13	PLL_1.2V	G4		
Analog_1.2V	H11	PLL_1.2V	H4		

Table 30. Grounds and No Connect Signals

Signal	Pin	Signal	Pin	Signal	Pin	Signal	Pin
VSS	B3	VSS	F10	VSS	L11	NC	D10
VSS	B7	VSS	F4	VSS	L6	NC	D9
VSS	C10	VSS	F5	VSS	M6	NC	H12
VSS	D5	VSS	F6	VSS	N1	NC	L8
VSS	D6	VSS	F7	VSS	N12	NC	P1
VSS	D7	VSS	F8	VSS	P8	NC	P14
VSS	D8	VSS	F9	AVSS	C12	RSVD_NC	C5
VSS	E10	VSS	G10	AVSS	D13	RSVD_NC	L7
VSS	E2	VSS	G7	AVSS	F11	RSVD_NC	M8
VSS	E5	VSS	G8	AVSS	G11	RSVD_NC	N11
VSS	E6	VSS	G9	AVSS	G14	RSVD_NC	F12
VSS	E7	VSS	H10	AVSS	K12	RSVD_VSS	D4
VSS	E8	VSS	H9	NC	A1	RSVD_VSS	E4
VSS	E9	VSS	K2	NC	A14		

Table 31. Voltage Regulation Control Signals

Signal	Pin	Signal	Pin
CTRL_18	B13	CTRL_12	P11

Table 32. Signal Names in Pin Order (Sheet 1 of 6)

Signal Name	Pin
NC	A1
SERR#	A2
3.3V	A3
IDSEL	A4
PCI_AD[25]	A5
PME#	A6
3.3V	A7
PCI_AD[30]	A8
LAN_PWRGD	A9
SMBCLK	A10
3.3V	A11
LED0 / LINKUP#	A12
TEST	A13
NC	A14
PCI_AD[22]	B1
PCI_AD[23]	B2
VSS	B3
PCI_AD[24]	B4
PCI_AD[26]	B5
PCI_AD[27]	B6
VSS	B7
PCI_AD[31]	B8
RST#	B9
SMBALRT#	B10
LED2 / LINK100#	B11
LED3 / LINK1000#	B12
CTRL_18	B13
IEEE_TEST+	B14
PCI_AD[21]	C1
M66EN	C2
REQ#	C3
CBE3#	C4
RSVD_NC	C5

**Table 32. Signal Names in Pin Order (Sheet 2 of 6) (Continued)**

PCI_AD[28]	C6
PCI_AD[29]	C7
CLK_RUN#	C8
SMBDATA	C9
VSS	C10
LED1 / ACT#	C11
AVSS	C12
MDI0+	C13
MDI0-	C14
PCI_AD[18]	D1
PCI_AD[19]	D2
PCI_AD[20]	D3
RSVD_VSS	D4
VSS	D5
VSS	D6
VSS	D7
VSS	D8
NC	D9
NC	D10
Analog_1.8V	D11
CLKR_1.8V	D12
AVSS	D13
IEEE_TEST-	D14
3.3V	E1
VSS	E2
PCI_AD[17]	E3
RSVD_VSS	E4
VSS	E5
VSS	E6
VSS	E7
VSS	E8
VSS	E9
VSS	E10
Analog_1.2V	E11
Analog_1.2V	E12
MDI1+	E13

Table 32. Signal Names in Pin Order (Sheet 3 of 6) (Continued)

MDI1-	E14
IRDY#	F1
FRAME#	F2
CBE2#	F3
VSS	F4
VSS	F5
VSS	F6
VSS	F7
VSS	F8
VSS	F9
VSS	F10
AVSS	F11
RSVD_NC	F12
MDI2+	F13
MDI2-	F14
CLK	G1
VIO	G2
TRDY#	G3
PLL_1.2V	G4
1.2V	G5
1.2V	G6
VSS	G7
VSS	G8
VSS	G9
VSS	G10
AVSS	G11
Analog_1.8V	G12
Analog_1.2V	G13
AVSS	G14
STOP#	H1
INTA#	H2
DEVSEL#	H3
PLL_1.2V	H4
1.2V	H5
1.2V	H6
1.2V	H7

**Table 32. Signal Names in Pin Order (Sheet 4 of 6) (Continued)**

1.2V	H8
VSS	H9
VSS	H10
Analog_1.2V	H11
NC	H12
MDI3+	H13
MDI3-	H14
PAR	J1
PERR#	J2
GNT#	J3
EE_MODE	J4
1.2V	J5
1.2V	J6
1.2V	J7
1.2V	J8
1.2V	J9
1.2V	J10
1.2V	J11
AUX_PWR	J12
XTAL_1.8V	J13
XTAL2	J14
PCI_AD[16]	K1
VSS	K2
3.3V	K3
3.3V	K4
1.2V	K5
1.2V	K6
1.2V	K7
1.2V	K8
1.2V	K9
1.2V	K10
1.2V	K11
AVSS	K12
3.3V	K13
XTAL1	K14
PCI_AD[14]	L1

Table 32. Signal Names in Pin Order (Sheet 5 of 6) (Continued)

PCI_AD[15]	L2
CBE1#	L3
1.2V	L4
1.2V	L5
VSS	L6
RSVD_NC	L7
NC	L8
1.2V	L9
1.2V	L10
VSS	L11
JTAG_TMS	L12
JTAG_TRST#	L13
JTAG_TCK	L14
PCI_AD[11]	M1
PCI_AD[12]	M2
PCI_AD[13]	M3
CBE0#	M4
PCI_AD[5]	M5
VSS	M6
PCI_AD[1]	M7
RSVD_NC	M8
FLSH_CE_N#	M9
EE_SK	M10
FLSH_SI	M11
SDP3	M12
JTAG_TDI	M13
JTAG_TDO	M14
VSS	N1
PCI_AD[10]	N2
PCI_AD[9]	N3
PCI_AD[7]	N4
PCI_AD[4]	N5
3.3V	N6
PCI_AD[0]	N7
3.3V	N8
FLSH_SCK	N9

**Table 32. Signal Names in Pin Order (Sheet 6 of 6) (Continued)**

EE_DO	N10
RSVD_NC	N11
VSS	N12
SDP2	N13
SDP0	N14
NC	P1
3.3V	P2
PCI_AD[8]	P3
PCI_AD[6]	P4
PCI_AD[3]	P5
PCI_AD[2]	P6
EE_CS	P7
VSS	P8
FLSH_SO	P9
EE_DI	P10
CTRL_12	P11
3.3V	P12
SDP1	P13
NC	P14

## 5.4 Visual Pin Assignments

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	
14	NC	IEEE TEST+	MDI- [0]	IEEE TEST-	MDI- [1]	MDI- [2]	AVSS	MDI- [3]	XTAL2	XTAL1	JTAG TCK	JTAG TDO	SDP [0]	NC	14
13	TEST	CTRL18	MDI+ [0]	AVSS	MDI+ [1]	MDI+ [2]	Analog 1.2V	MDI+ [3]	XTAL 1.8V	3.3V	JTAG TRST#	JTAG TDI	SDP [2]	SDP [1]	13
12	LINK UP#	LINK 1000#	AVSS	CLKR 1.8V	Analog 1.2V	RSVD_NC	Analog 1.8V	NC	AUX PWR	AVSS	JTAG TMS	SDP [3]	VSS	3.3V	12
11	3.3V	LINK 100#	ACT#	Analog 1.8V	Analog 1.2V	AVSS	AVSS	Analog 1.2V	1.2V	1.2V	VSS	FLSH SI	RSVD_NC	CTRL12	11
10	RSVD VCC	RSVD VCC	VSS	NC	VSS	VSS	VSS	VSS	1.2V	1.2V	1.2V	EE_SK	EE_DO	EE_DI	10
9	LAN PWRGD	RST#	SMB DAT	NC	VSS	VSS	VSS	VSS	1.2V	1.2V	1.2V	FLSH CE_N	FLSH SCK	FLSH SO	9
8	AD30	AD31	CLK RUN#	VSS	VSS	VSS	VSS	1.2V	1.2V	1.2V	NC	RSVD_NC	3.3V	VSS	8
7	3.3V	VSS	AD29	VSS	VSS	VSS	VSS	1.2V	1.2V	1.2V	RSVD_NC	AD1	AD0	EE_CS	7
6	PME#	AD27	AD28	VSS	VSS	VSS	1.2V	1.2V	1.2V	1.2V	VSS	VSS	3.3V	AD2	6
5	AD25	AD26	RSVD_NC	VSS	VSS	VSS	1.2V	1.2V	1.2V	1.2V	1.2V	AD5	AD4	AD3	5
4	IDSEL	AD24	CBE# [3]	RSVD VSS	RSVD VSS	VSS	PLL 1.2V	PLL 1.2V	EE MODE	3.3V	1.2V	CBE# [0]	AD7	AD6	4
3	3.3V	VSS	REQ#	AD20	AD17	CBE# [2]	TRDY#	DEV SEL#	GNT#	3.3V	CBE# [1]	AD13	AD9	AD8	3
2	SERR#	AD23	M66EN	AD19	VSS	FRAME#	VIO	INTA#	PERR#	VSS	AD15	AD12	AD10	3.3V	2
1	NC	AD22	AD21	AD18	3.3V	IRDY#	CLK	STOP#	PAR	AD16	AD14	AD11	VSS	NC	1
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	

Figure 13. Visual Pin Assignments