


"CONNECTOR"  
MOLEX 51021-0400  
N22259F

"TERMINAL"  
MOLEX 50079-8000  
N25027F  
(SEE NOTE 2)

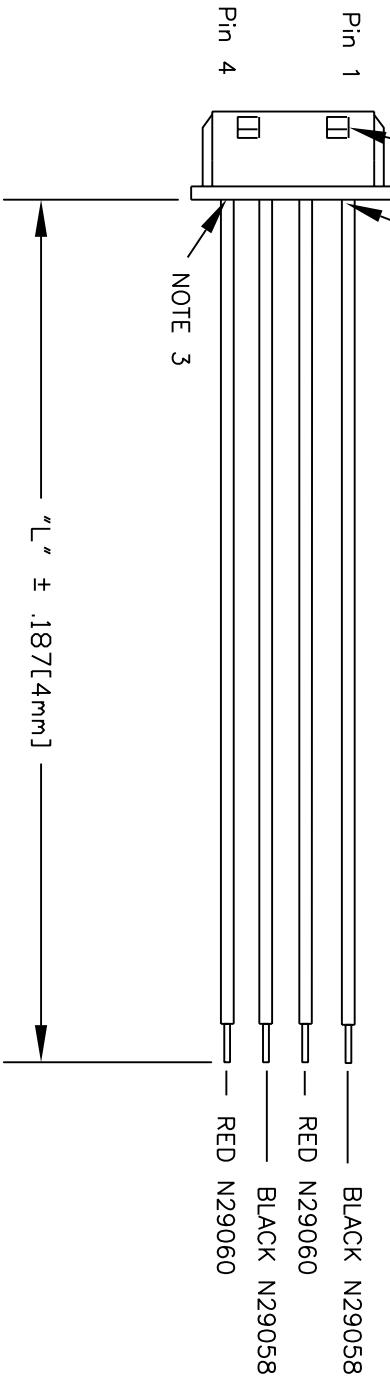

NOTES:

1. ALL WIRING MUST HAVE A FLAMIBILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER.
2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, PER IPC/WHMA-A-620.
3. CONNECTOR STRIP LENGTH IS  $1.65 \pm .25\text{mm}$ . OPEN STRIP LENGTH IS  $2.0 \pm .25\text{mm}$ .
4. WIRES TO BE 26 AWG, IN COLORS LISTED.
5. PLACE HARNESS ASSEMBLIES IN BAG CALLED OUT ON BOM. THEN MARK PART NUMBER AND QTY. ON BAG WITH PERMANENT MARKER.

ENDICOTT RESEARCH GROUP, INC.  
2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187

WIRING HARNESS  
H10004

APPROVALS	DATE	DRAWN BY	
	0	RELEASER	
		07/24/07	
MATERIAL	CC	06/26/08	
FINISH	CC	cc	
APPROVED	CC	C	DRAWING NUMBER
DO NOT SCALE			H10004
		SCALE	REV. 1
			1 OF 1

REV. 0		DESCRIPTION	DATE	APPROVED
1		ADDED TOLERANCE TO "L"	07/24/07	cc