

# HIGH EFFICIENCY SINGLE INDUCTOR BUCK-BOOST CONVERTER WITH 1-A SWITCHES

Check for Samples: [TPS63030](#), [TPS63031](#)

## FEATURES


- Up to 96% Efficiency
- 800-mA Output Current at 3.3V in Step Down Mode ( $V_{IN} = 3.6V$  to  $5.5V$ )
- Up to 500-mA Output Current at 3.3V in Boost Mode ( $V_{IN} > 2.4V$ )
- Automatic Transition Between Step Down and Boost Mode
- Device Quiescent Current less than  $50\mu A$
- Input Voltage Range:  $1.8V$  to  $5.5V$
- Fixed and Adjustable Output Voltage Options from  $1.2V$  to  $5.5V$
- Power Save Mode for Improved Efficiency at Low Output Power
- Forced Fixed Frequency Operation and Synchronization Possible
- Load Disconnect During Shutdown
- Over-Temperature Protection
- Available in Small  $2.5mm \times 2.5mm$ , QFN-10 Package

## APPLICATIONS

- All Two-Cell and Three-Cell Alkaline, NiCd or NiMH or Single-Cell Li Battery Powered Products
- Portable Audio Players
- PDAs
- Cellular Phones
- Personal Medical Products
- White LEDs

## DESCRIPTION

The TPS6303x devices provide a power supply solution for products powered by either a two-cell or three-cell alkaline, NiCd or NiMH battery, or a one-cell Li-Ion or Li-polymer battery. Output currents can go as high as 600 mA while using a single-cell Li-Ion or Li-Polymer Battery, and discharge it down to  $2.5V$  or lower. The buck-boost converter is based on a fixed frequency, pulse-width-modulation (PWM) controller using synchronous rectification to obtain maximum efficiency. At low load currents, the converter enters Power Save mode to maintain high efficiency over a wide load current range. The Power Save mode can be disabled, forcing the converter to operate at a fixed switching frequency. The maximum average current in the switches is limited to a typical value of 1000 mA. The output voltage is programmable using an external resistor divider, or is fixed internally on the chip. The converter can be disabled to minimize battery drain. During shutdown, the load is disconnected from the battery. The device is packaged in a 10-pin QFN PowerPAD™ package measuring  $2.5mm \times 2.5mm$  (DSK).

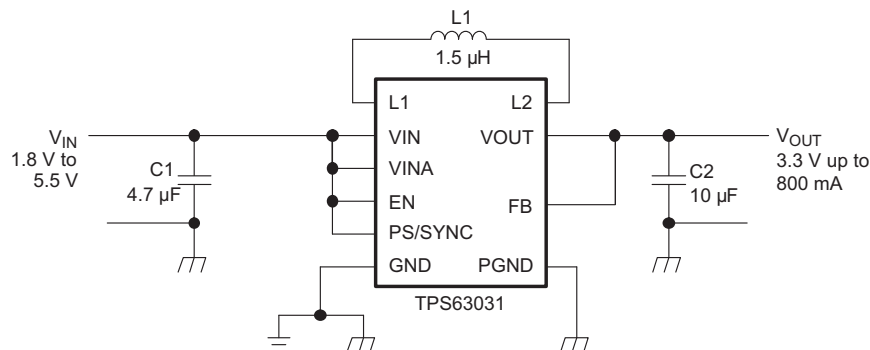

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2008–2012, Texas Instruments Incorporated



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### AVAILABLE OUTPUT VOLTAGE OPTIONS<sup>(1)</sup>

| T <sub>A</sub> | OUTPUT VOLTAGE<br>DC/DC | PACKAGE MARKING | PACKAGE    | PART NUMBER <sup>(2)</sup> |
|----------------|-------------------------|-----------------|------------|----------------------------|
| –40°C to 85°C  | Adjustable              | CEE             | 10-Pin QFN | TPS63030DSK                |
|                | 3.3 V                   | CEF             |            | TPS63031DSK                |

- (1) Contact the factory to check availability of other fixed output voltage versions.  
 (2) The DSK package is available taped and reeled. Add R suffix to device type (e.g., TPS63030DSKR) to order quantities of 3000 devices per reel. Add T suffix to device type (e.g., TPS63030DSKT) to order quantities of 250 devices per reel.

### ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                                  | TPS6300x       |
|------------------------------------------------------------------|----------------|
| Input voltage range on VIN, VINA, L1, L2, VOUT, ILIM, EN, FB, SS | –0.3 V to 7 V  |
| Operating virtual junction temperature range, T <sub>J</sub>     | –40°C to 150°C |
| Storage temperature range T <sub>stg</sub>                       | –65°C to 150°C |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### DISSIPATION RATINGS TABLE

| PACKAGE | THERMAL<br>RESISTANCE<br>θ <sub>JA</sub> <sup>(1)</sup> | THERMAL<br>RESISTANCE<br>θ <sub>JP</sub> | THERMAL<br>RESISTANCE<br>θ <sub>JC</sub> | POWER RATING<br>T <sub>A</sub> ≤ 25°C <sup>(1)</sup> | DERATING FACTOR<br>ABOVE<br>T <sub>A</sub> = 25°C <sup>(1)</sup> |
|---------|---------------------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| DSK     | 60.6°C/W                                                | 6.3°C/W                                  | 40°C/W                                   | 1650 mW                                              | 17 mW/°C                                                         |

- (1) Thermal ratings are determined assuming a high K PCB design according to JEDEC standard JESD51-7.

### RECOMMENDED OPERATING CONDITIONS


|                                                              | MIN | NOM | MAX | UNIT |
|--------------------------------------------------------------|-----|-----|-----|------|
| Supply voltage at VIN, VINA                                  | 1.8 |     | 5.5 | V    |
| Operating free air temperature range, T <sub>A</sub>         | –40 |     | 85  | °C   |
| Operating virtual junction temperature range, T <sub>J</sub> | –40 |     | 125 | °C   |

## ELECTRICAL CHARACTERISTICS

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

| DC/DC STAGE                                |                                   |                                      |                                                                                                               |  |       |      |       |      |
|--------------------------------------------|-----------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------|--|-------|------|-------|------|
| PARAMETER                                  |                                   |                                      | TEST CONDITIONS                                                                                               |  | MIN   | TYP  | MAX   | UNIT |
| V <sub>I</sub>                             | Input voltage range               |                                      |                                                                                                               |  | 1.8   |      | 5.5   | V    |
| V <sub>I</sub>                             | Minimum input voltage for startup |                                      | 0°C ≤ T <sub>A</sub> ≤ 85°C                                                                                   |  | 1.6   | 1.8  | 1.9   | V    |
| V <sub>I</sub>                             | Minimum input voltage for startup |                                      |                                                                                                               |  | 1.6   | 1.8  | 2.0   | V    |
| V <sub>O</sub>                             | TPS63030 output voltage range     |                                      |                                                                                                               |  | 1.2   |      | 5.5   | V    |
| Minimum duty cycle in step down conversion |                                   |                                      |                                                                                                               |  |       | 30%  | 40%   |      |
| V <sub>FB</sub>                            | TPS63030 feedback voltage         |                                      | PS/SYNC = V <sub>IN</sub>                                                                                     |  | 495   | 500  | 505   | mV   |
|                                            | TPS63031 output voltage           |                                      |                                                                                                               |  | 3.267 | 3.3  | 3.333 | V    |
| V <sub>FB</sub>                            | TPS63030 feedback voltage         |                                      | PS/SYNC = GND Referenced to 500mV                                                                             |  | -3%   |      | +6%   |      |
|                                            | TPS63031 output voltage           |                                      | PS/SYNC = GND Referenced to 3.3V                                                                              |  | -3%   |      | +6%   |      |
| f                                          | Oscillator frequency              |                                      |                                                                                                               |  | 2200  | 2400 | 2600  | kHz  |
| Frequency range for synchronization        |                                   |                                      |                                                                                                               |  | 2200  | 2400 | 2600  | kHz  |
| I <sub>SW</sub>                            | Average switch current limit      |                                      | V <sub>IN</sub> = V <sub>INA</sub> = 3.6 V, T <sub>A</sub> = 25°C                                             |  | 900   | 1000 | 1100  | mA   |
| High side switch on resistance             |                                   |                                      | V <sub>IN</sub> = V <sub>INA</sub> = 3.6 V                                                                    |  |       | 200  |       | mΩ   |
| Low side switch on resistance              |                                   |                                      | V <sub>IN</sub> = V <sub>INA</sub> = 3.6 V                                                                    |  |       | 200  |       | mΩ   |
| Maximum line regulation                    |                                   |                                      |                                                                                                               |  |       | 0.5% |       |      |
| Maximum load regulation                    |                                   |                                      |                                                                                                               |  |       | 0.5% |       |      |
| I <sub>q</sub>                             | Quiescent current                 | V <sub>IN</sub> and V <sub>INA</sub> | I <sub>O</sub> = 0 mA, V <sub>EN</sub> = V <sub>IN</sub> = V <sub>INA</sub> = 3.6 V, V <sub>OUT</sub> = 3.3 V |  |       | 25   | 35    | μA   |
|                                            |                                   | V <sub>OUT</sub>                     |                                                                                                               |  |       | 4    | 6     | μA   |
| TPS63031 FB input impedance                |                                   |                                      | V <sub>EN</sub> = HIGH                                                                                        |  |       | 1    |       | MΩ   |
| I <sub>S</sub>                             | Shutdown current                  |                                      | V <sub>EN</sub> = 0 V, V <sub>IN</sub> = V <sub>INA</sub> = 3.6 V                                             |  |       | 0.1  | 0.9   | μA   |
| CONTROL STAGE                              |                                   |                                      |                                                                                                               |  |       |      |       |      |
| V <sub>UVLO</sub>                          | Under voltage lockout threshold   |                                      | V <sub>INA</sub> voltage decreasing                                                                           |  | 1.4   | 1.5  | 1.6   | V    |
| V <sub>IL</sub>                            | EN, PS/SYNC input low voltage     |                                      |                                                                                                               |  |       |      | 0.4   | V    |
| V <sub>IH</sub>                            | EN, PS/SYNC input high voltage    |                                      |                                                                                                               |  | 1.2   |      |       | V    |
| EN, PS/SYNC input current                  |                                   |                                      | Clamped on GND or V <sub>INA</sub>                                                                            |  |       | 0.01 | 0.1   | μA   |
| Overtemperature protection                 |                                   |                                      |                                                                                                               |  |       | 140  |       | °C   |
| Overtemperature hysteresis                 |                                   |                                      |                                                                                                               |  |       | 20   |       | °C   |


## PIN ASSIGNMENTS

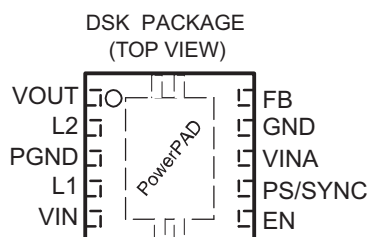


## Pin Functions

| Pin       |     | I/O | DESCRIPTION                                                                                         |
|-----------|-----|-----|-----------------------------------------------------------------------------------------------------|
| NAME      | NO. |     |                                                                                                     |
| EN        | 6   | I   | Enable input. (1 enabled, 0 disabled)                                                               |
| FB        | 10  | I   | Voltage feedback of adjustable versions, must be connected to VOUT on fixed output voltage versions |
| GND       | 9   |     | Control / logic ground                                                                              |
| PS/SYNC   | 7   | I   | Enable / disable power save mode (1 disabled, 0 enabled, clock signal for synchronization)          |
| L1        | 4   | I   | Connection for Inductor                                                                             |
| L2        | 2   | I   | Connection for Inductor                                                                             |
| PGND      | 3   |     | Power ground                                                                                        |
| VIN       | 5   | I   | Supply voltage for power stage                                                                      |
| VOUT      | 1   | O   | Buck-boost converter output                                                                         |
| VINA      | 8   | I   | Supply voltage for control stage                                                                    |
| PowerPAD™ |     |     | Must be soldered to achieve appropriate power dissipation. Should be connected to PGND.             |

### FUNCTIONAL BLOCK DIAGRAM (TPS63030)

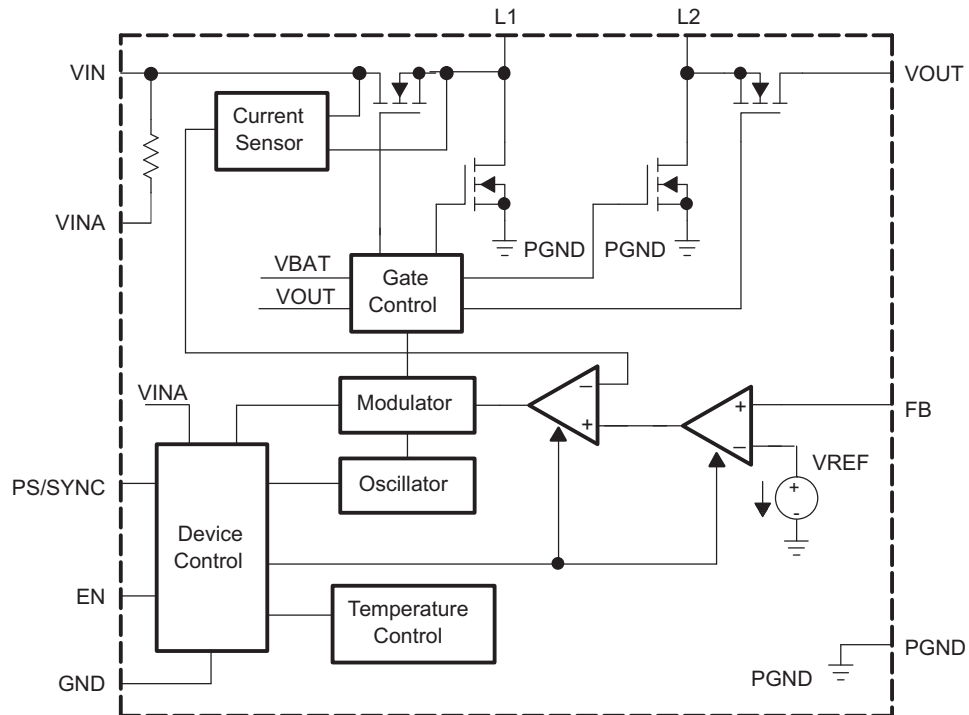





### FUNCTIONAL BLOCK DIAGRAM (TPS63031)

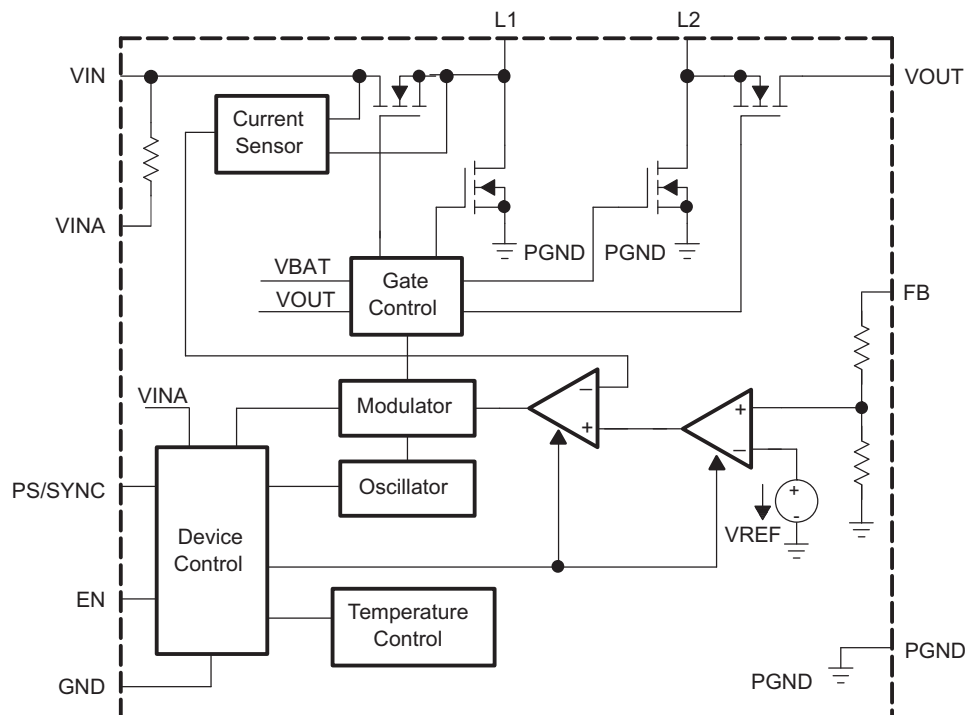

## TYPICAL CHARACTERISTICS

TABLE OF GRAPHS

| DESCRIPTION            |                                                                                         | FIGURE |
|------------------------|-----------------------------------------------------------------------------------------|--------|
| Maximum output current | vs Input voltage (TPS63030, VOUT = 2.5 V / VOUT = 4.5 V)                                | 1      |
|                        | vs Input voltage (TPS63031, VOUT = 3.3V)                                                | 2      |
| Efficiency             | vs Output current (TPS63030, Power Save Enabled, VOUT = 2.5 V / VOUT = 4.5 V)           | 3      |
|                        | vs Output current (TPS63030, Power Save Disabled, VOUT = 2.5V / VOUT = 4.5V)            | 4      |
|                        | vs Output current (TPS63031, Power Save Enabled, VOUT = 3.3V)                           | 5      |
|                        | vs Output current (TPS63031, Power Save Disabled, VOUT = 3.3V)                          | 6      |
|                        | vs Input voltage (TPS63030, Power Save Enabled, VOUT = 2.5V, IOUT = {10; 100; 500 mA})  | 7      |
|                        | vs Input voltage (TPS63030, Power Save Enabled, VOUT = 4.5V, IOUT = {10; 100; 500 mA})  | 8      |
|                        | vs Input voltage (TPS63030, Power Save Disabled, VOUT = 2.5V, IOUT = {10; 100; 500 mA}) | 9      |
|                        | vs Input voltage (TPS63030, Power Save Disabled, VOUT = 4.5V, IOUT = {10; 100; 500 mA}) | 10     |
|                        | vs Input voltage (TPS63031, Power Save Enabled, VOUT = 3.3V, IOUT = {10; 100; 500 mA})  | 11     |
|                        | vs Input voltage (TPS63031, Power Save Disabled, VOUT = 3.3V, IOUT = {10; 100; 500 mA}) | 12     |
| Output voltage         | vs Output current (TPS63030, VOUT = 2.5 V)                                              | 13     |
|                        | vs Output current (TPS63030, VOUT = 4.5 V)                                              | 14     |
|                        | vs Output current (TPS63031, VOUT = 3.3V)                                               | 15     |
| Waveforms              | Load transient response (TPS63031, VIN < VOUT, Load change from 40% to 60% of max)      | 16     |
|                        | Load transient response (TPS63031, VIN > VOUT, Load change from 40% to 60% of max)      | 17     |
|                        | Line transient response (TPS63031, VOUT = 3.3V, Iout = 300 mA)                          | 18     |
|                        | Startup after enable (TPS63031, VOUT = 3.3V, VIN = 2.4V, Iout = 300mA)                  | 19     |
|                        | Startup after enable (TPS63031, VOUT = 3.3V, VIN = 4.2V, Iout = 300mA)                  | 20     |

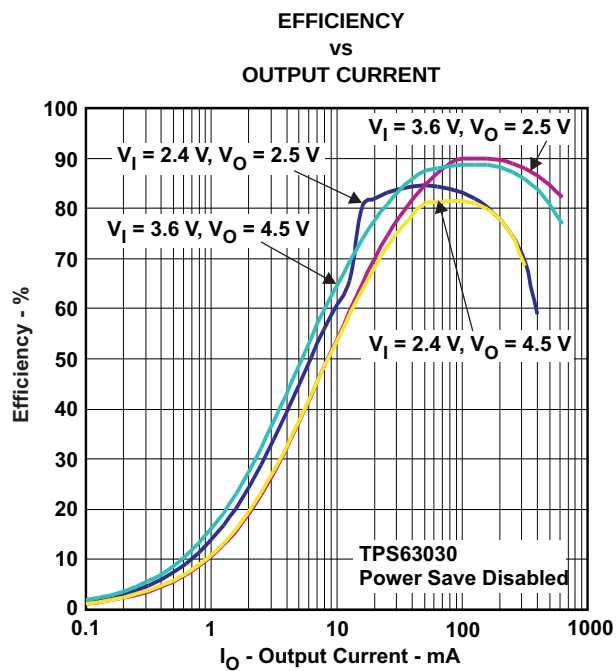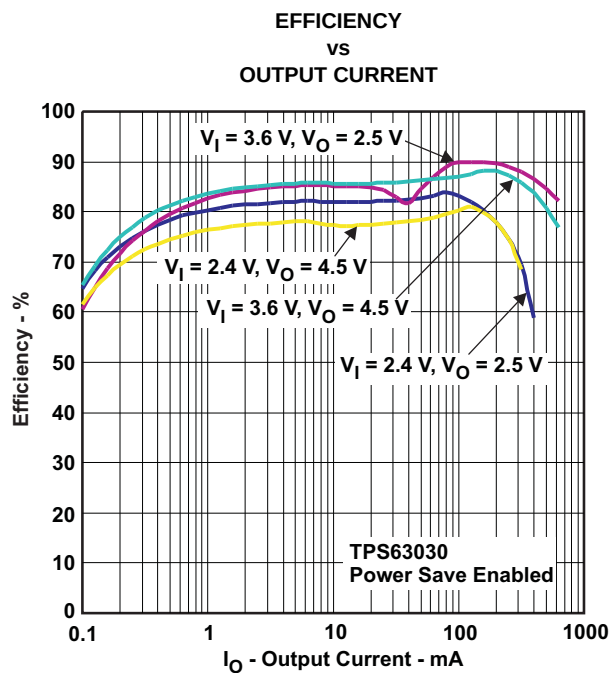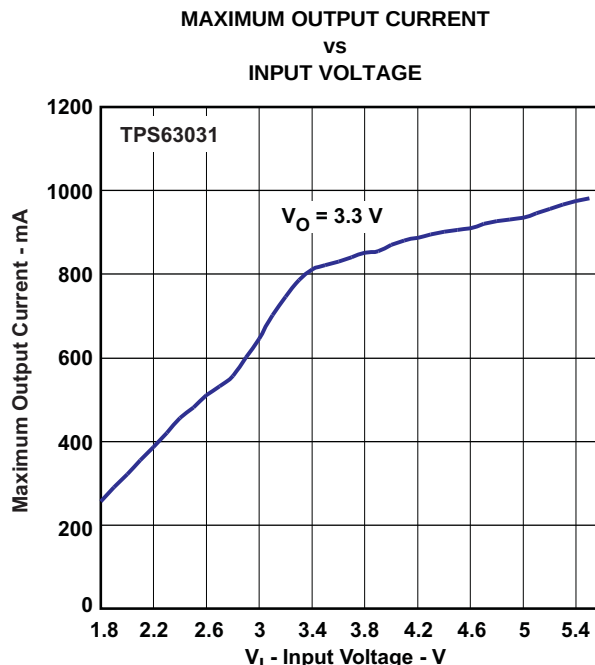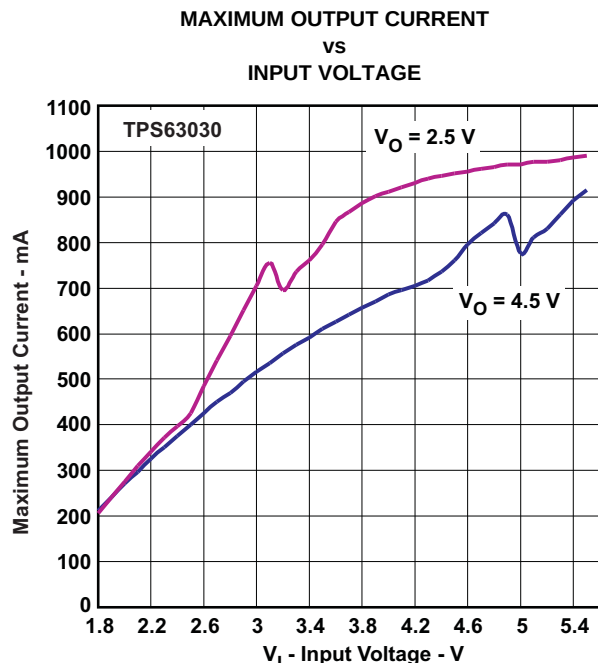

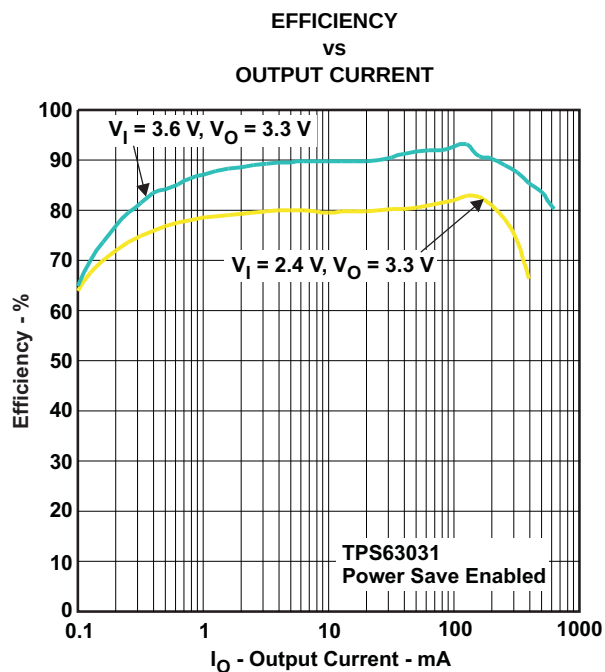


Figure 5.

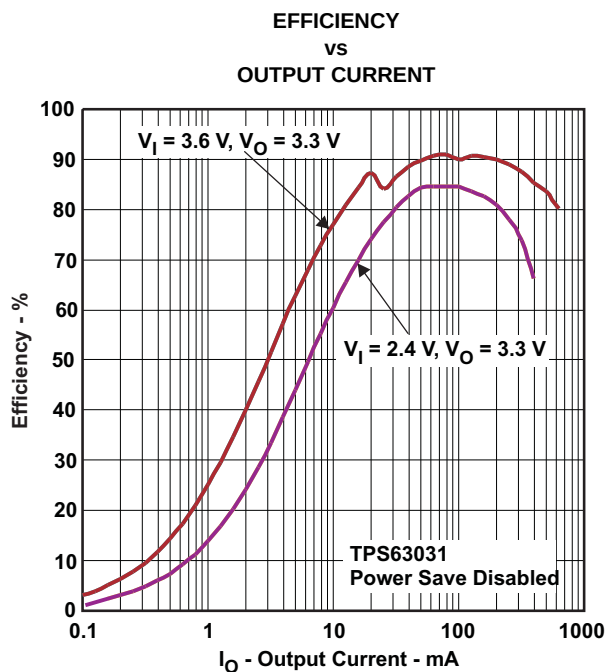


Figure 6.

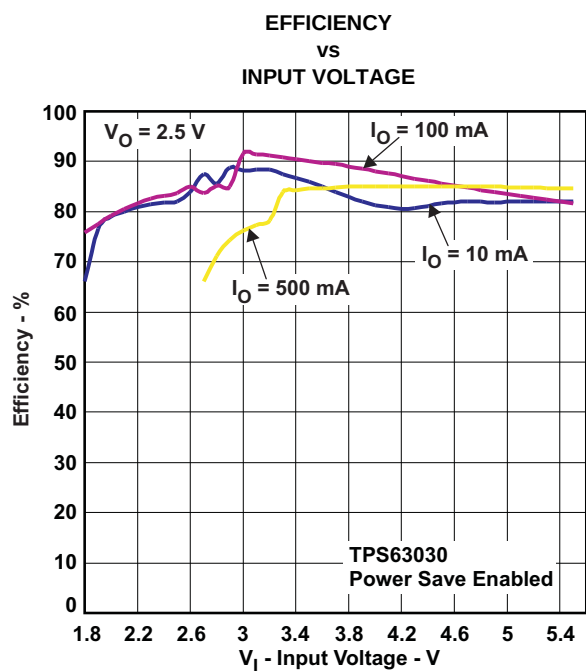


Figure 7.

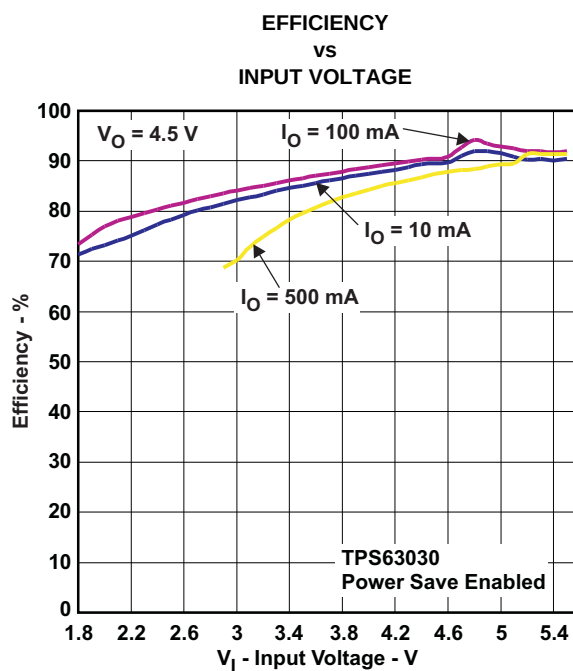


Figure 8.

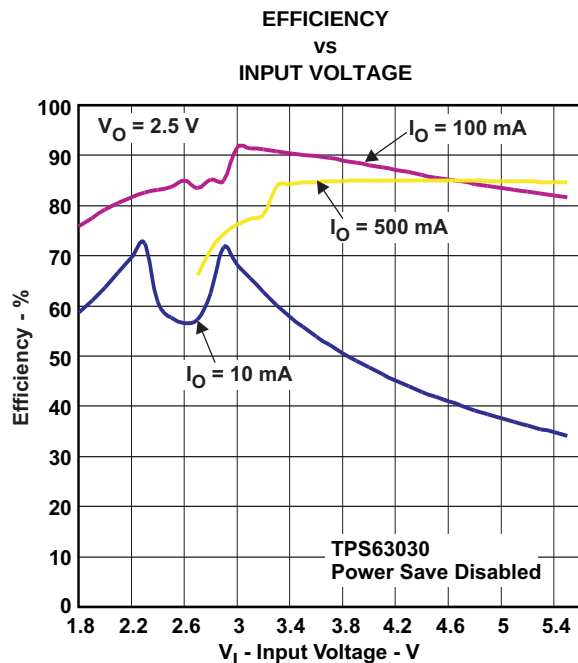


Figure 9.

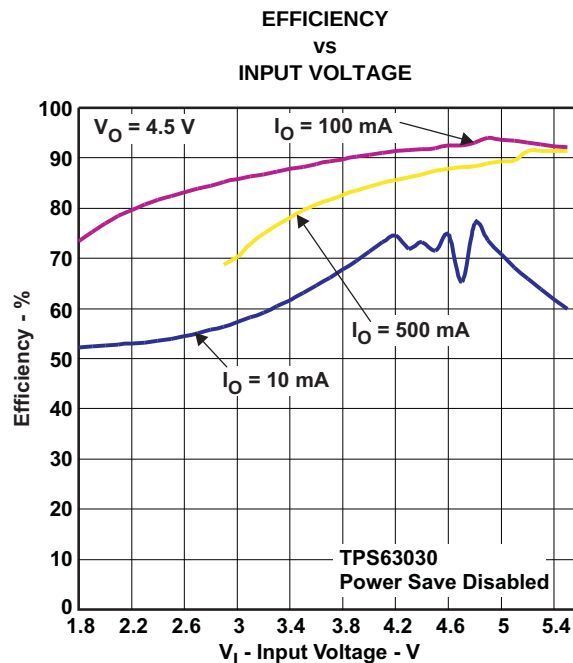


Figure 10.

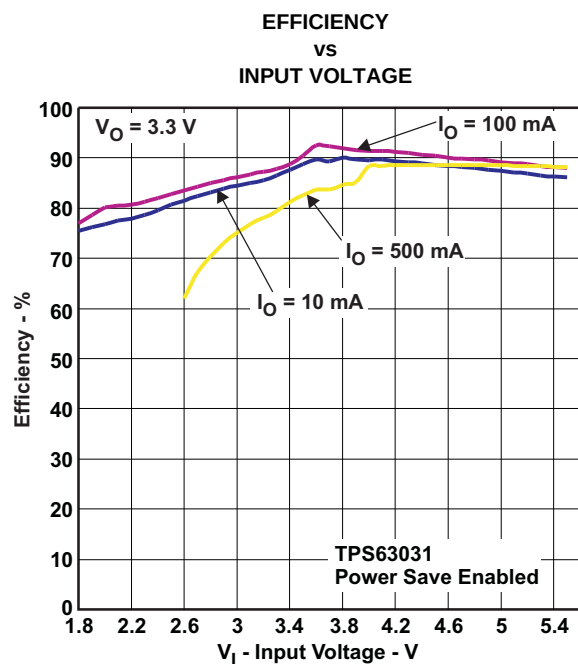


Figure 11.

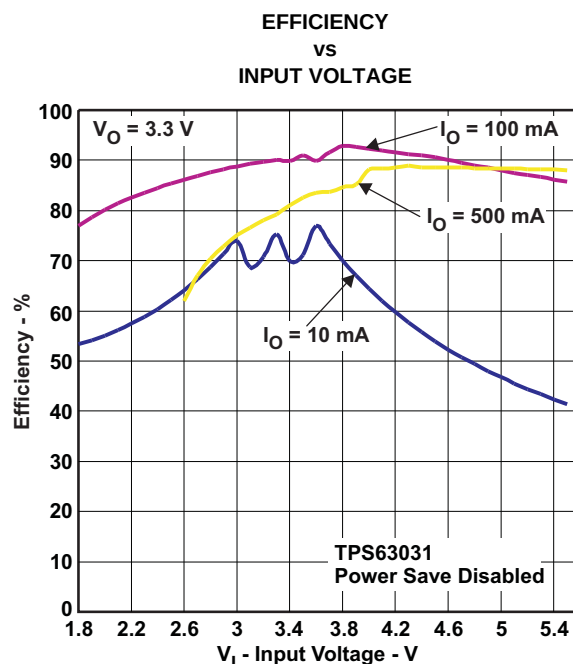


Figure 12.

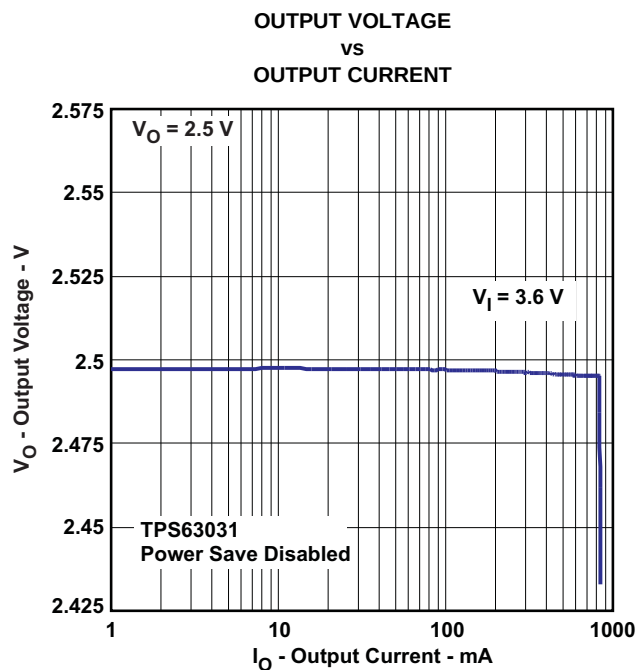


Figure 13.

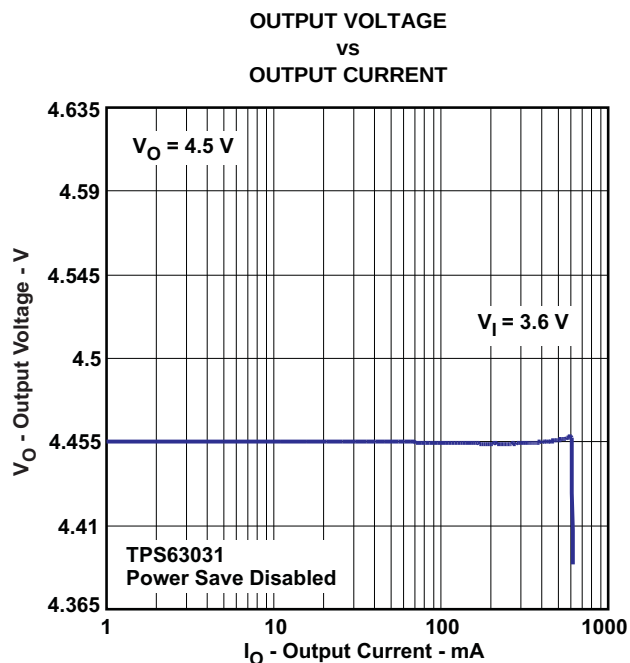


Figure 14.

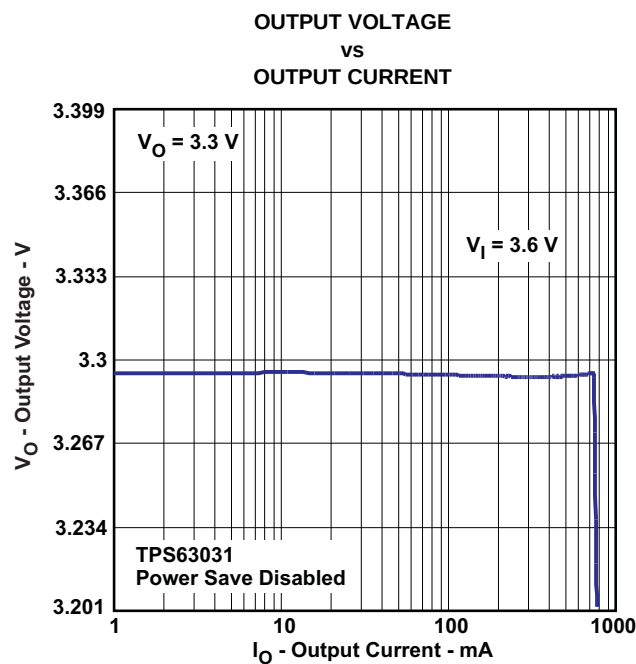


Figure 15.


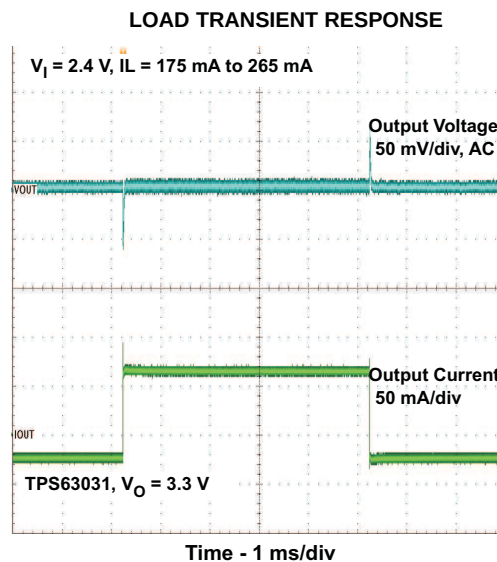


Figure 16.


### LOAD TRANSIENT RESPONSE

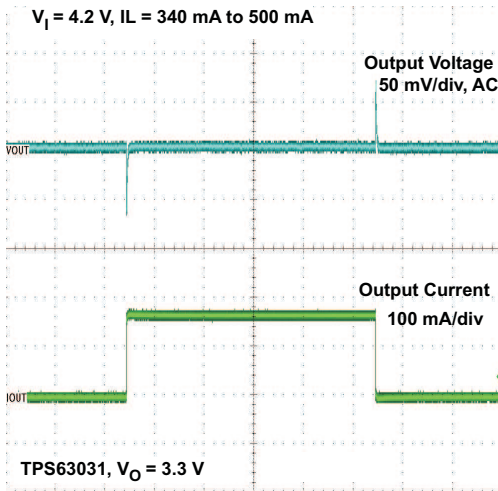

Time 1 ms/div

Figure 17.


### LINE TRANSIENT RESPONSE

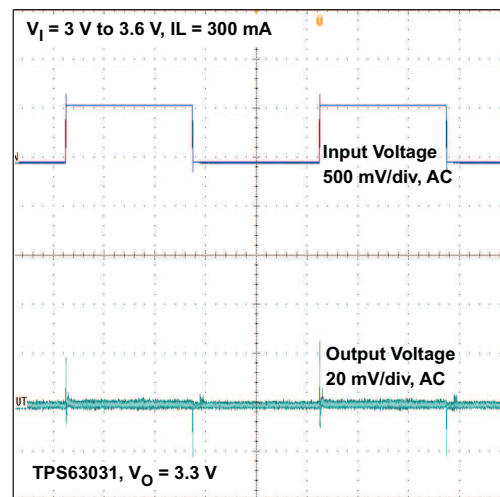

Time 2 ms/Div

Figure 18.


### STARTUP AFTER ENABLE

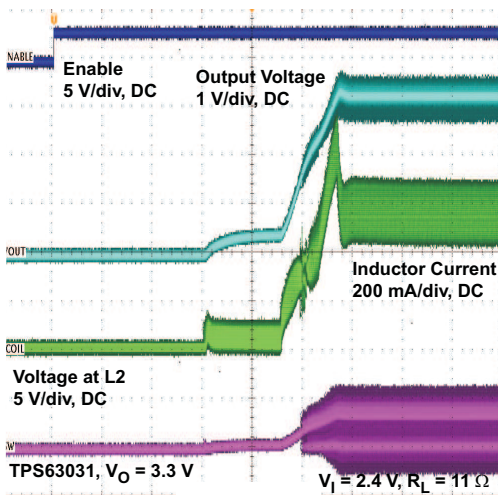

Time 200  $\mu$ s/div

Figure 19.


### STARTUP AFTER ENABLE

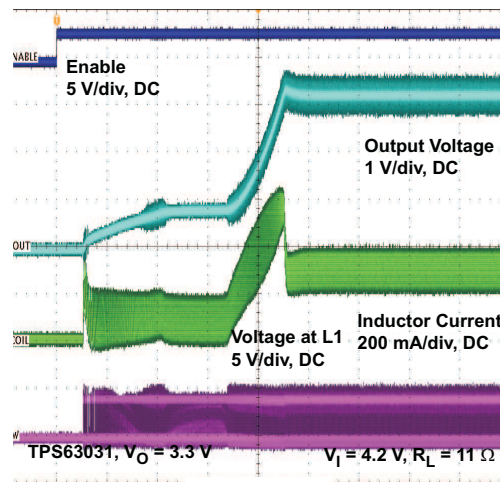

Time 100  $\mu$ s/div

Figure 20.

## PARAMETER MEASUREMENT INFORMATION

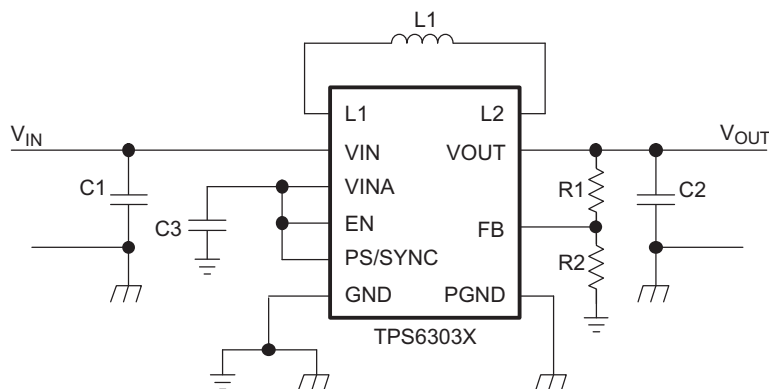

**Table 1. List of Components**

| REFERENCE | DESCRIPTION                                                       | MANUFACTURER                |
|-----------|-------------------------------------------------------------------|-----------------------------|
|           | TPS6303 0 / 1                                                     | Texas Instruments           |
| L1        | 1.5 $\mu$ H, 3 mm x 3 mm x 1.5 mm                                 | LPS3015-1R5, Coilcraft      |
| C1        | 10 $\mu$ F 6.3V, 0603, X7R ceramic                                | GRM188R60J106KME84D, Murata |
| C2        | 2 $\times$ 10 $\mu$ F 6.3V, 0603, X7R ceramic                     | GRM188R60J106KME84D, Murata |
| C3        | 0.1 $\mu$ F, X7R ceramic                                          |                             |
| R1, R2    | Depending on the output voltage at TPS63030, not used at TPS63031 |                             |

## DETAILED DESCRIPTION

### CONTROLLER CIRCUIT

The controlling circuit of the device is based on an average current mode topology. The average inductor current is regulated by a fast current regulator loop which is controlled by a voltage control loop. The controller also uses input and output voltage feedforward. Changes of input and output voltage are monitored and immediately can change the duty cycle in the modulator to achieve a fast response to those errors. The voltage error amplifier gets its feedback input from the FB pin. At adjustable output voltages a resistive voltage divider must be connected to that pin. At fixed output voltages FB must be connected to the output voltage to directly sense the voltage. Fixed output voltage versions use a trimmed internal resistive divider. The feedback voltage will be compared with the internal reference voltage to generate a stable and accurate output voltage.

The controller circuit also senses the average input current as well as the peak input current. With this, maximum input power can be controlled as well as the maximum peak current to achieve a safe and stable operation under all possible conditions. To finally protect the device from overheating, an internal temperature sensor is implemented.

### Synchronous Operation

The device uses 4 internal N-channel MOSFETs to maintain synchronous power conversion at all possible operating conditions. This enables the device to keep high efficiency over a wide input voltage and output power range.

To avoid ground shift problems due to the high currents in the switches, two separate ground pins GND and PGND are used. The reference for all control functions is the GND pin. The power switches are connected to PGND. Both grounds must be connected on the PCB at only one point ideally close to the GND pin. Due to the 4-switch topology, the load is always disconnected from the input during shutdown of the converter.

### Buck-Boost Operation

To be able to regulate the output voltage properly at all possible input voltage conditions, the device automatically switches from step down operation to boost operation and back as required by the configuration. It always uses one active switch, one rectifying switch, one switch permanently on, and one switch permanently off. Therefore, it operates as a step down converter (buck) when the input voltage is higher than the output voltage, and as a boost converter when the input voltage is lower than the output voltage. There is no mode of operation in which all 4 switches are permanently switching. Controlling the switches this way allows the converter to maintain high efficiency at the most important point of operation; when input voltage is close to the output voltage. The RMS current through the switches and the inductor is kept at a minimum, to minimize switching and conduction losses. Switching losses are also kept low by using only one active and one passive switch. Regarding the remaining 2 switches, one is kept permanently on and the other is kept permanently off, thus causing no switching losses.

### Power Save Mode and Synchronization

The PS/SYNC pin can be used to select different operation modes. To enable power save, PS/SYNC must be set low. Power save mode is used to improve efficiency at light load. If power save mode is enabled, the converter stops operating if the average inductor current gets lower than about 100 mA and the output voltage is at or above its nominal value. If the output voltage decreases below its nominal value, the device ramps up the output voltage again by starting operation using a programmed average inductor current higher than required by the current load condition. Operation can last for one or several pulses. The converter again stops operating once the conditions for stopping operation are met again.

The power save mode can be disabled by programming high at the PS/SYNC. Connecting a clock signal at PS/SYNC forces the device to synchronize to the connected clock frequency. Synchronization is done by a PLL, so synchronizing to lower and higher frequencies compared to the internal clock works without any issues. The PLL can also tolerate missing clock pulses without the converter malfunctioning. The PS/SYNC input supports standard logic thresholds.

## Device Enable

The device is put into operation when EN is set high. It is put into a shutdown mode when EN is set to GND. In shutdown mode, the regulator stops switching, all internal control circuitry is switched off, and the load is disconnected from the input. This also means that the output voltage can drop below the input voltage during shutdown. During start-up of the converter, the duty cycle and the peak current are limited in order to avoid high peak currents flowing from the input.

## Softstart and Short Circuit Protection

After being enabled, the device starts operating. The average current limit ramps up from an initial 400mA following the output voltage increasing. At an output voltage of about 1.2 V, the current limit is at its nominal value. If the output voltage does not increase, the current limit will not increase. There is no timer implemented. Thus the output voltage overshoot at startup, as well as the inrush current, is kept at a minimum. The device ramps up the output voltage in a controlled manner even if a very large capacitor is connected at the output. When the output voltage does not increase above 1.2 V, the device assumes a short circuit at the output and keeps the current limit low to protect itself and the application. At a short at the output during operation the current limit also will be decreased accordingly. At 0 V at the output, for example, the output current will not exceed about 400 mA.

## Undervoltage Lockout

An undervoltage lockout function prevents device start-up if the supply voltage on VINA is lower than approximately its threshold (see electrical characteristics table). When in operation, the device automatically enters the shutdown mode if the voltage on VINA drops below the undervoltage lockout threshold. The device automatically restarts if the input voltage recovers to the minimum operating input voltage.

## Overtemperature Protection

The device has a built-in temperature sensor which monitors the internal IC temperature. If the temperature exceeds the programmed threshold (see electrical characteristics table) the device stops operating. As soon as the IC temperature has decreased below the programmed threshold, it starts operating again. There is a built-in hysteresis to avoid unstable operation at IC temperatures at the overtemperature threshold.

## APPLICATION INFORMATION


### DESIGN PROCEDURE

The TPS6303x dc/dc converters are intended for systems powered by one-cell Li-Ion or Li-Polymer battery with a typical voltage between 2.3 V and 4.5 V. They can also be used in systems powered by a double or triple cell Alkaline, NiCd, or NiMH battery with a typical terminal voltage between 1.8 V and 5.5 V. Additionally, any other voltage source with a typical output voltage between 1.8 V and 5.5 V can power systems where the TPS6303x is used.

### PROGRAMMING THE OUTPUT VOLTAGE

Within the TPS6303X family there are fixed and adjustable output voltage versions available. To properly configure the fixed output voltage devices, the FB pin is used to sense the output voltage. This means that it must be connected directly to VOUT. At the adjustable output voltage versions, an external resistor divider is used to adjust the output voltage. The resistor divider must be connected between VOUT, FB and GND. When the output voltage is regulated properly, the typical value of the voltage at the FB pin is 500mV. The maximum recommended value for the output voltage is 5.5V. The current through the resistive divider should be about 100 times greater than the current into the FB pin. The typical current into the FB pin is 0.01  $\mu$ A, and the voltage across the resistor between FB and GND,  $R_2$ , is typically 500 mV. Based on those two values, the recommended value for  $R_2$  should be lower than 500k $\Omega$ , in order to set the divider current at 1 $\mu$ A or higher. It is recommended to keep the value for this resistor in the range of 200k $\Omega$ . From that, the value of the resistor connected between VOUT and FB,  $R_1$ , depending on the needed output voltage ( $V_{OUT}$ ), can be calculated using [Equation 1](#):

$$R_1 = R_2 \times \left( \frac{V_{OUT}}{V_{FB}} - 1 \right) \quad (1)$$

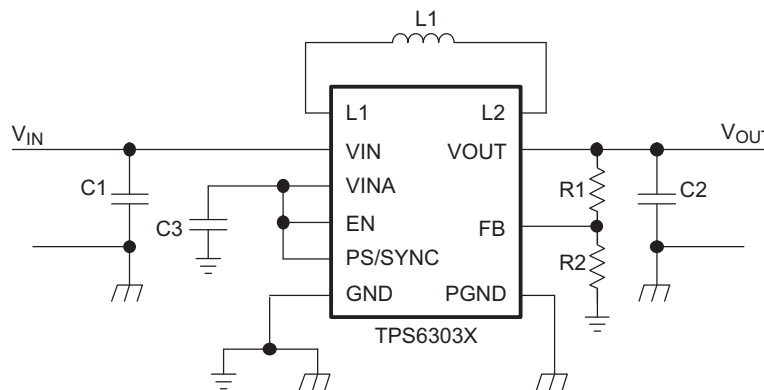

**Figure 21. Typical Application Circuit for Adjustable Output Voltage Option**

### INDUCTOR SELECTION

To properly configure the TPS6303X devices, an inductor must be connected between pin L1 and pin L2. To estimate the inductance value [Equation 2](#) and [Equation 3](#) can be used.

$$L_1 = (V_{IN1} - V_{OUT}) \times 0.5 \times \frac{\mu\text{s}}{\text{A}} \quad (2)$$

$$L_2 = V_{OUT} \times 0.5 \times \frac{\mu\text{s}}{\text{A}} \quad (3)$$

In [Equation 2](#) the minimum inductance value,  $L_1$  for step down mode operation is calculated.  $V_{IN1}$  is the maximum input voltage. In [Equation 3](#) the minimum inductance,  $L_2$ , for boost mode operation is calculated. The recommended minimum inductor value is either  $L_1$  or  $L_2$  whichever is higher. As an example, a suitable inductor for generating 3.3V from a Li-Ion battery with a battery voltage range from 2.5V up to 4.2V is 2.2  $\mu$ H. The recommended inductor value range is between 1.5  $\mu$ H and 4.7  $\mu$ H. In general, this means that at high voltage conversion rates, higher inductor values offer better performance.

With the chosen inductance value, the peak current for the inductor in steady state operation can be calculated. Equation 4 shows how to calculate the peak current  $I_1$  in step down mode operation and Equation 5 shows how to calculate the peak current  $I_2$  in boost mode operation.

$$I_1 = \frac{I_{OUT}}{0.8} + \frac{V_{OUT}(V_{IN1} - V_{OUT})}{2 \times V_{IN1} \times f \times L} \quad (4)$$

$$I_2 = \frac{V_{OUT} \times I_{OUT}}{0.8 \times V_{IN2}} + \frac{V_{IN2} \times (V_{OUT} - V_{IN2})}{2 \times V_{OUT} \times f \times L} \quad (5)$$

In both equations  $f$  is the minimum switching frequency.  $V_{IN2}$  is the minimum input voltage. The critical current value for selecting the right inductor is the higher value of  $I_1$  and  $I_2$ . It also needs to be taken into account that load transients and error conditions may cause higher inductor currents. This also needs to be taken into account when selecting an appropriate inductor. The following inductor series from different suppliers have been used with TPS6303x converters:

**Table 2. List of Inductors**

| VENDOR     | INDUCTOR SERIES |
|------------|-----------------|
| Coilcraft  | LPS3015         |
|            | EPL3010         |
| Murata     | LQH3NP          |
| Tajo Yuden | NR3015          |

## CAPACITOR SELECTION

### Input Capacitor

At least a 4.7  $\mu\text{F}$  input capacitor is recommended to improve transient behavior of the regulator and EMI behavior of the total power supply circuit. A ceramic capacitor placed as close as possible to the VIN and PGND pins of the IC is recommended.

### Bypass Capacitor

To make sure that the internal control circuits are supplied with a stable low noise supply voltage, a capacitor can be connected between VINA and GND. Using a ceramic capacitor with a value of 0.1  $\mu\text{F}$  is recommended. The value of this capacitor should not be higher than 0.22  $\mu\text{F}$ .

### Output Capacitor

For the output capacitor, it is recommended to use small ceramic capacitors placed as close as possible to the VOUT and PGND pins of the IC. If, for any reason, the application requires the use of large capacitors which can not be placed close to the IC, using a smaller ceramic capacitor in parallel to the large one is recommended. This small capacitor should be placed as close as possible to the VOUT and PGND pins of the IC.

To get an estimate of the recommended minimum output capacitance, Equation 6 can be used.

$$C_{OUT} = 5 \times L \times \frac{\mu\text{F}}{\mu\text{H}} \quad (6)$$

A capacitor with a value in the range of the calculated minimum should be used. This is required to maintain control loop stability. There are no additional requirements regarding minimum ESR. There is also no upper limit for the output capacitance value. Larger capacitors will cause lower output voltage ripple as well as lower output voltage drop during load transients.

## LAYOUT CONSIDERATIONS

As for all switching power supplies, the layout is an important step in the design, especially at high peak currents and high switching frequencies. If the layout is not carefully done, the regulator could show stability problems as well as EMI problems. Therefore, use wide and short traces for the main current path and for the power ground tracks. The input capacitor, output capacitor, and the inductor should be placed as close as possible to the IC. Use a common ground node for power ground and a different one for control ground to minimize the effects of ground noise. Connect these ground nodes at any place close to one of the ground pins of the IC.

The feedback divider should be placed as close as possible to the control ground pin of the IC. To lay out the control ground, it is recommended to use short traces as well, separated from the power ground traces. This avoids ground shift problems, which can occur due to superimposition of power ground current and control ground current.

## THERMAL INFORMATION

Implementation of integrated circuits in low-profile and fine-pitch surface-mount packages typically requires special attention to power dissipation. Many system-dependent issues such as thermal coupling, airflow, added heat sinks and convection surfaces, and the presence of other heat-generating components affect the power-dissipation limits of a given component.

Three basic approaches for enhancing thermal performance are listed below.

- Improving the power dissipation capability of the PCB design
- Improving the thermal coupling of the component to the PCB by soldering the PowerPAD
- Introducing airflow in the system

For more details on how to use the thermal parameters in the dissipation ratings table please check the [Thermal Characteristics Application Note \(SZZA017\)](#) and the [IC Package Thermal Metrics Application Note \(SPRA953\)](#).

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TPS63030DSKR     | ACTIVE        | SON          | DSK                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEE                      | <a href="#">Samples</a> |
| TPS63030DSKRG4   | ACTIVE        | SON          | DSK                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEE                      | <a href="#">Samples</a> |
| TPS63030DSKT     | ACTIVE        | SON          | DSK                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEE                      | <a href="#">Samples</a> |
| TPS63030DSKTG4   | ACTIVE        | SON          | DSK                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEE                      | <a href="#">Samples</a> |
| TPS63031DSKR     | ACTIVE        | SON          | DSK                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEF                      | <a href="#">Samples</a> |
| TPS63031DSKRG4   | ACTIVE        | SON          | DSK                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEF                      | <a href="#">Samples</a> |
| TPS63031DSKT     | ACTIVE        | SON          | DSK                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEF                      | <a href="#">Samples</a> |
| TPS63031DSKTG4   | ACTIVE        | SON          | DSK                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | CEF                      | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS63030DSKR | SON          | DSK             | 10   | 3000 | 179.0              | 8.4                | 2.73    | 2.73    | 0.8     | 4.0     | 8.0    | Q2            |
| TPS63030DSKR | SON          | DSK             | 10   | 3000 | 330.0              | 8.4                | 2.8     | 2.8     | 1.0     | 4.0     | 8.0    | Q2            |
| TPS63030DSKT | SON          | DSK             | 10   | 250  | 179.0              | 8.4                | 2.73    | 2.73    | 0.8     | 4.0     | 8.0    | Q2            |
| TPS63030DSKT | SON          | DSK             | 10   | 250  | 180.0              | 8.4                | 2.8     | 2.8     | 1.0     | 4.0     | 8.0    | Q2            |
| TPS63031DSKR | SON          | DSK             | 10   | 3000 | 179.0              | 8.4                | 2.73    | 2.73    | 0.8     | 4.0     | 8.0    | Q2            |
| TPS63031DSKR | SON          | DSK             | 10   | 3000 | 330.0              | 8.4                | 2.8     | 2.8     | 1.0     | 4.0     | 8.0    | Q2            |
| TPS63031DSKT | SON          | DSK             | 10   | 250  | 179.0              | 8.4                | 2.73    | 2.73    | 0.8     | 4.0     | 8.0    | Q2            |
| TPS63031DSKT | SON          | DSK             | 10   | 250  | 180.0              | 8.4                | 2.8     | 2.8     | 1.0     | 4.0     | 8.0    | Q2            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS63030DSKR | SON          | DSK             | 10   | 3000 | 203.0       | 203.0      | 35.0        |
| TPS63030DSKR | SON          | DSK             | 10   | 3000 | 367.0       | 367.0      | 35.0        |
| TPS63030DSKT | SON          | DSK             | 10   | 250  | 203.0       | 203.0      | 35.0        |
| TPS63030DSKT | SON          | DSK             | 10   | 250  | 210.0       | 185.0      | 35.0        |
| TPS63031DSKR | SON          | DSK             | 10   | 3000 | 203.0       | 203.0      | 35.0        |
| TPS63031DSKR | SON          | DSK             | 10   | 3000 | 367.0       | 367.0      | 35.0        |
| TPS63031DSKT | SON          | DSK             | 10   | 250  | 203.0       | 203.0      | 35.0        |
| TPS63031DSKT | SON          | DSK             | 10   | 250  | 210.0       | 185.0      | 35.0        |

## DSK (S-PDSO-N10)

## PLASTIC QUAD FLATPACK

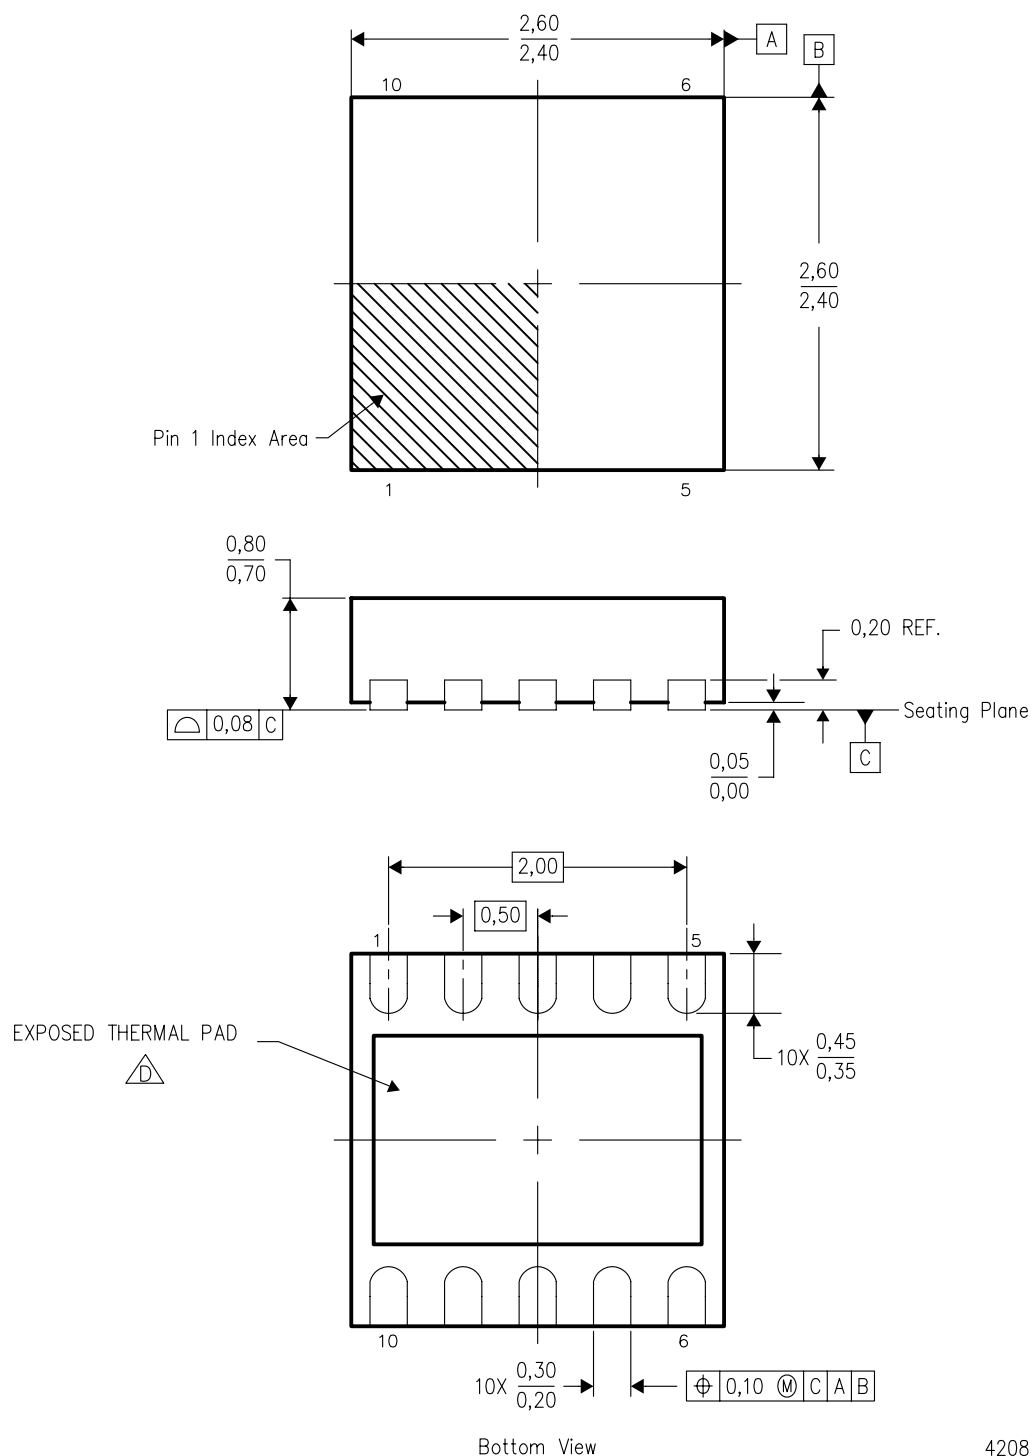

NOTES:

- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
- B. This drawing is subject to change without notice.
- C. Small Outline No-Lead (SON) package configuration.
-  D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.

## THERMAL PAD MECHANICAL DATA

DSK (R-PWSON-N10)


PLASTIC SMALL OUTLINE NO-LEAD

### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

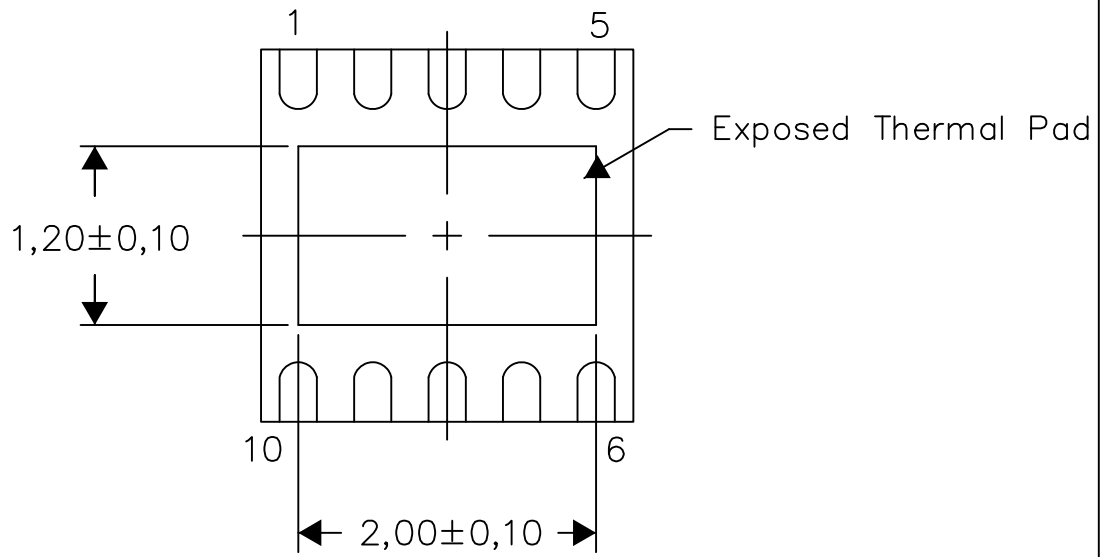

Bottom View


Exposed Thermal Pad Dimensions

4208579-2/E 12/12

NOTE: All linear dimensions are in millimeters

DSK (R-PWSON-N10)

PLASTIC SMALL OUTLINE NO-LEAD

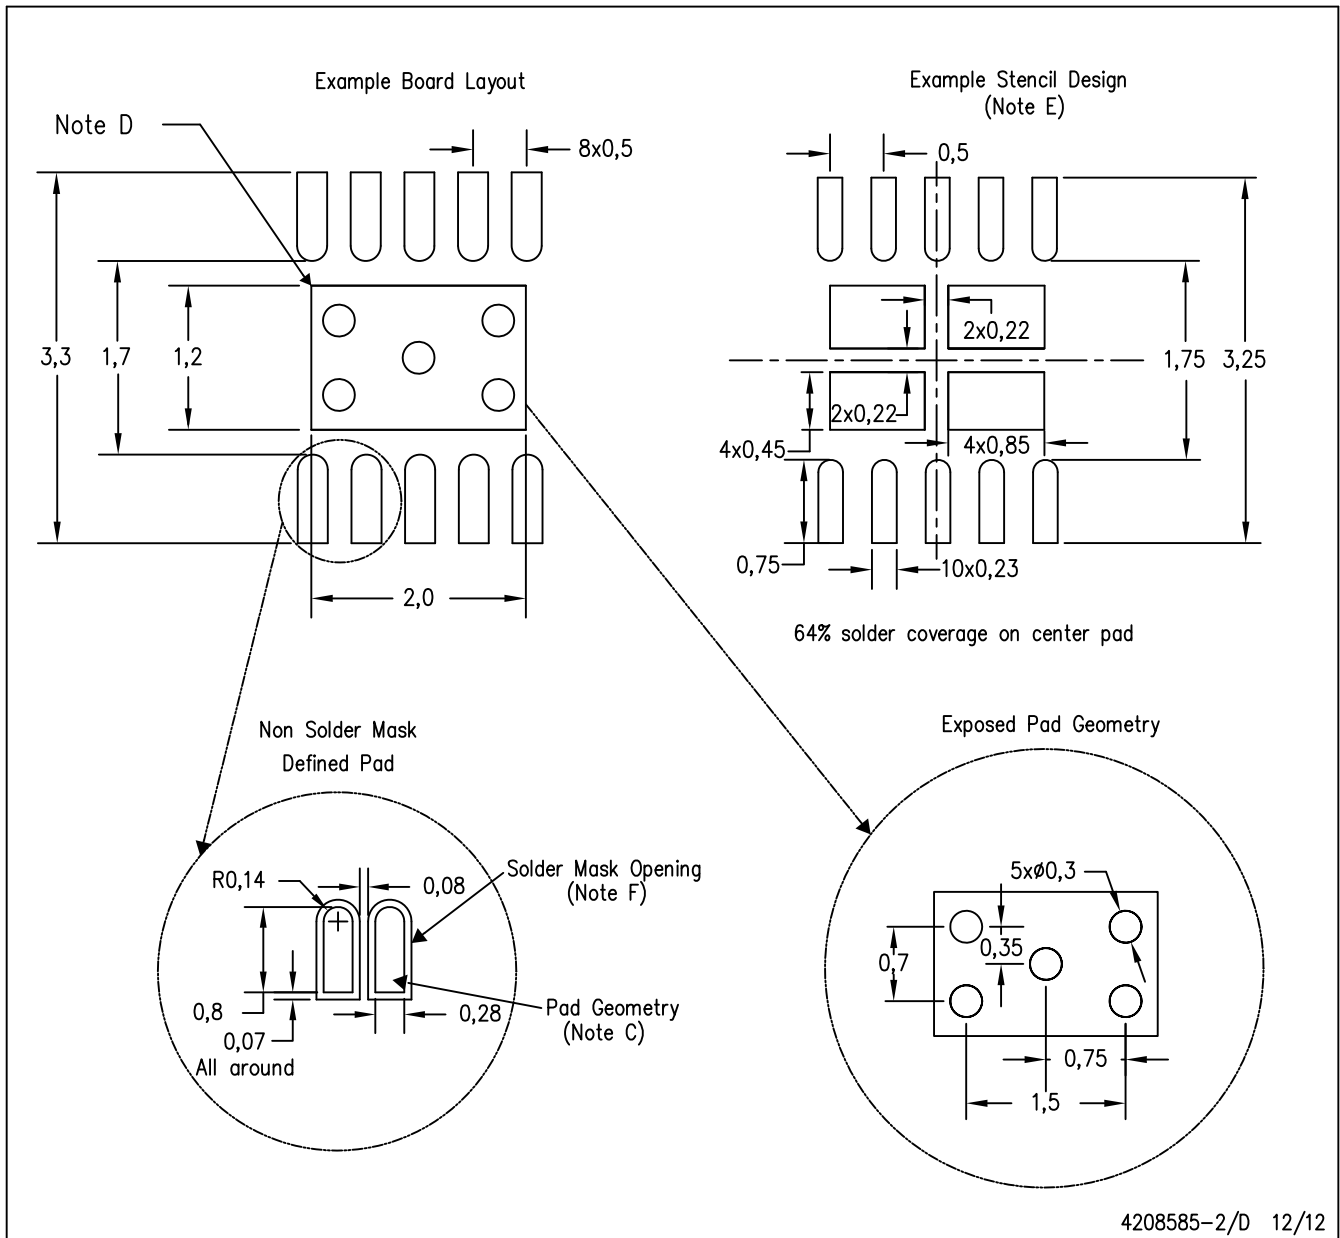

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-SM-782 is recommended for alternate designs.
  - D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)