

ROITHNER LASERTECHNIK

A-1040 WIEN, FLEISCHMANNGASSE 9

TEL: +43 -1- 586 52 43 FAX: +43 -1- 586 41 43

e-mail: office@roithner-laser.com http://www.roithner-laser.com

S6305MG

TECHNICAL DATA



Visible Wavelength Laserdiode

Structure: InGaAlP, index guided single transverse mode

Lasing wavelength: 635 nm typ.


Output power: 5 mW, CW

Package: 5.6 mm, TO-18




NOTE!
LASERDIODE
MUST BE COOLED!

PIN CONNECTION:



- 1) Laser diode cathode
- 2) Laser diode anode and photodiode cathode
- 3) Photodiode anode

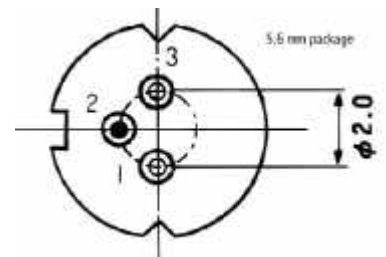

Maximum Ratings (Tc=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Optical Output Power	P_o	7	mW
LD Reverse Voltage	$V_{R(LD)}$	2	V
PD Reverse Voltage	$V_{R(PD)}$	30	V
Operation Case Temperature	T_c	-10 .. +40	°C
Storage Temperature	T_{STG}	-40 .. +85	°C

Optical-Electrical Characteristics (Tc = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Threshold Current	I_{th}	cw		35	45	mA
Operation Current	I_{op}	$P_o = 5 \text{ mW}$		45	60	mA
Operating Voltage	V_{op}	$P_o = 5 \text{ mW}$	2.1	2.3	2.6	V
Lasing Wavelength	λ_p	$P_o = 5 \text{ mW}$	630	635	640	nm
Beam Divergence	$\theta_{//}$	$P_o = 5 \text{ mW}$	6	7.5	9	°
Beam Divergence	$\theta_{\perp}$	$P_o = 5 \text{ mW}$	32	38	42	°
Slope Efficiency	η	$P_o = 3 \text{ mW}$	0.35	0.55	0.8	mW/mA
Monitor Current	I_m	$P_o = 5 \text{ mW}$	100	250	650	μA
Deviation Angle	$\Delta\theta_{//}$	$P_o = 5 \text{ mW}$			±5	°
Deviation Angle	$\Delta\theta_{\perp}$	$P_o = 5 \text{ mW}$			±5	°
Emission Point Accuracy	Δx	-			±80	μm
	Δy	-			±80	μm
	Δz	-			±80	μm