



CMOS Octal 8-Bit D/A Converter

MX7228

General Description


Maxim's MX7228 contains eight 8-bit voltage output digital-to-analog converters (DACs) with separate input latches and output buffers for simple microprocessor and TTL/CMOS interfacing. The MX7228 maintains 8-bit accuracy over the full operating temperature range without external trimming.

Internally, data transfer into the data registers is via a common 8-bit TTL/CMOS compatible input bus. Logic inputs A2, A1, and A0 control which DAC is loaded after WR goes low.

Applications

Minimum Component Count Analog Systems
Digital Offset/Gain Adjustment
Industrial Process Control
Arbitrary Function Generators
Automatic Test Equipment

Typical Operating Circuit

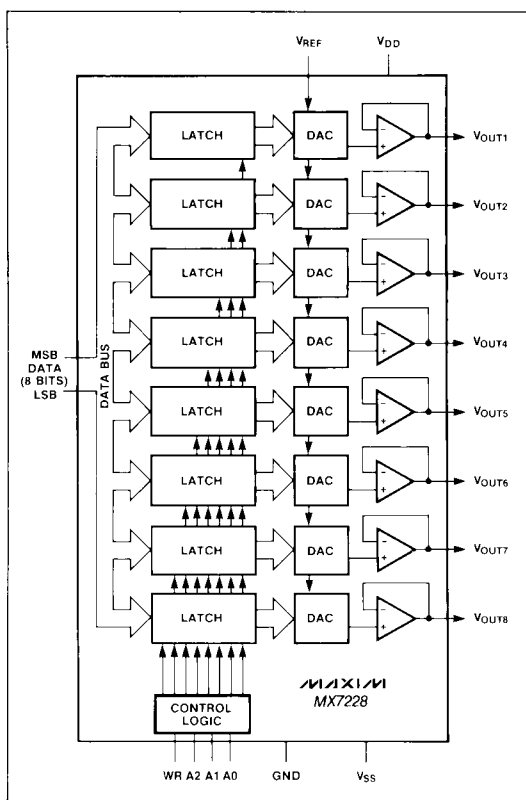

Features


- ◆ Buffered Voltage Output
- ◆ μ P Compatible
- ◆ TTL/CMOS Logic Compatible
- ◆ Requires No External Adjustments
- ◆ 24-Pin Narrow DIP Package
- ◆ Operates from Single or Dual Supplies

Ordering Information

PART	TEMP. RANGE	PACKAGE	ERROR
MX7228KN	0°C to +70°C	Plastic DIP	± 2 LSB
MX7228LN	0°C to +70°C	Plastic DIP	± 1 LSB
MX7228KCWG	0°C to +70°C	Wide SO	± 2 LSB
MX7228LCWG	0°C to +70°C	Wide SO	± 1 LSB
MX7228K/D	0°C to +70°C	Dice	± 2 LSB
MX7228KP	0°C to +70°C	PLCC	± 2 LSB
MX7228LP	0°C to +70°C	PLCC	± 1 LSB
MX7228BQ	-25°C to +85°C	CERDIP	± 2 LSB
MX7228CQ	-25°C to +85°C	CERDIP	± 1 LSB
MX7228TQ	-55°C to +125°C	CERDIP	± 2 LSB
MX7228UQ	-55°C to +125°C	CERDIP	± 1 LSB

Pin Configuration

Top View

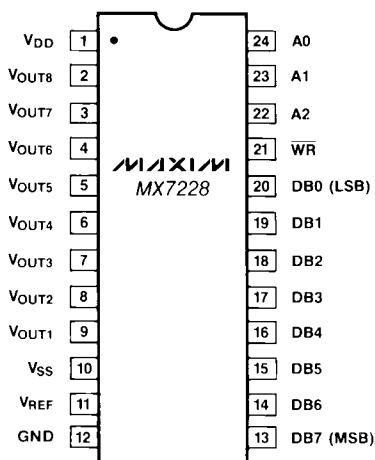

See page 11 for Plastic Chip Carrier Configuration



Maxim Integrated Products 1

MAXIM is a registered trademark of Maxim Integrated Products.

CMOS Octal 8-Bit D/A Converter

ABSOLUTE MAXIMUM RATINGS

V_{DD} to GND	-0.3V, +17V
V_{DD} to V_{SS}	-0.3V, +24V
V_{SS} to GND	-7V, V_{DD}
Digital Input Voltage to GND	-0.3V, V_{DD}
V_{REF} to GND	-0.3V, V_{DD}
V_{OUT} to GND (Note 1)	V_{SS} , V_{DD}
Power Dissipation (Any Package) to +75°C	1000mW
Derating above +75°C	12mW/°C

Operating Temperature Ranges

MX7228K, L	0°C to +70°C
MX7228B, C	-25°C to +85°C
MX7228T, U	-55°C to +125°C
Storage Temperature	-65°C to +165°C
Lead Temperature (Soldering 10 sec.)	+300°C

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Dual Supply Operation

(V_{DD} = +10.8V to +16.5V, V_{SS} = -5V $\pm$ 10%, GND = 0V, V_{REF} = +2V to +10V, R_L = 2k, C_L = 100pF, T_A = T_{MIN} to T_{MAX} unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
STATIC PERFORMANCE						
Resolution			8			Bits
Total Unadjusted Error		$V_{DD} = 15V \pm 10\%$ $V_{REF} = 10V$			+2 +1	LSB
Relative Accuracy	INL				+1 +1/2	LSB
Differential Nonlinearity	DNL	Guaranteed Monotonic			+1	LSB
Full Scale Error					+1 +1/2	LSB
Full Scale Tempco		$V_{REF} = 10V$		5		ppm/°C
Zero Code Error		$T_A = 25^\circ C$			+25 +15	mV
		$T_A = T_{MIN}$ to T_{MAX}			+30 +20	
Zero Code Tempco				30		$\mu V/^\circ C$
REFERENCE INPUT						
Reference Input Range		(Note 2)	2		10	V
Reference Input Resistance			2			k Ω
Reference Input Capacitance		(Note 3) DAC loaded with 1s			500	pF
AC Feedthrough		(Note 4)		-70		dB
DIGITAL INPUTS						
Input High Voltage	V_{INH}		2.4			V
Input Low Voltage	V_{INL}			0.8		V
Digital Input Leakage Current		$V_{IN} = 0V$ or V_{DD}			+1	μA
Digital Input Capacitance		(Note 3)			8	pF

Note 1: The outputs may be shorted to GND provided that the power dissipation of the package is not exceeded. Typical short circuit current to GND is 25mA.

Note 2: V_{OUT} must be less than V_{DD} by 3.5V to ensure correct operation.

Note 3: Sample tested at +25°C to ensure compliance.

Note 4: $V_{REF} = 10kHz$, 8V peak-to-peak sine wave.

Note 5: Code transition all 0s to all 1s. $V_{REF} = 0V$; $WR = V_{DD}$.

Note 6: Code transition all 0s to all 1s. $V_{REF} = 10V$; $WR = 0V$.

CMOS Octal 8-Bit D/A Converter

ELECTRICAL CHARACTERISTICS—Dual Supply Operation (Continued)

($V_{DD} = +10.8V$ to $+16.5V$, $V_{SS} = -5V \pm 10\%$, $GND = 0V$, $V_{REF} = +2V$ to $+10V$, $R_L = 2k$, $C_L = 100pF$, $T_A = T_{MIN}$ to T_{MAX} unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DYNAMIC PERFORMANCE (Note 3)						
Voltage Output Slew Rate			2			V/ μ s
V _{OUT} Settling Time		To +1/2 LSB, V _{REF} = 10V			5	μ s
Digital Feedthrough		(Note 5)		50		nV-sec
Digital Crosstalk		(Note 6)		50		nV-sec
Output Load Resistance		V _{OUT} = 10V	2			k Ω
POWER REQUIREMENTS						
Positive Supply Range	V _{DD}	For specified performance	10.8		16.5	V
Negative Supply Range	V _{SS}	For specified performance	-4.5		-5.5	V
Positive Supply Current (Note 7)	I _{DD}	T _A = 25°C All			16	mA
		T _A = T _{MIN} to T _{MAX} K,B,L,C T,U			20 22	
Negative Supply Current (Note 7)	I _{SS}	T _A = 25°C All			14	mA
		T _A = T _{MIN} to T _{MAX} K,B,L,C T,U			18 20	
SWITCHING CHARACTERISTICS (Note 3)						
Address to $\overline{WR}$ Setup	t ₁		0			ns
Address to $\overline{WR}$ Hold	t ₂		0			ns
Data to $\overline{WR}$ Setup	t ₃	T _A = 25°C All	70			ns
		T _A = T _{MIN} to T _{MAX} K,L,B,C T,U	90 100			
Data to $\overline{WR}$ Hold	t ₄		10			ns
$\overline{WR}$ Pulse Width	t ₅	T _A = 25°C All	95			ns
		T _A = T _{MIN} to T _{MAX} K,L,B,C T,U	120 150			

ELECTRICAL CHARACTERISTICS—Single +15V Supply Operation

($V_{DD} = +15V \pm 10\%$, $V_{SS} = GND = 0V$, $V_{REF} = +10V$, $R_L = 2k$, $C_L = 100pF$, $T_A = T_{MIN}$ to T_{MAX} unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
STATIC PERFORMANCE						
Resolution			8			Bits
Total Unadjusted Error		K,B,T L,C,U			±2 +1	LSB
Differential Nonlinearity		Guaranteed Monotonic			±1	LSB
REFERENCE INPUT All specifications are the same as for dual supplies.						
DIGITAL INPUTS All specifications are the same as for dual supplies.						
DYNAMIC PERFORMANCE All specifications are the same as for dual supplies.						
POWER REQUIREMENTS						
Positive Supply Range	V _{DD}	For specified performance	13.5		16.5	V
Positive Supply Current (Note 7)	I _{DD}	T _A = 25°C All			16	mA
		T _A = T _{MIN} to T _{MAX} K,B,L,C T,U			20 22	
SWITCHING CHARACTERISTICS All specifications are the same as for dual supplies.						

CMOS Octal 8-Bit D/A Converter

ELECTRICAL CHARACTERISTICS—+5V Supply Operation

($V_{DD} = +5V \pm 5\%$, $V_{SS} = 0$ to $-5V \pm 10\%$, $GND = 0V$, $V_{REF} = +1.25V$, $R_L = 2k$, $C_L = 100pF$, $T_A = T_{MIN}$ to T_{MAX} unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
STATIC PERFORMANCE							
Resolution				8			Bits
Differential Nonlinearity		Guaranteed Monotonic				+1	LSB
Full Scale Error			K,B,T L,C,U			±4 ±2	LSB
Zero Code Error		T _A = 25°C	K,B,T L,C,U			40 30	mV
REFERENCE INPUT							
Reference Input Range		(Note 2)		1.2		1.3	V
Reference Input Resistance				2			kΩ
Reference Input Capacitance		(Note 3) DAC loaded with 1s				500	pF
DIGITAL INPUTS All specifications are the same as for dual supplies.							
DYNAMIC PERFORMANCE All specifications are the same as for dual supplies.							
POWER REQUIREMENTS							
Positive Supply Range	V _{DD}	For Spec Performance		4.75		5.25	V
Positive Supply Current (Note 7)	I _{DD}	T _A = 25°C All				16	mA
		T _A = T _{MIN} to T _{MAX} K,B,L,C T,U				20 22	
Negative Supply Current (Note 7)	I _{SS}	T _A = 25°C All				14	mA
		T _A = T _{MIN} to T _{MAX} K,B,L,C T,U				18 20	
SWITCHING CHARACTERISTICS (Note 3)							
Address to WR Setup	t ₁			0			ns
Address to WR Hold	t ₂			0			ns
Data to WR Setup	t ₈	T _A = 25°C All		100			ns
		T _A = T _{MIN} to T _{MAX} K,L,B,C T,U		140 175			
Data to WR Hold	t ₄			10			ns
WR Pulse Width	t ₅	T _A = 25°C All		125			ns
		T _A = T _{MIN} to T _{MAX} K,L,B,C T,U		160 200			

Note 1: The outputs may be shorted to GND provided that the power dissipation of the package is not exceeded. Typical short circuit current to GND is 25mA.

Note 2: V_{OUT} must be less than V_{DD} by 3.5V to ensure correct operation.

Note 3: Sample tested at $+25^\circ C$ to ensure compliance.

Note 4: $V_{REF} = 10kHz$, 8V peak-to-peak sine wave.

Note 5: Code transition all 0s to all 1s. $V_{REF} = 0V$; $\overline{WR} = V_{DD}$.

Note 6: Code transition all 0s to all 1s. $V_{REF} = 10V$; $\overline{WR} = 0V$.

Note 7: Outputs unloaded.

CMOS Octal 8-Bit D/A Converter

Digital Inputs and Interface Logic

The digital inputs are compatible with both TTL and 5V CMOS logic, however the power supply current (I_{DD}) is somewhat dependent on input logic level. Supply current is specified for TTL input levels (worst case) but is reduced (by about 450 μ A) when the logic inputs are driven near GND or greater than 4 volts above GND.

Table 1 shows control logic truth table for $\overline{WR}$, A2, A1, and A0 operation. When $\overline{WR}$ is low, the input latch of the selected DAC is transparent, and the DAC's output responds to the activity on the data bus. The data is latched into the addressed DAC's latch on the rising edge of the $\overline{WR}$ signal. Figure 1 shows the timing diagram for the MX7228.

Table 1. Control Logic Truth Table

WR	A2	A1	A0	OPERATION
H	X	X	X	No operation Device not selected
L	L	L	L	DAC 1 Transparent
R	L	L	L	DAC 1 Latched
L	L	L	H	DAC 2 Transparent
L	L	H	L	DAC 3 Transparent
L	L	H	H	DAC 4 Transparent
L	H	L	L	DAC 5 Transparent
L	H	L	H	DAC 6 Transparent
L	H	H	L	DAC 7 Transparent
L	H	H	H	DAC 8 Transparent

H = High State, L = Low State, X = Don't Care, R = Rising Edge

Detailed Description

The MX7228 has eight matched voltage output digital-to-analog converters (DACs). The DACs are "inverted" R-2R ladder networks which convert 8 digital bits into equivalent analog output voltages in proportion to the

applied reference voltage. All 8 DACs in the MX7228 share the same reference input (V_{REF}) and GND. A simplified circuit diagram of one of the eight DACs is provided in Figure 2.

V_{REF} Input

The voltage at V_{REF} sets the full-scale output of the DACs. The input impedance of the V_{REF} pin is code dependent. The lowest value, approximately 2 kohms, occurs when the input code of all eight DACs is 01010101. The maximum value of infinity occurs when all of the input codes of the eight DACs is 00000000. Because the input resistance at V_{REF} is code dependent, the DACs' reference source should not have an output impedance more than 4 ohms. The capacitance at V_{REF} is also code dependent and typically varies from 120pF to 350pF.

V_{OUT1} , V_{OUT2} , V_{OUT3} , V_{OUT4} , V_{OUT5} , V_{OUT6} , V_{OUT7} , and V_{OUT8} can be represented by a digitally programmable voltage source as:

$$V_{OUT} = N_b \times V_{REF}/256$$

where N_b is the numeric value of the DAC's binary input code.

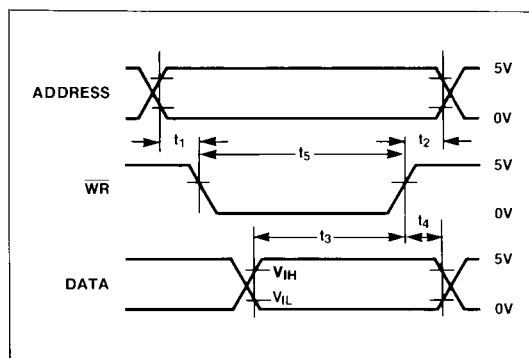


Figure 1. Write Cycle Timing Diagram

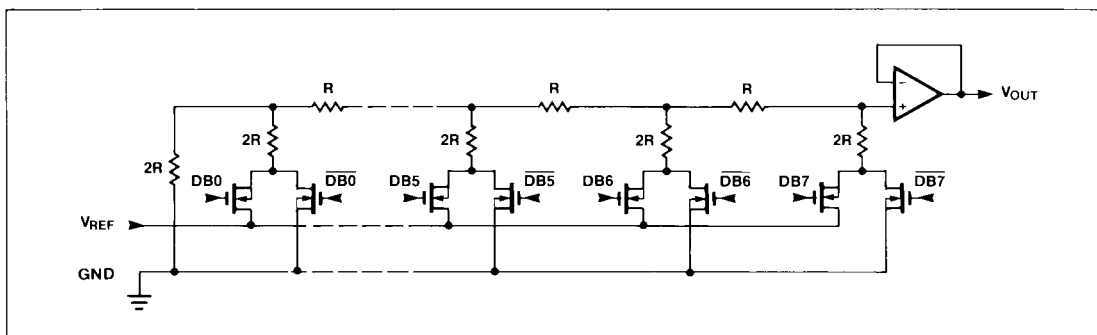


Figure 2. DAC Circuit Diagram

CMOS Octal 8-Bit D/A Converter

Output Buffer Amplifiers

All voltage outputs are internally buffered by precision unity gain followers which slew at greater than $2\text{V}/\mu\text{s}$. The output settles to $\pm 1/2$ LSB in less than $5\mu\text{s}$ when driving $2\text{k}\Omega$ in parallel with 100pF with a full scale transition (0V to $+10\text{V}$ or $+10\text{V}$ to 0V). The buffers will also drive $2\text{k}\Omega$ in parallel with 500pF to 10V levels without oscillation. Typical dynamic response and settling performance of the MX7228 are shown in Figures 3 and 4.

A simplified circuit diagram of an output buffer is shown in Figure 5. Input common mode range to GND is provided by a PMOS input structure. The output circuitry incorporates both a constant current source and an actively driven n-channel device. The actively driven n-channel device aids in discharging large output capacitances.

The MX7228 can operate from either a single supply or dual supplies. The output buffer amplifiers are the only part of the MX7228 that receive V_{SS} power. Operating the MX7228 from dual supplies will improve the negative going output settling time near GND. In addition, the output amplifier can sink $500\mu\text{A}$ when operating with dual supplies. The use of dual supplies also extends the input reference voltage range. When operating with a single supply, the output sink current decreases when the output approaches 0V (see Figure 6).

The output amplifier broadband noise is approximately $50\mu\text{V}_{\text{RMS}}$ and is not strongly power supply voltage dependent. The output impedance of the output buffer is approximately 1Ω .

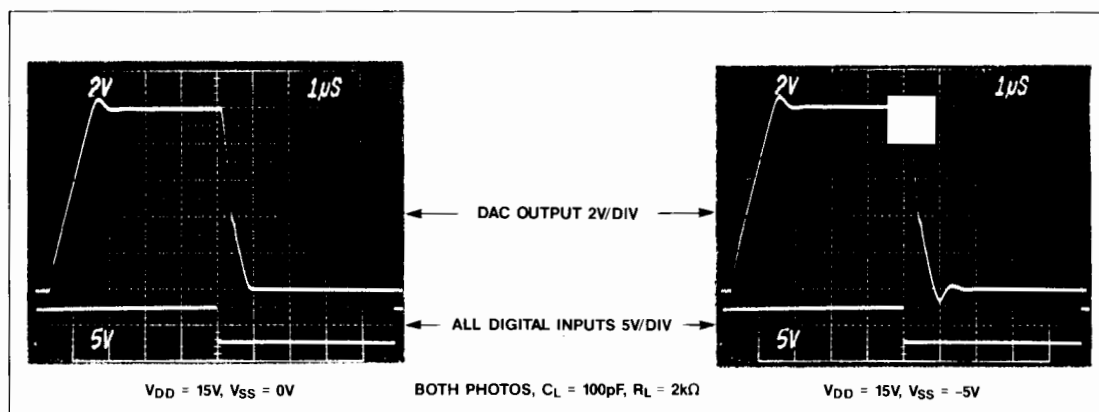


Figure 3. Dynamic Response

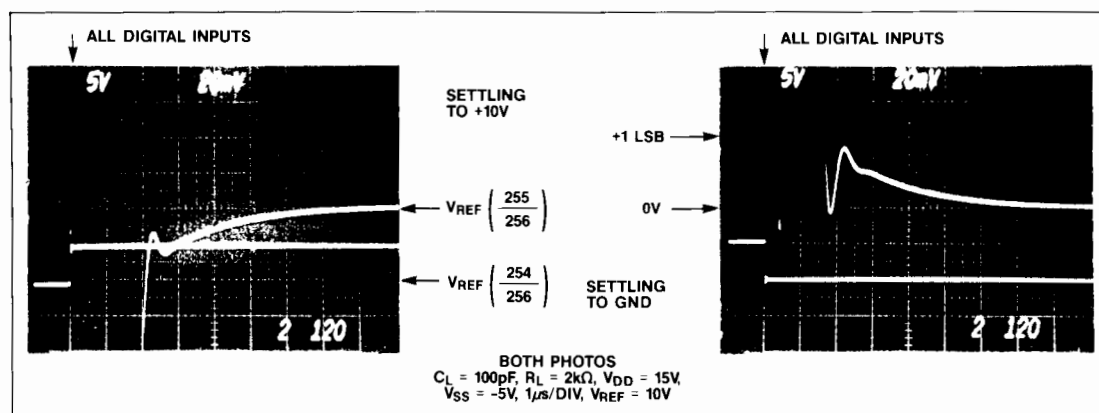


Figure 4. Dynamic Response

CMOS Octal 8-Bit D/A Converter

MX7228

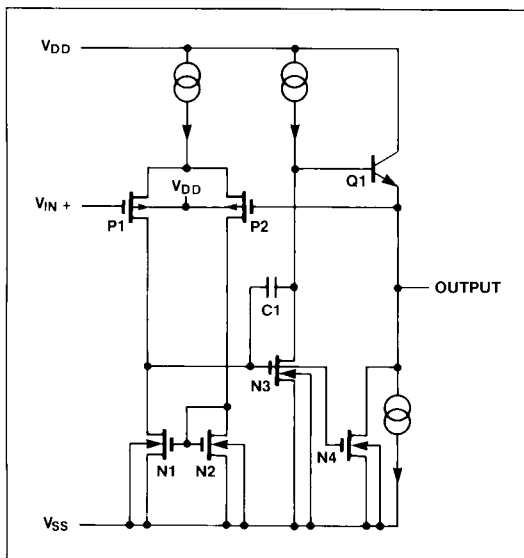


Figure 5. Output Buffer Amplifier

Applications Information

Power Supply and Reference Operating Ranges

The MX7228 is fully specified to operate between $+12V \pm 10\%$ and $+15V \pm 10\%$ (10.8V to 16.5V), and with V_{SS} from 0V to -5.5V. 8 bit performance is guaranteed for single supply operation ($V_{SS} = 0V$), however, zero code error is improved with $V_{SS} = -5V$.

For adequate DAC and buffer operation, V_{REF} must always be below V_{DD} by at least 3.5V.

Power Supply Management

Careful PCB layout techniques should be used to minimize crosstalk between V_{REF} , GND, and the digital inputs. This is particularly important if the reference input is driven from an AC source. Bypass capacitors (0.1 μF in parallel with 6.8 μF) should be used between V_{DD} and GND (also between V_{SS} and GND if V_{SS} is -5V).

Unipolar Output

In unipolar operation, the reference voltage is the same polarity as the output voltage. Since the reference voltage must always be positive with respect to GND, the output voltage is also positive with respect to GND. An example of a unipolar circuit configuration is shown in Figure 7. The unipolar code is given in Table 2.

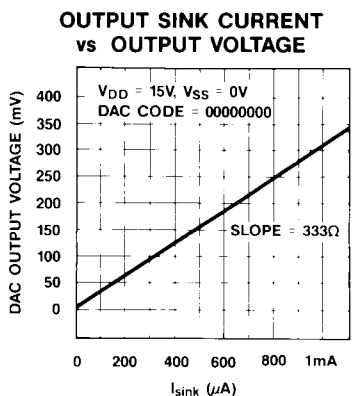
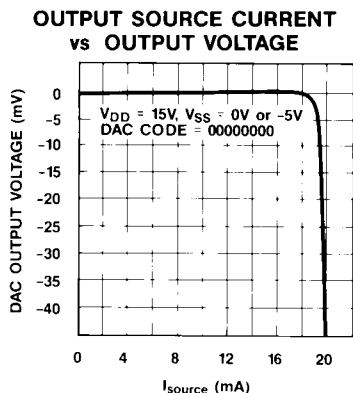
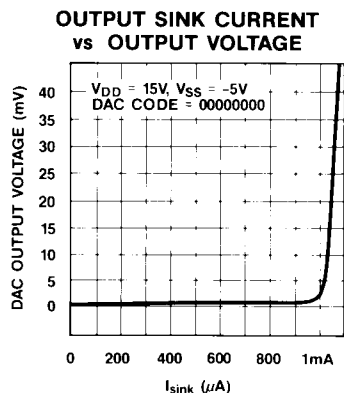


Figure 6. Output Sink/Source Current vs. Output Voltage

CMOS Octal 8-Bit D/A Converter

Table 2. Unipolar Code Table

DAC CONTENTS								ANALOG OUTPUT
MSB				LSB				
1	1	1	1	1	1	1	1	$+V_{REF} \left(\frac{255}{256} \right)$
1	0	0	0	0	0	0	1	$+V_{REF} \left(\frac{129}{256} \right)$
1	0	0	0	0	0	0	0	$+V_{REF} \left(\frac{128}{256} \right) = + \frac{V_{REF}}{2}$
0	1	1	1	1	1	1	1	$+V_{REF} \left(\frac{127}{256} \right)$
0	0	0	0	0	0	0	1	$+V_{REF} \left(\frac{1}{256} \right)$
0	0	0	0	0	0	0	0	0V

Note: $1 \text{ LSB} = (V_{\text{REF}})(2^{-8}) = +V_{\text{REF}} \left(\frac{1}{256} \right)$

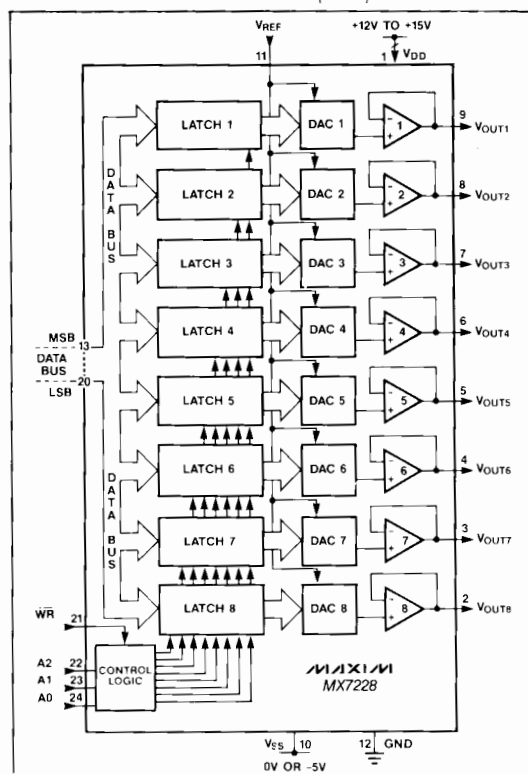


Figure 7. Unipolar Output Circuit

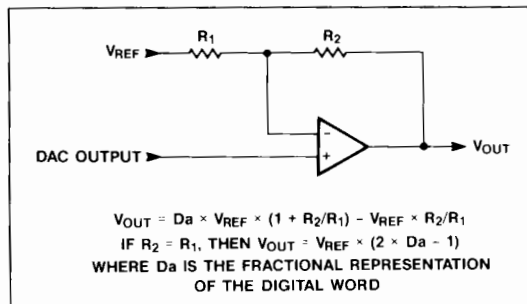


Figure 8. Bipolar Output Circuit

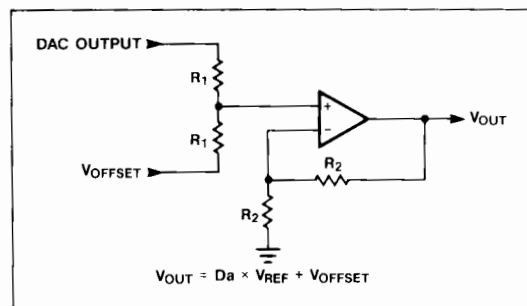


Figure 9. Offset Circuit

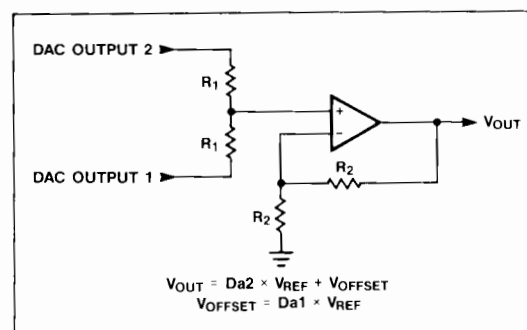


Figure 10. Offset Circuit

MX7228

distortion is typically less than 0.1% for frequencies up to 50kHz.

Generating V_{SS}

Digital Interface Applications

Figures 13 through 16 shown examples of interfacing the MX7228 to most popular microprocessors.

5V Operation

The MX7228 can also be used with a single 5V power supply or a $\pm 5V$ power supply. The timing specifications are degraded, and the reference voltage range is reduced. The DNL of each DAC remains at ± 1 LSB guaranteeing monotonicity. For devices with a negative offset and no negative supply there is a possibility, near zero, that the DAC will not change when the DAC code is incremented. Once the DAC has reached the offset voltage of the output buffer, the DAC will begin to increment in a normal fashion. Since the LSB voltage is only a few millivolts, care should be used in decoupling supplies, ground loops, etc.

Figure 11. AC Reference Input Circuit

MAXIM

CMOS Octal 8-Bit D/A Converter

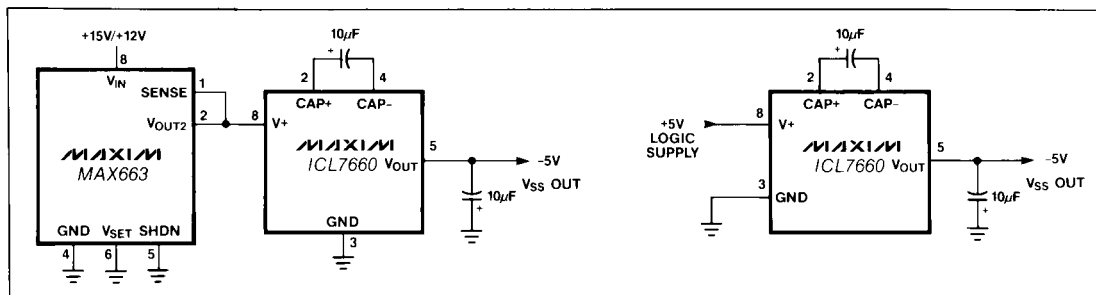


Figure 12. Generating -5V for V_{SS}

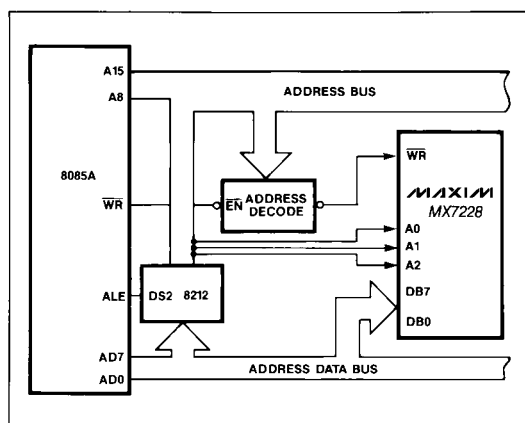


Figure 13. MX7228 to 8085A Interface

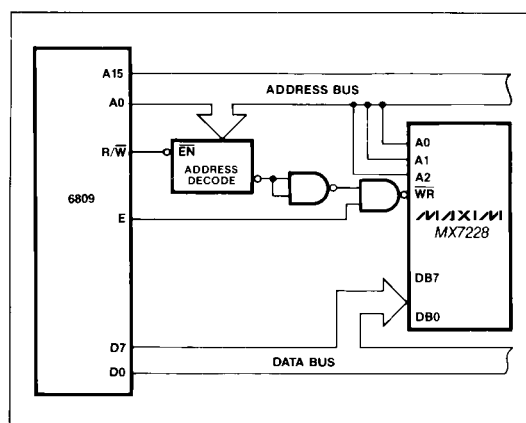


Figure 14. MX7228 to 6809 Interface

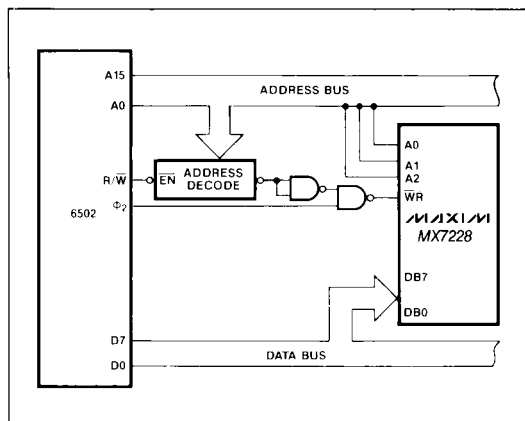


Figure 15. MX7228 to 6502 Interface



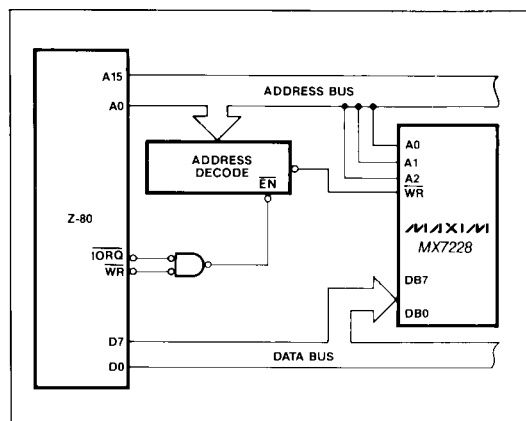


Figure 16. MX7228 to Z-80 Interface

CMOS Octal 8-Bit D/A Converter


Pin Configuration (continued)

Top View

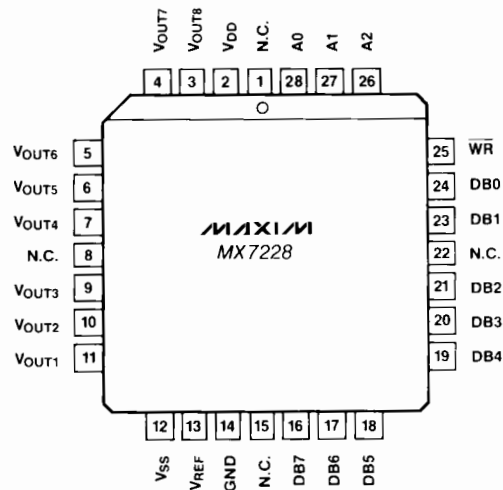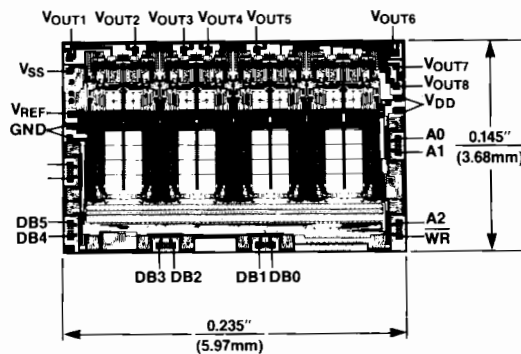

28 Lead Plastic Chip Carrier (Quad Pak)


Package Information

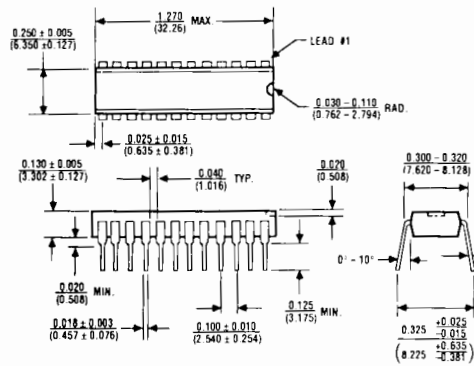

24 Lead Plastic Narrow DIP (NG)

$\theta_{JA} = 120^{\circ}\text{C/W}$

$\theta_{JC} = 60^{\circ}\text{C/W}$

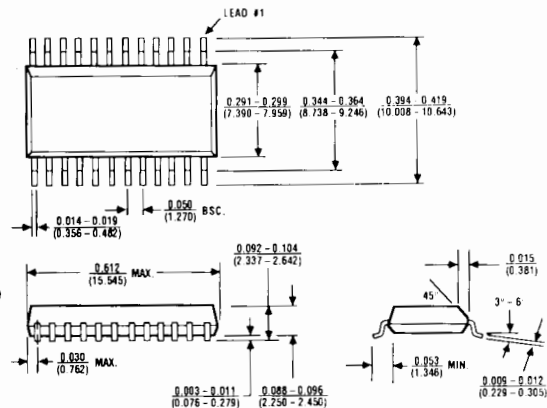


24 Lead Small Outline, Wide (WG)

$\theta_{JA} = 85^{\circ}\text{C/W}$

$\theta_{JC} = 45^{\circ}\text{C/W}$

CMOS Octal 8-Bit D/A Converter


Package Information (continued)

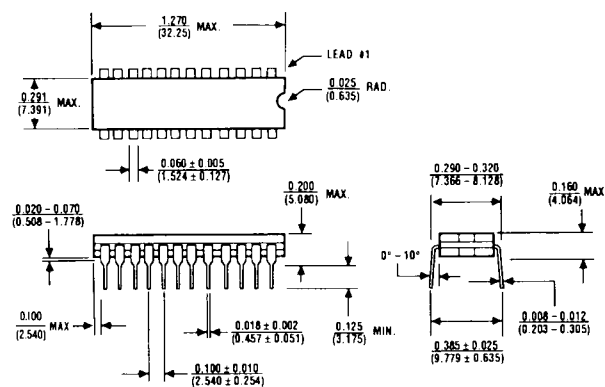

24 Lead Narrow Cerdip (RG)

$$\theta_{JA} = 80^{\circ}\text{C/W}$$

$$\theta_{JC} = 40^{\circ}\text{C/W}$$

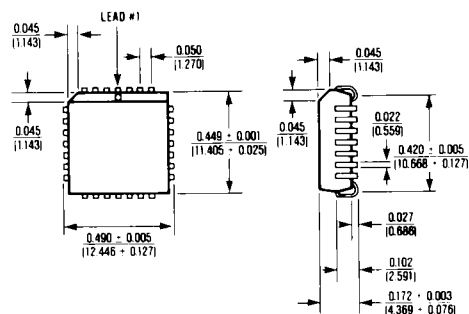

**28 Lead Plastic Chip Carrier
(Quad Pak) (QI)**

$$\theta_{JA} = 100^{\circ}\text{C/W}$$

$$\theta_{JC} = 45^{\circ}\text{C/W}$$

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600**

©1989 Maxim Integrated Products

Printed USA

19-875

1/89