

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## 1-Kb, 2-Kb, 4-Kb, 8-Kb and 16-Kb I<sup>2</sup>C CMOS Serial EEPROM

### Description

The CAT24C01/02/04/08/16 are 1-Kb, 2-Kb, 4-Kb, 8-Kb and 16-Kb respectively CMOS Serial EEPROM devices organized internally as 8/16/32/64 and 128 pages respectively of 16 bytes each. All devices support both the Standard (100 kHz) as well as Fast (400 kHz) I<sup>2</sup>C protocol.


Data is written by providing a starting address, then loading 1 to 16 contiguous bytes into a Page Write Buffer, and then writing all data to non-volatile memory in one internal write cycle. Data is read by providing a starting address and then shifting out data serially while automatically incrementing the internal address count.

External address pins make it possible to address up to eight CAT24C01 or CAT24C02, four CAT24C04, two CAT24C08 and one CAT24C16 device on the same bus.

### Features

- Supports Standard and Fast I<sup>2</sup>C Protocol
- 1.7 V to 5.5 V Supply Voltage Range
- 16-Byte Page Write Buffer
- Hardware Write Protection for Entire Memory
- Schmitt Triggers and Noise Suppression Filters on I<sup>2</sup>C Bus Inputs (SCL and SDA)
- Low power CMOS Technology
- More than 1,000,000 Program/Erase Cycles
- 100 Year Data Retention
- Industrial and Extended Temperature Range
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### PIN CONFIGURATION

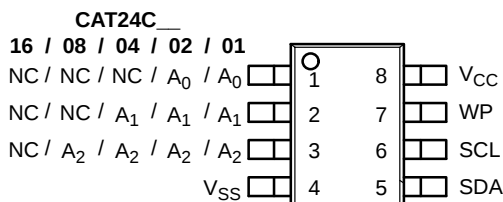

PDIP (L), SOIC (W), TSSOP (Y), MSOP (Z), US (US)\*\*,  
TDFN, (VP2)\*, UDFN-EP (HU4) (Top View)


\* The TDFN (VP2) package is not recommended for new designs.

\*\* Preliminary, please contact factory for availability.





ON Semiconductor®


<http://onsemi.com>

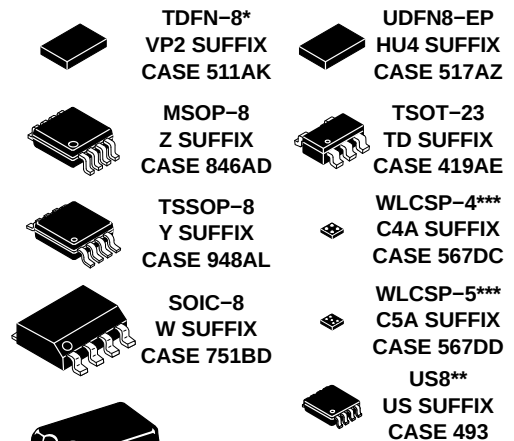

### PIN CONFIGURATIONS

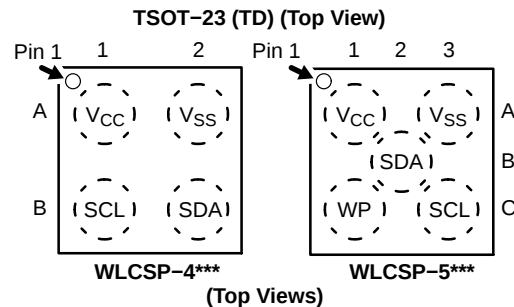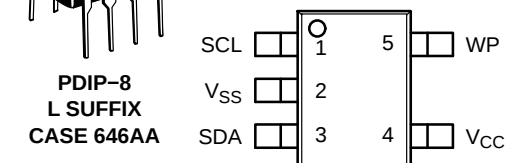


\*\*\* WLCSP are available for the CAT24C04, CAT24C08 and CAT24C16 only.

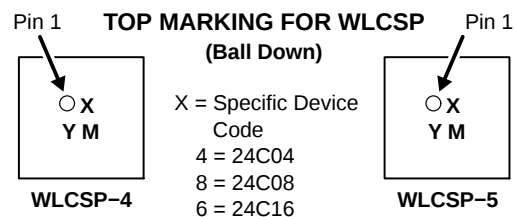

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 19 of this data sheet.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

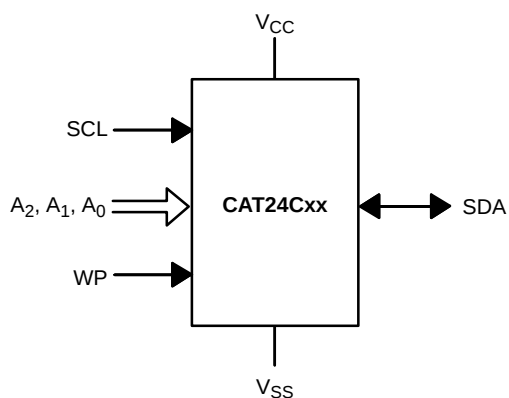

**Figure 1. Functional Symbol**

**Table 1. PIN FUNCTION**

| Pin Name <sup>†</sup> | Function                 |
|-----------------------|--------------------------|
| A0, A1, A2            | Device Address Input     |
| SDA                   | Serial Data Input/Output |
| SCL                   | Serial Clock Input       |
| WP                    | Write Protect Input      |
| V <sub>CC</sub>       | Power Supply             |
| V <sub>SS</sub>       | Ground                   |
| NC                    | No Connect               |

<sup>†</sup> The exposed pad for the TDFN/UDFN packages can be left floating or connected to Ground.

**Table 2. ABSOLUTE MAXIMUM RATINGS**

| Parameters                                         | Ratings      | Units |
|----------------------------------------------------|--------------|-------|
| Storage Temperature                                | -65 to +150  | °C    |
| Voltage on any pin with respect to Ground (Note 1) | -0.5 to +6.5 | V     |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. During input transitions, voltage undershoot on any pin should not exceed -1 V for more than 20 ns. Voltage overshoot on pins A<sub>0</sub>, A<sub>1</sub>, A<sub>2</sub> and WP should not exceed V<sub>CC</sub> + 1 V for more than 20 ns, while voltage on the I<sup>2</sup>C bus pins, SCL and SDA, should not exceed the absolute maximum ratings, irrespective of V<sub>CC</sub>.

**Table 3. RELIABILITY CHARACTERISTICS** (Note 2)

| Symbol                    | Parameter      | Min       | Units                  |
|---------------------------|----------------|-----------|------------------------|
| N <sub>END</sub> (Note 3) | Endurance      | 1,000,000 | Program / Erase Cycles |
| T <sub>DR</sub>           | Data Retention | 100       | Years                  |

2. These parameters are tested initially and after a design or process change that affects the parameter according to appropriate AEC-Q100 and JEDEC test methods.
3. Page Mode, V<sub>CC</sub> = 5 V, 25°C.

**Table 4. D.C. OPERATING CHARACTERISTICS**

(V<sub>CC</sub> = 1.8 V to 5.5 V, T<sub>A</sub> = -40°C to +125°C and V<sub>CC</sub> = 1.7 V to 5.5 V, T<sub>A</sub> = -40°C to +85°C, unless otherwise specified.)

| Symbol           | Parameter          | Test Conditions                                         |                                                            | Min                   | Max                   | Units |
|------------------|--------------------|---------------------------------------------------------|------------------------------------------------------------|-----------------------|-----------------------|-------|
| I <sub>CCR</sub> | Read Current       | Read, f <sub>SCL</sub> = 400 kHz                        |                                                            |                       | 1                     | mA    |
| I <sub>CCW</sub> | Write Current      | Write, f <sub>SCL</sub> = 400 kHz                       |                                                            |                       | 2                     | mA    |
| I <sub>SB</sub>  | Standby Current    | All I/O Pins at GND or V <sub>CC</sub>                  | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> ≤ 3.3 V |                       | 1                     | μA    |
|                  |                    |                                                         | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> > 3.3 V |                       | 3                     |       |
|                  |                    |                                                         | T <sub>A</sub> = -40°C to +125°C                           |                       | 5                     |       |
| I <sub>L</sub>   | I/O Pin Leakage    | Pin at GND or V <sub>CC</sub>                           |                                                            |                       | 2                     | μA    |
| V <sub>IL</sub>  | Input Low Voltage  |                                                         |                                                            | -0.5                  | 0.3 × V <sub>CC</sub> | V     |
| V <sub>IH</sub>  | Input High Voltage | A <sub>0</sub> , A <sub>1</sub> , A <sub>2</sub> and WP |                                                            | 0.7 × V <sub>CC</sub> | V <sub>CC</sub> + 0.5 | V     |
|                  |                    | SCL and SDA                                             |                                                            | 0.7 × V <sub>CC</sub> | 5.5                   |       |
| V <sub>OL</sub>  | Output Low Voltage | V <sub>CC</sub> > 2.5 V, I <sub>OL</sub> = 3 mA         |                                                            |                       | 0.4                   |       |
|                  |                    | V <sub>CC</sub> < 2.5 V, I <sub>OL</sub> = 1 mA         |                                                            |                       | 0.2                   |       |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

**Table 5. PIN IMPEDANCE CHARACTERISTICS**

( $V_{CC} = 1.8\text{ V to }5.5\text{ V}$ ,  $T_A = -40^{\circ}\text{C to }+125^{\circ}\text{C}$  and  $V_{CC} = 1.7\text{ V to }5.5\text{ V}$ ,  $T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$ , unless otherwise specified.)

| Symbol            | Parameter                                                                                                          | Conditions                                                             | Max | Units         |
|-------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----|---------------|
| $C_{IN}$ (Note 4) | SDA Pin Capacitance                                                                                                | $V_{IN} = 0\text{ V}$ , $f = 1.0\text{ MHz}$ , $V_{CC} = 5.0\text{ V}$ | 8   | pF            |
|                   | Other Pins                                                                                                         |                                                                        | 6   | pF            |
| $I_{WP}$ (Note 5) | WP Input Current                                                                                                   | $V_{IN} < V_{IH}$ , $V_{CC} = 5.5\text{ V}$                            | 130 | $\mu\text{A}$ |
|                   |                                                                                                                    | $V_{IN} < V_{IH}$ , $V_{CC} = 3.3\text{ V}$                            | 120 |               |
|                   |                                                                                                                    | $V_{IN} < V_{IH}$ , $V_{CC} = 1.7\text{ V}$                            | 80  |               |
|                   |                                                                                                                    | $V_{IN} > V_{IH}$                                                      | 2   |               |
| $I_A$ (Note 5)    | Address Input Current<br>(A0, A1, A2)<br>Product Rev H: CAT24C02<br>Product Rev K: CAT24C04,<br>CAT24C08, CAT24C16 | $V_{IN} < V_{IH}$ , $V_{CC} = 5.5\text{ V}$                            | 50  | $\mu\text{A}$ |
|                   |                                                                                                                    | $V_{IN} < V_{IH}$ , $V_{CC} = 3.3\text{ V}$                            | 35  |               |
|                   |                                                                                                                    | $V_{IN} < V_{IH}$ , $V_{CC} = 1.7\text{ V}$                            | 25  |               |
|                   |                                                                                                                    | $V_{IN} > V_{IH}$                                                      | 2   |               |

4. These parameters are tested initially and after a design or process change that affects the parameter according to appropriate AEC-Q100 and JEDEC test methods.

5. When not driven, the WP, A0, A1 and A2 pins are pulled down to GND internally. For improved noise immunity, the internal pull-down is relatively strong; therefore the external driver must be able to supply the pull-down current when attempting to drive the input HIGH. To conserve power, as the input level exceeds the trip point of the CMOS input buffer ( $\sim 0.5 \times V_{CC}$ ), the strong pull-down reverts to a weak current source.

**Table 6. A.C. CHARACTERISTICS**

(Note 6) ( $V_{CC} = 1.8\text{ V to }5.5\text{ V}$ ,  $T_A = -40^{\circ}\text{C to }+125^{\circ}\text{C}$  and  $V_{CC} = 1.7\text{ V to }5.5\text{ V}$ ,  $T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$ , unless otherwise specified.)

| Symbol                | Parameter                                  | Standard |      | Fast |     | Units         |
|-----------------------|--------------------------------------------|----------|------|------|-----|---------------|
|                       |                                            | Min      | Max  | Min  | Max |               |
| $F_{SCL}$             | Clock Frequency                            |          | 100  |      | 400 | kHz           |
| $t_{HD:STA}$          | START Condition Hold Time                  | 4        |      | 0.6  |     | $\mu\text{s}$ |
| $t_{LOW}$             | Low Period of SCL Clock                    | 4.7      |      | 1.3  |     | $\mu\text{s}$ |
| $t_{HIGH}$            | High Period of SCL Clock                   | 4        |      | 0.6  |     | $\mu\text{s}$ |
| $t_{SU:STA}$          | START Condition Setup Time                 | 4.7      |      | 0.6  |     | $\mu\text{s}$ |
| $t_{HD:DAT}$          | Data In Hold Time                          | 0        |      | 0    |     | $\mu\text{s}$ |
| $t_{SU:DAT}$          | Data In Setup Time                         | 250      |      | 100  |     | ns            |
| $t_R$                 | SDA and SCL Rise Time                      |          | 1000 |      | 300 | ns            |
| $t_F$ (Note 6)        | SDA and SCL Fall Time                      |          | 300  |      | 300 | ns            |
| $t_{SU:STO}$          | STOP Condition Setup Time                  | 4        |      | 0.6  |     | $\mu\text{s}$ |
| $t_{BUF}$             | Bus Free Time Between STOP and START       | 4.7      |      | 1.3  |     | $\mu\text{s}$ |
| $t_{AA}$              | SCL Low to Data Out Valid                  |          | 3.5  |      | 0.9 | $\mu\text{s}$ |
| $t_{DH}$              | Data Out Hold Time                         | 100      |      | 100  |     | ns            |
| $T_i$ (Note 6)        | Noise Pulse Filtered at SCL and SDA Inputs |          | 100  |      | 100 | ns            |
| $t_{SU:WP}$           | WP Setup Time                              | 0        |      | 0    |     | $\mu\text{s}$ |
| $t_{HD:WP}$           | WP Hold Time                               | 2.5      |      | 2.5  |     | $\mu\text{s}$ |
| $t_{WR}$              | Write Cycle Time                           |          | 5    |      | 5   | ms            |
| $t_{PU}$ (Notes 7, 8) | Power-up to Ready Mode                     |          | 1    |      | 1   | ms            |

6. Test conditions according to "AC Test Conditions" table.

7. Tested initially and after a design or process change that affects this parameter.

8.  $t_{PU}$  is the delay between the time  $V_{CC}$  is stable and the device is ready to accept commands.

Table 7. A.C. TEST CONDITIONS

|                          |                                                                                                            |
|--------------------------|------------------------------------------------------------------------------------------------------------|
| Input Drive Levels       | $0.2 \times V_{CC}$ to $0.8 \times V_{CC}$                                                                 |
| Input Rise and Fall Time | $\leq 50$ ns                                                                                               |
| Input Reference Levels   | $0.3 \times V_{CC}$ , $0.7 \times V_{CC}$                                                                  |
| Output Reference Level   | $0.5 \times V_{CC}$                                                                                        |
| Output Test Load         | Current Source $I_{OL} = 3$ mA ( $V_{CC} \geq 2.5$ V); $I_{OL} = 1$ mA ( $V_{CC} < 2.5$ V); $C_L = 100$ pF |

### Power-On Reset (POR)

Each CAT24Cxx\* incorporates Power-On Reset (POR) circuitry which protects the internal logic against powering up in the wrong state.

A CAT24Cxx device will power up into Standby mode after  $V_{CC}$  exceeds the POR trigger level and will power down into Reset mode when  $V_{CC}$  drops below the POR trigger level. This bi-directional POR feature protects the device against 'brown-out' failure following a temporary loss of power.

*\*For common features, the CAT24C01/02/04/08/16 will be referred to as CAT24Cxx.*

### Pin Description

**SCL:** The Serial Clock input pin accepts the Serial Clock generated by the Master.

**SDA:** The Serial Data I/O pin receives input data and transmits data stored in EEPROM. In transmit mode, this pin is open drain. Data is acquired on the positive edge, and is delivered on the negative edge of SCL.

**A0, A1 and A2:** The Address inputs set the device address when cascading multiple devices. When not driven, these pins are pulled LOW internally.

**WP:** The Write Protect input pin inhibits all write operations, when pulled HIGH. When not driven, this pin is pulled LOW internally.

### Functional Description

The CAT24Cxx supports the Inter-Integrated Circuit (I<sup>2</sup>C) Bus data transmission protocol, which defines a device that sends data to the bus as a transmitter and a device receiving data as a receiver. Data flow is controlled by a Master device, which generates the serial clock and all START and STOP conditions. The CAT24Cxx acts as a Slave device. Master and Slave alternate as either transmitter or receiver.

### I<sup>2</sup>C Bus Protocol

The I<sup>2</sup>C bus consists of two 'wires', SCL and SDA. The two wires are connected to the  $V_{CC}$  supply via pull-up resistors. Master and Slave devices connect to the 2-wire bus via their respective SCL and SDA pins. The transmitting device pulls down the SDA line to 'transmit' a '0' and releases it to 'transmit' a '1'.

Data transfer may be initiated only when the bus is not busy (see AC Characteristics).

During data transfer, the SDA line must remain stable while the SCL line is high. An SDA transition while SCL is high will be interpreted as a START or STOP condition (Figure 2). The START condition precedes all commands. It consists of a HIGH to LOW transition on SDA while SCL is HIGH. The START acts as a 'wake-up' call to all receivers. Absent a START, a Slave will not respond to commands. The STOP condition completes all commands. It consists of a LOW to HIGH transition on SDA while SCL is HIGH.

**NOTE:** The I/O pins of CAT24Cxx do not obstruct the SCL and SDA lines if the VCC supply is switched off. During power-up, the SCL and SDA pins (connected with pull-up resistors to VCC) will follow the VCC monotonically from VSS (0 V) to nominal VCC value, regardless of pull-up resistor value. The delta between the VCC and the instantaneous voltage levels during power ramping will be determined by the relation between bus time constant (determined by pull-up resistance and bus capacitance) and actual VCC ramp rate.

### Device Addressing

The Master initiates data transfer by creating a START condition on the bus. The Master then broadcasts an 8-bit serial Slave address. For normal Read/Write operations, the first 4 bits of the Slave address are fixed at 1010 (Ah). The next 3 bits are used as programmable address bits when cascading multiple devices and/or as internal address bits. The last bit of the slave address, R/W, specifies whether a Read (1) or Write (0) operation is to be performed. The 3 address space extension bits are assigned as illustrated in Figure 3. A<sub>2</sub>, A<sub>1</sub> and A<sub>0</sub> must match the state of the external address pins, and a<sub>10</sub>, a<sub>9</sub> and a<sub>8</sub> are internal address bits.

### Acknowledge

After processing the Slave address, the Slave responds with an acknowledge (ACK) by pulling down the SDA line during the 9th clock cycle (Figure 4). The Slave will also acknowledge the address byte and every data byte presented in Write mode. In Read mode the Slave shifts out a data byte, and then releases the SDA line during the 9th clock cycle. As long as the Master acknowledges the data, the Slave will continue transmitting. The Master terminates the session by not acknowledging the last data byte (NoACK) and by issuing a STOP condition. Bus timing is illustrated in Figure 5.

The diagram illustrates the timing of START and STOP conditions in an I2C protocol. It shows two signals: SCL (Serial Clock Line) and SDA (Serial Data Line). The START condition is defined by a high-to-low transition on SDA while SCL is high. The STOP condition is defined by a low-to-high transition on SDA while SCL is high. Vertical dashed lines indicate the exact timing of these conditions.

|   |   |   |   |          |       |       |                  |                       |
|---|---|---|---|----------|-------|-------|------------------|-----------------------|
| 1 | 0 | 1 | 0 | $A_2$    | $A_1$ | $A_0$ | $R/\overline{W}$ | CAT24C01 and CAT24C02 |
| 1 | 0 | 1 | 0 | $A_2$    | $A_1$ | $a_8$ | $R/\overline{W}$ | CAT24C04              |
| 1 | 0 | 1 | 0 | $A_2$    | $a_9$ | $a_8$ | $R/\overline{W}$ | CAT24C08              |
| 1 | 0 | 1 | 0 | $a_{10}$ | $a_9$ | $a_8$ | $R/\overline{W}$ | CAT24C16              |

The diagram illustrates the timing relationships for the I2C protocol. It shows three signals: SCL (Serial Clock), SDA IN (Serial Data Input), and SDA OUT (Serial Data Output). The timing parameters are defined as follows:

- $t_F$ : SCL rise time
- $t_{LOW}$ : SCL low pulse width
- $t_{HIGH}$ : SCL high pulse width
- $t_R$ : SCL fall time
- $t_{SU:STA}$ : SDA setup time before start
- $t_{HD:SDA}$ : SDA hold time after start
- $t_{HD:DAT}$ : SDA hold time after data
- $t_{SU:DAT}$ : SDA setup time before data
- $t_{SU:STO}$ : SDA setup time before stop
- $t_{AA}$ : SDA output delay time
- $t_{DH}$ : SDA output delay time
- $t_{BUF}$ : SDA output delay time

<http://onsemi.com>

## WRITE OPERATIONS

**Byte Write**

In Byte Write mode, the Master sends the START condition and the Slave address with the R/W bit set to zero to the Slave. After the Slave generates an acknowledge, the Master sends the byte address that is to be written into the address pointer of the CAT24Cxx. After receiving another acknowledge from the Slave, the Master transmits the data byte to be written into the addressed memory location. The CAT24Cxx device will acknowledge the data byte and the Master generates the STOP condition, at which time the device begins its internal Write cycle to nonvolatile memory (Figure 6). While this internal cycle is in progress ( $t_{WR}$ ), the SDA output will be tri-stated and the CAT24Cxx will not respond to any request from the Master device (Figure 7).

**Page Write**

The CAT24Cxx writes up to 16 bytes of data in a single write cycle, using the Page Write operation (Figure 8). The Page Write operation is initiated in the same manner as the Byte Write operation, however instead of terminating after the data byte is transmitted, the Master is allowed to send up to fifteen additional bytes. After each byte has been transmitted the CAT24Cxx will respond with an acknowledge and internally increments the four low order address bits. The high order bits that define the page address remain unchanged. If the Master transmits more than sixteen bytes prior to sending the STOP condition, the address counter 'wraps around' to the beginning of page and previously transmitted data will be overwritten. Once all

sixteen bytes are received and the STOP condition has been sent by the Master, the internal Write cycle begins. At this point all received data is written to the CAT24Cxx in a single write cycle.

**Acknowledge Polling**

The acknowledge (ACK) polling routine can be used to take advantage of the typical write cycle time. Once the stop condition is issued to indicate the end of the host's write operation, the CAT24Cxx initiates the internal write cycle. The ACK polling can be initiated immediately. This involves issuing the start condition followed by the slave address for a write operation. If the CAT24Cxx is still busy with the write operation, NoACK will be returned. If the CAT24Cxx has completed the internal write operation, an ACK will be returned and the host can then proceed with the next read or write operation.

**Hardware Write Protection**

With the WP pin held HIGH, the entire memory is protected against Write operations. If the WP pin is left floating or is grounded, it has no impact on the operation of the CAT24Cxx. The state of the WP pin is strobed on the last falling edge of SCL immediately preceding the first data byte (Figure 9). If the WP pin is HIGH during the strobe interval, the CAT24Cxx will not acknowledge the data byte and the Write request will be rejected.

**Delivery State**

The CAT24Cxx is shipped erased, i.e., all bytes are FFh.

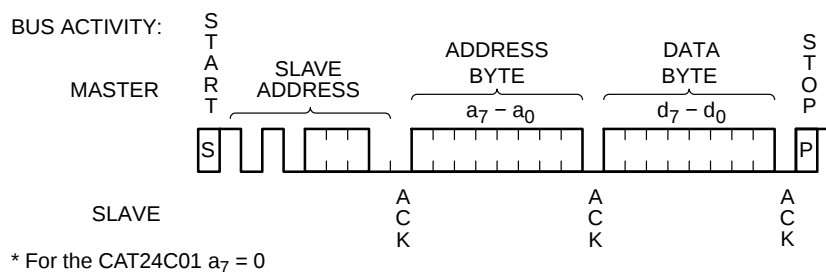


Figure 6. Byte Write Sequence

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

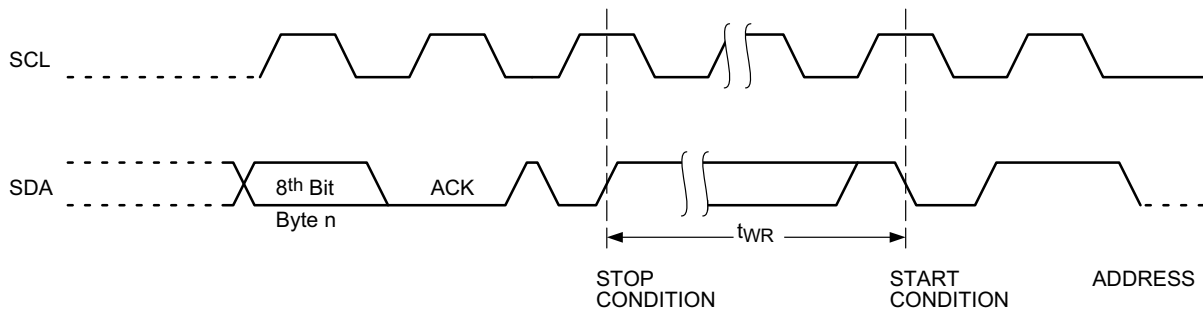


Figure 7. Write Cycle Timing

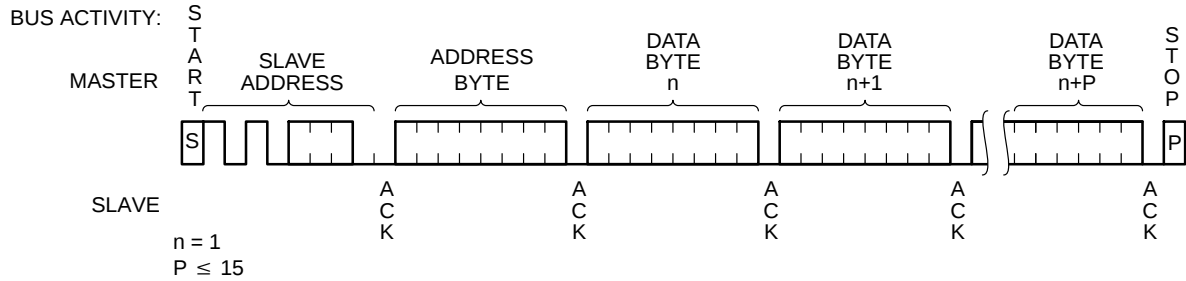


Figure 8. Page Write Sequence

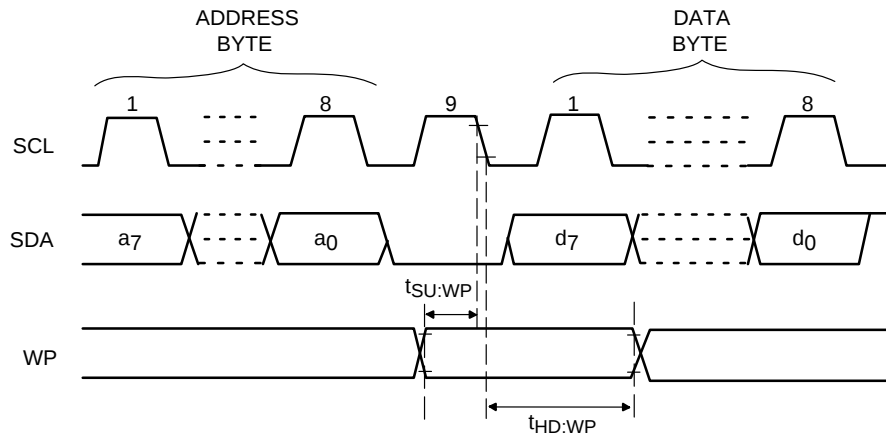


Figure 9. WP Timing

## READ OPERATIONS

### Immediate Read

Upon receiving a Slave address with the R/W bit set to '1', the CAT24Cxx will interpret this as a request for data residing at the current byte address in memory. The CAT24Cxx will acknowledge the Slave address, will immediately shift out the data residing at the current address, and will then wait for the Master to respond. If the Master does not acknowledge the data (NoACK) and then follows up with a STOP condition (Figure 10), the CAT24Cxx returns to Standby mode.

### Selective Read

Selective Read operations allow the Master device to select at random any memory location for a read operation. The Master device first performs a 'dummy' write operation by sending the START condition, slave address and byte address of the location it wishes to read. After the

CAT24Cxx acknowledges the byte address, the Master device resends the START condition and the slave address, this time with the R/W bit set to one. The CAT24Cxx then responds with its acknowledge and sends the requested data byte. The Master device does not acknowledge the data (NoACK) but will generate a STOP condition (Figure 11).

### Sequential Read

If during a Read session, the Master acknowledges the 1<sup>st</sup> data byte, then the CAT24Cxx will continue transmitting data residing at subsequent locations until the Master responds with a NoACK, followed by a STOP (Figure 12). In contrast to Page Write, during Sequential Read the address count will automatically increment to and then wrap-around at end of memory (rather than end of page). In the CAT24C01, the internal address count will not wrap around at the end of the 128 byte memory space.

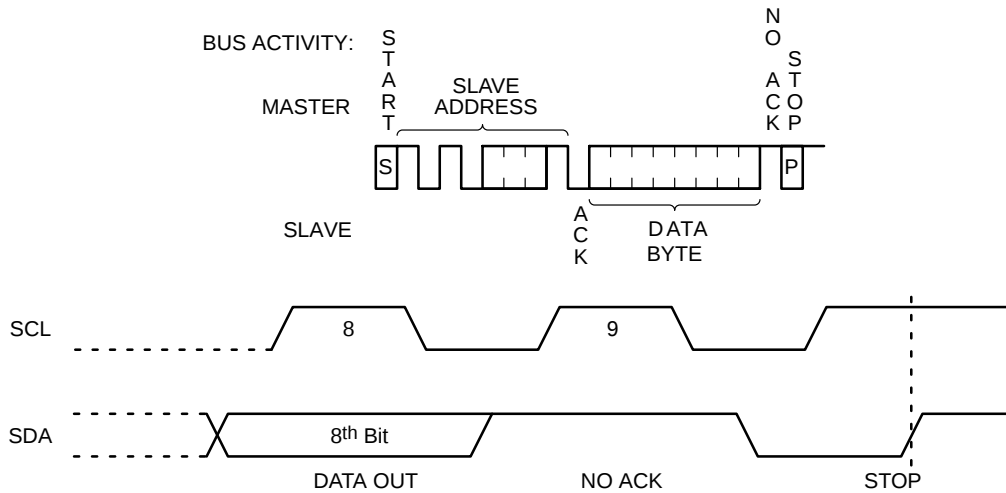


Figure 10. Immediate Read Sequence and Timing

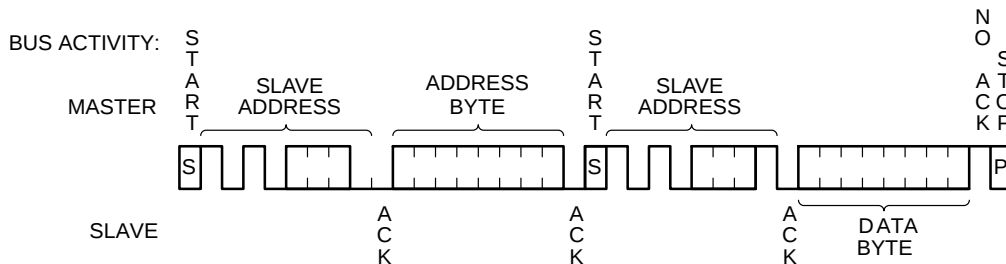


Figure 11. Selective Read Sequence


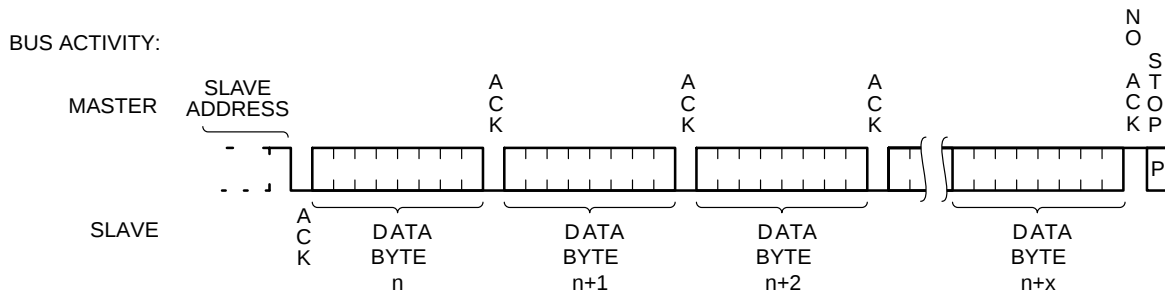


Figure 12. Sequential Read Sequence

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16


## PACKAGE DIMENSIONS

PDIP-8, 300 mils  
CASE 646AA  
ISSUE A

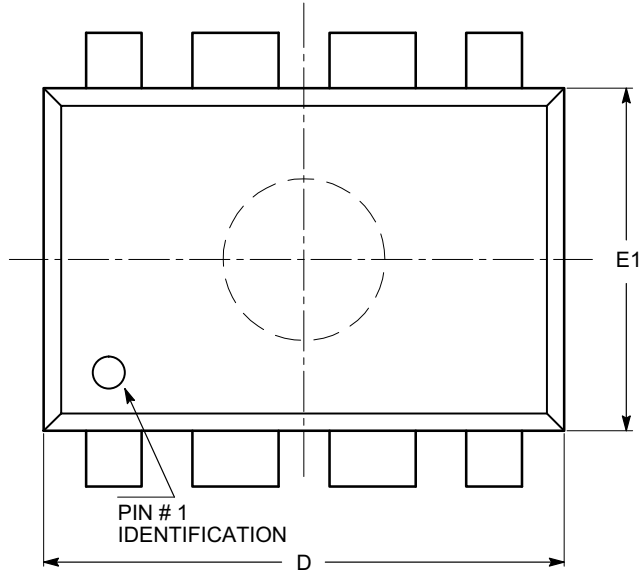


| SYMBOL | MIN      | NOM  | MAX   |
|--------|----------|------|-------|
| A      |          |      | 5.33  |
| A1     | 0.38     |      |       |
| A2     | 2.92     | 3.30 | 4.95  |
| b      | 0.36     | 0.46 | 0.56  |
| b2     | 1.14     | 1.52 | 1.78  |
| c      | 0.20     | 0.25 | 0.36  |
| D      | 9.02     | 9.27 | 10.16 |
| E      | 7.62     | 7.87 | 8.25  |
| E1     | 6.10     | 6.35 | 7.11  |
| e      | 2.54 BSC |      |       |
| eB     | 7.87     |      | 10.92 |
| L      | 2.92     | 3.30 | 3.80  |

TOP VIEW

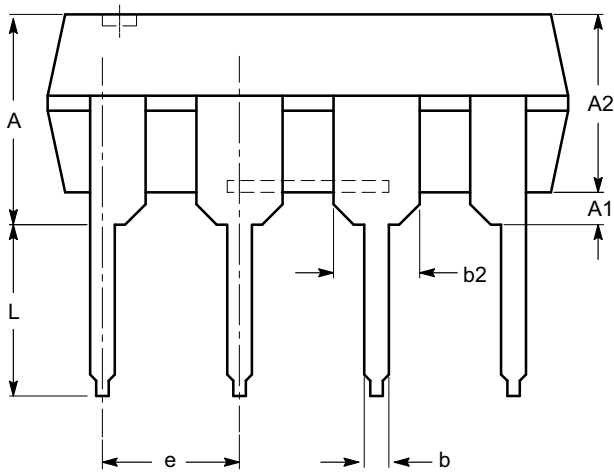

SIDE VIEW

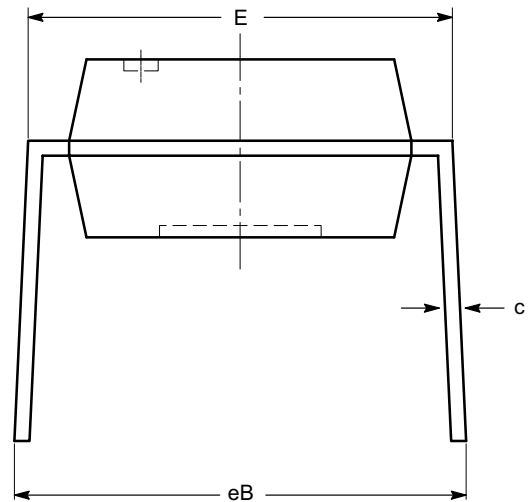

END VIEW


### Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MS-001.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16


## PACKAGE DIMENSIONS

SOIC 8, 150 mils  
CASE 751BD  
ISSUE O

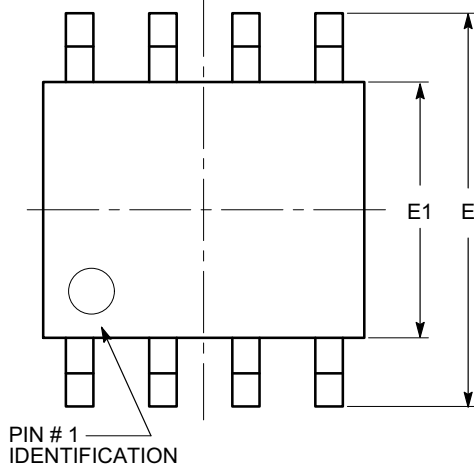


TOP VIEW

| SYMBOL   | MIN      | NOM | MAX  |
|----------|----------|-----|------|
| A        | 1.35     |     | 1.75 |
| A1       | 0.10     |     | 0.25 |
| b        | 0.33     |     | 0.51 |
| c        | 0.19     |     | 0.25 |
| D        | 4.80     |     | 5.00 |
| E        | 5.80     |     | 6.20 |
| E1       | 3.80     |     | 4.00 |
| e        | 1.27 BSC |     |      |
| h        | 0.25     |     | 0.50 |
| L        | 0.40     |     | 1.27 |
| $\theta$ | 0°       |     | 8°   |

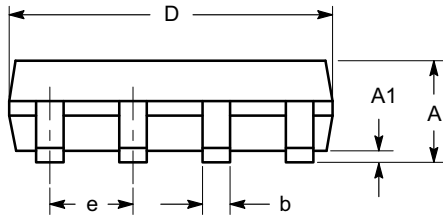

SIDE VIEW

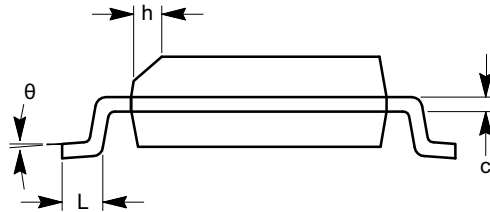

END VIEW


### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-012.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16


## PACKAGE DIMENSIONS

TSSOP8, 4.4x3  
CASE 948AL  
ISSUE O

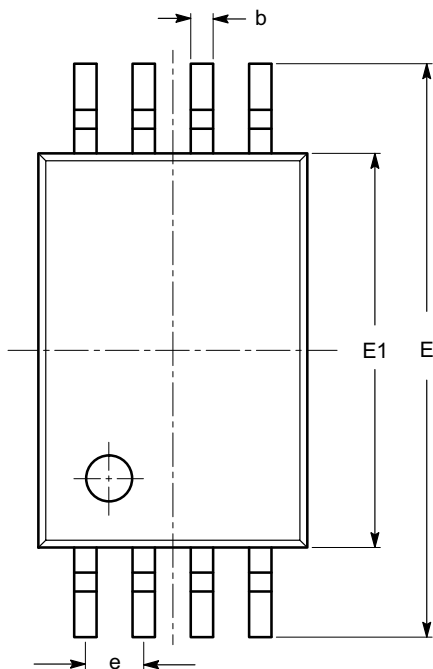


| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      |          |      | 1.20 |
| A1     | 0.05     |      | 0.15 |
| A2     | 0.80     | 0.90 | 1.05 |
| b      | 0.19     |      | 0.30 |
| c      | 0.09     |      | 0.20 |
| D      | 2.90     | 3.00 | 3.10 |
| E      | 6.30     | 6.40 | 6.50 |
| E1     | 4.30     | 4.40 | 4.50 |
| e      | 0.65 BSC |      |      |
| L      | 1.00 REF |      |      |
| L1     | 0.50     | 0.60 | 0.75 |
| θ      | 0°       |      | 8°   |

TOP VIEW

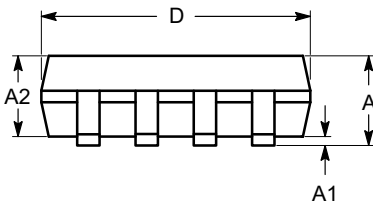

SIDE VIEW

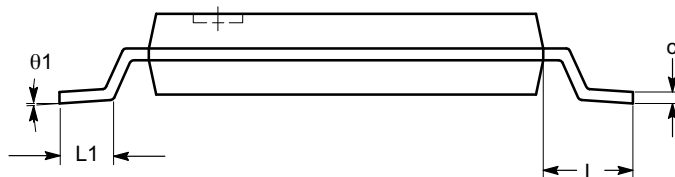

END VIEW


### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-153.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16


## PACKAGE DIMENSIONS

MSOP 8, 3x3  
CASE 846AD  
ISSUE O

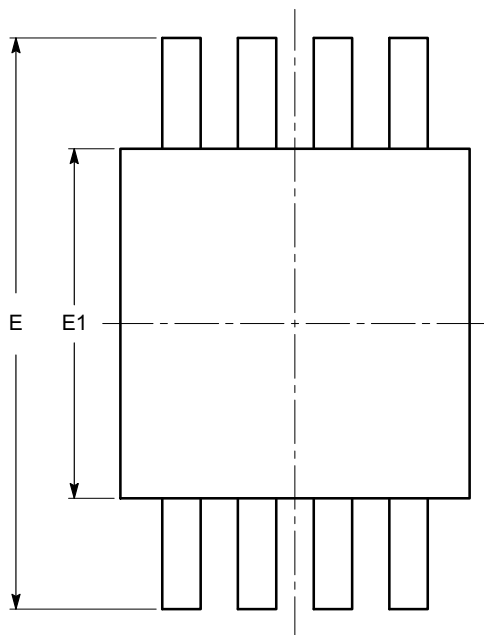


TOP VIEW


| SYMBOL   | MIN      | NOM  | MAX  |
|----------|----------|------|------|
| A        |          |      | 1.10 |
| A1       | 0.05     | 0.10 | 0.15 |
| A2       | 0.75     | 0.85 | 0.95 |
| b        | 0.22     |      | 0.38 |
| c        | 0.13     |      | 0.23 |
| D        | 2.90     | 3.00 | 3.10 |
| E        | 4.80     | 4.90 | 5.00 |
| E1       | 2.90     | 3.00 | 3.10 |
| e        | 0.65 BSC |      |      |
| L        | 0.40     | 0.60 | 0.80 |
| L1       | 0.95 REF |      |      |
| L2       | 0.25 BSC |      |      |
| $\theta$ | 0°       |      | 6°   |

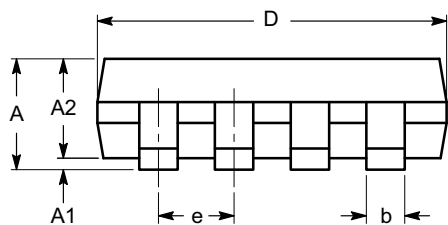

SIDE VIEW

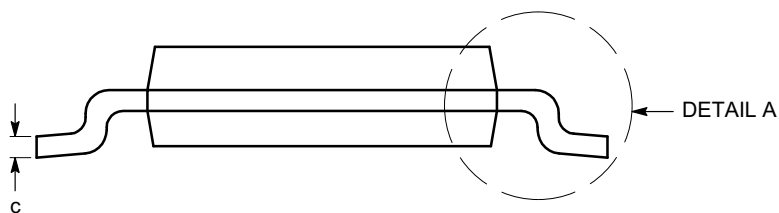

END VIEW

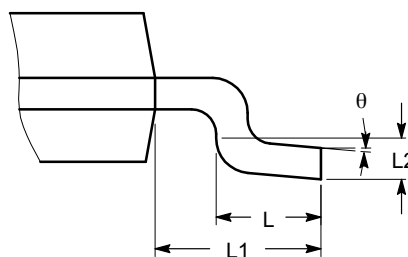

DETAIL A


### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-187.


# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## PACKAGE DIMENSIONS


TDFN8, 2x3  
CASE 511AK  
ISSUE A

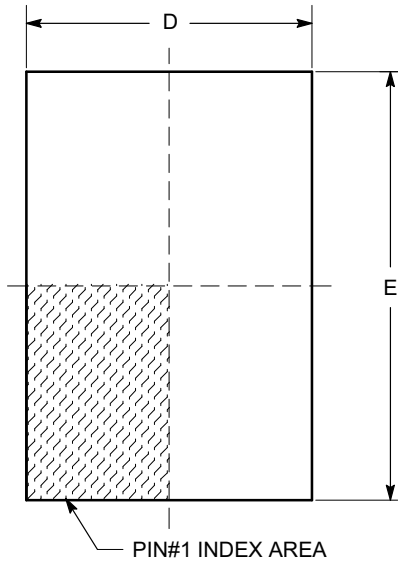

TOP VIEW

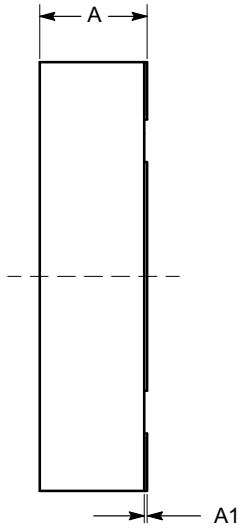


SIDE VIEW

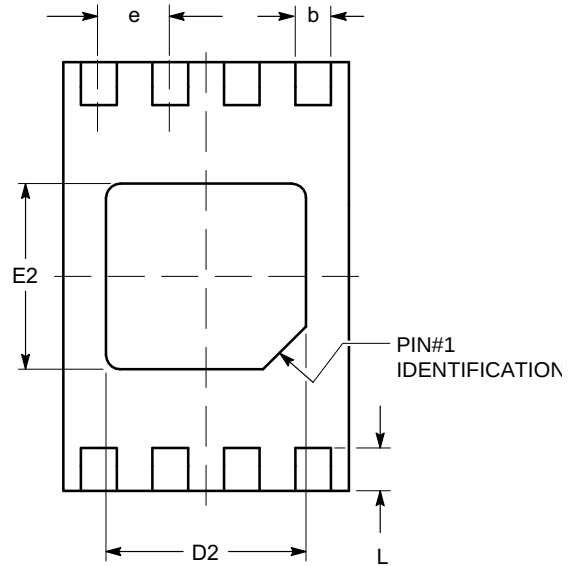

BOTTOM VIEW

| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      | 0.70     | 0.75 | 0.80 |
| A1     | 0.00     | 0.02 | 0.05 |
| A2     | 0.45     | 0.55 | 0.65 |
| A3     | 0.20 REF |      |      |
| b      | 0.20     | 0.25 | 0.30 |
| D      | 1.90     | 2.00 | 2.10 |
| D2     | 1.30     | 1.40 | 1.50 |
| E      | 2.90     | 3.00 | 3.10 |
| E2     | 1.20     | 1.30 | 1.40 |
| e      | 0.50 TYP |      |      |
| L      | 0.20     | 0.30 | 0.40 |

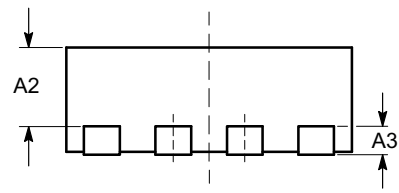

FRONT VIEW


### Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MO-229.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16


## PACKAGE DIMENSIONS

TSOT-23, 5 LEAD  
CASE 419AE  
ISSUE O

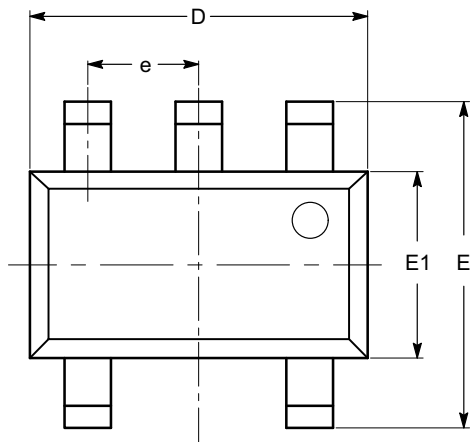


TOP VIEW

| SYMBOL   | MIN      | NOM  | MAX  |
|----------|----------|------|------|
| A        |          |      | 1.00 |
| A1       | 0.01     | 0.05 | 0.10 |
| A2       | 0.80     | 0.87 | 0.90 |
| b        | 0.30     |      | 0.45 |
| c        | 0.12     | 0.15 | 0.20 |
| D        | 2.90 BSC |      |      |
| E        | 2.80 BSC |      |      |
| E1       | 1.60 BSC |      |      |
| e        | 0.95 TYP |      |      |
| L        | 0.30     | 0.40 | 0.50 |
| L1       | 0.60 REF |      |      |
| L2       | 0.25 BSC |      |      |
| $\theta$ | 0°       |      | 8°   |

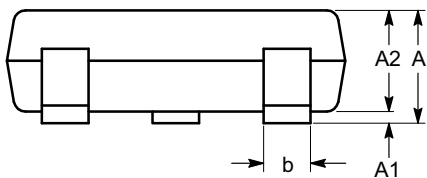

SIDE VIEW

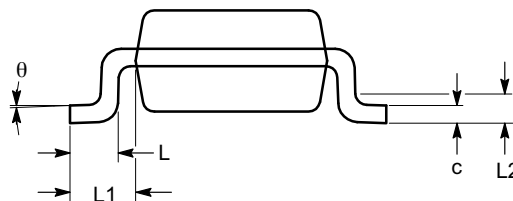

END VIEW


### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-193.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## PACKAGE DIMENSIONS



### UDFN8, 2x3 EXTENDED PAD CASE 517AZ ISSUE O

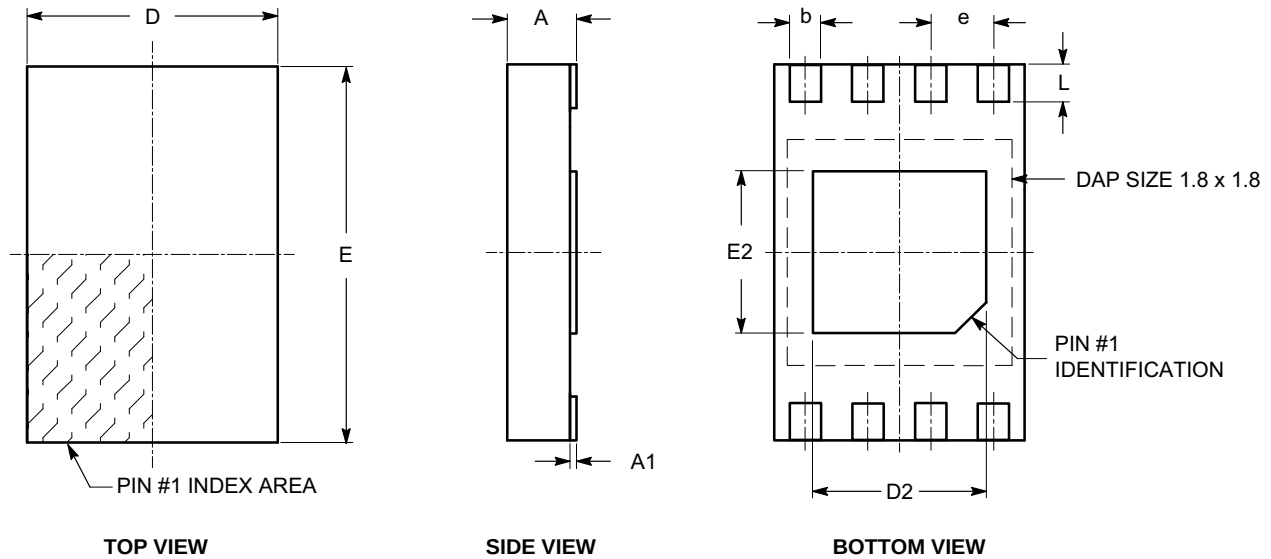

| SYMBOL | MIN       | NOM  | MAX  |
|--------|-----------|------|------|
| A      | 0.45      | 0.50 | 0.55 |
| A1     | 0.00      | 0.02 | 0.05 |
| A3     | 0.127 REF |      |      |
| b      | 0.20      | 0.25 | 0.30 |
| D      | 1.95      | 2.00 | 2.05 |
| D2     | 1.35      | 1.40 | 1.45 |
| E      | 2.95      | 3.00 | 3.05 |
| E2     | 1.25      | 1.30 | 1.35 |
| e      | 0.50 REF  |      |      |
| L      | 0.25      | 0.30 | 0.35 |


#### Notes:

- (1) All dimensions are in millimeters.
- (2) Refer JEDEC MO-236/MO-252.

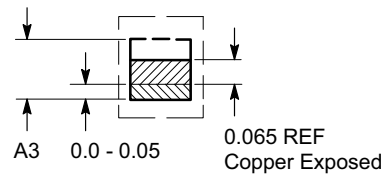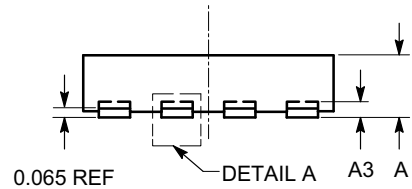

PACKAGE DIMENSIONS

US8  
CASE 493-02  
ISSUE B

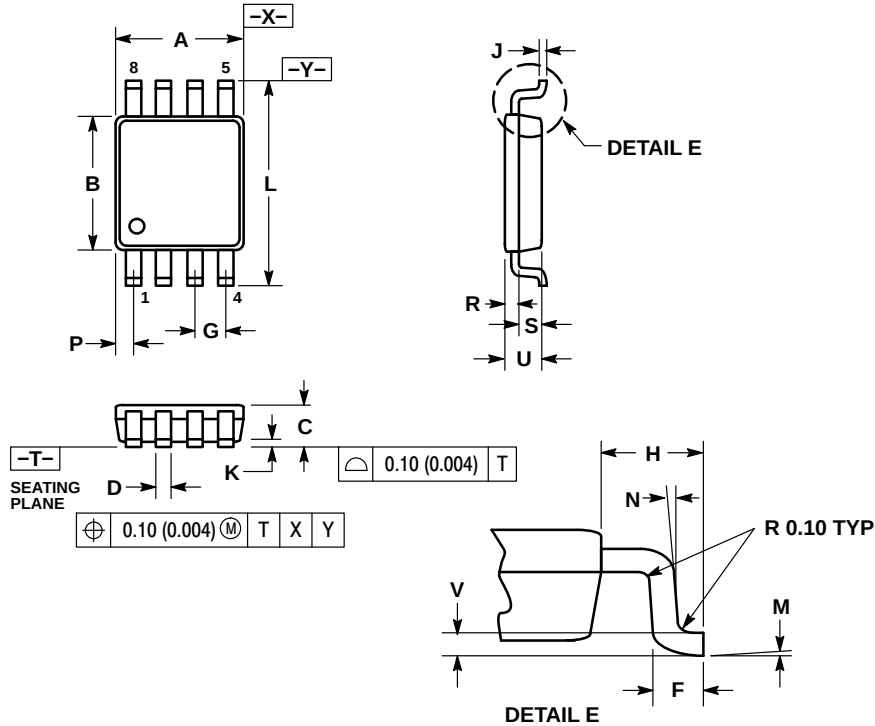


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION "A" DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURR. MOLD FLASH, PROTRUSION AND GATE BURR SHALL NOT EXCEED 0.140 MM (0.0055") PER SIDE.
4. DIMENSION "B" DOES NOT INCLUDE INTER-LEAD FLASH OR PROTRUSION. INTER-LEAD FLASH AND PROTRUSION SHALL NOT EXCEED 0.140 (0.0055") PER SIDE.
5. LEAD FINISH IS SOLDER PLATING WITH THICKNESS OF 0.0076-0.0203 MM. (300-800 °).
6. ALL TOLERANCE UNLESS OTHERWISE SPECIFIED  $\pm 0.0508$  (0.0020").

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 1.90        | 2.10 | 0.075     | 0.083 |
| B   | 2.20        | 2.40 | 0.087     | 0.094 |
| C   | 0.60        | 0.90 | 0.024     | 0.035 |
| D   | 0.17        | 0.25 | 0.007     | 0.010 |
| F   | 0.20        | 0.35 | 0.008     | 0.014 |
| G   | 0.50 BSC    |      | 0.020 BSC |       |
| H   | 0.40 REF    |      | 0.016 REF |       |
| J   | 0.10        | 0.18 | 0.004     | 0.007 |
| K   | 0.00        | 0.10 | 0.000     | 0.004 |
| L   | 3.00        | 3.20 | 0.118     | 0.126 |
| M   | 0°          | 6°   | 0°        | 6°    |
| N   | 5°          | 10°  | 5°        | 10°   |
| P   | 0.23        | 0.34 | 0.010     | 0.013 |
| R   | 0.23        | 0.33 | 0.009     | 0.013 |
| S   | 0.37        | 0.47 | 0.015     | 0.019 |
| U   | 0.60        | 0.80 | 0.024     | 0.031 |
| V   | 0.12 BSC    |      | 0.005 BSC |       |

SOLDERING FOOTPRINT\*



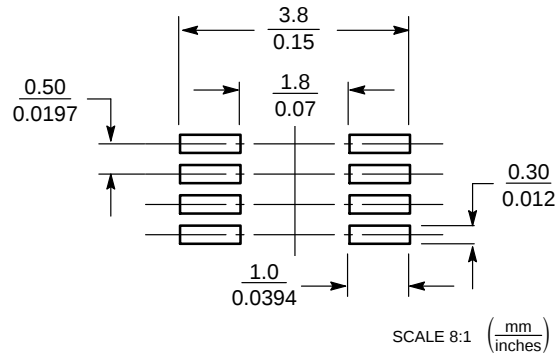


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## PACKAGE DIMENSIONS

WLCSP4, 0.84x0.86  
CASE 567DC  
ISSUE D

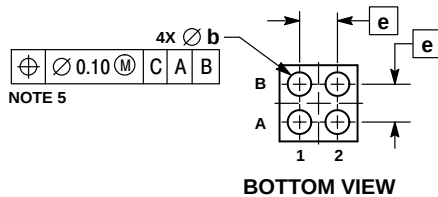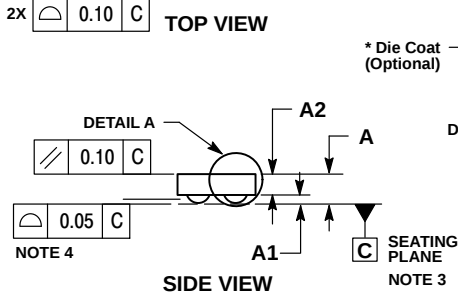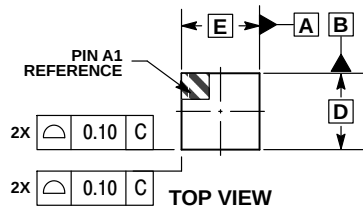


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DATUM C, THE SEATING PLANE, IS DEFINED BY THE SPHERICAL CROWNS OF THE CONTACT BALLS.
4. COPLANARITY APPLIES TO SPHERICAL CROWNS OF THE CONTACT BALLS.
5. DIMENSION b IS MEASURED AT THE MAXIMUM CONTACT BALL DIAMETER PARALLEL TO DATUM C.

| MILLIMETERS |           |      |
|-------------|-----------|------|
| DIM         | MIN       | MAX  |
| A           | 0.28      | 0.38 |
| A1          | 0.08      | 0.12 |
| A2          | 0.23 REF  |      |
| A3*         | 0.025 REF |      |
| b           | 0.16      | 0.20 |
| D           | 0.84 BSC  |      |
| E           | 0.86 BSC  |      |
| e           | 0.40 BSC  |      |

\* Die Coat (Optional)

### RECOMMENDED SOLDERING FOOTPRINT\*




DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## PACKAGE DIMENSIONS

WLCSP5, 0.86x0.84  
CASE 567DD  
ISSUE C

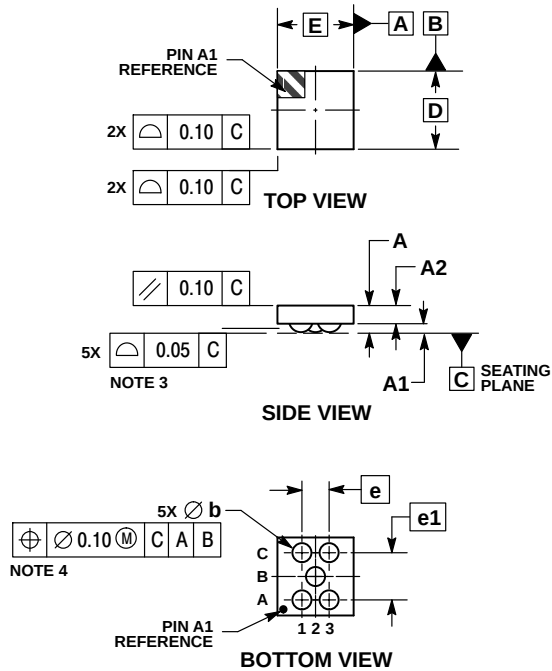


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DATUM C, THE SEATING PLANE, IS DEFINED BY THE SPHERICAL CROWNS OF THE CONTACT BALLS.
4. COPLANARITY APPLIES TO SPHERICAL CROWNS OF THE CONTACT BALLS.
5. DIMENSION b IS MEASURED AT THE MAXIMUM CONTACT BALL DIAMETER PARALLEL TO DATUM C.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.29        | 0.39 |
| A1  | 0.10        | 0.14 |
| A2  | 0.23        | REF  |
| b   | 0.14        | 0.18 |
| D   | 0.86        | BSC  |
| E   | 0.84        | BSC  |
| e   | 0.30        | BSC  |
| e1  | 0.52        | BSC  |

### RECOMMENDED SOLDERING FOOTPRINT\*



DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## Ordering Information

### CAT24C01 Ordering Information

| Device Order Number | Specific Device Marking | Package Type | Temperature Range (Note 9) | Lead Finish | Shipping                        |
|---------------------|-------------------------|--------------|----------------------------|-------------|---------------------------------|
| CAT24C01TDI-GT3     | MM                      | TSOT-23-5    | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C01VP2I-GT3*   | EE                      | TDFN-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C01WI-GT3      | 24C01WI                 | SOIC-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C01WE-GT3      | 24C01WI                 | SOIC-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C01YI-GT3      | C01                     | TSSOP-8      | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C01YE-GT3      | C01                     | TSSOP-8      | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C01ZI-GT3      | ABMK                    | MSOP-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |

### CAT24C02 Ordering Information (Notes 10, 11)

| Device Order Number | Specific Device Marking | Package Type | Temperature Range (Note 9) | Lead Finish | Shipping                        |
|---------------------|-------------------------|--------------|----------------------------|-------------|---------------------------------|
| CAT24C02WI-G        | 24C02H                  | SOIC-8       | Industrial                 | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C02WI-GA       | 24C02H                  | SOIC-8       | Industrial                 | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C02WI-GT3      | 24C02H                  | SOIC-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02WI-GT3A     | 24C02H                  | SOIC-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02WE-GT3      | 24C02H                  | SOIC-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02WE-GT3A     | 24C02H                  | SOIC-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02YI-G        | C02H                    | TSSOP-8      | Industrial                 | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C02YI-GA       | C02H                    | TSSOP-8      | Industrial                 | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C02YI-GT3      | C02H                    | TSSOP-8      | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02YI-GT3A     | C02H                    | TSSOP-8      | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02YE-GT3      | C02H                    | TSSOP-8      | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02YE-GT3A     | C02H                    | TSSOP-8      | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02VP2I-GT3*   | C1T                     | TDFN-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02VP2IGT3A*   | C1T                     | TDFN-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02VP2E-GT3*   | C1T                     | TDFN-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02VP2EGT3A*   | C1T                     | TDFN-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02ZI-GT3      | C1                      | MSOP-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02ZE-GT3      | C1                      | MSOP-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02ZI-GT3A     | C1                      | MSOP-8       | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02ZE-GT3A     | C1                      | MSOP-8       | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02TDI-GT3     | C1                      | TSOT-23-5    | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02TDE-GT3     | C1                      | TSOT-23-5    | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02TDI-GT3A    | C1                      | TSOT-23-5    | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02TDE-GT3A    | C1                      | TSOT-23-5    | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02LI-GA       | 24C02H                  | PDIP-8       | Industrial                 | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C02LE-GA       | 24C02H                  | PDIP-8       | Extended                   | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C02HU4IGT3A    | C1U                     | UDFN8-EP     | Industrial                 | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02HU4EGT3A    | C1U                     | UDFN8-EP     | Extended                   | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C02USI-T3      | TBD                     | US8          | Industrial                 | Matte-Tin   | Tape & Reel, 3,000 Units / Reel |

9. Industrial temperature range is -40°C to +85°C and Extended temperature range is -40°C to +125°C.

10. Part numbers ending with "A" for the CAT24C02 are for Gresham (Product Rev H) only die.

11. The CAT24C02 "non-A" Device Order Numbers use Gresham die (Rev H) for date codes, starting August 1st, 2012. Therefore the Specific Device Marking for these OPNs reflect Rev H die.

\* The TDFN (VP2) package is not recommended for new designs.

## CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

### CAT24C04 Ordering Information

| Device Order Number | Specific Device Marking | Package Type | Temperature Range (Note 12) | Lead Finish | Shipping                        |
|---------------------|-------------------------|--------------|-----------------------------|-------------|---------------------------------|
| CAT24C04WI-G        | 24C04K                  | SOIC-8       | Industrial                  | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C04WI-GT3      | 24C04K                  | SOIC-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04WE-GT3      | 24C04K                  | SOIC-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04YI-G        | C04K                    | TSSOP-8      | Industrial                  | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C04YI-GT3      | C04K                    | TSSOP-8      | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04YE-GT3      | C04K                    | TSSOP-8      | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04VP2I-GT3*   | C2T                     | TDFN-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04LI-G        | 24C04K                  | PDIP-8       | Industrial                  | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C04LE-G        | 24C04K                  | PDIP-8       | Extended                    | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C04ZI-GT3      | C2                      | MSOP-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04ZE-GT3      | C2                      | MSOP-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04C4ATR       | 4                       | WLCSP-4      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C04C5ATR       | 4                       | WLCSP-5      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C04TDI-GT3     | C2                      | TSOT-23-5    | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04TDE-GT3     | C2                      | TSOT-23-5    | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04HU4I-GT3    | C2U                     | UDFN8-EP     | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04HU4E-GT3    | C2U                     | UDFN8-EP     | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C04USI-T3      | TBD                     | US8          | Industrial                  | Matte-Tin   | Tape & Reel, 3,000 Units / Reel |

### CAT24C08 Ordering Information

| Device Order Number | Specific Device Marking | Package Type | Temperature Range (Note 12) | Lead Finish | Shipping                        |
|---------------------|-------------------------|--------------|-----------------------------|-------------|---------------------------------|
| CAT24C08WI-G        | 24C08K                  | SOIC-8       | Industrial                  | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C08WI-GT3      | 24C08K                  | SOIC-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08WE-GT3      | 24C08K                  | SOIC-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08YI-G        | C08K                    | TSSOP-8      | Industrial                  | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C08YI-GT3      | C08K                    | TSSOP-8      | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08YE-GT3      | C08K                    | TSSOP-8      | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08VP2I-GT3*   | C3T                     | TDFN-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08VP2E-GT3*   | C3T                     | TDFN-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08LI-G        | 24C08K                  | PDIP-8       | Industrial                  | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C08LE-G        | 24C08K                  | PDIP-8       | Extended                    | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C08ZI-GT3      | C3                      | MSOP-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08ZE-GT3      | C3                      | MSOP-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08C4ATR       | 8                       | WLCSP-4      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C08C4CTR**     | 8                       | WLCSP-4      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C08C5ATR       | 8                       | WLCSP-5      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C08TDI-GT3     | C3                      | TSOT-23-5    | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08TDE-GT3     | C3                      | TSOT-23-5    | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08HU4I-GT3    | C3U                     | UDFN8-EP     | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08HU4E-GT3    | C3U                     | UDFN8-EP     | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C08USI-T3      | TBD                     | US8          | Industrial                  | Matte-Tin   | Tape & Reel, 3,000 Units / Reel |

12. Industrial temperature range is -40°C to +85°C and Extended temperature range is -40°C to +125°C.

\* The TDFN (VP2) package is not recommended for new designs.

\*\* CAT24C08C4CTR is a backside coated version. Contact factory for other densities.

# CAT24C01, CAT24C02, CAT24C04, CAT24C08, CAT24C16

## CAT24C16 Ordering Information

| Device Order Number | Specific Device Marking | Package Type | Temperature Range (Note 13) | Lead Finish | Shipping                        |
|---------------------|-------------------------|--------------|-----------------------------|-------------|---------------------------------|
| CAT24C16WI-G        | 24C16K                  | SOIC-8       | Industrial                  | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C16WI-GT3      | 24C16K                  | SOIC-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16WE-GT3      | 24C16K                  | SOIC-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16YI-G        | C16K                    | TSSOP-8      | Industrial                  | NiPdAu      | Tube, 100 Units / Tube          |
| CAT24C16YI-GT3      | C16K                    | TSSOP-8      | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16YE-GT3      | C16K                    | TSSOP-8      | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16VP2I-GT3*   | C4T                     | TDFN-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16VP2E-GT3*   | C4T                     | TDFN-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16LI-G        | 24C16K                  | PDIP-8       | Industrial                  | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C16LE-G        | 24C16K                  | PDIP-8       | Extended                    | NiPdAu      | Tube, 50 Units / Tube           |
| CAT24C16ZI-GT3      | C4                      | MSOP-8       | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16ZE-GT3      | C4                      | MSOP-8       | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16C4ATR       | 6                       | WLCSP-4      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C16C5ATR       | 6                       | WLCSP-5      | Industrial                  | N/A         | Tape & Reel, 5,000 Units / Reel |
| CAT24C16TDI-GT3     | C4                      | TSOT-23-5    | Industrial                  | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16TDE-GT3     | C4                      | TSOT-23-5    | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16HU4I-GT3    | C4U                     | UDFN8-EP     | Extended                    | NiPdAu      | Tape & Reel, 3,000 Units / Reel |
| CAT24C16USI-T3      | TBD                     | US8          | Industrial                  | Matte-Tin   | Tape & Reel, 3,000 Units / Reel |

13. Industrial temperature range is -40°C to +85°C and Extended temperature range is -40°C to +125°C.

14. All packages are RoHS-compliant (Lead-free, Halogen-free).

15. For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

16. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

\* The TDFN (VP2) package is not recommended for new designs.

ON Semiconductor is licensed by Philips Corporation to carry the I<sup>2</sup>C Bus Protocol.

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

**CAT24C01/D**