

CC2541 Mini Development Kit Quick Start Guide

This document is a guide through the initial steps required to run the preprogrammed Bluetooth® low energy (BLE) Keyfob demo application.

Contents

1	Opening the Box and Evaluating Bluetooth® Low Energy	2
2	Evaluate Using BTool	4
3	Evaluate Using an iOS Device (iPod, iPad, or iPhone)	8
4	Additional Tools and Links	11

List of Figures

1	Insert Battery	3
2	Port Settings	4
3	Scan Button	5
4	Establish Button	5
5	Characteristic Value Handle	5
6	Discover UUIDs	6
7	Terminate Button	7
8	SimpleLink™ Starter	8
9	Connect to the Keyfob	9
10	Evaluate App	10
11	BLE Packet Sniffer	11
12	SmartRF Flash Programmer	11
13	IAR Embedded Workbench	12
14	BLE E2E Forum	12

Trademarks

SimpleLink is a trademark of Texas Instruments.
 Bluetooth is a registered trademark of Bluetooth SIG Inc..
 iOS is a trademark of Cisco.
 Windows is a registered trademark of Microsoft Corp..

1 Opening the Box and Evaluating Bluetooth® Low Energy

1.1 Kit Contents



- 1 × CC2540 USB dongle
- 1 × CC2541 Keyfob board
- 1 × Keyfob plastic case
- 1 × CC Debugger with cables
- 1 × CR2032 Battery
- Documentation

The RF boards in this kit are designed to comply with ETIS, FCC, and IC regulations over a temperature from 0°C to +35°C. The kit is for evaluation only; it is not FCC approved for resale.

CAUTION

The kit contains ESD sensitive components. Handle with care to prevent permanent damage.

1.2 Introduction


This guide describes the hardware in the box and some of the tools that can be used for developing software at a later stage. For the CC2541DK-MINI, there are two ways of getting started:

1. Evaluate using BTool: BTool is a Windows® application that allows the user to control a central device using the serial interface, and perform various BLE functions while connected to a peripheral device, such as the CC2541 Keyfob.
2. Evaluate using an iOS™ device: Some Apple iOS devices support BT4.0, and Texas Instruments has created an iOS application to evaluate a peripheral device, such as the CC2541 Keyfob. The iOS application runs on:
 - iPhone 4s / 5 / 5s / 5c / 6 / 6Plus / 6s
 - iPad 3 / 4 / air / air 2
 - iPod Touch (5. gen)

1.3 Hardware Setup

First, power up the CC2541 Keyfob. Insert the CR 2032 battery, as shown in [Figure 1](#); the LED is lit green for one second.

Figure 1. Insert Battery

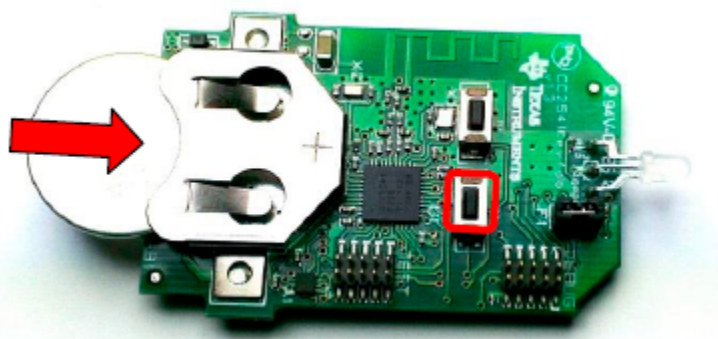

Toggle advertisements on and off by pushing the right button on the CC2541 Keyfob. During advertisement, the LED blinks red.

WARNING

This kit includes a non-rechargeable lithium battery. To minimize risk of personal injury or property damage due to a potential explosion or rupture of the battery, always completely remove the battery from the CC2541 Keyfob when connected to an external power source. The external power source cannot exceed 3.6 VDC. Dispose of the battery properly, and keep out of the reach of children at all times.

2 Evaluate Using BTool

2.1 Download and Install BLE-Stack

The latest BLE software can be downloaded at www.ti.com/ble-stack.

After the BLE-Stack software installation is complete, the USB dongle driver must be associated with the device to use the BTool application. To associate the USB dongle driver, first connect the USB dongle to the USB port of the PC, or to a USB hub that connects to the PC.

The first time the dongle is connected to the PC, a message pops up indicating that Windows does not recognize the device.

The driver is found in the Accessories\ Drivers folder in the default install directory. For more information on how to install the driver, refer to the *CC2540/41 Mini Development Kit User Guide* (SWRU270).

2.2 Identify the COM Port Number

When the driver is installed, determine which COM port Windows has assigned to the USB dongle. Right-click on Computer in the Start Menu, and select Properties.

The System Properties window opens; select Device Manager.

A list of all hardware devices appears. Under the Ports (COM & LPT) section, the device TI CC2540 Low-Power RF to USB CDC Serial Port appears. Next to the name should be the port number (COM#).


Note this port number, as it is needed to use BTool.

2.3 Start BTool

BTool is included as part of the installation of the BLE stack, and can be found in the \Projects\BTool folder in the default install directory.


When starting up BTool, you will be prompted to set port settings. Select the options shown in [Figure 2](#), and press OK.

Figure 2. Port Settings

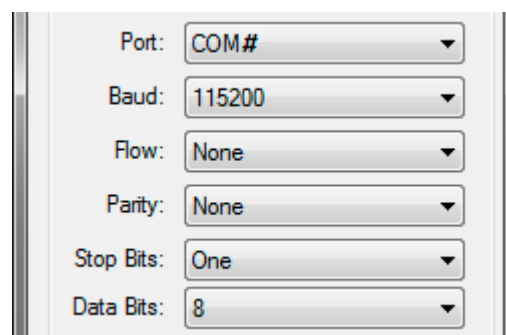


2.4 Connect to the CC2541 Keyfob

Pressing the right button on the CC2541 Keyfob starts the advertisement. The device advertises for 30 seconds. In BTool, press the Scan button, as shown in [Figure 3](#).

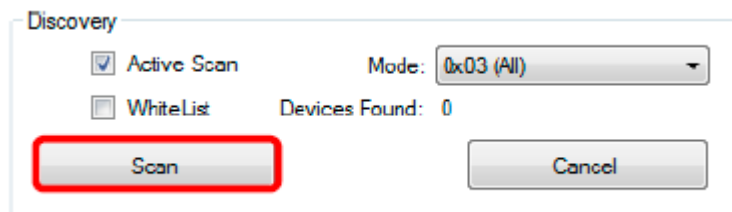
Figure 3. Scan Button


After the scanning is complete, choose the device to connect to, and press Establish, as shown in [Figure 4](#).

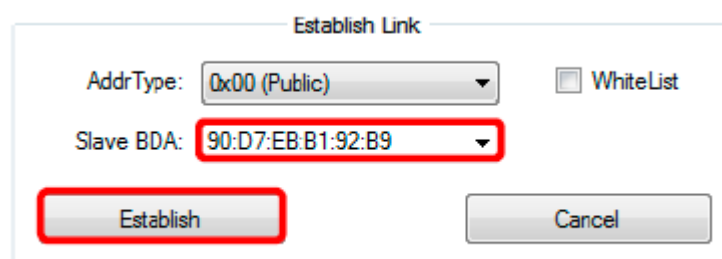Figure 4. Establish Button


2.5 Button Notifications


To notify when buttons are pressed on the CC2541 Keyfob, notifications must be enabled. This is done in the Read/Write tab of BTool by writing 01:00 to the characteristic handle 0x0049, as shown in [Figure 5](#).

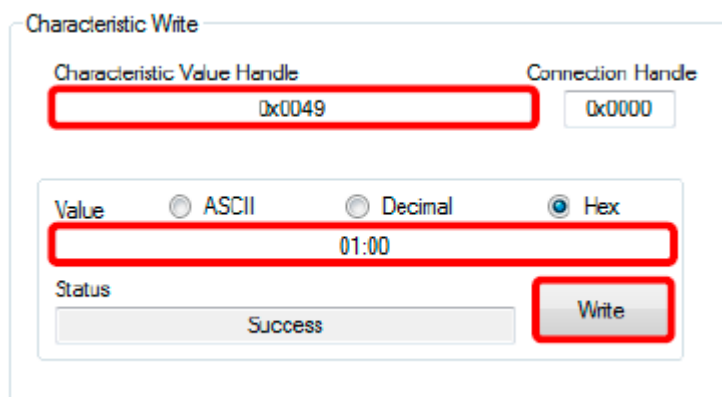Figure 5. Characteristic Value Handle


If a button on the CC2541 Keyfob is now pushed, notifications are sent, and can be monitored in the BTool log window.

NOTE: These handles are subject to change, depending on the firmware version used. To verify handle IDs, discover all UUIDs by right-clicking the handle id under Connection Info, and selecting Discover UUIDs, as shown in [Figure 6](#).


Figure 6. Discover UUIDs

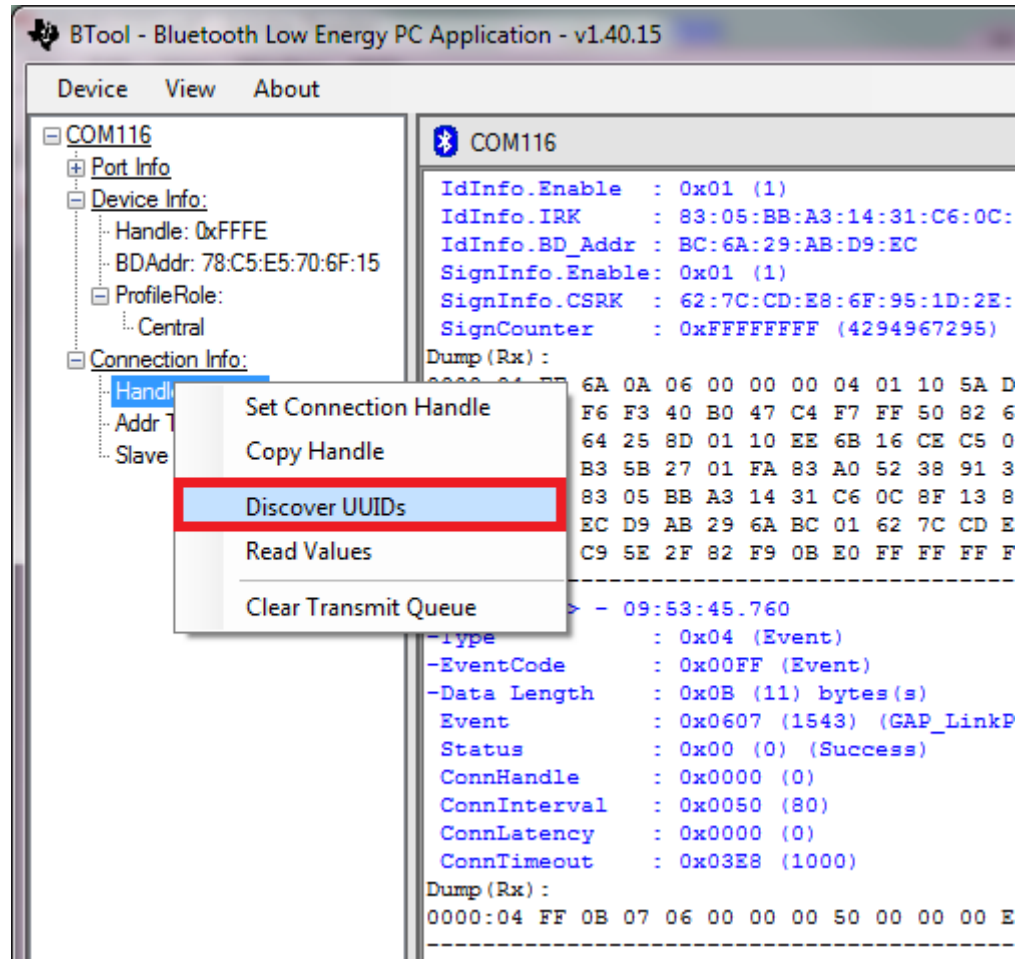

2.6 Enable Accelerometer

Similar to the button notifications, the notifications for the accelerometer data can be enabled. This example only shows enable notifications for the x-axis.

First, enable the accelerometer by writing 01:00 to the characteristic handle 0x0035 in the Read/Write tab of BTool. To enable notifications for the xaxis, write 01:00 to the characteristic handle 0x003C. This enables the CC2541 Keyfob to send notifications as it is moved.

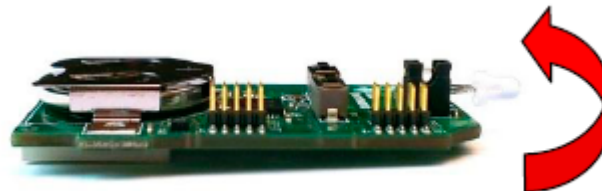


For more information about the accelerometer service, refer to the *CC2540/41 Mini Development Kit User Guide* (SWRU270).

2.7 Immediate Alert

To sound the buzzer located on the CC2541 Keyfob, write the following value to the characteristic handle 0x0028:

- 01:00 for low Alert
- 02:00 for high Alert
- 00:00 to turn off

The buzzer will sound for 10 seconds.

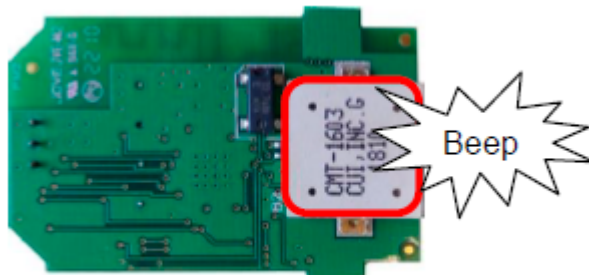


2.8 Terminate Connection

There are three options to terminate the connection:

- Press the Terminate button in BTool, as shown in Figure 7.
- Remove the battery from the CC2541 Keyfob, which triggers a supervision timeout.
- Move the CC2541 Keyfob out of range (typically >10m), which triggers a supervision timeout.

Figure 7. Terminate Button

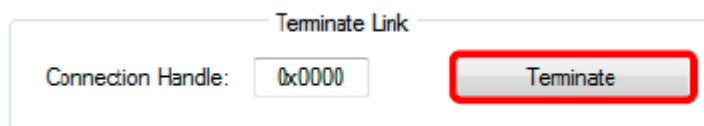

2.9 Source Code

The project and source code files for the preprogrammed application (as well as many others) are included with the Bluetooth low energy (BLE) stack from Texas Instruments, which can be downloaded at www.ti.com/ble-stack.

The project implementing this demo is called Keyfobdemo (CC2541DK-mini Keyfob Slave configuration). The project can be modified as desired, and should provide a good framework for developing custom BLE applications.


More details on these projects can be found within the *BLE Software Developer's Guide* ([SWRU271](#)), which is also included with the stack installer. For troubleshooting, refer to the *CC2540/41 Mini Development Kit User Guide* ([SWRU270](#)).

3 Evaluate Using an iOS Device (iPod, iPad, or iPhone)

3.1 Download the SimpleLink™ Starter

The SimpleLink™ Starter iOS app can be downloaded through iTunes (found at www.apple.com/itunes) or the App Store, which is pre-installed on iOS devices.

Figure 8. SimpleLink™ Starter

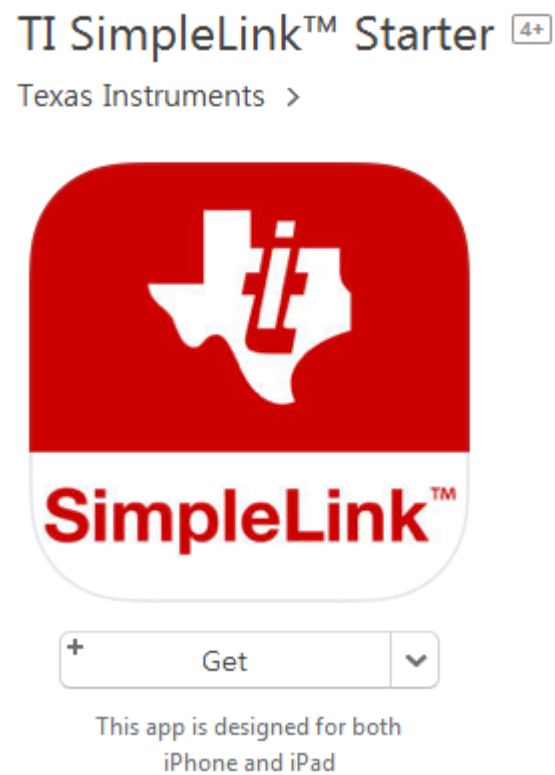



3.2 Connect to the CC2541 Keyfob

Figure 9. Connect to the Keyfob




BLUETOOTH SMART DEVICES

1

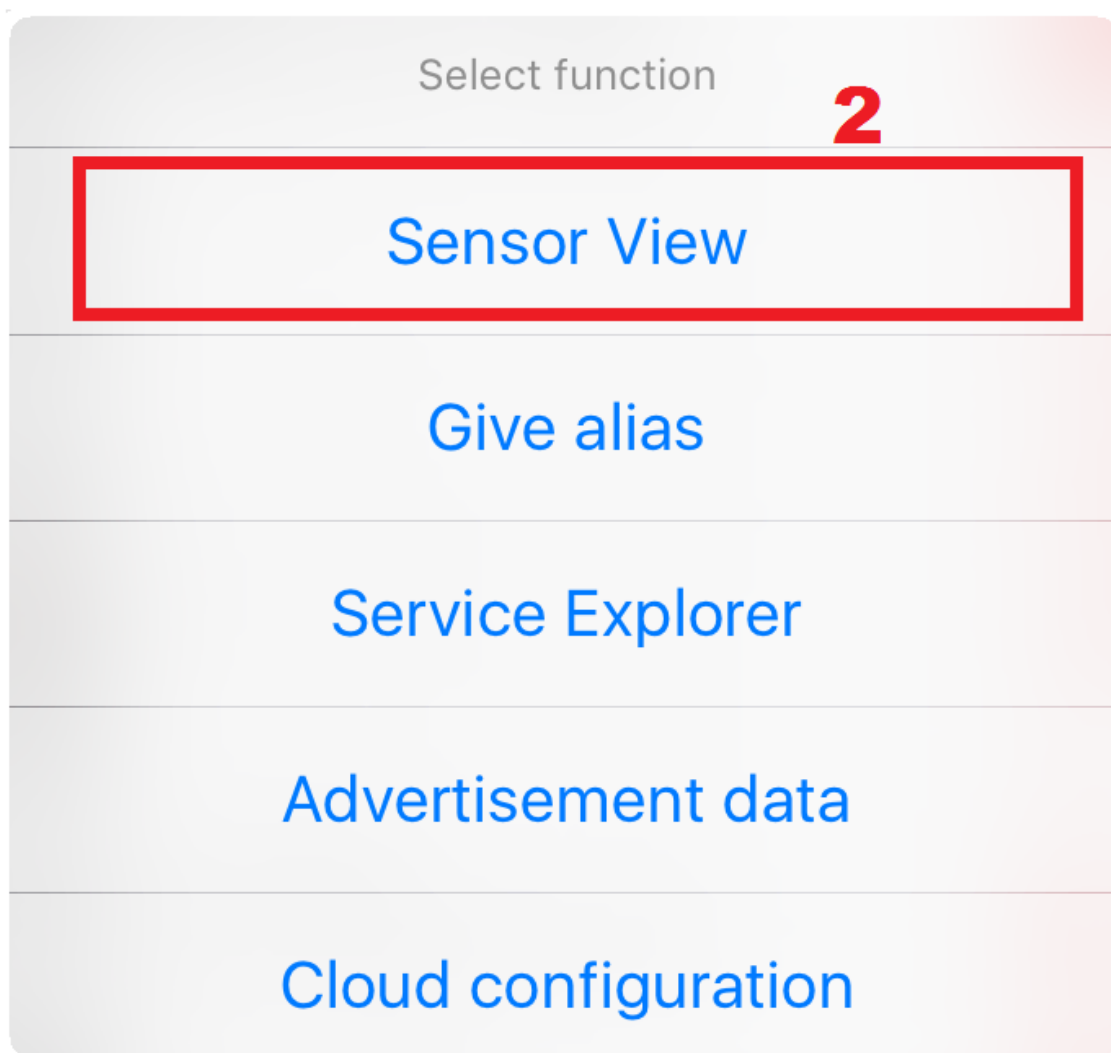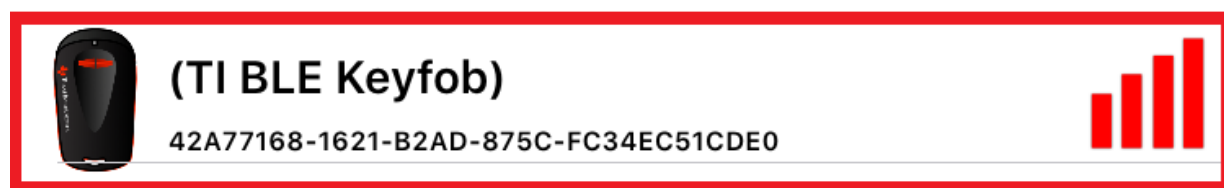

3.3 Evaluate the Application


Figure 10. Evaluate App

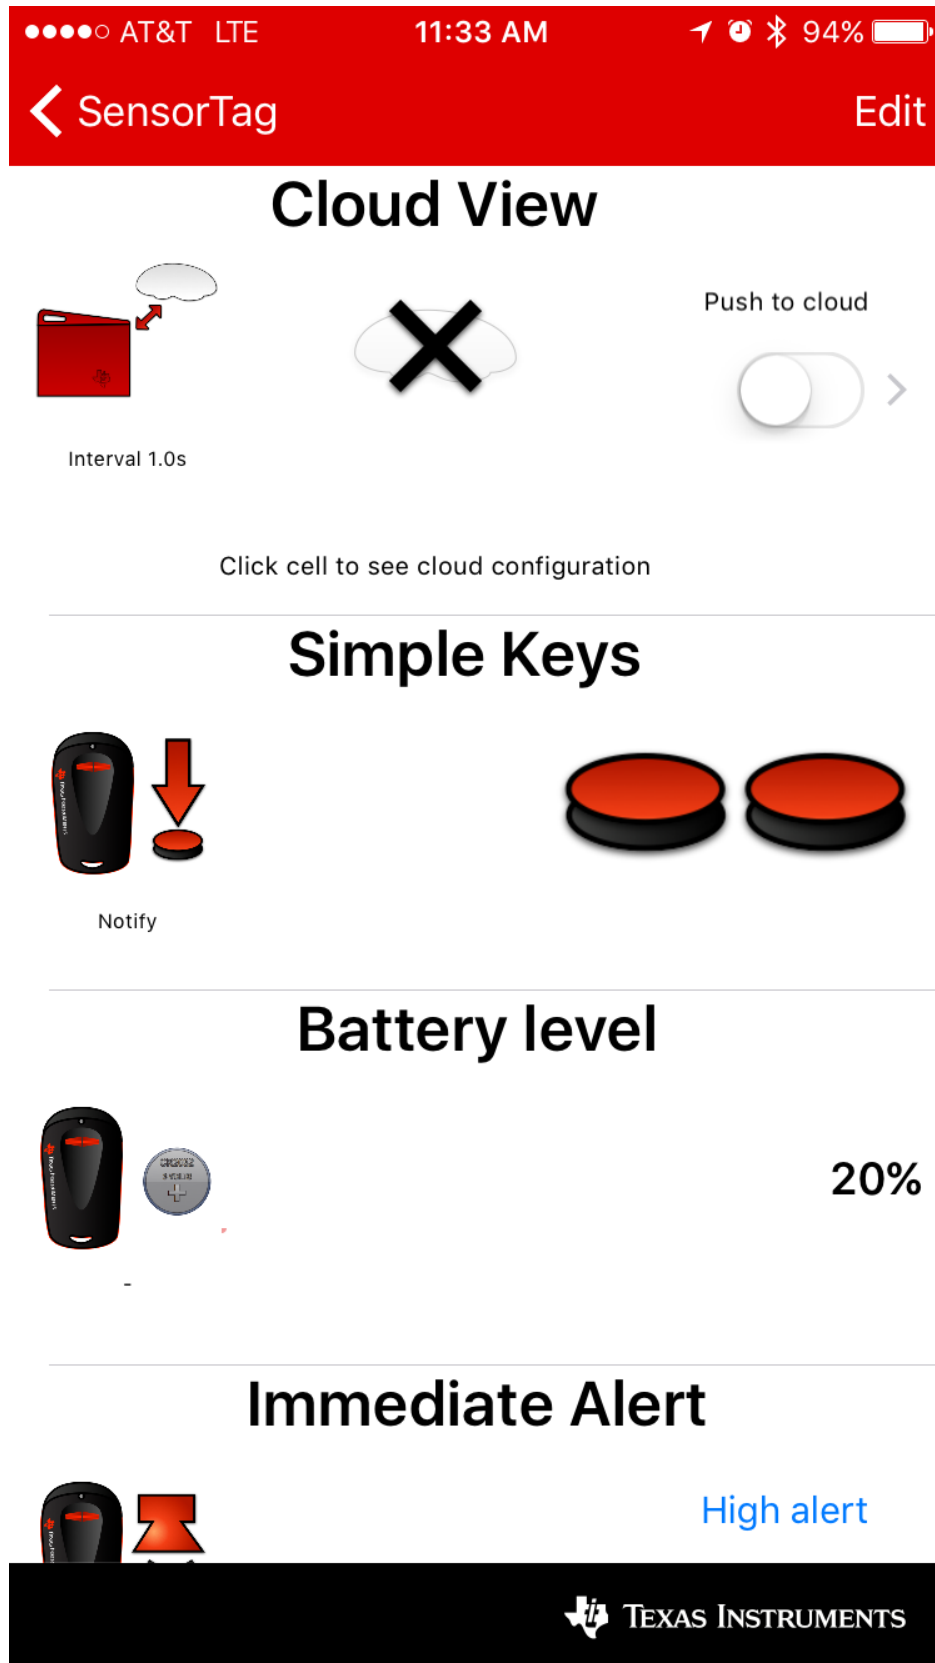

4.3 IAR Embedded Workbench

To develop software, program, and debug the CC2541, use the IAR Embedded Workbench for 8051.

Figure 13. IAR Embedded Workbench

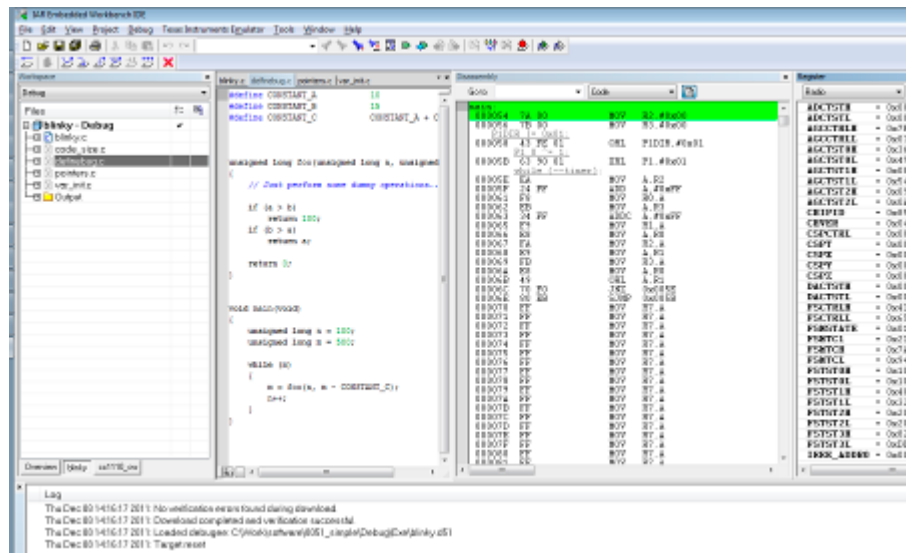


More information on IAR EW8051, including a free evaluation version download, can be found at <https://www.iar.com/iar-embedded-workbench/partners/texas-instruments/ti-wireless/>. Refer to the *BLE Software Developer's Guide (SWRU271)* for the specific version of IAR.

4.4 BLE E2E Forum

For additional help, visit the TI Bluetooth low energy E2E forum, www.ti.com/ble-forum, for instant support during development.

Figure 14. BLE E2E Forum

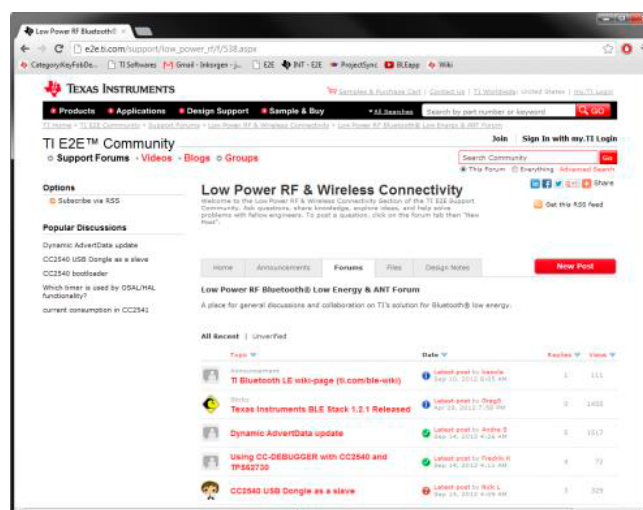

4.5 BLE Wiki

The BLE Wiki contains application examples, guides, and documentation covering any extra steps you might need help with. The Wiki is not only managed by Texas Instruments employees, but also by E2E community members. Anyone can share, edit, and make use of the information posted here.

The Wiki is found at www.ti.com/ble-wiki.

4.6 Useful Links

- TI BLE Stack and Software: www.ti.com/ble-stack
- CC2540/41 Mini Development Kit User Guide: www.ti.com/lit/swru270
- CC2540/41 BLE Software Developer's Guide: www.ti.com/lit/swru271
- CC2540/41 User's Guide: www.ti.com/lit/swru191
- CC2541 Product Page: www.ti.com/product/cc2541

Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from B Revision (October 2015) to C Revision	Page
• Changed Characteristic Handle from 0x0048 to 0x0049.	5
• Updated Characteristic Value Handle image.	5
• Changed Characteristic Handle from 0x0034 to 0x0035.	6
• Changed Characteristic Handle from 0x003B to 0x003C.	6

IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated