

IFX1763

Wide Input Range Low Noise 500mA LDO

Data Sheet

Rev. 1.1, 2014-10-30


Standard Power




1 Overview

Features

- Low Noise down to $24 \mu V_{RMS}$ (BW = 10 Hz to 100 kHz)
- 500 mA Current Capability
- Low Quiescent Current: 30 μA
- Wide Input Voltage Range: 1.8 V to 20 V
- 2.5% Output Voltage Accuracy (over full temperature and load range)
- Low Dropout Voltage: 320 mV
- Very low Shutdown Current: < 1 μA
- No Protection Diodes Needed
- Fixed Output Voltage: 3.3 V
- Adjustable Version with Output from 1.22 V to 20 V
- Stable with $\geq 3.3 \mu F$ Output Capacitor
- Stable with Aluminium, Tantalum or Ceramic Capacitors
- Reverse Battery Protection
- No Reverse Current
- Overcurrent and Overtemperature Protected
- DSO-8 Exposed Pad and TSON-10 Exposed Pad packages
- Green Product (RoHS compliant)

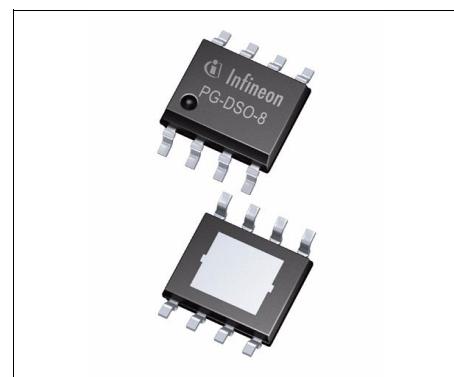

PG-DSO-8 Exposed Pad

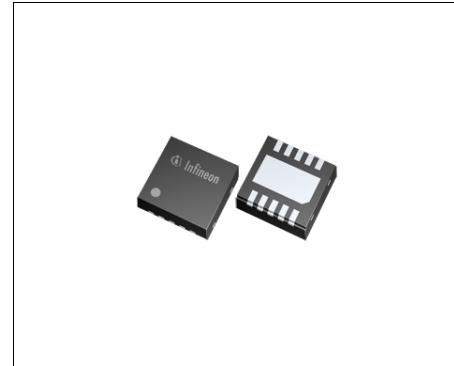

PG-TSON-10

Applications

- Microcontroller Supply
- Battery-Powered Systems
- Noise Sensitive Instruments
- Radar Applications
- Image Sensors

The IFX1763 is not qualified and manufactured according to the requirements of Infineon Technologies with regards to automotive and/or transportation applications. For automotive applications please refer to the Infineon TLx (TLE, TLS, TLF.....) voltage regulator products.

Type	Package	Marking
IFX1763XEJ V	PG-DSO-8 Exposed Pad	1763EV
IFX1763XEJ V33	PG-DSO-8 Exposed Pad	1763EV33
IFX1763LD V	PG-TSON-10	176LV
IFX1763LD V33	PG-TSON-10	176LV33

Overview

The IFX1763 is a micropower, low noise, low dropout voltage regulator. The device is capable of supplying an output current of 500 mA with a dropout voltage of 320 mV. Designed for use in battery-powered systems, the low quiescent current of 30 μ A makes it an ideal choice.

A key feature of the IFX1763 is its low output noise. By adding an external 0.01 μ F bypass capacitor output noise values down to 24 μ V_{RMS} over a 10 Hz to 100 kHz bandwidth can be reached. The IFX1763 voltage regulator is stable with output capacitors as small as 3.3 μ F. Small ceramic capacitors can be used without the series resistance required by many other regulators. Its internal protection circuitry includes reverse battery protection, current limiting and reverse current protection. The IFX1763 comes as fixed output voltage 3.3 V as well as adjustable device with a 1.22 V reference voltage. It is available in a DSO-8 Exposed Pad and as well as in a TSON-10 Exposed Pad package.

2 Block Diagram

Note: Pin numbers in the block diagrams refer to the DSO-8 EP package type.

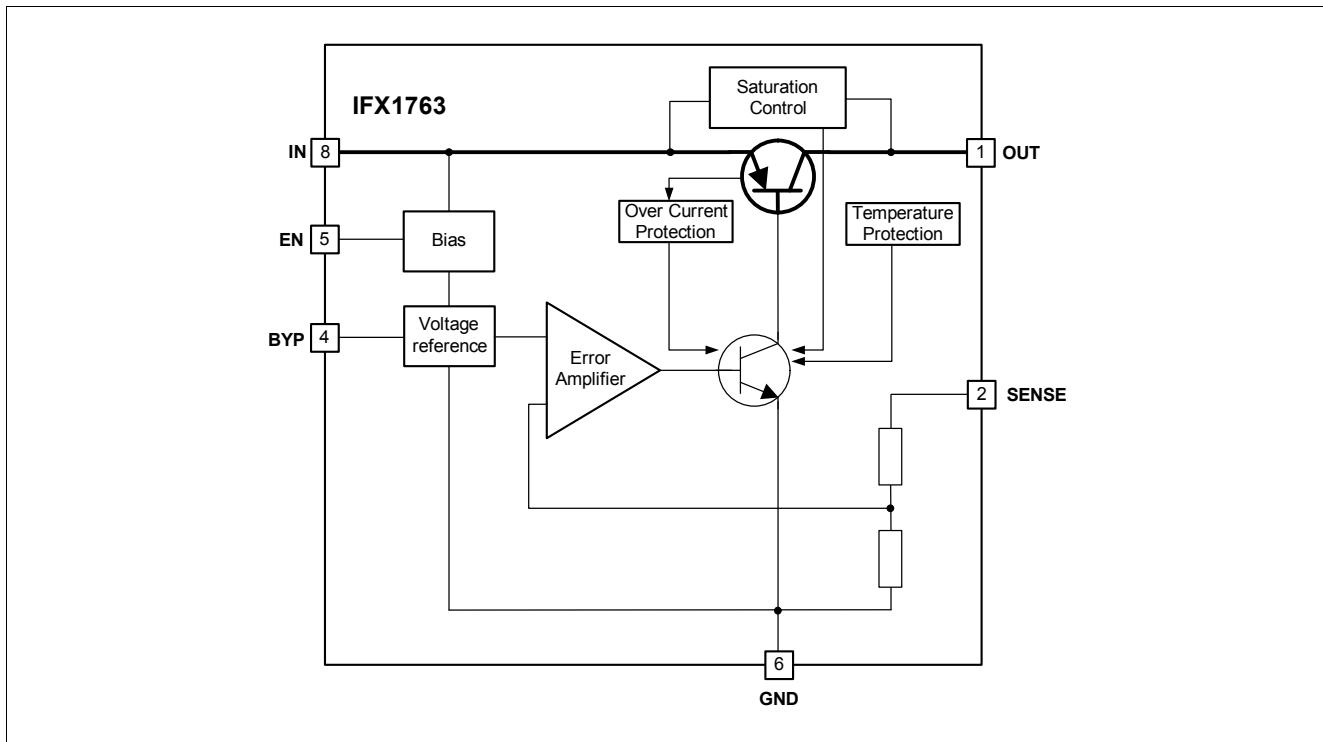


Figure 1 Block Diagram IFX1763 fixed voltage version

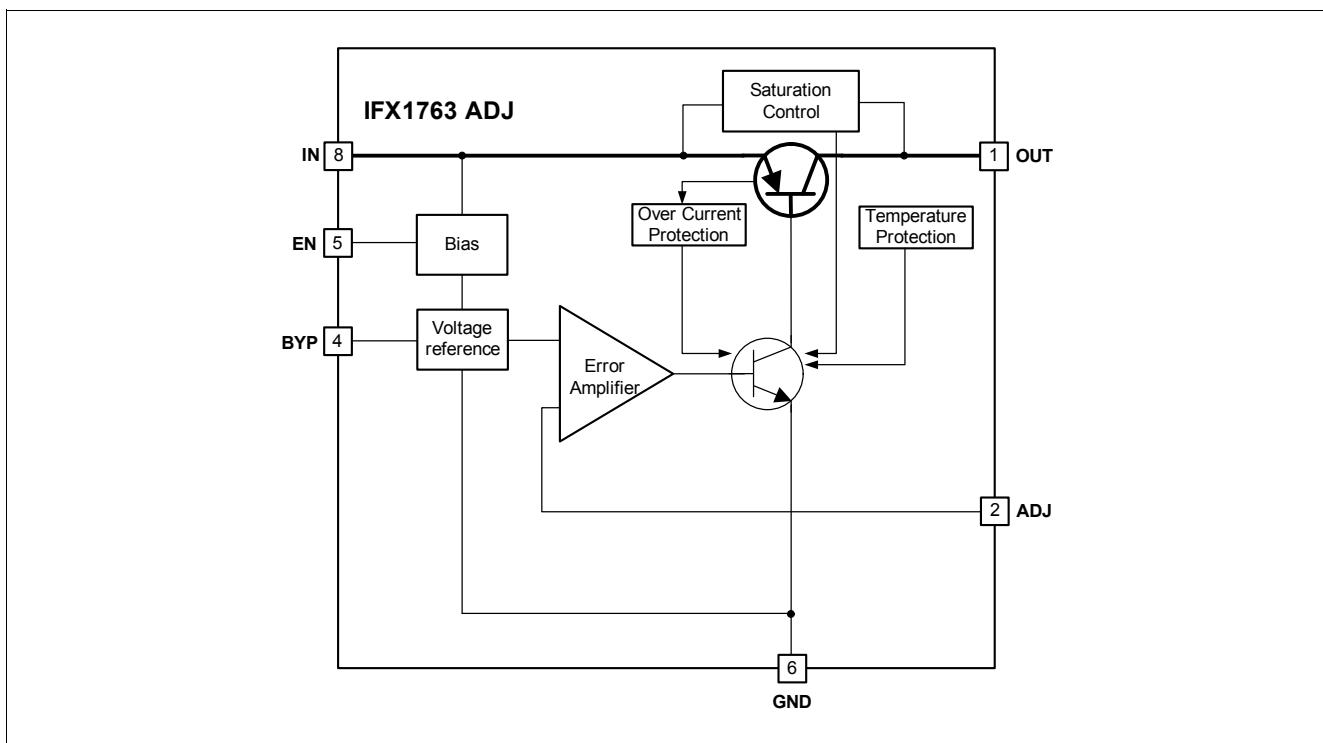


Figure 2 Block Diagram IFX1763 adjustable version

3 Pin Configuration

3.1 Pin Assignment

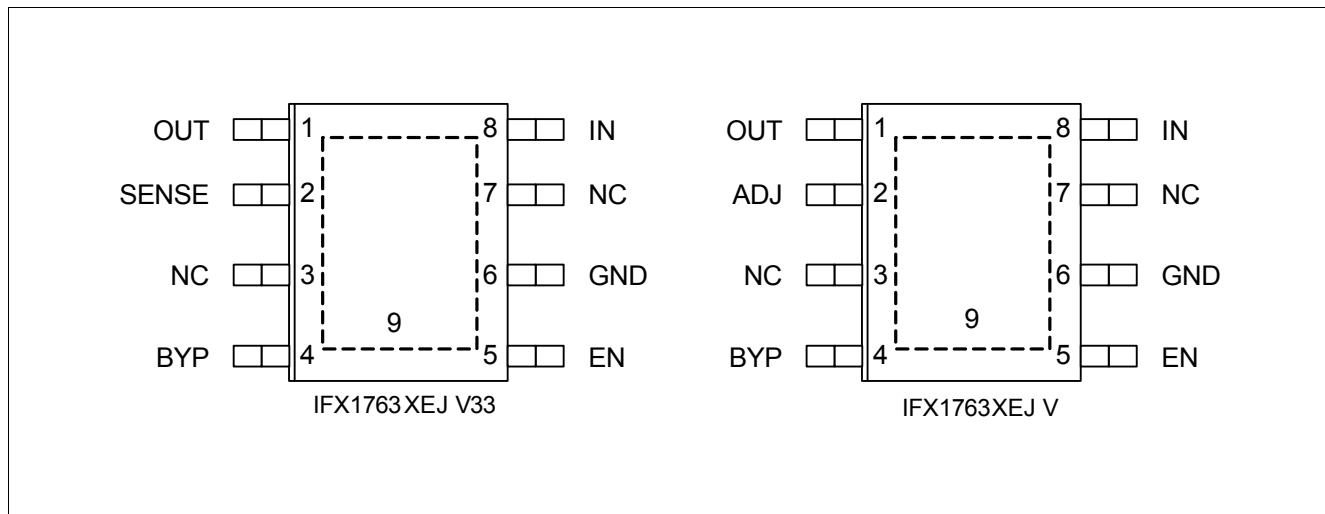


Figure 3 Pin Configuration of IFX1763 in PG-DSO-8 Exposed Pad for fixed voltage and adjustable version

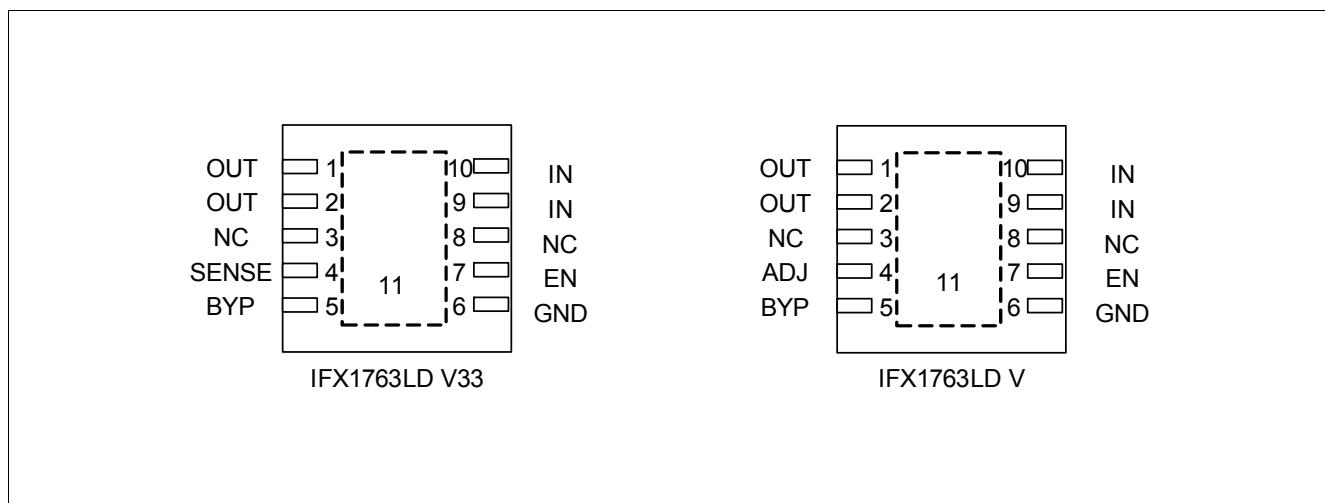


Figure 4 Pin Configuration of IFX1763 in PG-TSON-10 for fixed voltage and adjustable version

3.2 Pin Definitions and Functions

Pin	Symbol	Function
1 (DSO-8 EP) 1,2 (TSON-10)	OUT	Output. Supplies power to the load. For this pin a minimum output capacitor of 3.3 μ F is required to prevent oscillations. Larger output capacitors may be required for applications with large transient loads in order to limit peak voltage transients or when the regulator is applied in conjunction with a bypass capacitor. For more details please refer to the section “Application Information” on Page 24 .
2 (DSO-8 EP) 4 (TSON-10)	SENSE (fix voltage version)	Output Sense. For the fixed voltage version the SENSE pin is the input to the error amplifier. This allows to achieve an optimized regulation performance in case of small voltage drops R_p that occur between regulator and load. In applications where such drops are relevant they can be eliminated by connecting the SENSE pin directly at the load. In standard configurations the SENSE pin can be connected directly to the OUT pin. For further details please refer to the section “Kelvin Sense Connection” on Page 25 .
2 (DSO-8 EP) 4 (TSON-10)	ADJ (adjustable version)	Adjust. For the adjustable version the ADJ pin is the input to the error amplifier. The ADJ pin voltage is 1.22V referenced to ground and allows an output voltage range from 1.22V to 20V - V_{DR} . The ADJ pin is internally clamped to ± 7 V. Please note that the bias current of the ADJ pin is flowing into the pin. ¹⁾
3, 7 (DSO-8 EP) 3, 8 (TSON-10)	NC	No Connect. The NC Pins have no connection to any internal circuitry. Connect either to GND or leave open.
4 (DSO-8) 5 (TSON-10)	BYP	Bypass. The BYP pin is used to bypass the reference of the IFX1763 to achieve low noise performance. The BYP-pin is clamped internally to ± 0.6 V (i.e. one V_{BE}). A small capacitor from the output to the BYP pin will bypass the reference to lower the output voltage noise ²⁾ . If not used this pin must be left unconnected.
5 (DSO-8 EP) 7 (TSON-10)	EN	Enable. With the EN pin the IFX1763 can be put into a low power shutdown state. The output will be off when the EN is pulled low. The EN pin can be driven by 5V logic or open-collector logic with pull-up resistor. The pull-up resistor is required to supply the pull-up current of the open-collector gate ³⁾ and the EN pin current ⁴⁾ . Please note that if the EN pin is not used it must be connected to V_{IN} . It must not be left floating.
6 (DSO-8 EP) 6, (TSON-10)	GND	Ground. For the ADJ version connect the bottom of the output voltage setting resistor divider directly to the GND pin for optimum load regulation performance.
8 (DSO-8 EP) 9, 10 (TSON-10)	IN	Input. Via the input pin IN the power is supplied to the device. A capacitor at the input pin is required if the device is more than 6 inches away from the main input filter capacitor or if bigger inductance is present at the IN pin ⁵⁾ . The IFX1763 is designed to withstand reverse voltages on the Input pin with respect to GND and Output. In the case of reverse input (e.g. due to a wrongly attached battery) the device will act as if there is a diode in series with its input. In this way there will be no reverse current flowing into the regulator and no reverse voltage will appear at the load. Hence, the device will protect both - the device itself and the load.
9 (DSO-8 EP) 11 (TSON-10)	Tab	Exposed Pad. To ensure proper thermal performance,solder Pin 11 (exposed pad) of TSON-10 to the PCB ground and tie directly to Pin 6. In the case of DSO-8 EP as well solder exposed pad (Pin 9) to the PCB ground and tie directly to Pin 6.

Pin Configuration

- 1) The typical value of the ADJ pin bias current is 60 nA with a very good temperature stability. See also the corresponding Typical Performance Graph "[Adjust Pin Bias current \$I_{ADJ}\$ versus Junction Temperature \$T_J\$](#) " on Page 20.
- 2) A maximum value of 10 nF can be used for reducing output voltage noise over the bandwidth from 10 Hz to 100 kHz.
- 3) Normally several microamperes.
- 4) Typical value is 1 μ A.
- 5) In general the output impedance of a battery rises with frequency, so it is advisable to include a bypass capacitor in battery-powered circuits. Depending on actual conditions an input capacitor in the range of 1 to 10 μ F is sufficient.

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 1 Absolute Maximum Ratings¹⁾

T_j = -40 °C to +150 °C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Input Voltage							
Voltage	V_{IN}	-20	-	20	V	-	P_4.1.1
Output Voltage							
Voltage	V_{OUT}	-20	-	20	V	-	P_4.1.2
Input to Output Differential Voltage	$V_{IN} - V_{OUT}$	-20	-	20	V	-	P_4.1.3
Sense Pin							
Voltage	V_{SENSE}	-20	-	20	V	-	P_4.1.4
ADJ Pin							
Voltage	V_{ADJ}	-7	-	7	V	-	P_4.1.5
BYP Pin							
Voltage	V_{BYP}	-0.6	-	0.6	V	-	P_4.1.6
Enable Pin							
Voltage	V_{EN}	-20	-	20	V	-	P_4.1.7
Temperatures							
Junction Temperature	T_j	-40	-	150	°C	-	P_4.1.8
Storage Temperature	T_{stg}	-55	-	150	°C	-	P_4.1.9
ESD Susceptibility							
All Pins	V_{ESD}	-2	-	2	kV	HBM ²⁾	P_4.1.10
All Pins	V_{ESD}	-1	-	1	kV	CDM ³⁾	P_4.1.11

1) Not subject to production test, specified by design.

2) ESD susceptibility, HBM according to ANSI/ESDA/JEDEC JS001 (1.5k Ω, 100 pF)

3) ESD susceptibility, Charged Device Model "CDM" according JEDEC JESD22-C101

Notes

1. Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
2. Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

4.2 Functional Range

Table 2 Functional Range

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Input Voltage Range (3.3 V fix voltage version)	V_{IN}	3.8 V	—	20	V	—	P_4.2.1
Input Voltage Range (adjustable voltage version)	V_{IN}	2.3	—	20	V	^{—1)}	P_4.2.2
Operating Junction Temperature	T_j	-40	—	125	°C	—	P_4.2.3

1) For the IFX1763 adjustable version the minimum limit of the functional range V_{IN} is tested and specified with the ADJ- pin connected to the OUT pin.

Note: Within the functional or operating range, the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the Electrical Characteristics table.

4.3 Thermal Resistance

Note: This thermal data was generated in accordance with JEDEC JESD51 standards. For more information, go to www.jedec.org.

Table 3 Thermal Resistance¹⁾

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
IFX1763X EJ (PG-DSO-8 Exposed Pad)							
Junction to Case	R_{thJC}	—	7.0	—	K/W	—	P_4.3.1
Junction to Ambient	R_{thJA}	—	39	—	K/W	^{—2)}	P_4.3.2
Junction to Ambient	R_{thJA}	—	155	—	K/W	Footprint only ³⁾	P_4.3.3
Junction to Ambient	R_{thJA}	—	66	—	K/W	300 mm ² heatsink area on PCB ³⁾	P_4.3.4
Junction to Ambient	R_{thJA}	—	52	—	K/W	600 mm ² heatsink area on PCB ³⁾	P_4.3.5
IFX1763 LD (PG-TSON-10)							
Junction to Case	R_{thJC}	—	6.4	—	K/W	—	P_4.3.6
Junction to Ambient	R_{thJA}	—	53	—	K/W	^{—2)}	P_4.3.7
Junction to Ambient	R_{thJA}	—	183	—	K/W	Footprint only ³⁾	P_4.3.8
Junction to Ambient	R_{thJA}	—	69	—	K/W	300 mm ² heatsink area on PCB ³⁾	P_4.3.9
Junction to Ambient	R_{thJA}	—	57	—	K/W	600 mm ² heatsink area on PCB ³⁾	P_4.3.10

1) Not subject to production test, specified by design.

General Product Characteristics

- 2) Specified R_{thJA} value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board; The Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 2 inner copper layers (2 x 70 μ m Cu, 2 x 35 μ m Cu). Where applicable a thermal via array under the exposed pad contacted the first inner copper layer.
- 3) Specified R_{thJA} value is according to JEDEC JESD 51-3 at natural convection on FR4 1s0p board; The Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm³ board with 1 copper layer (1 x 70 μ m Cu).

5 Electrical Characteristics

5.1 Electrical Characteristics Table

Table 4 Electrical Characteristics

$-40^{\circ}\text{C} < T_j < 125^{\circ}\text{C}$; all voltages with respect to ground; positive current defined flowing out of pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Minimum Operating Voltage	$V_{\text{IN,min}}$	—	1.8	2.3	V	$I_{\text{OUT}} = 500 \text{ mA}$ ¹⁾²⁾³⁾	P_5.1.1
Output Voltage⁴⁾							
IFX1763XEJ V33	V_{OUT}	3.220	3.30	3.380	V	$1 \text{ mA} < I_{\text{OUT}} < 500 \text{ mA}$, $4.3 \text{ V} < V_{\text{IN}} < 20 \text{ V}$	P_5.1.2
IFX1763LD V33							
IFX1763XEJ V	V_{OUT}	1.190	1.22	1.250	V	$1 \text{ mA} < I_{\text{OUT}} < 500 \text{ mA}$; $2.3 \text{ V} < V_{\text{IN}} < 20 \text{ V}$ ³⁾	P_5.1.3
IFX1763LD V							
Line Regulation							
IFX1763XEJ V33	ΔV_{OUT}	—	1	20	mV	$\Delta V_{\text{IN}} = 3.8 \text{ V}$ to 20 V ; $I_{\text{OUT}} = 1 \text{ mA}$	P_5.1.4
IFX1763LD V33							
IFX1763XEJ V	ΔV_{OUT}	—	1	20	mV	$\Delta V_{\text{IN}} = 2.0 \text{ V}$ to 20 V ; $I_{\text{OUT}} = 1 \text{ mA}$ ³⁾	P_5.1.5
IFX1763LD V							
Load Regulation							
IFX1763XEJ V33	ΔV_{OUT}	—	9	22	mV	$T_j = 25^{\circ}\text{C}$; $V_{\text{IN}} = 4.3 \text{ V}$; $\Delta I_{\text{OUT}} = 1$ to 500 mA	P_5.1.6
IFX1763LD V33							
IFX1763XEJ V33	ΔV_{OUT}	—	—	38	mV	$V_{\text{IN}} = 4.3 \text{ V}$; $\Delta I_{\text{OUT}} = 1$ to 500 mA	P_5.1.7
IFX1763LD V33							
IFX1763XEJ V	ΔV_{OUT}	—	4	8	mV	$T_j = 25^{\circ}\text{C}$; $V_{\text{IN}} = 2.3 \text{ V}$; $\Delta I_{\text{OUT}} = 1$ to 500 mA ³⁾	P_5.1.8
IFX1763LD V							
IFX1763XEJ V	ΔV_{OUT}	—	—	14	mV	$V_{\text{IN}} = 2.3 \text{ V}$; $\Delta I_{\text{OUT}} = 1$ to 500 mA ³⁾	P_5.1.9
IFX1763LD V							
Dropout Voltage²⁾⁵⁾⁶⁾							
Dropout Voltage	V_{DR}	—	100	130	mV	$I_{\text{OUT}} = 10 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$; $T_j = 25^{\circ}\text{C}$	P_5.1.10
Dropout Voltage	V_{DR}	—	—	190	mV	$I_{\text{OUT}} = 10 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$	P_5.1.11
Dropout Voltage	V_{DR}	—	150	190	mV	$I_{\text{OUT}} = 50 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$; $T_j = 25^{\circ}\text{C}$	P_5.1.12
Dropout Voltage	V_{DR}	—	—	250	mV	$I_{\text{OUT}} = 50 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$	P_5.1.13
Dropout Voltage	V_{DR}	—	190	220	mV	$I_{\text{OUT}} = 100 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$; $T_j = 25^{\circ}\text{C}$	P_5.1.14
Dropout Voltage	V_{DR}	—	—	300	mV	$I_{\text{OUT}} = 100 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$	P_5.1.15
Dropout Voltage	V_{DR}	—	320	350	mV	$I_{\text{OUT}} = 500 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$; $T_j = 25^{\circ}\text{C}$	P_5.1.16

Electrical Characteristics

Table 4 Electrical Characteristics (cont'd)

$-40^{\circ}\text{C} < T_{\text{j}} < 125^{\circ}\text{C}$; all voltages with respect to ground; positive current defined flowing out of pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Dropout Voltage	V_{DR}	—	—	450	mV	$I_{\text{OUT}} = 500 \text{ mA}$; $V_{\text{IN}} = V_{\text{OUT,nom}}$	P_5.1.17
GND Pin Current⁵⁾⁷⁾							
GND Pin Current	I_{GND}	—	30	60	μA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 0 \text{ mA}$	P_5.1.18
GND Pin Current	I_{GND}	—	50	100	μA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 1 \text{ mA}$	P_5.1.19
GND Pin Current	I_{GND}	—	300	850	μA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 50 \text{ mA}$	P_5.1.20
GND Pin Current	I_{GND}	—	0.7	2.2	mA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 100 \text{ mA}$	P_5.1.21
GND Pin Current	I_{GND}	—	3	8	mA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 250 \text{ mA}$	P_5.1.22
GND Pin Current	I_{GND}	—	11	22	mA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 500 \text{ mA}; T_{\text{j}} \geq 25^{\circ}\text{C}$	P_5.1.23
GND Pin Current	I_{GND}	—	11	31	mA	$V_{\text{IN}} = V_{\text{OUT,nom}}$; $I_{\text{OUT}} = 500 \text{ mA}; T_{\text{j}} < 25^{\circ}\text{C}$	P_5.1.24
Quiescent Current in Off-Mode (EN-pin low)	I_{q}	—	0.1	1	μA	$V_{\text{IN}} = 6 \text{ V}$; $V_{\text{EN}} = 0 \text{ V}$; $T_{\text{j}} = 25^{\circ}\text{C}$	P_5.1.25
Enable							
Enable Threshold High	$V_{\text{th,EN}}$	—	0.8	2.0	V	$V_{\text{OUT}} = \text{Off to On}$	P_5.1.26
Enable Threshold Low	$V_{\text{tl,EN}}$	0.25	0.65	—	V	$V_{\text{OUT}} = \text{On to Off}$	P_5.1.27
EN Pin Current ⁸⁾	I_{EN}	—	0.01	—	μA	$V_{\text{EN}} = 0 \text{ V}$; $T_{\text{j}} = 25^{\circ}\text{C}$	P_5.1.28
EN Pin Current ⁸⁾	I_{EN}	—	1	—	μA	$V_{\text{EN}} = 20 \text{ V}$; $T_{\text{j}} = 25^{\circ}\text{C}$	P_5.1.29
Adjust Pin Bias Current⁹⁾¹¹⁾							
ADJ Pin Bias Current	$I_{\text{bias,ADJ}}$	—	60	—	nA	$T_{\text{j}} = 25^{\circ}\text{C}$	P_5.1.30
Output Voltage Noise¹¹⁾							
Output Voltage Noise IFX1763XEJ V ¹⁰⁾ IFX1763LD V ¹⁰⁾	e_{no}	—	41	—	μV_{RMS}	$C_{\text{OUT}} = 10 \mu\text{F}$ ceramic; $C_{\text{BYP}} = 10 \text{ nF}$; $I_{\text{OUT}} = 500 \text{ mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.31
Output Voltage Noise IFX1763XEJ V ¹⁰⁾ IFX1763LD V ¹⁰⁾	e_{no}	—	28	—	μV_{RMS}	$C_{\text{OUT}} = 10 \mu\text{F}$ ceramic +250m Ω resistor in series; $C_{\text{BYP}} = 10 \text{ nF}$; $I_{\text{OUT}} = 500 \text{ mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.32
Output Voltage Noise IFX1763XEJ V ¹⁰⁾ IFX1763LD V ¹⁰⁾	e_{no}	—	29	—	μV_{RMS}	$C_{\text{OUT}} = 22 \mu\text{F}$ ceramic; $C_{\text{BYP}} = 10 \text{ nF}$; $I_{\text{OUT}} = 500 \text{ mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.33

Electrical Characteristics

Table 4 Electrical Characteristics (cont'd)

$-40^{\circ}\text{C} < T_{\text{j}} < 125^{\circ}\text{C}$; all voltages with respect to ground; positive current defined flowing out of pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Output Voltage Noise IFX1763XEJ V ¹⁰⁾ IFX1763LD V ¹⁰⁾	e_{no}	—	24	—	μV_{RMS}	$C_{\text{OUT}} = 22 \mu\text{F}$ ceramic +250mΩ resistor in series; $C_{\text{BYP}} = 10 \text{nF}$; $I_{\text{OUT}} = 500 \text{mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.34
Output Voltage Noise IFX1763XEJ V33 IFX1763LD V33	e_{no}	—	45	—	μV_{RMS}	$C_{\text{OUT}} = 10 \mu\text{F}$ ceramic; $C_{\text{BYP}} = 10 \text{nF}$; $I_{\text{OUT}} = 500 \text{mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.35
Output Voltage Noise IFX1763XEJ V33 IFX1763LD V33	e_{no}	—	35	—	μV_{RMS}	$C_{\text{OUT}} = 10 \mu\text{F}$ ceramic +250mΩ resistor in series; $C_{\text{BYP}} = 10 \text{nF}$; $I_{\text{OUT}} = 500 \text{mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.36
Output Voltage Noise IFX1763XEJ V33 IFX1763LD V33	e_{no}	—	33	—	μV_{RMS}	$C_{\text{OUT}} = 22 \mu\text{F}$ ceramic; $C_{\text{BYP}} = 10 \text{nF}$; $I_{\text{OUT}} = 500 \text{mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.37
Output Voltage Noise IFX1763XEJ V33 IFX1763LD V33	e_{no}	—	30	—	μV_{RMS}	$C_{\text{OUT}} = 22 \mu\text{F}$ ceramic +250mΩ resistor in series; $C_{\text{BYP}} = 10 \text{nF}$; $I_{\text{OUT}} = 500 \text{mA}$; (BW = 10 Hz to 100 kHz)	P_5.1.38

Power Supply Ripple Rejection¹¹⁾

Power Supply Ripple Rejection	$PSRR$	50	65	—	dB	$V_{\text{IN}} - V_{\text{OUT}} = 1.5\text{V}$ (avg); $V_{\text{RIPPLE}} = 0.5\text{Vpp}$; $f_r = 120\text{Hz}$; $I_{\text{OUT}} = 500\text{mA}$	P_5.1.39
-------------------------------	--------	----	----	---	----	--	----------

Output Current Limitation

Output Current Limit	$I_{\text{OUT,limit}}$	520	—	—	mA	$V_{\text{IN}} = 7 \text{V}$; $V_{\text{OUT}} = 0 \text{V}$	P_5.1.40
Output Current Limit	$I_{\text{OUT,limit}}$	520	—	—	mA	$V_{\text{IN}} = V_{\text{OUT,nom}} + 1 \text{V}$ or $2.3 \text{V}^{12)}$; $\Delta V_{\text{OUT}} = -0.1 \text{V}$	P_5.1.41

Input Reverse Leakage Current

Input Reverse Leakage	$I_{\text{leak,rev}}$	—	—	1	mA	$V_{\text{IN}} = -20 \text{V}$; $V_{\text{OUT}} = 0 \text{V}$	P_5.1.42
-----------------------	-----------------------	---	---	---	----	--	----------

Reverse Output Current¹³⁾

Fixed Voltage Versions	I_{Reverse}	—	10	20	μA	$V_{\text{OUT}} = V_{\text{OUT,nom}}$; $V_{\text{IN}} < V_{\text{OUT,nom}}$; $T_{\text{j}} = 25^{\circ}\text{C}$	P_5.1.43
Adjustable Voltage Version	I_{Reverse}	—	5	10	μA	$V_{\text{OUT}} = 1.22 \text{V}$; $V_{\text{IN}} < 1.22 \text{V}$; $T_{\text{j}} = 25^{\circ}\text{C}^{13)}$	P_5.1.44

Electrical Characteristics

Table 4 Electrical Characteristics (cont'd)

$-40^{\circ}\text{C} < T_j < 125^{\circ}\text{C}$; all voltages with respect to ground; positive current defined flowing out of pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			

Output Capacitor¹¹⁾


Output Capacitance	C_{OUT}	3.3	–	–	μF	$C_{\text{BYP}} = 0 \text{ nF}$	P_5.1.45
ESR	ESR	^{–14)}	–	3	Ω	–	P_5.1.46

- 1) This parameter defines the minimum input voltage for which the device is powered up and provides the maximum output current of 500 mA. Due to the nominal output voltage of 3.3 V of the fixed voltage version or depending on the chosen setting of the external voltage divider as well as on the applied conditions the device may either regulate its nominal output voltage or it may be in tracking mode. For further details please also refer to the V_{OUT} specification in [Table 4](#).
- 2) For the IFX1763XEJ V and IFX1763LD V adjustable versions the dropout voltage for certain output voltage / load conditions will be restricted by the minimum input voltage specification.
- 3) The adjustable versions of the IFX1763 are tested and specified for these conditions with the ADJ pin connected to the OUT pin.
- 4) The operation conditions are limited by the maximum junction temperature. The regulated output voltage specification will only apply for conditions where the limit of the maximum junction temperature is fulfilled. It will therefore not apply for all possible combinations of input voltage and output current at a given output voltage. When operating at maximum input voltage, the output current must be limited for thermal reasons. The same holds true when operating at maximum output current where the input voltage range must be limited for thermal reasons.
- 5) To satisfy requirements for minimum input voltage, the adjustable version of the IFX1763 is tested and specified for these conditions with an external resistor divider (two 250 k Ω resistors) for an output voltage of 2.44 V. The external resistors will add a 5 μA DC load on the output.
- 6) The dropout voltage is the minimum input to output voltage differential needed to maintain regulation at a specified output current. In dropout, the output voltage will be equal to $V_{\text{IN}} - V_{\text{DR}}$.
- 7) GND-pin current is tested with $V_{\text{IN}} = V_{\text{OUT,nom}}$ or $V_{\text{IN}} = 2.3 \text{ V}$, whichever is greater, and a current source load. This means that this parameter is tested while being in dropout condition and thus reflects a worst case condition. The GND-pin current will in most cases decrease slightly at higher input voltages - please also refer to the corresponding typical performance graphs.
- 8) The EN pin current flows into EN pin.
- 9) The ADJ pin current flows into ADJ pin.
- 10) ADJ pin connected to OUT pin.
- 11) Not subject to production test, specified by design.
- 12) whichever of the two values of V_{IN} is greater in order to also satisfy the requirements for $V_{\text{IN,min}}$.
- 13) Reverse output current is tested with the IN pin grounded and the OUT pin forced to the rated output voltage. This current flows into the OUT pin and out of the GND pin.
- 14) $C_{\text{BYP}} = 0 \text{ nF}$, $C_{\text{OUT}} \geq 3.3 \mu\text{F}$; please note that for cases where a bypass capacitor at BYP is used - depending on the actual applied capacitance of C_{OUT} and C_{BYP} - a minimum requirement for ESR may apply. For further details please also refer to the corresponding typical performance graph.


Note: The listed characteristics are ensured over the operating range of the integrated circuit. Typical characteristics specified mean values expected over the production spread. If not otherwise specified, typical characteristics apply at $T_A = 25^{\circ}\text{C}$ and the given supply voltage.

6 Typical Performance Characteristics


Dropout Voltage V_{DR} versus
Output Current I_{OUT}

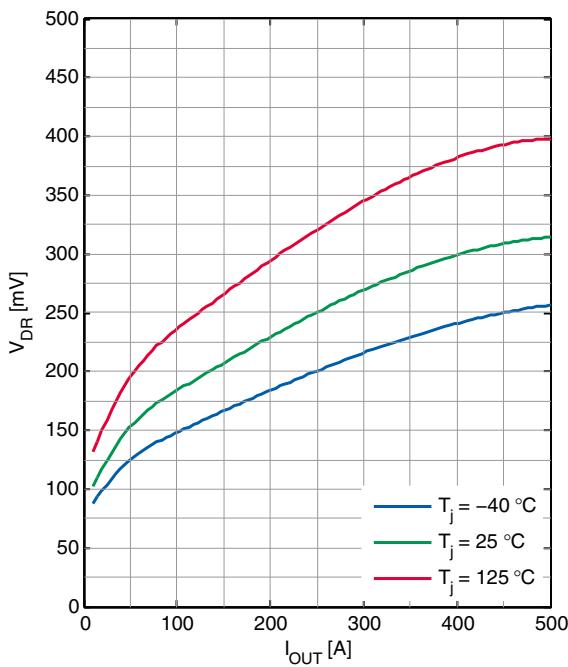


Guaranteed Dropout Voltage V_{DR} versus
Output Current I_{OUT}




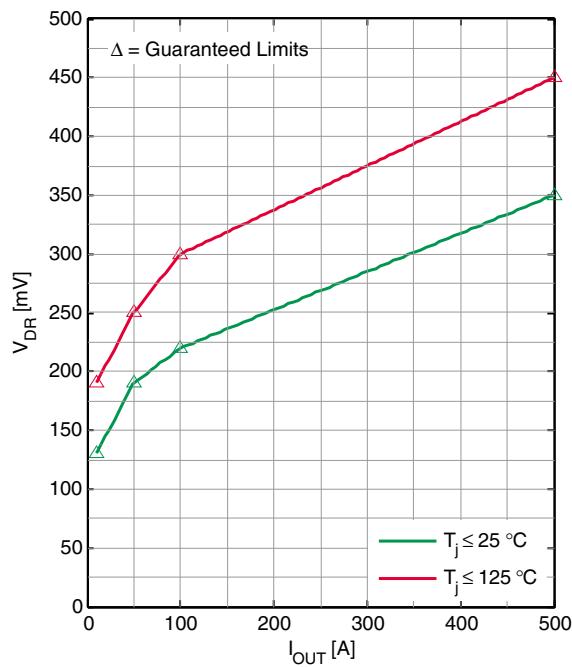


Dropout Voltage V_{DR} versus
Junction Temperature T_j

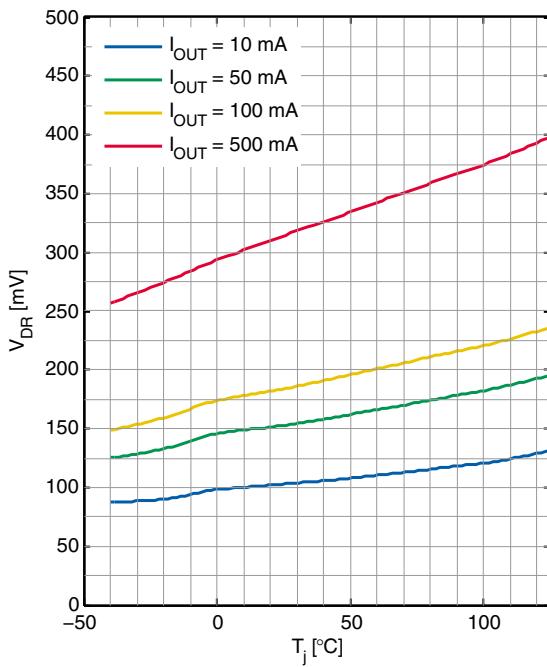


Quiescent Current versus
Junction Temperature T_j

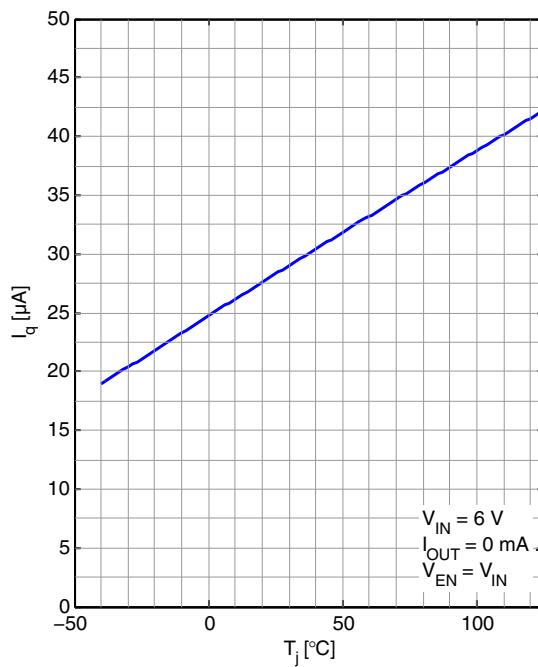

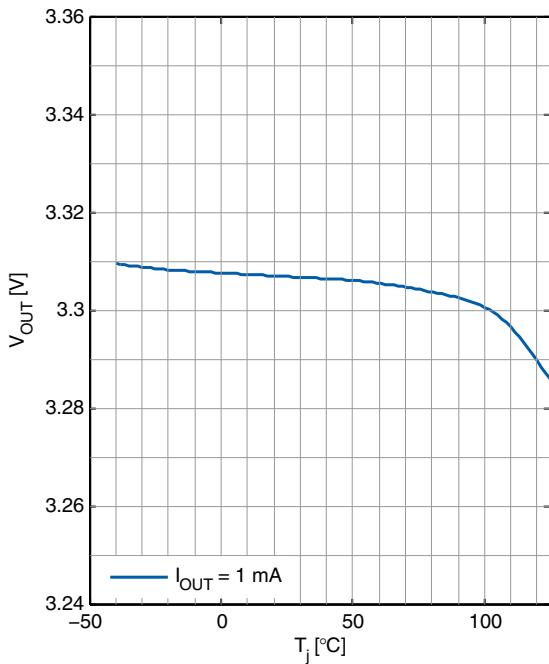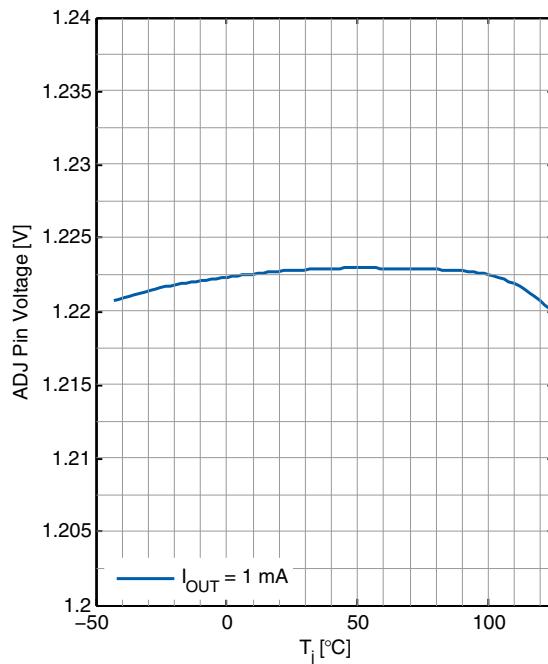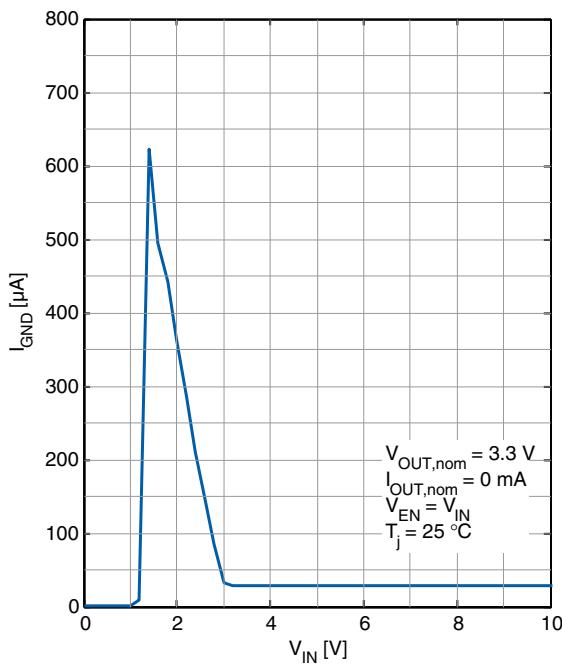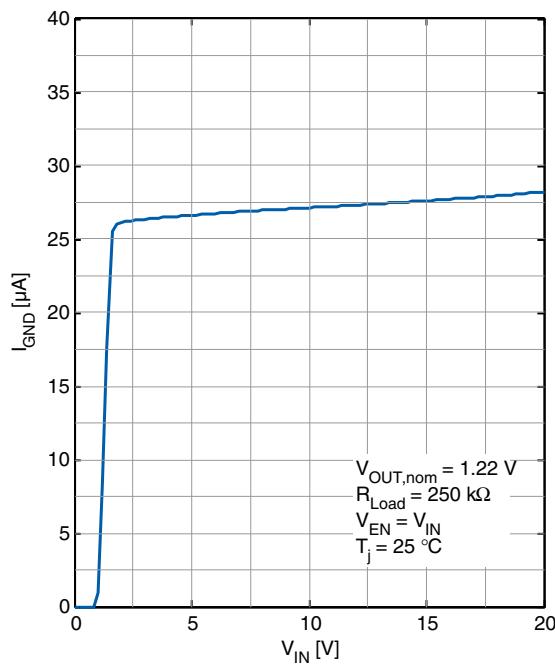
Typical Performance Characteristics
**Output Voltage V_{OUT} versus
Junction Temperature T_J (IFX1763XEJ V33)**

**Output / ADJ Pin Voltage V_{OUT} versus
Junction Temperature T_J (IFX1763XEJ V)**

**Quiescent Current I_q versus
Input Voltage V_{IN} (IFX1763XEJ V33)**

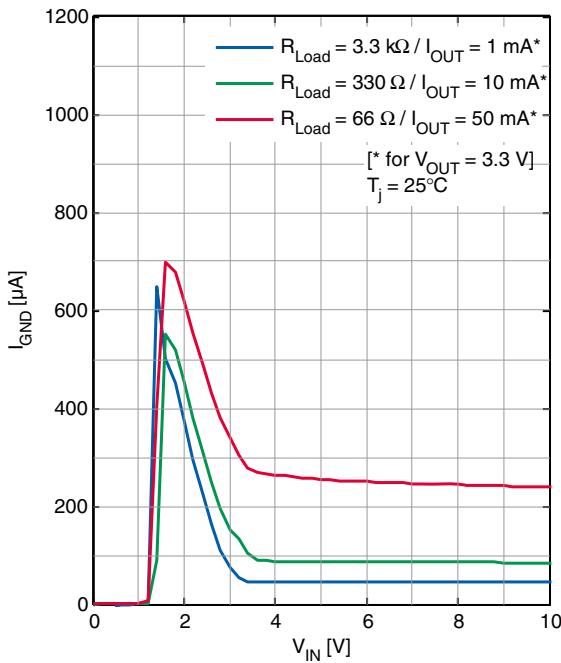**Quiescent Current I_q versus
Input Voltage V_{IN} (IFX1763XEJ V)**


Typical Performance Characteristics

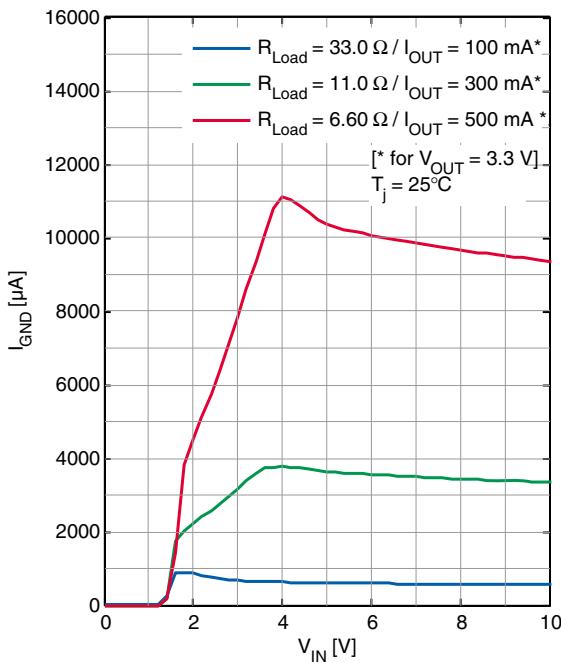
**GND Current I_{GND} versus
Input Voltage V_{IN} (IFX1763XEJ V33)**




**GND Current I_{GND} versus
Input Voltage V_{IN} (IFX1763XEJ V33)**







**GND Current I_{GND} versus
Input Voltage V_{IN} (IFX1763XEJ V)**

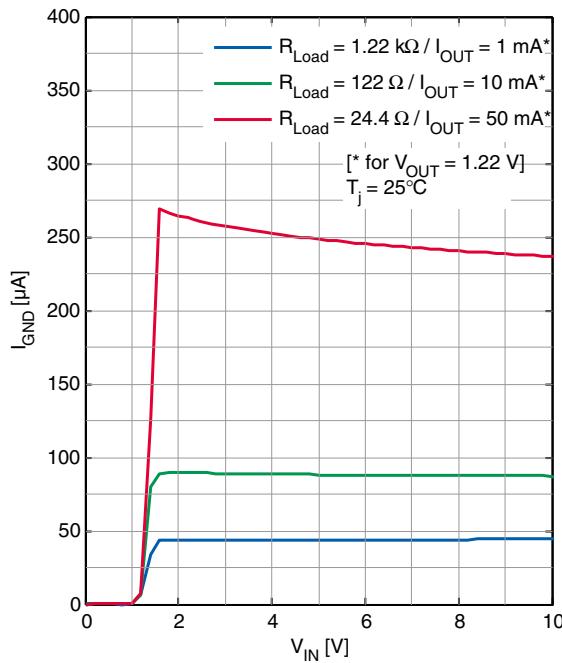

**GND Current I_{GND} versus
Input Voltage V_{IN} (IFX1763XEJ V)**

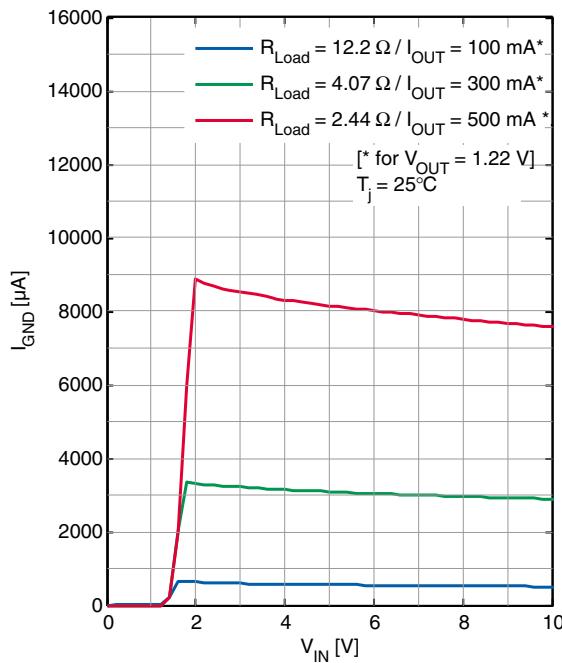


Typical Performance Characteristics

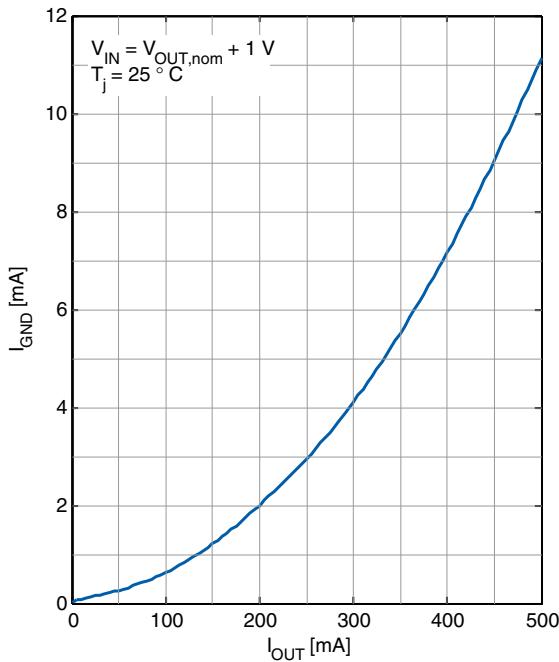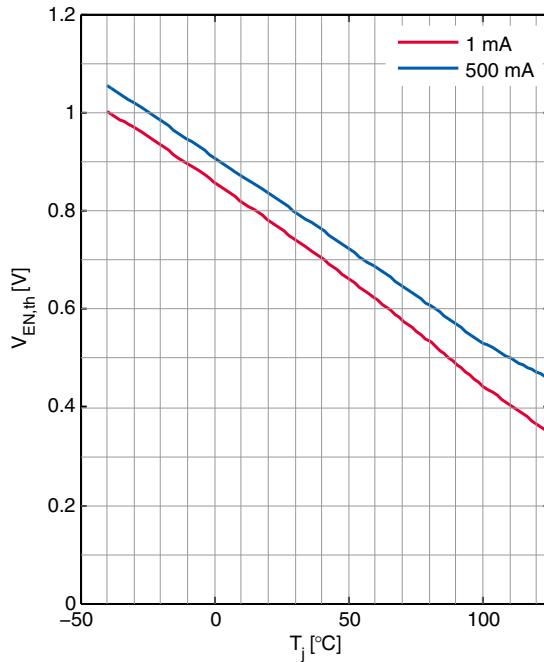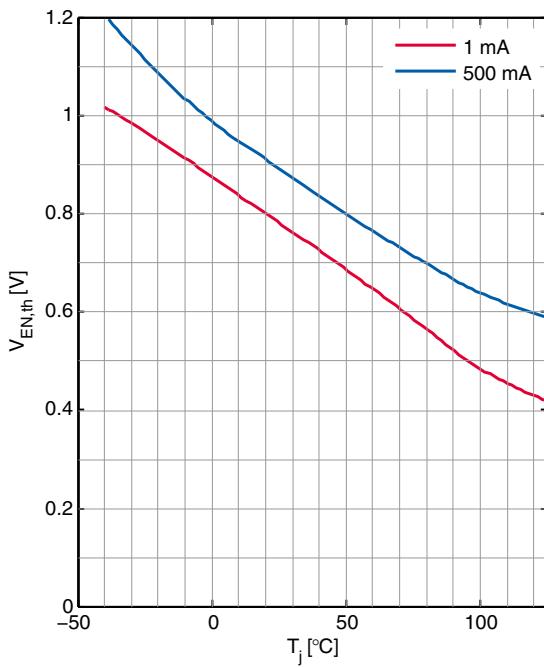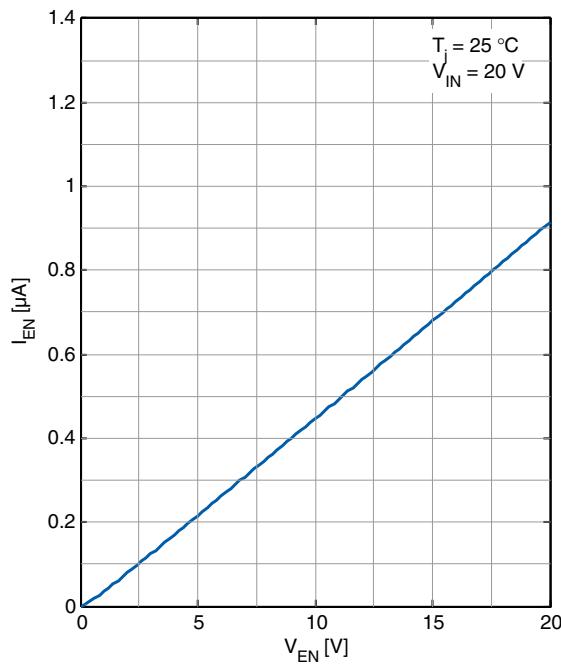
 GND Current I_{GND} versus
Output Current I_{OUT}

 EN Pin Threshold (On-to-Off) versus
Junction Temperature T_j

 EN Pin Threshold (Off-to-On) versus
Junction Temperature T_j

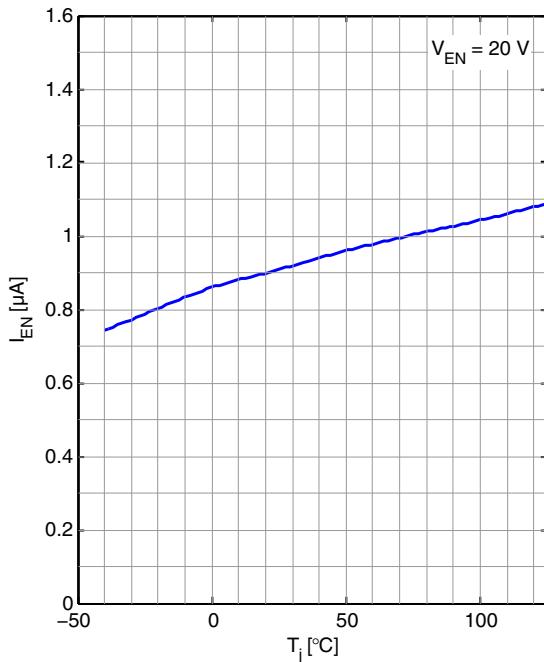 EN Pin Input Current versus
EN Pin Voltage V_{EN}


Typical Performance Characteristics

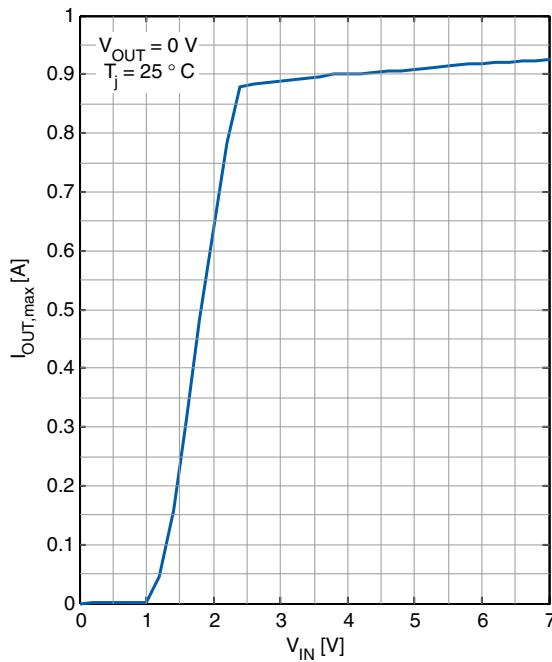
EN Pin Input Current versus Junction Temperature T_j




Current Limit versus Input Voltage V_{IN}







Current Limit versus Junction Temperature T_j

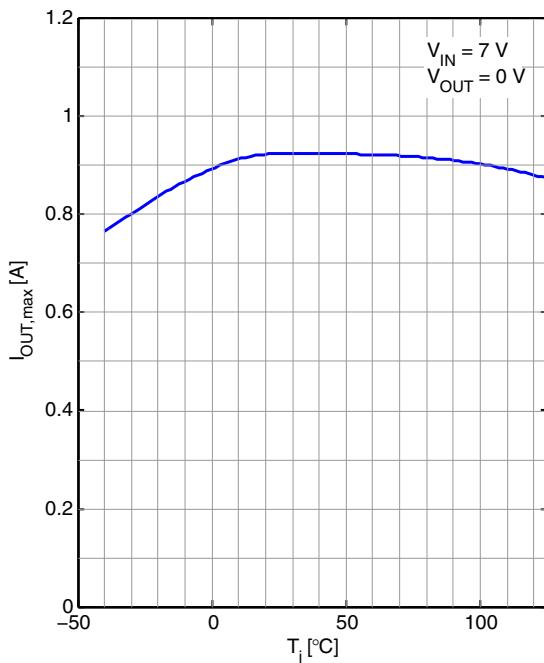

Reverse Output Current versus Output Voltage V_{OUT}

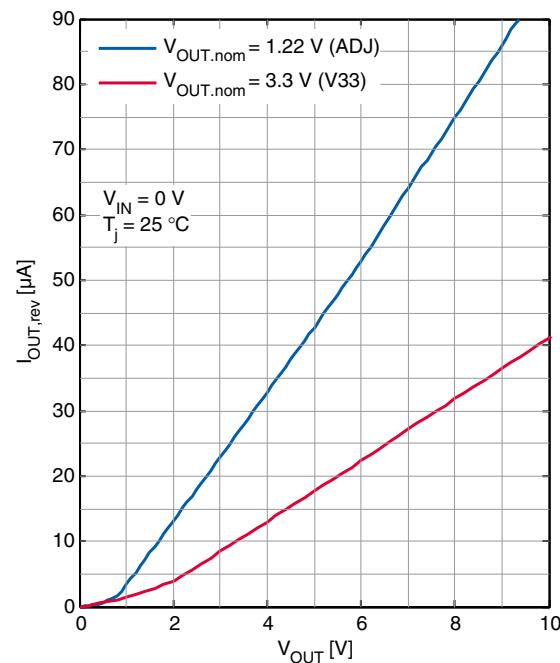


Typical Performance Characteristics

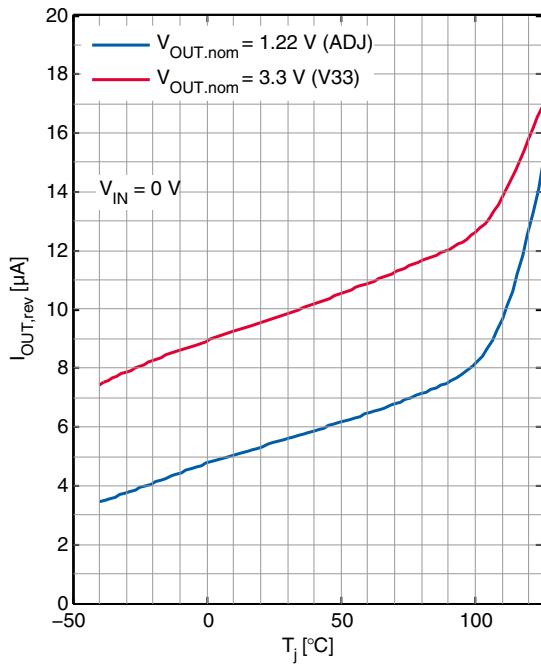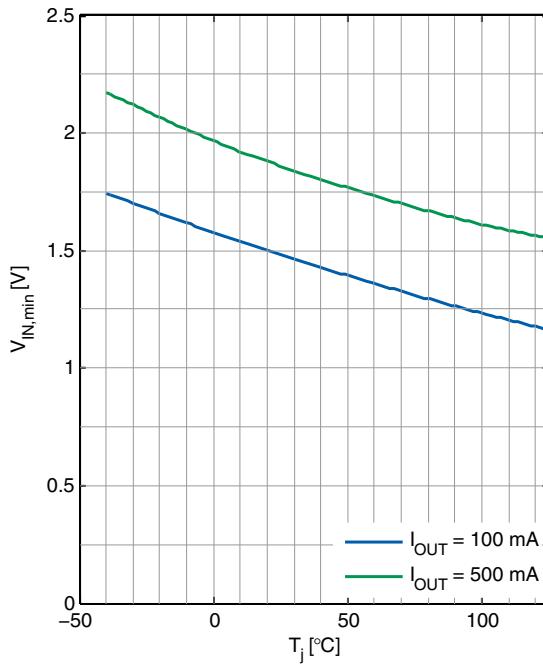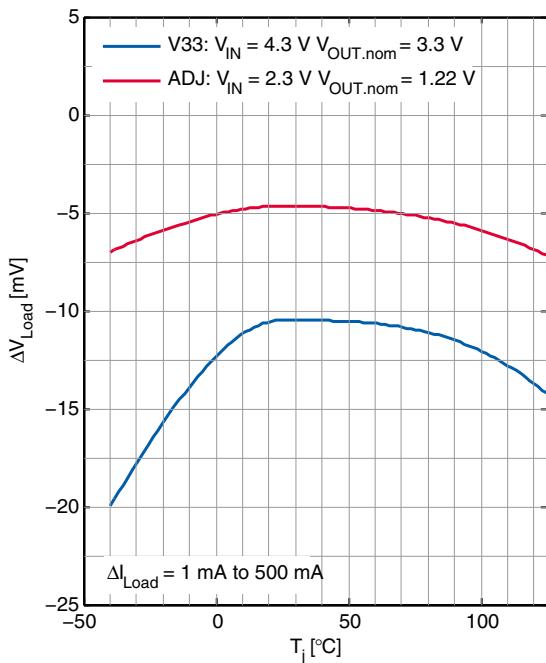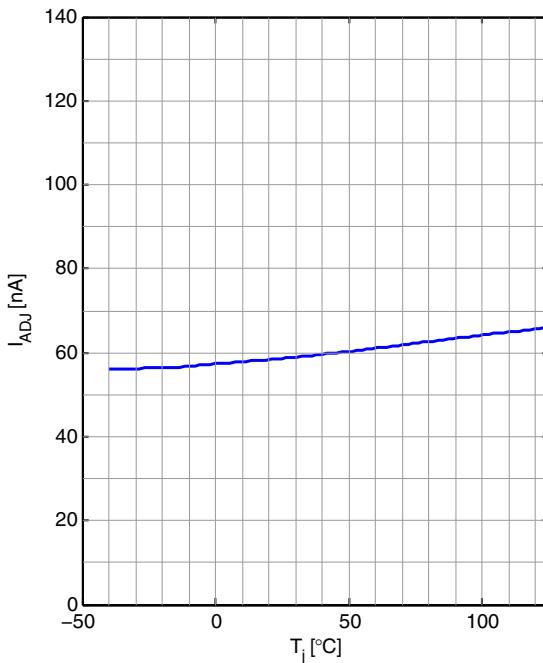 Reverse Output Current versus
Junction Temperature T_j

 Minimum Input Voltage¹⁾ versus
Junction Temperature T_j

 Load Regulation versus
Junction Temperature T_j

 Adjust Pin Bias current I_{ADJ} versus
Junction Temperature T_j

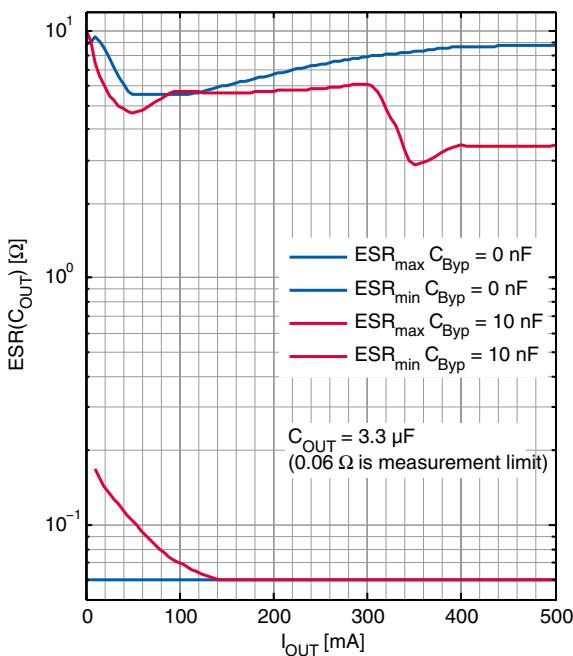
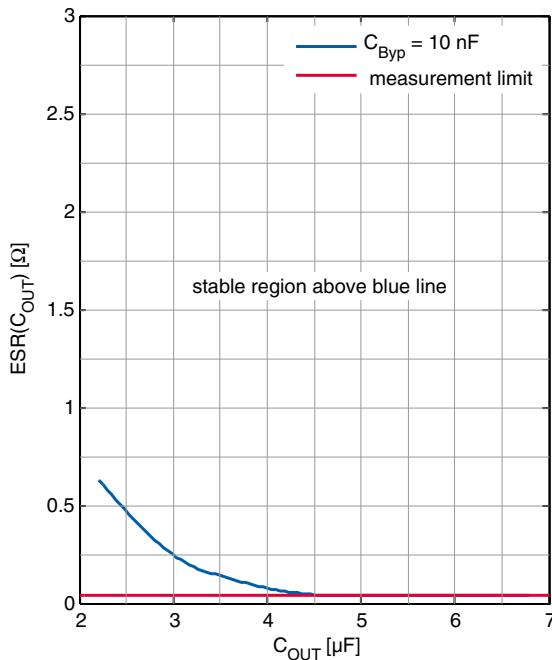
1) $V_{IN,min}$ is referred here as the minimum input voltage for which the requested current is provided and V_{OUT} reaches 1 V.

Typical Performance Characteristics


**ESR Stability versus
Output Current I_{OUT} (for $C_{\text{OUT}} = 3.3 \mu\text{F}$)**




**ESR(C_{OUT}) with $C_{\text{BYP}} = 10 \text{ nF}$ versus
Output Capacitance C_{OUT}**



**Input Ripple Rejection PSRR versus
Frequency f**

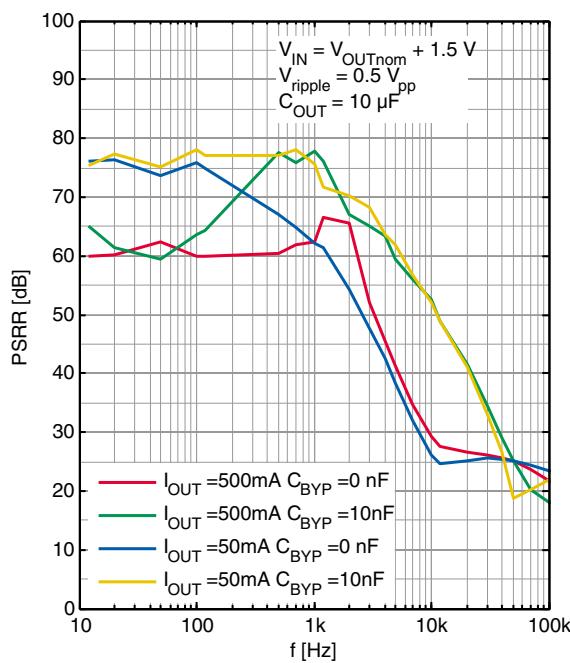


**Input Ripple Rejection PSRR versus
Junction Temperature T_j**

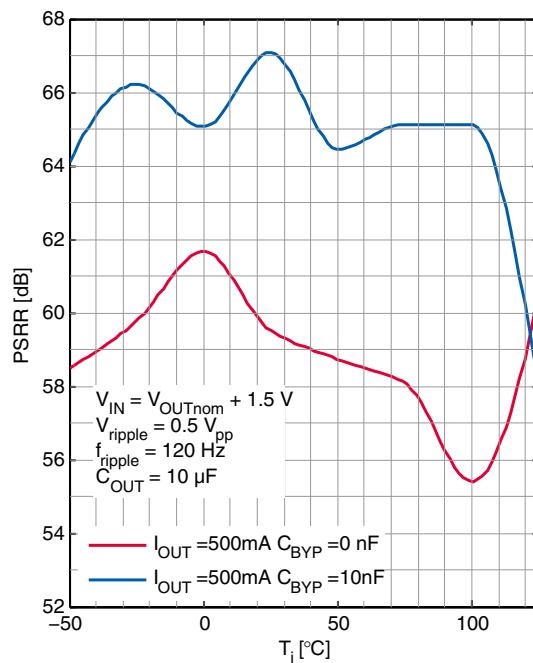


Typical Performance Characteristics


Output Noise Spectral Density (ADJ) versus Frequency ($C_{OUT} = 10 \mu F$, $I_{OUT} = 50 mA^1$)

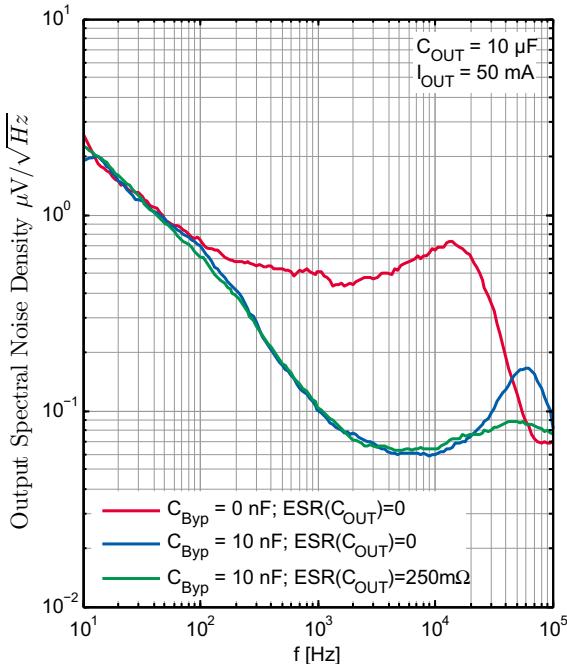


Output Noise Spectral Density (3.3 V) versus Frequency ($C_{OUT} = 10 \mu F$, $I_{OUT} = 50 mA^1$)

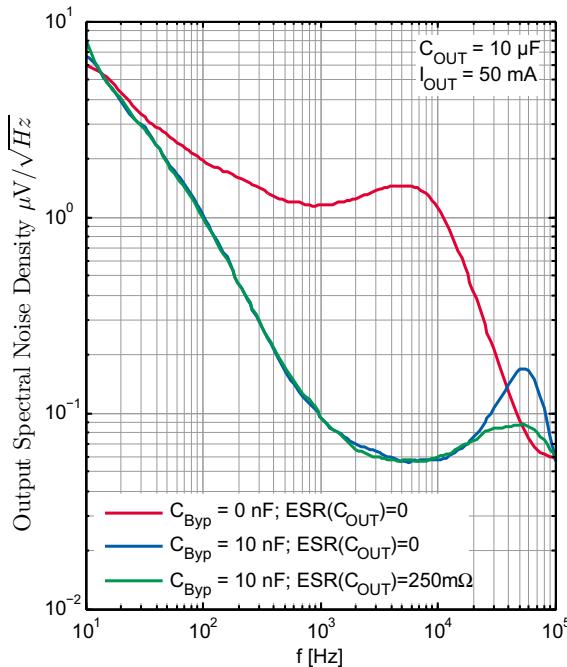

Output Noise Spectral Density (ADJ) versus Frequency ($C_{OUT} = 22 \mu F$, $I_{OUT} = 50 mA^1$)




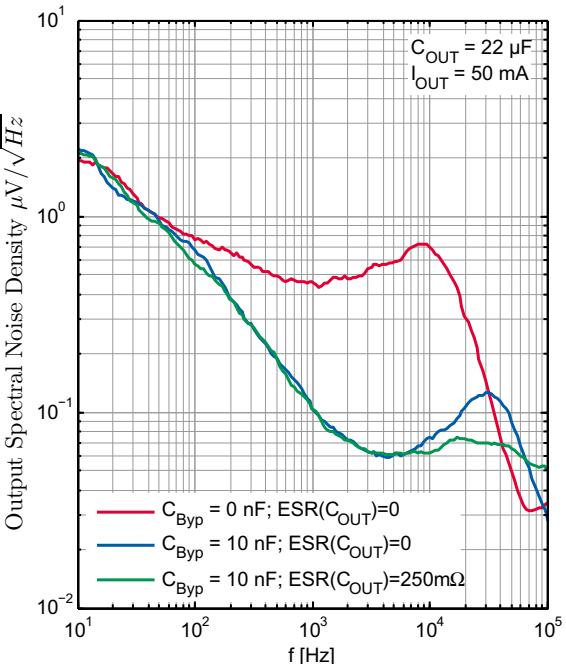


Output Noise Spectral Density (3.3 V) versus Frequency ($C_{OUT} = 22 \mu F$, $I_{OUT} = 50mA^1$)

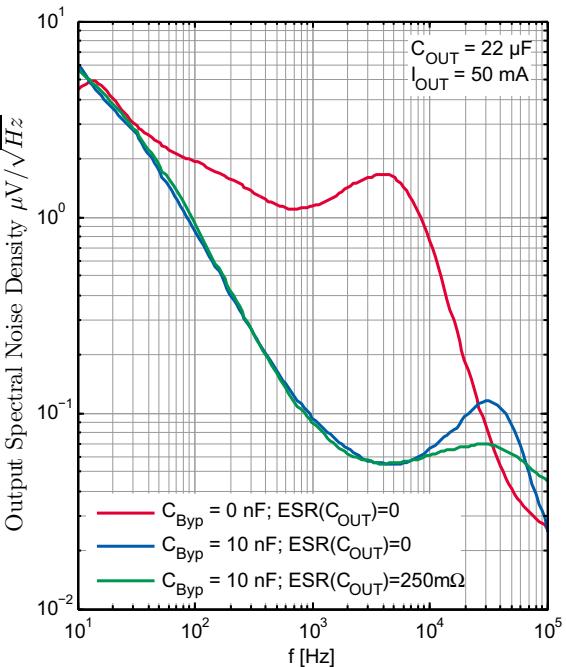

1) Load condition 50mA is representing a worst case condition with regard to output voltage noise performance.

Typical Performance Characteristics

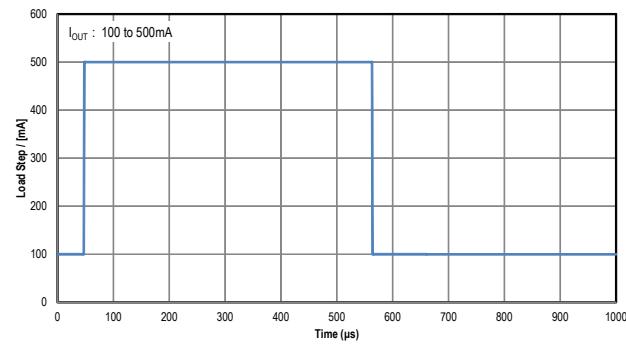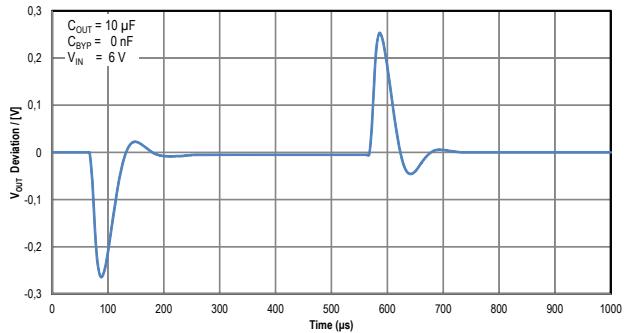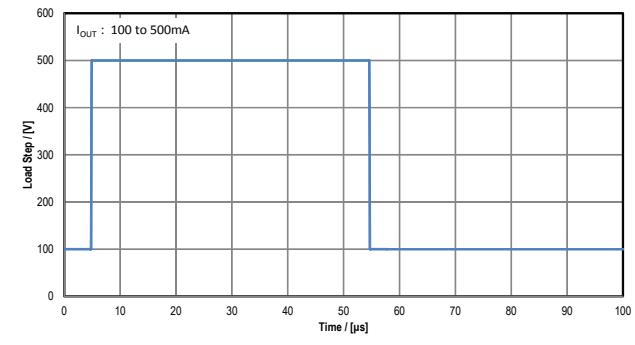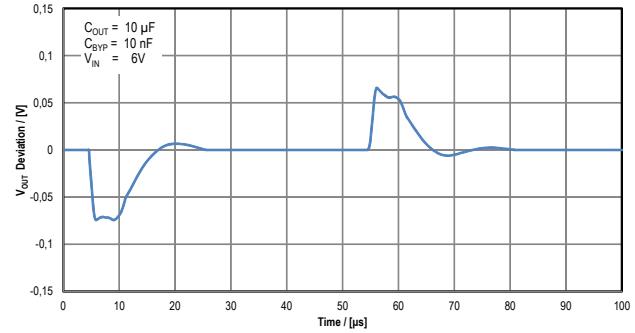Transient Response $C_{\text{BYP}} = 0\text{nF}$ (IFX1763XEJ V33)

Transient Response $C_{\text{BYP}} = 10\text{nF}$ (IFX1763XEJ V33)


7 Application Information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.


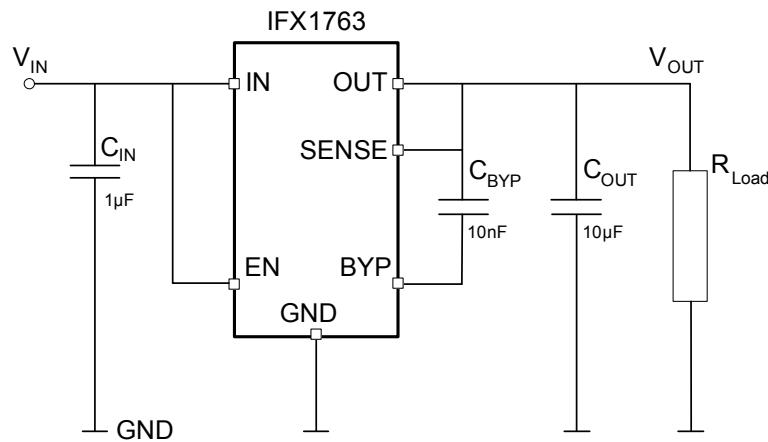


Figure 5 Typical Application Circuit IFX1763 (fixed voltage version)

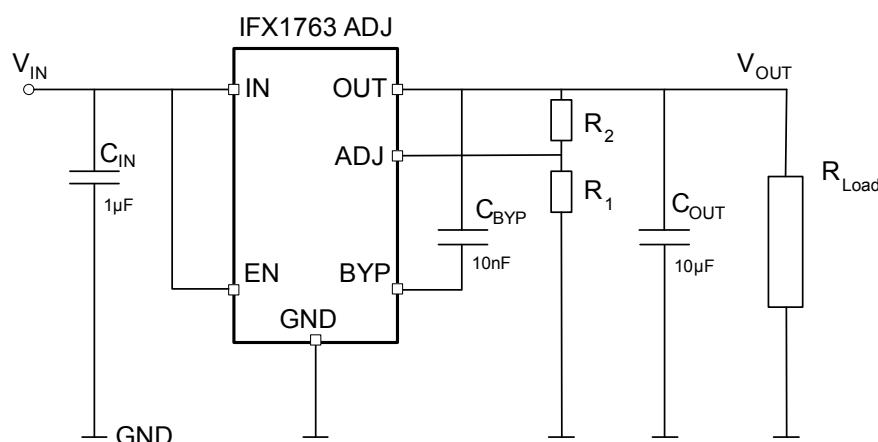

$$\text{Calculation of } V_{\text{OUT}}: \quad V_{\text{OUT}} = 1.22V \times (1 + R_2 / R_1) + (I_{\text{ADJ}} \times R_2)$$

Figure 6 Typical Application Circuit IFX1763 (adjustable version)

Note: This is a very simplified example of an application circuit. The function must be verified in the real application¹⁾²⁾.

- 1) Please note that in case a non-negligible inductance at IN pin is present, e.g. due to long cables, traces, parasitics, etc, a bigger input capacitor C_{IN} may be required to filter its influence. As a rule of thumb if the IN pin is more than six inches away from the main input filter capacitor an input capacitor value of $C_{\text{IN}} = 10 \mu\text{F}$ is recommended.
- 2) For specific needs a small optional resistor may be placed in series to very low ESR output capacitors C_{OUT} for enhanced noise performance (for details please see “[Bypass Capacitance and Low Noise Performance](#)” on Page 25).

The IFX1763 is a 500 mA low dropout regulator with very low quiescent current and Enable-functionality. The device is capable of supplying 500 mA at a dropout voltage of 320 mV. Output voltage noise numbers down to $24 \mu V_{RMS}$ can be achieved over a 10 Hz to 100 kHz bandwidth with the addition of a 10 nF reference bypass capacitor. The usage of a reference bypass capacitor will additionally improve transient response of the regulator, lowering the settling time for transient load conditions. The device has a low operating quiescent current of typical 30 μA that drops to less than 1 μA in shutdown (EN-pin pulled to low level). The device also incorporates several protection features which makes it ideal for battery-powered systems. It is protected against both reverse input and reverse output voltages. In battery backup applications where the output can be held up by a backup battery when the input is pulled to ground the device behaves like it has a diode in series with its output and prevents reverse current flow.

7.1 Adjustable Operation

The adjustable version of the IFX1763 has an output voltage range of 1.22 V to 20 V - V_{DR} . The output voltage is set by the ratio of two external resistors, as it can be seen in [Figure 6](#) (for the calculation of V_{OUT} the formula given in the figure can be used). The device controls the output to maintain the ADJ pin at 1.22 V referenced to ground. The current in R_1 is then equal $1.22 V / R_1$ and the current in R_2 equals the current in R_1 plus the ADJ pin bias current. The ADJ pin bias current, which is ~ 60 nA @ 25°C, flows through R_2 into the ADJ pin. The value of R_1 should be not greater than 250 k Ω in order to minimize errors in the output voltage caused by the ADJ pin bias current. Note that when the device is shutdown (i.e. low level applied to EN pin) the output is turned off and consequently the divider current will be zero. For details of the ADJ pin bias current see also the corresponding typical performance graph [Figure "Adjust Pin Bias current \$I_{ADJ}\$ versus Junction Temperature \$T_J\$ " on Page 20](#).

7.2 Kelvin Sense Connection

For the fixed voltage version of the IFX1763 the SENSE pin is the input to the error amplifier. An optimum regulation will be obtained at the point where the SENSE pin is connected to the OUT pin of the regulator. In critical applications however small voltage drops can be caused by the resistance R_P of the PC-traces and thus may lower the resulting voltage at the load. This effect may be eliminated by connecting the SENSE pin to the output as close as possible at the load (see [Figure 7](#)). Please note that the voltage drop across the external PC trace will add up to the dropout voltage of the regulator.

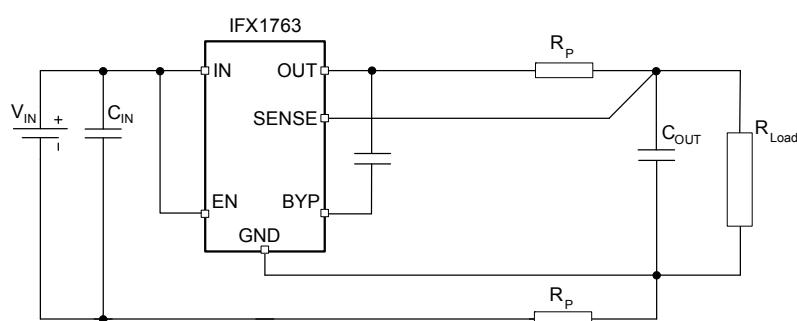


Figure 7 Kelvin Sense Connection

7.3 Bypass Capacitance and Low Noise Performance

The IFX1763 regulator may be used in combination with a bypass capacitor connecting the OUT pin to the BYP pin in order to minimize output voltage noise¹⁾. This capacitor will bypass the reference of the regulator, providing

1) a good quality low leakage capacitor is recommended.

a low frequency noise pole. The noise pole provided by such a bypass capacitor will lower the output voltage noise in the considered bandwidth. For a given output voltage actual numbers of the output voltage noise will - next to the bypass capacitor itself - be dependent on the capacitance of the applied output capacitor and its ESR: In case of the IFX1763XEJ V applied with unity gain (i.e. $V_{OUT} = 1.22$ V) the usage of a bypass capacitor of 10 nF in combination with a (low ESR) ceramic C_{OUT} of 10 μ F will result in output voltage noise numbers of typical 41 μ V_{RMS}. This Output Noise level can be reduced to typical 28 μ V_{RMS} under the same conditions by adding a small resistor of ~ 250 m Ω in series to the 10 μ F ceramic output capacitor acting as additional ESR. A reduction of the output voltage noise can also be achieved by increasing capacitance of the output capacitor. For $C_{OUT} = 22$ μ F (ceramic low ESR) the output voltage noise will be typically around 29 μ V_{RMS} and can again be further lowered to 24 μ V_{RMS} by adding a small resistance of ~ 250 m Ω in series to C_{OUT} . In case of the fix voltage version IFX1763XEJ V33 the output voltage noise for the described cases vary from 45 μ V_{RMS} down to 30 μ V_{RMS}. For further details please also see "[Output Voltage Noise^{11\)} on Page 12](#)," of the Electrical Characteristics. Please note that next to reducing the output voltage noise level the usage of a bypass capacitor has the additional benefit of improving transient response which will be also explained in the next chapter. However one needs to take into consideration that on the other hand the regulator start-up time is proportional to the size of the bypass capacitor and slows down to values around 15 ms when using a 10 nF bypass capacitor in combination with a 10 μ F C_{OUT} output capacitor.

7.4 Output Capacitance Requirements and Transient Response

The IFX1763 is designed to be stable with a wide range of output capacitors. The ESR of the output capacitor is an essential parameter with regard to stability, most notably with small capacitors. A minimum output capacitor of 3.3 μ F with an ESR of 3 Ω or less is recommended to prevent oscillations. Like in general for LDO's the output transient response of the IFX1763 will be a function of the output capacitance. Larger values of output capacitance decrease peak deviations and thus improve transient response for larger load current changes. Bypass capacitors, used to decouple individual components powered by the IFX1763 will increase the effective output capacitor value. Please note that with the usage of bypass capacitors for low noise operation either larger values of output capacitors are needed or a minimum ESR requirement of C_{OUT} may have to be considered (see also [Figure "ESR\(\$C_{OUT}\$ \) with \$C_{BYP} = 10\$ nF versus Output Capacitance \$C_{OUT}\$ " on Page 21](#) as example). In conjunction with the usage of a 10 nF bypass capacitor an output capacitor $C_{OUT} \geq 6.8$ μ F is recommended. The benefit of a bypass capacitor to the transient response performance is impressive and illustrated as one example in [Figure 8](#) where the transient response of the IFX1763XEJ V33 to one and the same load step from 100 mA to 500 mA is shown with and without a 10 nF bypass capacitor: for the given configuration of $C_{OUT} = 10$ μ F with no bypass capacitor the load step will settle in the range of less than 100 μ s while for $C_{OUT} = 10$ μ F in conjunction with a 10 nF bypass capacitor the same load step will settle in the range of 10 μ s. Due to the shorter reaction time of the regulator by adding the bypass capacitor not only the settling time improves but also output voltage deviations due to load steps are sharply reduced.

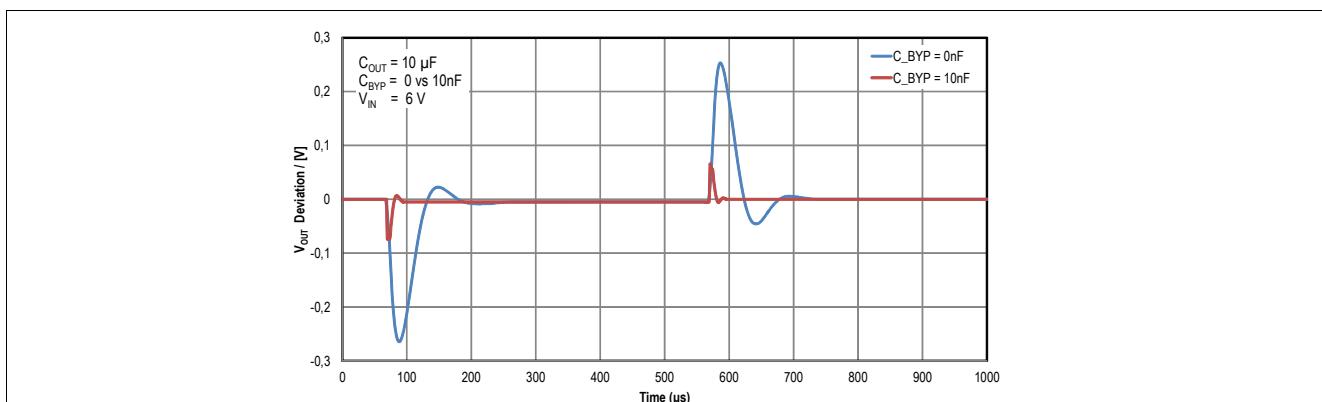


Figure 8 Influence of C_{BYP} : example of transient response to one and the same load step with and without C_{BYP} of 10 nF (I_{OUT} 100 mA to 500 mA, IFX1763XEJ V33)

7.5 Protection Features

The IFX1763 regulators incorporate several protection features which make them ideal for usage in battery-powered circuits. In addition to normal protection features associated with monolithic regulators like current limiting and thermal limiting the device is protected against reverse input voltage, reverse output voltage and reverse voltages from output to input.

Current limit protection and thermal overload protection are intended to protect the device against current overload conditions at the output of the device. For normal operation the junction temperature must not exceed 125°C.

The input of the device will withstand reverse voltages of 20 V. Current flowing into the device will be limited to less than 1 mA (typically less than 100 μ A) and no negative voltage will appear at the output. The device will protect both itself and the load. This provides protection against batteries being plugged backwards.

The output of the IFX1763 can be pulled below ground without damaging the device. If the input is left open-circuit or grounded, the output can be pulled below ground by 20 V. Under such conditions the output of the device by itself behaves like an open circuit with practically no current flowing out of the pin¹⁾. In more application relevant cases however where the output is either connected to the SENSE pin (fix voltage variant) or tied either via an external voltage divider or directly to the ADJ pin (adjustable variant) a small current will be present from this origin. In the case of the fixed voltage version this current will typically be below 100 μ A while for the adjustable version it depends on the magnitude of the top resistor of the external voltage divider²⁾. If the input is powered by a voltage source the output will source the short circuit current of the device and will protect itself by thermal limiting. In this case grounding the EN pin will turn off the device and stop the output from sourcing the short-circuit current.

The ADJ pin of the adjustable device can be pulled above or below ground by as much as 7 V without damaging the device. If the input is grounded or left open-circuit, the ADJ pin will act inside this voltage range like a large resistor (typically 100 k Ω) when being pulled above ground and like a resistor (typically 5 k Ω) in series with a diode when being pulled below ground. In situations where the ADJ pin is at risk of being pulled outside its absolute maximum ratings ± 7 V the ADJ pin current must be limited to 1 mA (e.g. in cases where the ADJ pin is connected to a resistor divider that would pull the ADJ pin above its 7 V clamp voltage). Let's consider for example the case where a resistor divider is used to provide a 1.5 V output from the 1.22 V reference and the output is forced to 20 V. The top resistor of the resistor divider must then be chosen to limit the current into the ADJ pin to 1 mA or less when the ADJ pin is at 7 V. The 13 V difference between output and ADJ pin divided by the 1 mA maximum current into the ADJ pin requires a minimum resistor value of 13 k Ω .

In circuits where a backup battery is required, several different input/output conditions can occur. The output voltage may be held up while the input is either pulled to ground, pulled to some intermediate voltage or is left open-circuit. Current flow back into the output will follow the curve as shown in [Figure 9](#) below.

When the IN pin of the fixed voltage version is forced below the OUT pin, or the OUT pin is pulled above the IN pin, the input current will drop to very small values – typically down to less than 2 μ A, once V_{OUT} exceeds V_{IN} by some 300 mV or more. This can happen if the input of the device is connected to a discharged battery and the output is held up by either a backup battery or a second regulator circuit. The state of the EN pin will have no effect on the reverse output current when the output is pulled above the input.

1) typically < 1 μ A for the mentioned conditions, V_{OUT} being pulled below ground with other pins either grounded or open.

2) In case there is no external voltage divider applied i.e. the ADJ pin is directly connected to the output and the output is pulled below ground by 20 V the current flowing out of the ADJ pin will be typically ~ 4 mA. Please ensure in such cases that the absolute maximum ratings of the ADJ pin are respected.

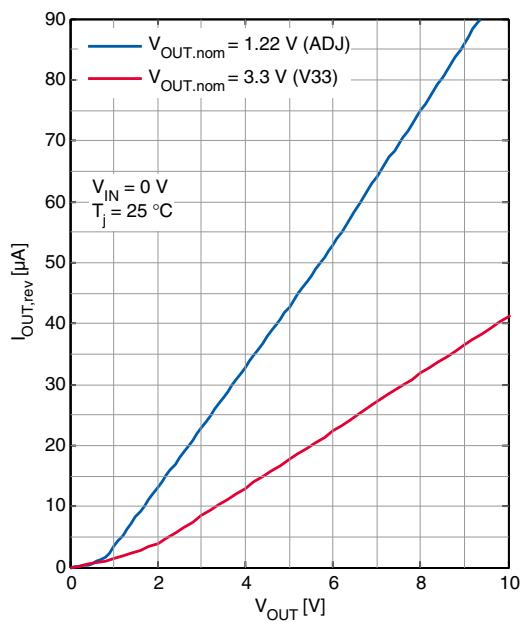


Figure 9 Reverse Output Current

8 Package Outlines

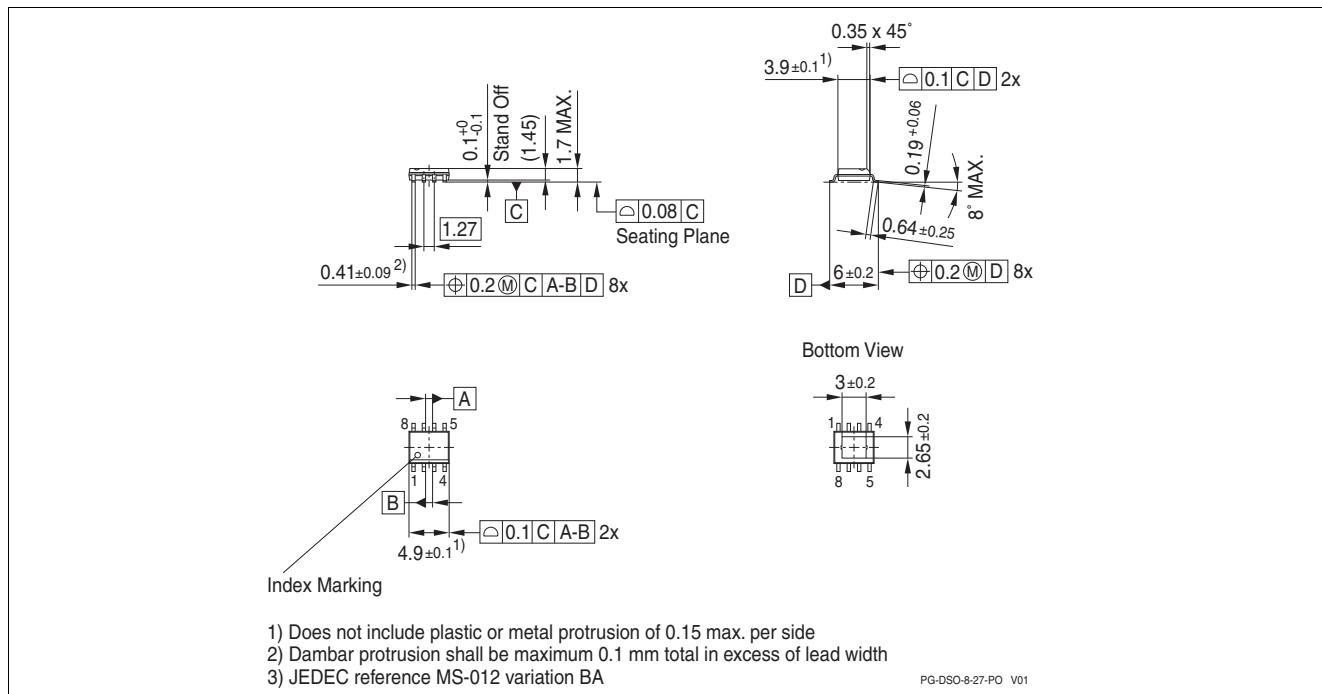


Figure 10 PG-DSO-8 Exposed Pad package outlines

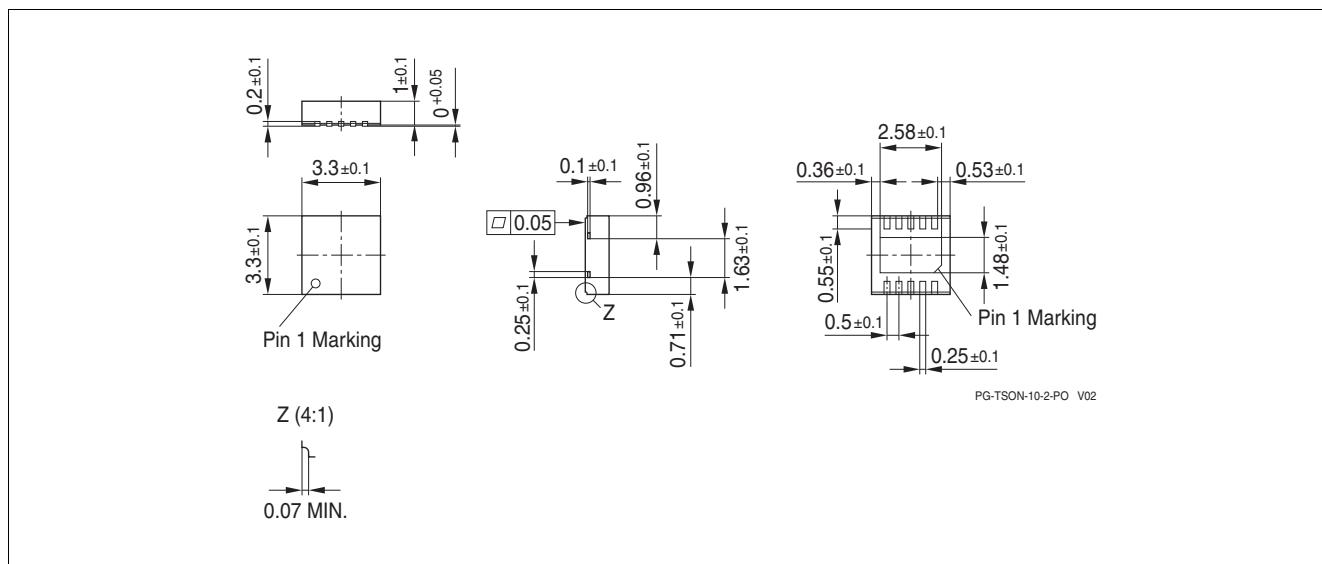


Figure 11 PG-TSON-10 Package Outlines

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

For further information on alternative packages, please visit our website:

<http://www.infineon.com/packages>.

Dimensions in mm

9 Revision History

Revision	Date	Changes
1.1	2014-10-30	<p>Updated Data Sheet including additional package type PG-TSON-10:</p> <ul style="list-style-type: none">• PG-TSON-10 package variants added: Product Overview, Pin Configuration Thermal Resistance, Wording, etc added / updated accordingly.• Typical Performance Graphs: some legends entries updated and corrected (Figure “Minimum Input Voltage versus Junction Temperature T_J” on Page 20 and Figure “Input Ripple Rejection PSRR versus Junction Temperature T_J” on Page 21).• Application Information updated: Clarification and correction of wording. Typical values updated and footnotes added.• Editorial changes throughout the document.
1.0	2014-02-13	Data Sheet - Initial Release

Edition 2014-10-30

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2014 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.