



SAW Components

Data Sheet B3570

Farnell Code - 7455429

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters that appear to be floating or emerging from a dark, textured background. The letters have a bright, white-to-blue gradient. In the background, there are faint, circular patterns resembling a globe or a circuit board, adding a technical and global feel to the design.



SAW Components

B3570

Low-loss Filter

868,30 MHz

Data Sheet


Features

- RF low-loss filter for remote control receivers
- Package for **Surface Mounted Technology (SMT)**

Terminals

- Ni, gold plated


Ceramic package **QCC8C**

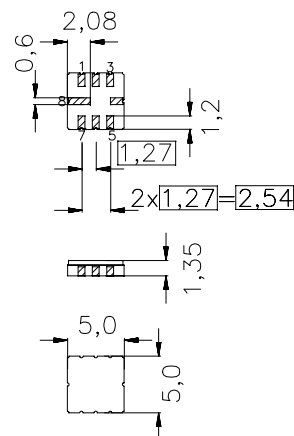

typ. dimensions in mm, approx. weight 0,1 g

Pin configuration

- 1 Input
- 2,7 Input Ground
- 5 Output
- 3,6 Output Ground
- 4,8 Case - Ground



Type	Ordering code	Marking and package according to	Packing according to
B3570	B39871-B3570-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-45/+90	°C	
Storage temperature range	T_{stg}	-45/+90	°C	
DC voltage	V_{DC}	0	V	
Source power	P_S	0	dBm	source impedance 50 Ω



SAW Components

B3570

Low-loss Filter

868,30 MHz

Data Sheet

Characteristics

Reference temperature:

$$T_A = 25\text{ °C}$$

Terminating source impedance:

$$Z_S = 50\ \Omega \text{ and matching network}$$

Terminating load impedance:

$$Z_L = 50\ \Omega \text{ and matching network}$$

		min.	typ.	max.	
Center frequency	f_C	—	868,39	—	MHz
(center frequency between 3 dB points)					
Minimum insertion attenuation	$\alpha_{\min}$	—	2,7	4,2	dB
868,00 ... 868,78 MHz					
Pass band (relative to $\alpha_{\min}$)					
868,00 ... 868,78 MHz					
		—	1,0	3,0	dB
867,90 ... 868,88 MHz					
		—	1,5	6,0	dB
Relative attenuation (relative to $\alpha_{\min}$)	α_{rel}				
10,00 ... 700,00 MHz					
		50	55	—	dB
700,00 ... 830,00 MHz					
		35	45	—	dB
830,00 ... 850,00 MHz					
		32	40	—	dB
850,00 ... 865,20 MHz					
		25	30	—	dB
871,00 ... 874,50 MHz					
		11	16	—	dB
874,50 ... 883,00 MHz					
		22	27	—	dB
883,00 ... 900,00 MHz					
		30	35	—	dB
900,00 ... 1000,00 MHz					
		35	40	—	dB
Impedance for pass band matching ²⁾					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$					
		—	216 $\parallel$ 2,20	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$					
		—	222 $\parallel$ 2,20	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency ¹⁾	TC_f	—	−0,03	—	ppm/K ²
Frequency inversion point	T_0	15	—	35	°C

¹⁾Temperature dependence of f_C : $f_C(T_A) = f_C(T_0) (1 + TC_f(T_A - T_0)^2)$

²⁾ Impedance for passband matching bases on an ideal, perfect matching of the SAW filter to source- and to load impedance (here 50 Ohm). After the SAW filter is removed and input impedance into the input matching / output matching network is calculated.

The conjugate complex value of these characteristic impedances are the input and output impedances for flat passband. For more details, we refer to EPCOS application note #4.



SAW Components

B3570

Low-loss Filter

868,30 MHz

Data Sheet

Characteristics

Reference temperature:

$$T_A = -45 \dots 90 \text{ }^{\circ}\text{C}$$

Terminating source impedance:

$$Z_S = 50 \text{ } \Omega \text{ and matching network}$$

Terminating load impedance:

$$Z_L = 50 \text{ } \Omega \text{ and matching network}$$

		min.	typ.	max.	
Center frequency	f_c	—	868,30	—	MHz
(center frequency between 3 dB points)					
Minimum insertion attenuation	$\alpha_{\min}$	—	2,7	4,7	dB
	868,00 ... 868,78 MHz				
Pass band (relative to $\alpha_{\min}$)					
	868,00 ... 868,60 MHz	—	1,0	3,0	dB
	867,90 ... 868,70 MHz	—	1,5	6,0	dB
Relative attenuation (relative to $\alpha_{\min}$)	α_{rel}				
	10,00 ... 700,00 MHz	50	55	—	dB
	700,00 ... 830,00 MHz	35	45	—	dB
	830,00 ... 850,00 MHz	32	40	—	dB
	850,00 ... 865,02 MHz	25	30	—	dB
	871,00 ... 874,50 MHz	11	16	—	dB
	874,50 ... 883,00 MHz	22	27	—	dB
	883,00 ... 900,00 MHz	30	35	—	dB
	900,00 ... 1000,00 MHz	35	40	—	dB
Impedance for pass band matching ²⁾					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	216 $\parallel$ 2,20	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	222 $\parallel$ 2,20	—	$\Omega \parallel \text{pF}$

²⁾ Impedance for passband matching bases on an ideal, perfect matching of the SAW filter to source- and to load impedance (here 50 Ohm). After the SAW filter is removed and input impedance into the input matching / output matching network is calculated.

The conjugate complex value of these characteristic impedances are the input and output impedances for flat passband. For more details, we refer to EPCOS application note #4.



SAW Components


B3570

Low-loss Filter

868,30 MHz

Data Sheet

Matching network to 50 Ω (element values depend on pcb layout and equivalent circuit)

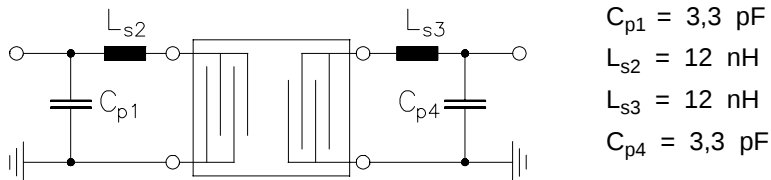


Minimising the crosstalk

For a good ultimate rejection a low crosstalk is necessary. Low crosstalk can be realised with a good RF layout. The major crosstalk mechanism is caused by the "ground-loop" problem.

Grounding loops are created if input-and output transducer GND are connected on the top-side of the PCB and fed to the system grounding plane by a common via hole. To avoid the common ground path, the ground pin of the input- and output transducer are fed to the system ground plane (bottom PCB plane) by their own via hole. The transducers' grounding pins should be isolated from the upper grounding plane.

A common GND inductivity of 0.5nH degrades the ultimate rejection (crosstalk) by 20dB.

The optimised PCB layout, including matching network for transformation to 50 Ohm, is shown here. In this PCB layout the grounding loops are minimised to realise good ultimate rejection.



Optimised PCB layout for SAW filters in QCC8C package, pinning 1,5 (top side, scale 1:1)

The bottom side is a copper plane (system ground area). The input and output grounding pins are isolated and connected to the common ground by separated via holes.

For good contact of the upper grounding area with the lower side it is necessary to place enough via holes.



SAW Components


B3570

Low-loss Filter


868,30 MHz

Data Sheet

Normalized frequency response

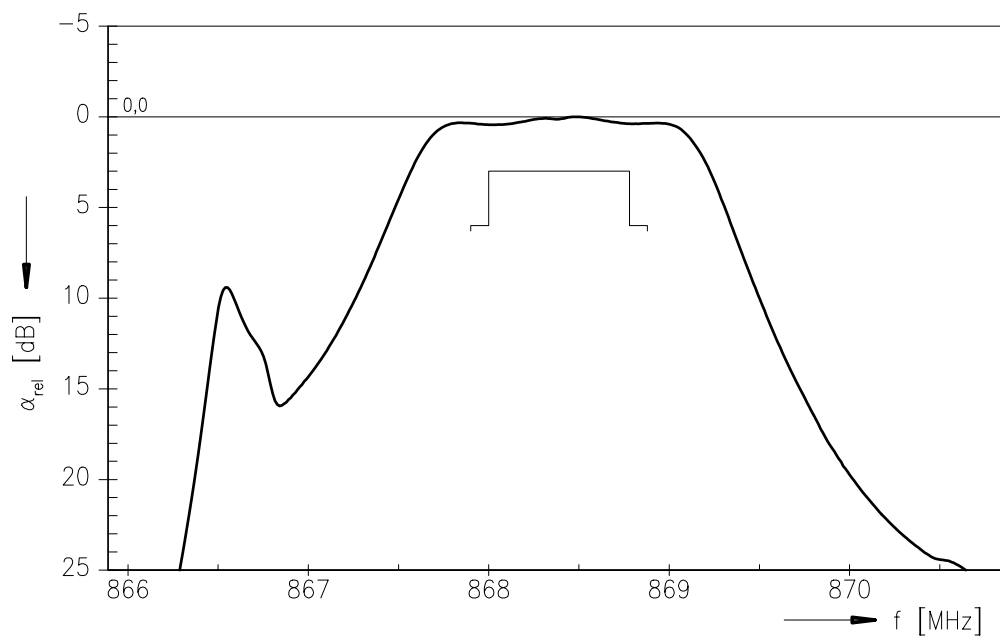

Normalized frequency response (wideband)

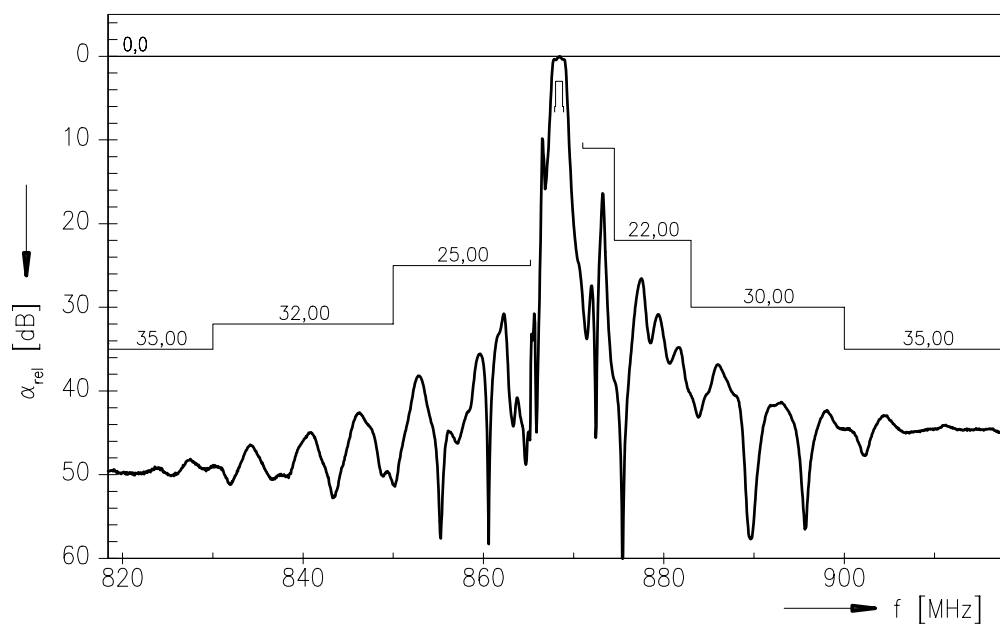



SAW Components	B3570
Low-loss Filter	868,30 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE AE PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.