



Siemens Matsushita Components

## SAW Components Low Loss Filter

B4836  
270,00 MHz

### Data Sheet


#### Features

- Low-loss IF filter for mobile telephone
- Channel selection in GSM, PCN, PCS systems
- Hermetically sealed ceramic SMD package
- Balanced and unbalanced operation possible
- Flat group delay response
- High stopband attenuation

#### Terminals

- Gold-plated Ni


Ceramic package QCC12B

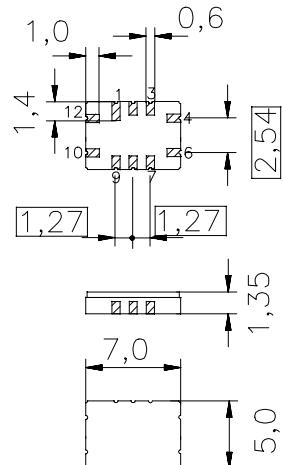

Dimensions in mm, approx. weight 0,2 g

#### Pin configuration

2	Input
1	Input ground or balanced input
8	Output
7	Output ground or balanced output
10	Expansion Coil
3, 9	Case – ground
4, 6, 12	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4836	B39271-B4836-Z910	C61157-A7-A52	F61074-V8038-Z000

Electrostatic Sensitive Device (ESD)

#### Maximum ratings

Operable temperature range	$T$	-20/+ 70	°C	
Storage temperature range	$T_{stg}$	-25/+ 85	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	10	dBm	

Preliminary Format of Data Sheet

Terms of delivery and rights to change design reserved.  
Page 1 of 4

OFW EM EU  
Sept. 7, 1998



Siemens Matsushita Components

**SAW Components**  
**Low Loss Filter****B4836**  
**270,00 MHz****Data Sheet****Characteristics**

Operating temperature range:  $T = -20$  to  $70^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 520 \Omega \parallel 2,0 \text{ pF}$   
 Terminating load impedance:  $Z_L = 520 \Omega \parallel 2,0 \text{ pF}$

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	270,00	—	MHz
<b>Minimum insertion attenuation</b> including losses in matching circuit	$\alpha_{\min}$	3,5	4,5	5,5	dB
<b>Amplitude ripple (p-p)</b> $f_N - 87,5 \text{ kHz} \dots f_N + 87,5 \text{ kHz}$	$\Delta\alpha$	—	0,3	2,0	dB
<b>Group delay ripple (p-p)</b> $f_N - 87,5 \text{ kHz} \dots f_N + 87,5 \text{ kHz}$	$\Delta\tau$	—	0,7	1,3	$\mu\text{s}$
<b>Insertion attenuation</b>	$\alpha$				
$f_N - 25,0 \text{ MHz} \dots f_N - 3,00 \text{ MHz}$		55	65	—	dB
$f_N - 3,00 \text{ MHz} \dots f_N - 1,60 \text{ MHz}$		46	64	—	dB
$f_N - 1,60 \text{ MHz} \dots f_N - 0,60 \text{ MHz}$		38	53	—	dB
$f_N - 0,60 \text{ MHz} \dots f_N - 0,40 \text{ MHz}$		30	54	—	dB
$f_N - 0,40 \text{ MHz} \dots f_N - 0,20 \text{ MHz}$		5	10	—	dB
$f_N + 0,20 \text{ MHz} \dots f_N + 0,40 \text{ MHz}$		5	10	—	dB
$f_N + 0,40 \text{ MHz} \dots f_N + 0,60 \text{ MHz}$		28	32	—	dB
$f_N + 0,60 \text{ MHz} \dots f_N + 1,60 \text{ MHz}$		38	43	—	dB
$f_N + 1,60 \text{ MHz} \dots f_N + 3,00 \text{ MHz}$		46	49	—	dB
$f_N + 3,00 \text{ MHz} \dots f_N + 25,0 \text{ MHz}$		55	63	—	dB
<b>Impedance within the passband</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	520 $\parallel$ 2,0	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	520 $\parallel$ 2,0	—	$\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency</b> <sup>1)</sup>	$TC_f$	—	- 0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	25	—	$^\circ\text{C}$

<sup>1)</sup> Temperature dependence of  $f_c$ :  $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$




Siemens Matsushita Components

**SAW Components**  
**Low Loss Filter**

**B4836**  
**270,00 MHz**

**Data Sheet**

**Test matching network to  $50 \Omega$  (element values depend on PCB layout):**

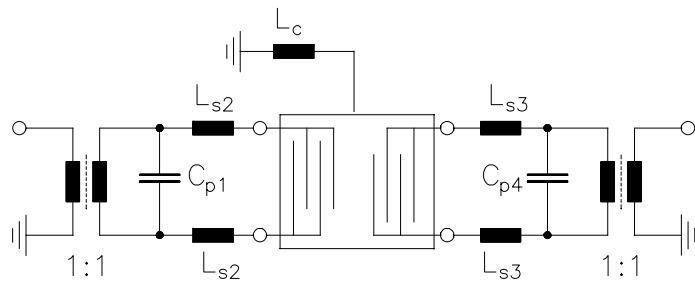

$C_{p1} = 4,7 \text{ pF}$   
 $L_{s2} = 56 \text{ nH}$   
 $L_{s3} = 56 \text{ nH}$   
 $C_{p4} = 4,7 \text{ pF}$   
 $L_c = 82 \text{ nH}$




Siemens Matsushita Components

**SAW Components**  
**Low Loss Filter**

**B4836**  
**270,00 MHz**

**Data Sheet**

**Transfer function:**

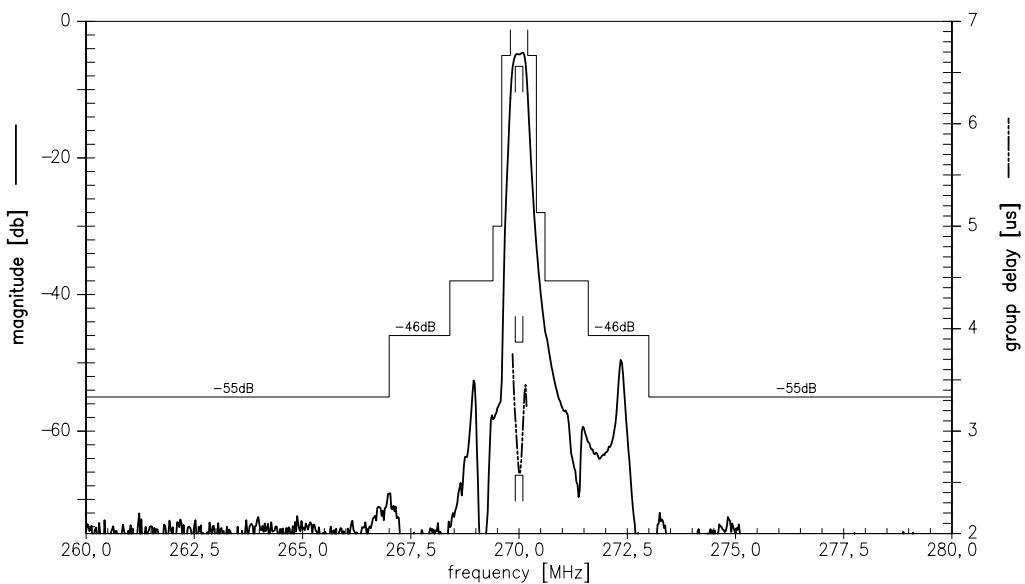

**Transfer function (pass band):**

