


NPN Silicon Germanium RF Transistor*

- For medium power amplifiers and driver stages
- High O/I_P3 and P_{-1dB}
- Ideal for low phase noise oscillators
- Maxim. available Gain $G_{ma} = 21.5$ dB at 1.8 GHz
Noise figure $F = 0.8$ dB at 1.8 GHz
- 70 GHz f_T - Silicon Germanium technology
- Pb-free (RoHS compliant) package¹⁾
- Qualified according AEC Q101

* Short term description



ESD (Electrostatic discharge) sensitive device, observe handling precaution!

Type	Marking	Pin Configuration						Package
BFP650F	R5s	1=B	2=E	3=C	4=E	-	-	TSFP-4

¹Pb-containing package may be available upon special request

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage $T_A > 0^\circ\text{C}$	V_{CEO}	4	V
$T_A \leq 0^\circ\text{C}$		3.7	
Collector-emitter voltage	V_{CES}	13	
Collector-base voltage	V_{CBO}	13	
Emitter-base voltage	V_{EBO}	1.2	
Collector current	I_C	150	mA
Base current	I_B	10	
Total power dissipation ¹⁾ $T_S \leq 85^\circ\text{C}$	P_{tot}	500	mW
Junction temperature	T_j	150	°C
Ambient temperature	T_A	-65 ... 150	
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ²⁾	R_{thJS}	≤ 130	K/W

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 3 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	4	4.5	-	V
Collector-emitter cutoff current $V_{\text{CE}} = 13 \text{ V}, V_{\text{BE}} = 0$	I_{CES}	-	-	100	μA
Collector-base cutoff current $V_{\text{CB}} = 5 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{\text{EB}} = 0.5 \text{ V}, I_C = 0$	I_{EBO}	-	-	10	μA
DC current gain $I_C = 80 \text{ mA}, V_{\text{CE}} = 3 \text{ V}, \text{pulse measured}$	h_{FE}	110	180	270	-

¹ T_S is measured on the collector lead at the soldering point to the pcb


²For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics (verified by random sampling)					
Transition frequency $I_C = 80 \text{ mA}, V_{CE} = 3 \text{ V}, f = 1 \text{ GHz}$	f_T	-	42	-	GHz
Collector-base capacitance $V_{CB} = 3 \text{ V}, f = 1 \text{ MHz}, V_{BE} = 0 \text{ V}$, emitter grounded	C_{cb}	-	0.26	-	pF
Collector emitter capacitance $V_{CE} = 3 \text{ V}, f = 1 \text{ MHz}, V_{BE} = 0 \text{ V}$, base grounded	C_{ce}	-	0.45	-	
Emitter-base capacitance $V_{EB} = 0.5 \text{ V}, f = 1 \text{ MHz}, V_{CB} = 0 \text{ V}$, collector grounded	C_{eb}	-	1.3	-	
Noise figure $I_C = 10 \text{ mA}, V_{CE} = 3 \text{ V}, f = 1.8 \text{ GHz}, Z_S = Z_{\text{Sopt}}$ $I_C = 10 \text{ mA}, V_{CE} = 3 \text{ V}, f = 6 \text{ GHz}, Z_S = Z_{\text{Sopt}}$	F	-	0.8	-	dB
-		-	1.9	-	
Power gain, maximum available ¹⁾ $I_C = 80 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_{\text{Sopt}}, Z_L = Z_{\text{Lopt}}$, $f = 1.8 \text{ GHz}$ $f = 6 \text{ GHz}$	G_{ma}	-	21.5	-	
-		-	11	-	
Transducer gain $I_C = 80 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_L = 50 \Omega$, $f = 1.8 \text{ GHz}$ $f = 6 \text{ GHz}$	$ S_{21e} ^2$	15	17.5	-	dB
-		-	7.5	-	
Third order intercept point at output ²⁾ $V_{CE} = 3 \text{ V}, I_C = 80 \text{ mA}, f = 1.8 \text{ GHz}$, $Z_S = Z_L = 50 \Omega$	IP_3	-	31	-	dBm
1dB Compression point at output $I_C = 80 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_L = 50 \Omega$, $f = 1.8 \text{ GHz}$	$P_{-1\text{dB}}$	-	17.5	-	

¹ $G_{\text{ma}} = |S_{21e}| / S_{12e} \left(k - (k^2 - 1)^{1/2} \right)$
²IP3 value depends on termination of all intermodulation frequency components.
Termination used for this measurement is 50Ω from 0.1 MHz to 6 GHz

Total power dissipation $P_{\text{tot}} = f(T_S)$

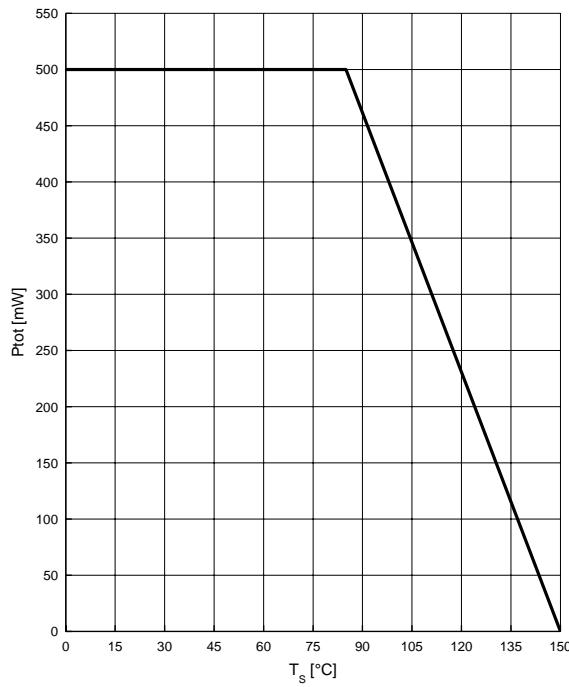


Collector-base capacitance $C_{\text{cb}} = f(V_{\text{CB}})$
 $f = 1 \text{ MHz}$

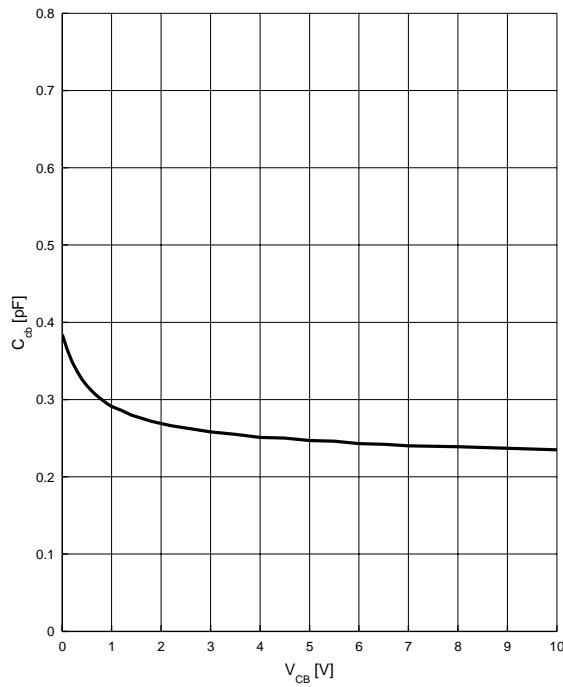


Transition frequency $f_T = f(I_C)$

$V_{\text{CE}} = \text{parameter in V}$, $f = 1 \text{ GHz}$

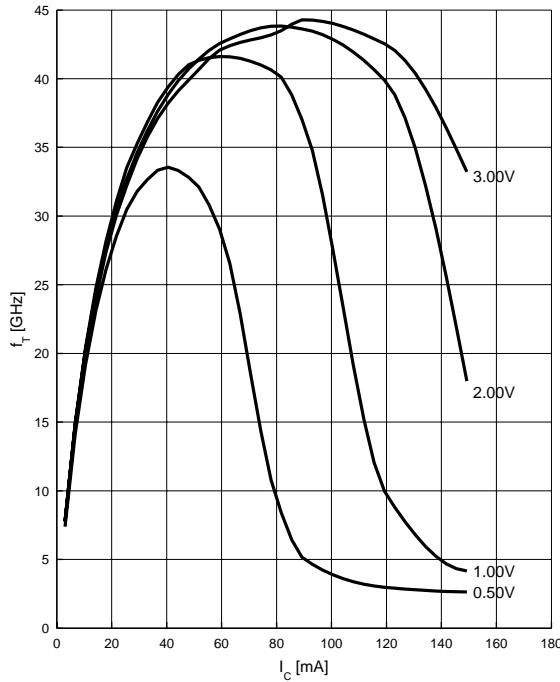

Power gain $G_{\text{ma}}, G_{\text{ms}} = f(f)$


$V_{\text{CE}} = 3 \text{ V}$, $I_C = 80 \text{ mA}$

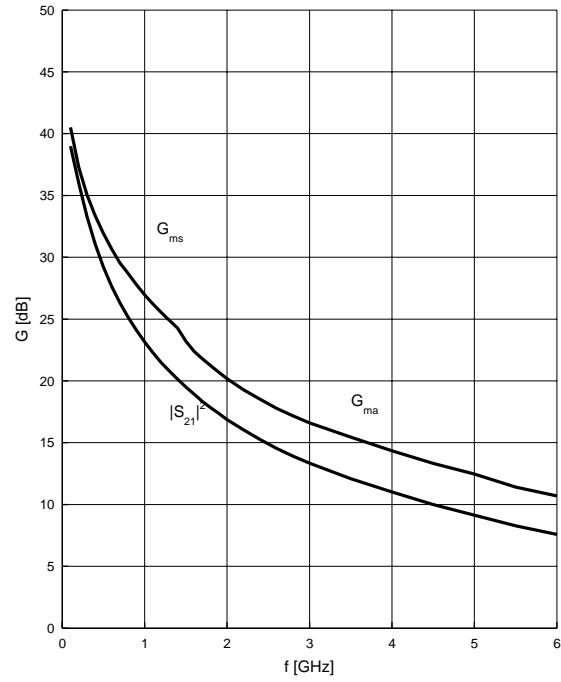

Power gain G_{ma} , $G_{ms} = f (I_C)$

$V_{CE} = 3 \text{ V}$


$f = \text{parameter in GHz}$

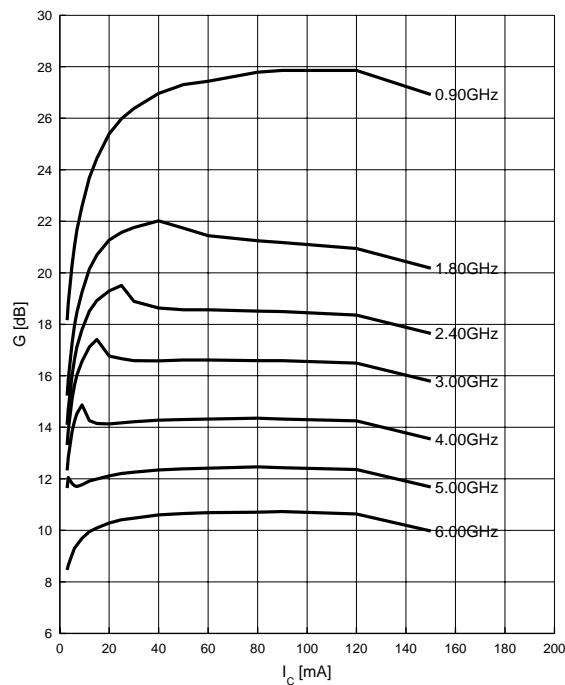


Power gain G_{ma} , $G_{ms} = f (V_{CE})$

$I_C = 80 \text{ mA}$


$f = \text{parameter in GHz}$

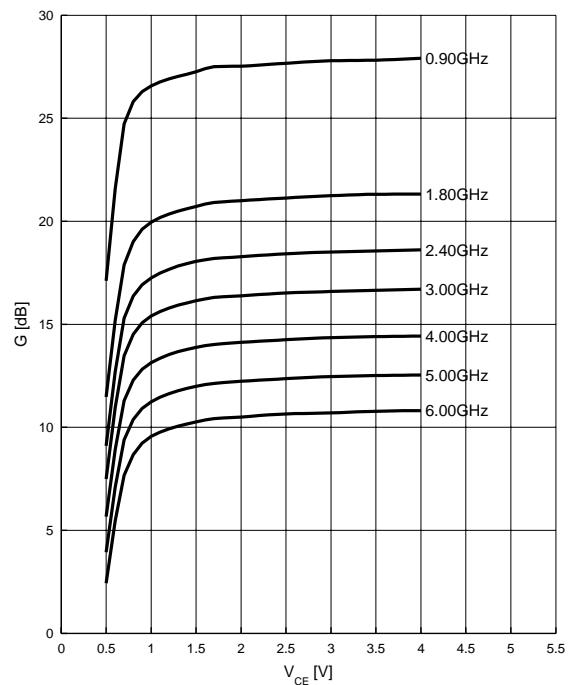


Package Outline

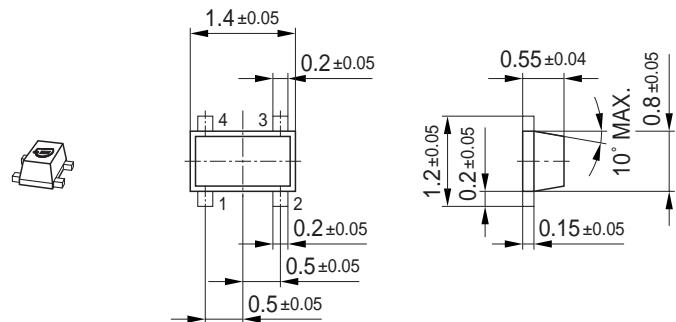

Foot Print




Marking Layout (Example)

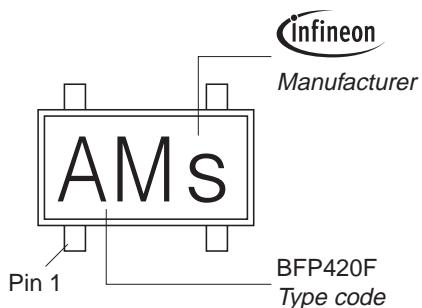

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
 Reel ø330 mm = 10.000 Pieces/Reel

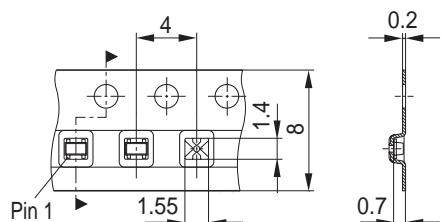

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

BFP 650F H6327