

6- x

PowerBreaker™

OUR NEW EASY TO OPERATE RCD ADAPTOR




THE J02 RCD SAFETY ADAPTOR

RCD ADAPTOR



JO2

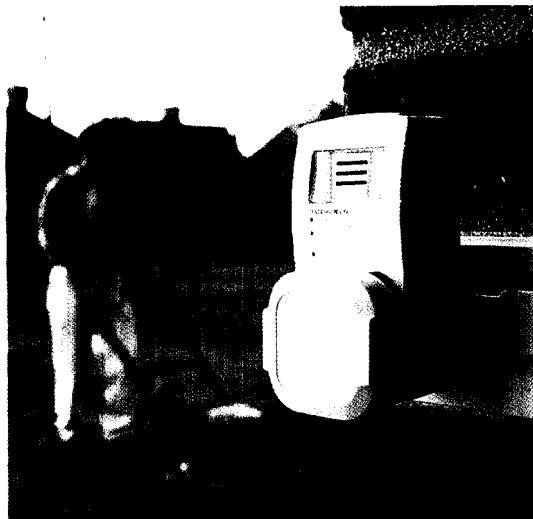

For use with appliances inside or outside the home, office or factory.


EASE OF OPERATION

The JO2 is an RCD Adaptor which simply plugs into any standard 13amp socket outlet and trips if current leakage to earth is detected. The JO2 can be easily operated and tested by simply pressing and releasing the button on the top of the unit. There is a large clear indicator window to enable the on/off 'status' of the device to be clearly identified.


Operating instructions are clearly marked on the front face of the adaptor.

APPLICATIONS

The new stylish JO2 RCD Adaptor complies with BS7071 and provides added protection against the risk of electrocution when using electrical appliances. An essential safety accessory for the tool box, you can always ensure you benefit from RCD protection – even when operating your portable appliance on unfamiliar circuits. Ideal applications include; lawnmowers, power tools, irons, kettles, hedge trimmers and virtually any portable electrical appliance.

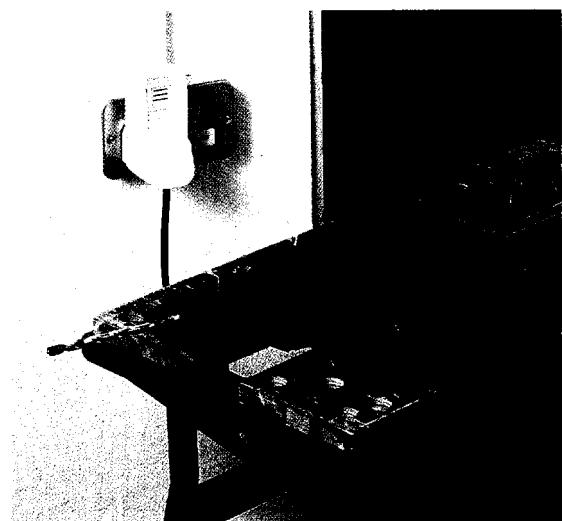

Electrically latched to ensure your appliance will not 're-start' after a power supply failure.




Stylish packaging provides clear user advice and maintains the product in pristine condition prior to purchase.

STANDARDS

Independently tested and approved to BS 7071.


Guaranteed for 3 years.



- **Added protection against the risk of electrocution.**
- **Suitable for use with electrical household appliances and power tool equipment.**

- **Stylish Design.**
- **Will not allow your appliance to 're-start' after a power supply failure. (Electrically latched).**

- **Easy to operate and test.**
- **Double pole switching.**
- **No wiring required – simply plug in.**

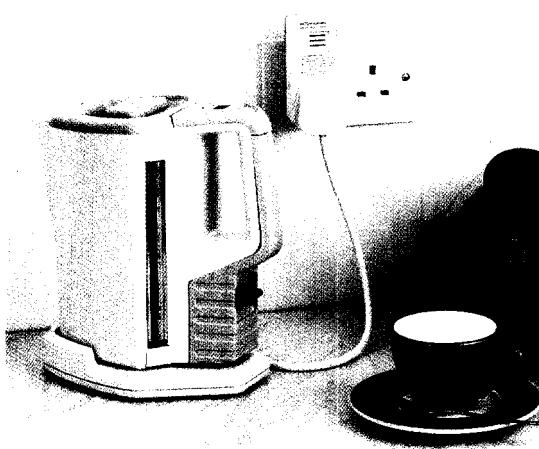

Provides added protection, particularly where electricity and water are present.




An essential portable accessory when operating your appliance on unfamiliar circuits.

TECHNICAL INFORMATION

Voltage	230V-240V 50Hz
Current rating	13A (Max)
Load	3kW (Max)
Rated trip current	30mA
Trip speed	40mS (typical)
Electrically latched	
RCD contact break	Double pole
Responsive to both positive and negative cycles	
Single test and reset button	
Suitable for both 3 and 2 wire appliances	
Weight	125g

DIMENSIONS

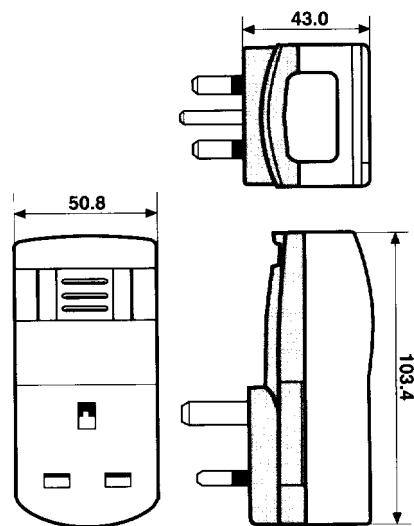

PowerBreaker

FEATURES	BENEFITS
Stylish attractive design	Complements any interior decor
Large single test/reset button located on top of the unit	Easily accessible and simple to operate
Large, clear indicator window	Clear identification of 'status' of device – even at distance
Clear user instructions on front of device	Instructions are always readily available

HOW RCDs WORK

A PowerBreaker RCD works by monitoring the current in the live and neutral wires feeding your appliance. An imbalance such as that caused by a leakage to earth or by someone touching a live part, which could cause electrocution, will cause the unit to cut off the power within a fraction of a second (before human life is threatened).



For further information on our full range of RCD products and your nearest stockist, call our Customer Service Centre on: **01279 641 800**

