

TYPE KC22J12T13, EQC632C

TRANSFORMER GROUND CONNECTORS

For Copper


Fits all standard EEI-NEMA distribution transformers as a tank grounding terminal.



Type EQC632C

CATALOG NUMBER	RANGES
KC22J12T13	8 Sol. - 2 Sol.
KC26	2 Sol. - 2/0 Str.
KC34J12T13	3/0 - 500 Str.
EQC632C	8 Sol. - 2 Str.

Both, one-wrench installation.

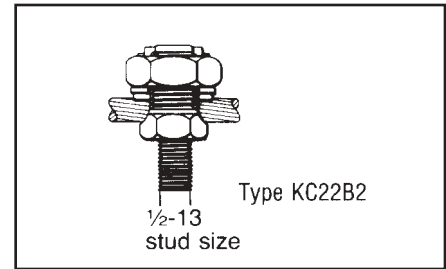

Type KC22B2

1/2-13
stud size


E-40

TYPE YA-2LH

HYSEALUG

Terminal for Copper

Tin-plated, pure copper 2-hole NEMA compression terminal with shrouded barrel for terminating insulated copper conductor to transformers and other equipment. Shroud prevents seepage of water or moisture into conductor strands and minimizes taping.

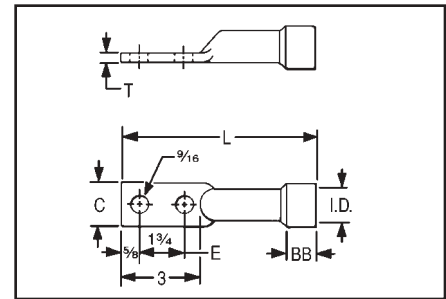

CATALOG NUMBER	CONDUCTOR	BB	SHROUD INSIDE DIA.	C	L	T	TOOLS, DIE SET CATALOG NUMBER, & (NUMBER OF CRIMPS)					
							MD7, MD6	Y35, Y750, Y45†, Y46‡				
YAB4C-2LH72	4 Str.	5/8	.57	3/4	6-1/4	1/8	W161 (2)	U4CRT (2)				
YAB4C-2LH73			.84									
YAB2C-2LH74	2 Str.	3/4	.58		6-1/2		W162 (4)	U2CRT (2)				
YAB2C2LH75			.91									
YAB25-2LH70	1/0 Str.	1	.69	7/8	6-3/4	3/8	W163 (4)	U25RT (2)				
YAB25-2LH71			.98									
YA26-2LH88	2/0 Str.		.73		6-1/4		W241 (2)	U26RT (2)				
YA26-2LH89			1.04									
YA27-2LH97	3/0 Str.		.84	1		6-5/8			1/8	W243 (2)	U27RT (2)	
YA27-2LH98			1.06									
YA28-2LH114	4/0 Str.		.86		6-5/8		1/8	W-BG or W243 (2)				U28RT (2)
YA28-2LH115			1.24									
YA29-2LH90	250		.88	1-1/8		7			W166 (4)	U29RT (2)		
YA29-2LH91			1.25									
YA30-2LH85	300	.92	1-1/4	7-5/8	—		U30RT (2)					
YA30-2LH86		1.32										
YA31-2LH89	350	1.03	1-3/8			1/4		—	U34RT (2)			
YA31-2LH90		1.40										
YA34-2LH110	500	1-1/2	1.14	1-1/2	7-3/4		1/4			—	U34RT (2)	
YA34-2LH111			1.88									

† U Die with adapter PT-6515
‡ U Die with adapter PUADP-1.