

TA8186P


AM / FM IF + MPX

TA8186P is the AM / FM IF + MPX system IC, which is designed for radio cassette recorders and music centers.

FEATURES


- Compact package (DIP16), and small number of external parts.
- AM IFT is also used for VCO resonator.
- Built-in FM soft muting circuit.
- Operating supply voltage range :
 $V_{CC}(\text{opr}) = 3.5 \sim 13\text{V}$ ($T_a = 25^\circ\text{C}$)
 At FM soft mute using :
 $V_{CC}(\text{opr}) = 3.5 \sim 9\text{V}$ ($T_a = 25^\circ\text{C}$)

※ Handle with care to prevent devices from deteriorations by static electricity.

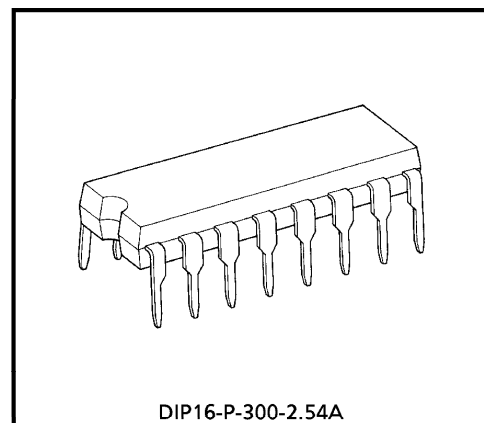

Weight : 1.00g (Typ.)

BLOCK DIAGRAM

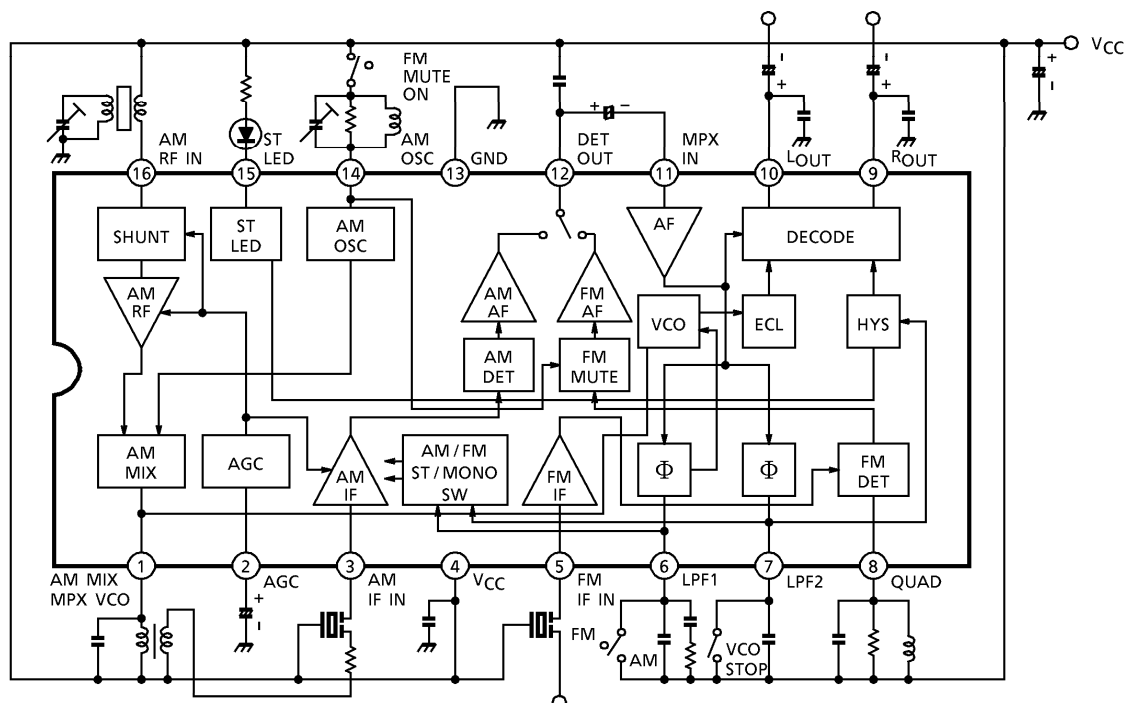

TERMINAL EXPLANATION (Terminal voltage shows the typical value at $T_a = 25^\circ\text{C}$, $V_{CC} = 6\text{V}$, and non-signal test circuit)

PIN No.	TERMINAL NAME	CONTENTS	INTERNAL CIRCUIT	TERMINAL VOLTAGE (V)	
				FM	AM
1	AM MIX MPX VCO	- AM mixer output terminal - AM IFT is also used for VCO resonator		6.0	6.0
2	AGC	AM AGC terminal It is necessary to connect external capacitance		0.4	0.3
3	AM IF IN	AM IF Amp input terminal		6.0	6.0
4	V_{CC}	Power supply	—	6.0	6.0
5	FM IF IN	FM IF Amp input terminal		6.0	6.0
6	LPF1	- LPF terminal for phase detector - Bias terminal for AM/FM switch circuit $V_6 = V_{CC} \rightarrow \text{AM}$ $V_6 = \text{Open} \rightarrow \text{FM}$		4.3 (At VCO STOP 5.6)	6.0

PIN No.	TERMINAL NAME	CONTENTS	INTERNAL CIRCUIT	TERMINAL VOLTAGE (V)	
				FM	AM
7	LPF2	- LPF terminal for synchronous detector - VCO stop terminal $V_7 = V_{CC} \rightarrow \text{VCO Stop}$		4.3	6.0
8	QUAD	FM QUAD detector terminal FM QUAD coil is connected.		6.0	6.0
9	R _{out}	MPX audio output terminal		3.5	3.5
10	L _{out}			3.5	3.5
11	MPX IN	MPX input terminal		3.3	3.3
12	DET OUT	FM / AM detector output terminal		1.3	1.3
13	GND	GND terminal	—	0	0

PIN No.	TERMINAL NAME	CONTENTS	INTERNAL CIRCUIT	TERMINAL VOLTAGE (V)	
				FM	AM
14	AM OSC	• AM OSC terminal • Bias terminal for FM soft mute switch circuit $V_{14} = \text{Open} \rightarrow \text{FM MUTE ON}$		6.0 (At FM MUTE ON) 5.4	6.0
15	ST LED	• Stereo LED terminal • VCO monitor terminal		5.4	5.4
16	AM RF IN	AM RF Amp input terminal ($R_{in} = 1M\Omega$, at $f_{in} = 1\text{MHz}$)		6.0	6.0

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	15	V
LED Current	I_{LED}	10	mA
LED Voltage	V_{LED}	15	V
Power Dissipation	P_D (Note)	750	mW
Operating Temperature	T_{opr}	$-25 \sim 75$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-55 \sim 150$	$^\circ\text{C}$


(Note) Derated above $T_a = 25^\circ\text{C}$ in the proportion of $6\text{mW}/^\circ\text{C}$.

ELECTRICAL CHARACTERISTICSUnless otherwise specified, $T_a = 25^\circ\text{C}$, $V_{CC} = 6\text{V}$,FM IF : $f = 10.7\text{MHz}$, $\Delta f = \pm 22.5\text{kHz}$, $f_m = 1\text{kHz}$ AM : $f = 1\text{MHz}$, $\text{MOD} = 30\%$, $f_m = 1\text{kHz}$ MPX : $f_m = 1\text{kHz}$

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Supply Current		I _{CC} (FM)	1	FM Mode, V _{in} = 0	—	17.0	25.0	mA	
		I _{CC} (AM)	1	AM Mode, V _{in} = 0	—	15.0	22.0		
FM IF	Input Limiting Voltage	V _{in} (lim)	1	− 3dB limiting point	38	43	48	dB μ V EMF	
	Recovered Output Voltage	V _{OD}	1	V _{in} = 80dB μ V EMF	55	80	110	mV _{rms}	
	Signal To Noise Ratio	S / N	1	V _{in} = 80dB μ V EMF	—	70	—	dB	
	Total Harmonic Distortion	THD	1	V _{in} = 80dB μ V EMF	—	0.1	—	%	
	AM Rejection Ratio	AMR	1	V _{in} = 80dB μ V EMF	—	45	—	dB	
AM	Gain	G _V	1	V _{in} = 26dB μ V EMF	20	35	50	mV _{rms}	
	Recovered Output Voltage	V _{OD}	1	V _{in} = 60dB μ V EMF	55	80	110	mV _{rms}	
	Signal To Noise Ratio	S / N	1	V _{in} = 60dB μ V EMF	—	42	—	dB	
	Total Harmonic Distortion	THD	1	V _{in} = 60dB μ V EMF	—	1.0	—	%	
Pin ⑫ Output Resistance		R ₁₂	1	FM Mode	—	1.5	—	k Ω	
				AM Mode	—	10	—		
MPX	Input Resistance		R _{IN}	1	—		33	—	k Ω
	Output Resistance		R _{OUT}	1	—		5	—	
	Max. Composite Signal Input Voltage		V _{in} MAX (Stereo)	1	L + R = 90%, P = 10% THD = 3%, SW→LPF : ON		800	—	mV _{rms}
	Separator		Sep	1	L + R = 180mV _{rms} P = 20mV _{rms} SW→LPF : ON	f _m = 100Hz	—	43	dB
						f _m = 1kHz	35	43	
						f _m = 10kHz	—	43	
	Total Harmonic Distortion	Monaural	THD (Monaural)	1	V _{in} = 200mV _{rms} (Mono)		—	0.2	—
		Stereo	THD (Stereo)		L + R = 180mV _{rms} P = 20mV _{rms} SW→LPF : ON		—	0.2	
	Voltage Gain		G _V (MPX)	1	V _{in} = 200mV _{rms} (Mono)		− 2	0	2
Channel Balance		C.B.	1	V _{in} = 200mV _{rms} (Mono)		− 2	0	2	dB

CHARACTERISTIC			SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
MPX	Stereo LED Sensitivity	ON	V_L (ON)	1	Pilot input	—	10	16	mV_{rms}
		OFF	V_L (OFF)			2	6	—	
	Stereo LED Hysteresis		V_H	1	To LED turn off from LED turn on	—	4	—	mV_{rms}
	Capture Range		C.R.	1	$P = 20mV_{rms}$	—	± 4	—	%
	Signal To Noise Ratio		S / N	1	$V_{in} = 200mV_{rms}$ (Mono)	—	78	—	dB

TEST CIRCUIT

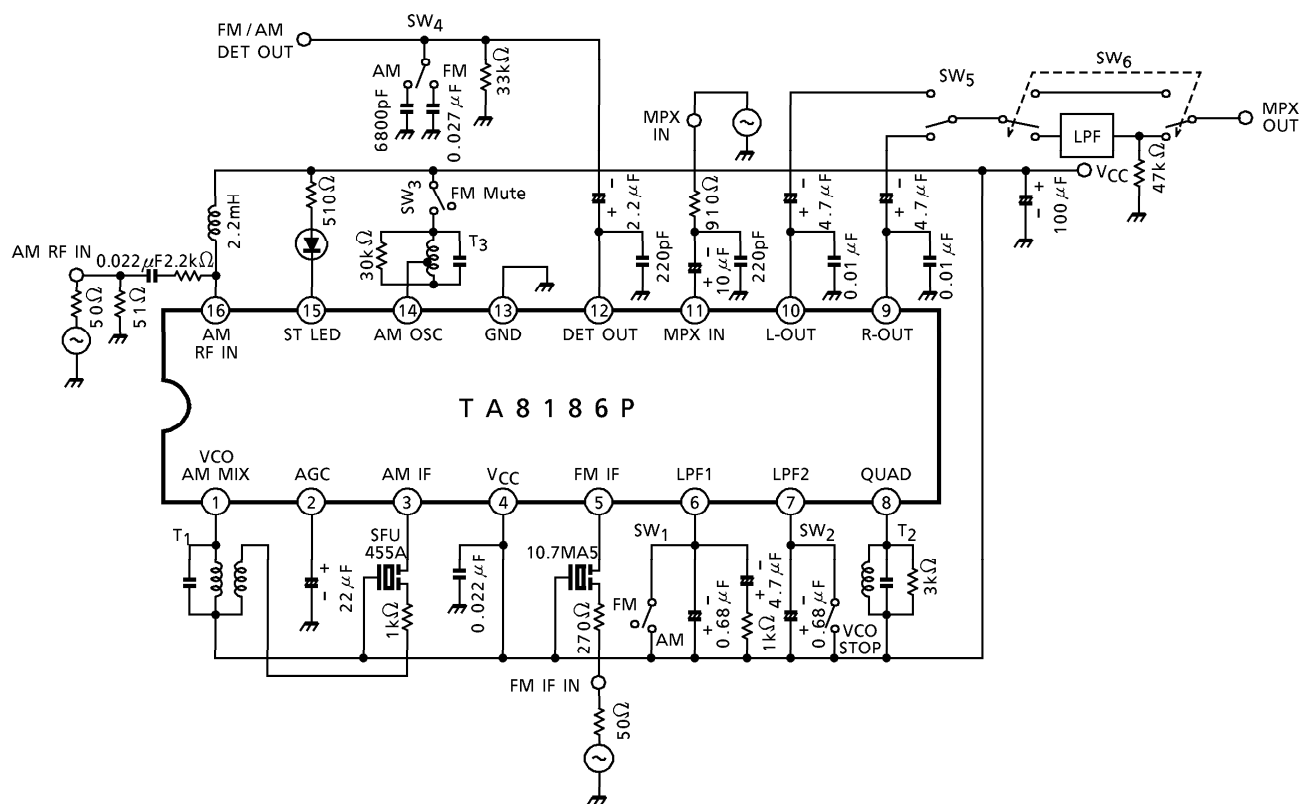


COIL DATA

COIL No.	f	L (μ H)	C ₀ (pF)	Q ₀	TURN				WIRE (mm ϕ)	REF
					1-2	2-3	1-3	4-6		
T ₁ AM IFT	455kHz	—	180	120	—	—	180	15	0.06 UEW	⑤2150-2162-165
		—	180	50 $\uparrow$	—	—	158	14	0.07 ϕ 2 UEW	①A7LCS-11432X
T ₂ FM DET	10.7MHz	—	82	110	—	—	13	—	0.12 UEW	⑤4152-4095-015
		—	82	80 $\uparrow$	—	—	11	—	0.1 ϕ 2 UEW	①A119ACS-19118Z
T ₃ AM OSC	796kHz	288	—	115	13	73	—	—	0.08 UEW	⑤4147-1356-038
		288	—	105 $\uparrow$	16	88	—	—	0.07 ϕ 2 UEW	①7TRS-11433Y


⑤ : SUMIDA ELECTRIC Co., Ltd.

① : TOKO Co., Ltd.

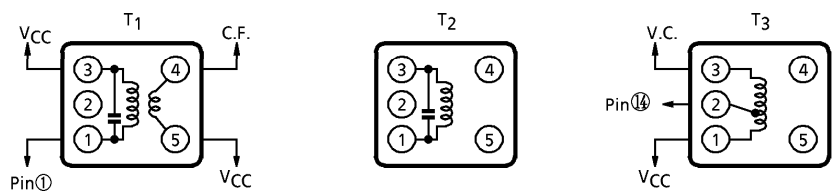

PACKAGE DIMENSIONS
DIP16-P-300-2.54A

Unit : mm

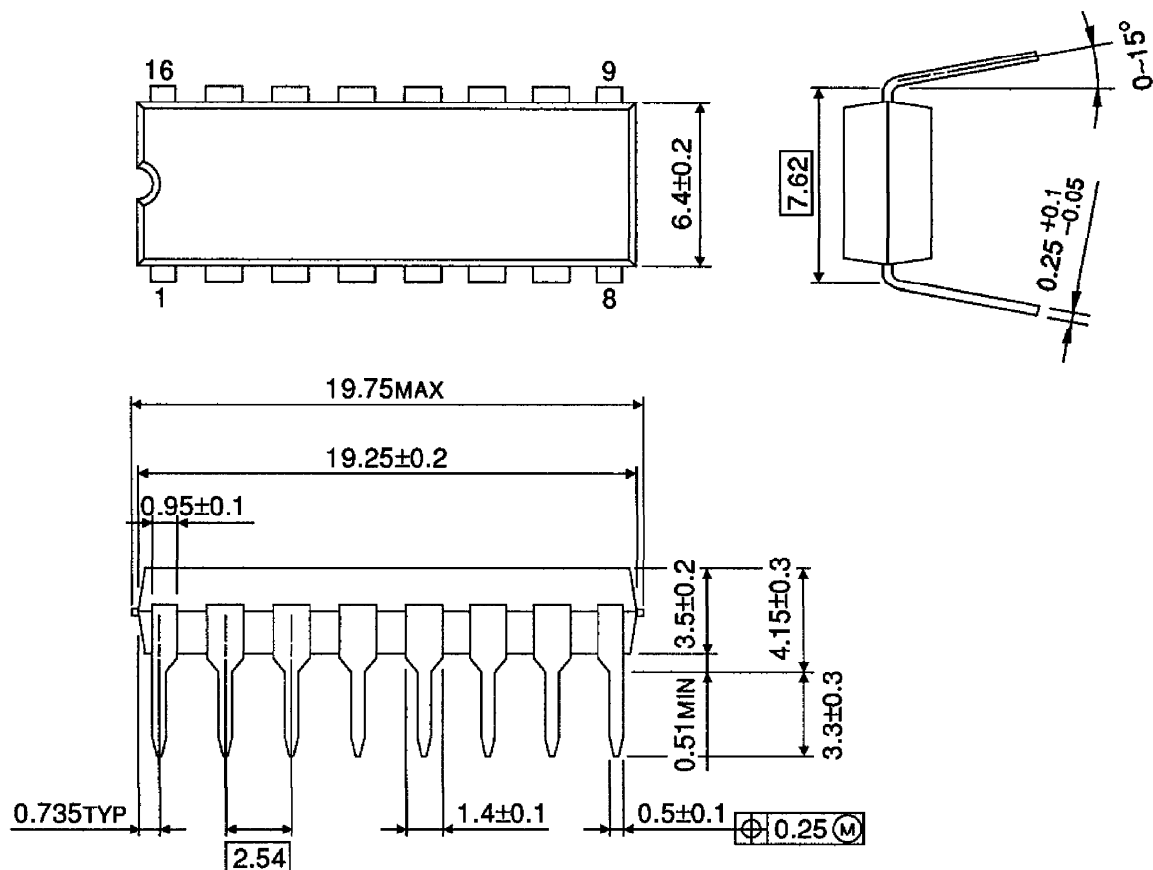

Weight : 1.00g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.