



CONDENSER MICROPHONE APPLICATION.

FEATURES

- Especially Suited for Use in Audio, Telephone.
- Capacitor Microphones.
- Excellent Voltage Characteristics.
- Excellent Transient Characteristics.

MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Gate-Drain Voltage	V_{GDO}	-20	V
Gate Current	I_G	10	mA
Drain Current	I_D	1	mA
Drain Power Dissipation	P_D	100	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

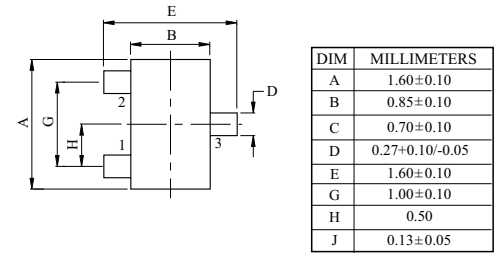

1. SOURCE
2. DRAIN
3. GATE


ESM

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate-Drain Breakdown Voltage	$V_{(BR)GDO}$	$I_G = -100 \mu A$	-20	-	-	V
Gate-Source Cut-off Voltage	$V_{GS(OFF)}$	$V_{DS} = 5V, I_D = 1 \mu A$	-	-0.6	-1.5	V
Drain Current	$I_{DSS} \text{ (Note)}$	$V_{DS} = 5V, V_{GS} = 0$	150	-	320	μA
Foward Transfer Admittance	$ y_{fs} $	$V_{DS} = 5V, V_{GS} = 0, f = 1kHz$	0.4	1.2	-	mS
Input Capacitance	C_{iss}	$V_{DS} = 5V, V_{GS} = 0, f = 1MHz$	-	3.5	-	pF
Reverse Transfer Capacitance	C_{rss}	$V_{DS} = 5V, V_{GS} = 0, f = 1MHz$	-	0.65	-	pF

Note : I_{DSS} Classification Y(1):150~240, GR(2):210~320

Marking

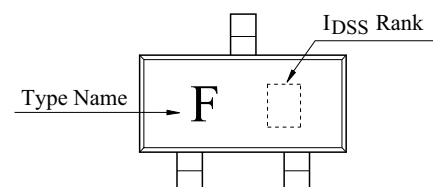


ELECTRICAL CHARACTERISTICS

(Ta=25℃, VCC=4.5V, RL=1kΩ, Cin=15pF, See Specified Test Circuit.)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Voltage Gain	G_V	$V_{in}=10mV$, $f=1kHz$	-	-3.0	-	dB
Reduced Voltage Characteristic	$\angle G_{VV}$	$V_{in}=10mV$, $f=1kHz$ $V_{CC}=4.5V \rightarrow 1.5V$	-	-1.2	-4.0	dB
Frequency Characteristic	$\angle G_{VF}$	$f=1kHz \sim 110Hz$	-	-	-1.0	dB
Input Resistance	Z_{in}	$f=1kHz$	25	-	-	MΩ
Output Resistance	Z_O	$f=1kHz$	-	-	700	Ω
Total Harmonic Distortion	THD	$V_{in}=30mV$, $f=1kHz$	-	1.0		%
Output Noise Voltage	V_{NO}	$V_{in}=0$, A curve	-	-	-110	dB

SPECIFIED TEST CIRCUIT


- Voltage gain.
- Frequency Characteristic.
- Distortion.
- Reduced Voltage Characteristic.

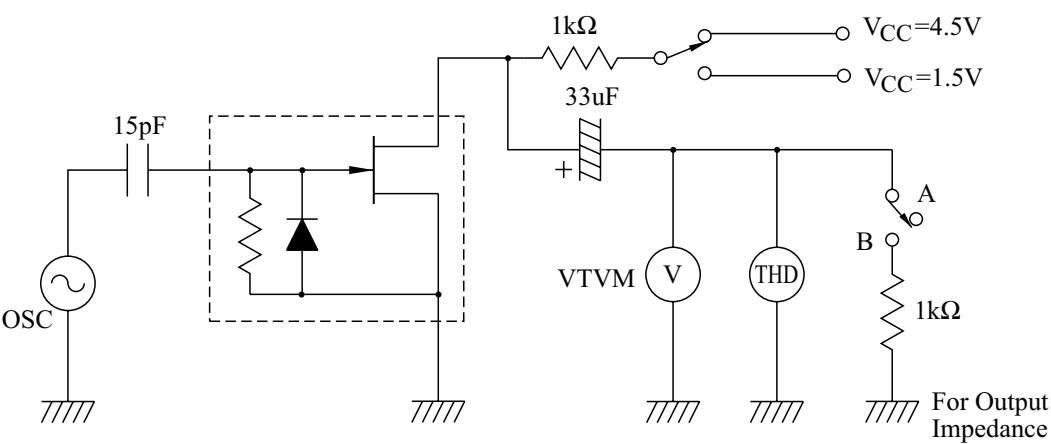


$I_D - V_{DS}$

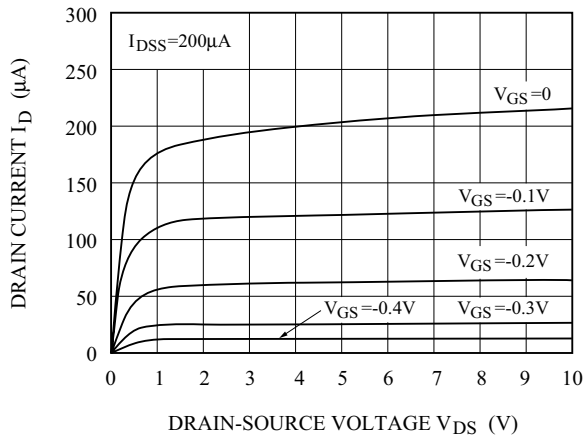


$I_D - V_{GS}$

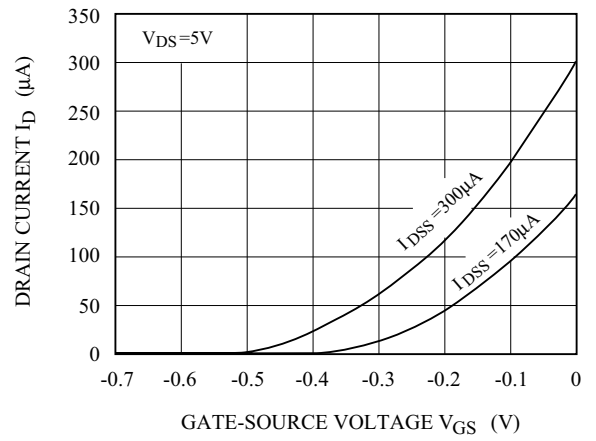


$|y_{fs}| - I_{DSS}$

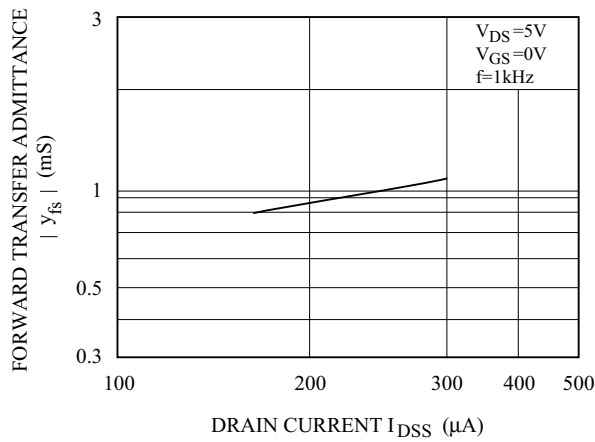

$V_{GS(off)} - I_{DSS}$

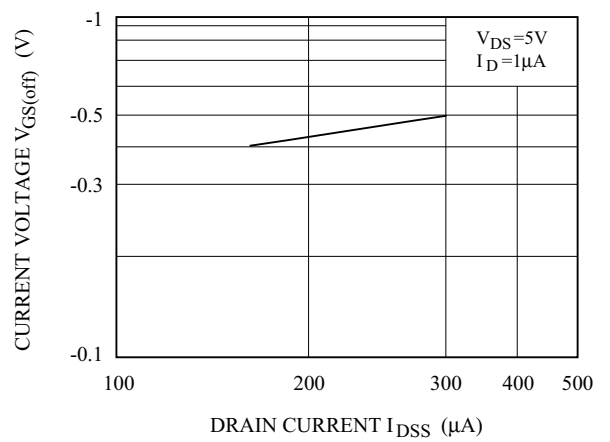

$C_{iss} - V_{DS}$

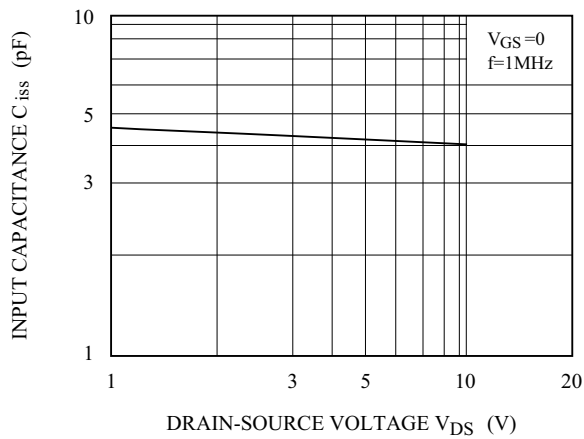

$C_{rss} - V_{DS}$

