



## **Crimzon® ZLR16300**

### **Z8® Low-Voltage ROM MCUs with Infrared Timers**

#### **Product Specification**



**Maxim Integrated Products  
120 San Gabriel Drive  
Sunnyvale, CA 94086  
United States**

**408-737-7600  
[www.maxim-ic.com](http://www.maxim-ic.com)**

Copyright © 2009 Maxim Integrated Products

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. Maxim retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time. While the information furnished herein is held to be accurate and reliable, no responsibility will be assumed by Maxim for its use. Furthermore, the information contained herein does not convey to the purchaser of microelectronic devices any license under the patent right of any manufacturer.

Maxim is a registered trademark of Maxim Integrated Products, Inc.

All other products or service names used in this publication are for identification purposes only, and may be trademarks or registered trademarks of their respective companies. All other trademarks or registered trademarks mentioned herein are the property of their respective holders.

Z8 is a registered trademark of Zilog, Inc.

Crimzon is a registered trademark of Universal Electronics Inc.



## Revision History

Each instance in the Revision History table reflects a change to this document from its previous revision. For more details, refer to the corresponding pages and appropriate links in the table below.

| Date          | Revision Level | Description                                                       | Page No            |
|---------------|----------------|-------------------------------------------------------------------|--------------------|
| April 2009    | 19             | Changed to Maxim product                                          | All                |
| February 2008 | 18             | Updated the <a href="#">Ordering Information</a> section.         | <a href="#">85</a> |
| January 2008  | 17             | Updated the <a href="#">Ordering Information</a> section.         | <a href="#">85</a> |
| August 2007   | 16             | Updated the Disclaimer section and implemented style guide.       | All                |
| February 2007 | 15             | Updated <a href="#">Low-Voltage Detection</a> .                   | <a href="#">53</a> |
| April 2006    | 14             | Added pin P22 to the SMR block input, <a href="#">Figure 30</a> . | <a href="#">47</a> |
| December 2005 | 13             | Updated Input output port and Clock.                              | 12, 47             |



# Table of Contents

|                                               |           |
|-----------------------------------------------|-----------|
| <b>Architectural Overview</b>                 | <b>1</b>  |
| Features                                      | 1         |
| Functional Block Diagram                      | 3         |
| <b>Pin Description</b>                        | <b>5</b>  |
| Pin Functions                                 | 7         |
| XTAL1 Crystal 1 (Time-Based Input)            | 7         |
| XTAL2 Crystal 2 (Time-Based Output)           | 7         |
| Input/Output Ports                            | 7         |
| <b>Functional Description</b>                 | <b>14</b> |
| Program Memory                                | 14        |
| RAM                                           | 15        |
| Expanded Register File                        | 16        |
| Register File                                 | 19        |
| Stack                                         | 20        |
| Timers                                        | 20        |
| Counter/Timer Functional Blocks               | 28        |
| Input Circuit                                 | 28        |
| Interrupts                                    | 39        |
| Clock                                         | 42        |
| Power Management                              | 43        |
| Power-On Reset                                | 43        |
| Port Configuration                            | 44        |
| Stop Mode Recovery                            | 44        |
| Watchdog Timer Mode                           | 50        |
| Low-Voltage Detection                         | 53        |
| Expanded Register File Control Registers (0D) | 54        |
| Expanded Register File Control Registers (0F) | 60        |
| Standard Control Registers                    | 63        |
| <b>Electrical Characteristics</b>             | <b>71</b> |
| Absolute Maximum Ratings                      | 71        |
| Standard Test Conditions                      | 72        |
| DC Characteristics                            | 72        |
| AC Characteristics                            | 74        |
| Capacitance                                   | 76        |
| <b>Packaging</b>                              | <b>79</b> |
| <b>Ordering Information</b>                   | <b>85</b> |
| Part Number Description                       | 87        |
| <b>Index</b>                                  | <b>88</b> |
| <b>Customer Support</b>                       | <b>92</b> |



# Architectural Overview

Maxim's Crimzon® ZLR16300 MCU is a ROM-based member of the Crimzon ZLR16300 family of general-purpose microcontrollers. With 1 KB to 16 KB of Program Memory and 237 B of general-purpose RAM, Maxim's CMOS microcontrollers offer fast-executing, efficient use of memory, sophisticated interrupts, input/output (I/O) bit manipulation capabilities, automated pulse generation/reception, and internal key-scan pull-up transistors.

The Crimzon ZLR16300 architecture (see [Figure 1](#) on page 3 and [Figure 2](#) on page 4) is based on Maxim's 8-bit microcontroller core with an Expanded Register File allowing access to register-mapped peripherals, I/O circuits, and powerful counter/timer circuitry. The Z8® core offers a flexible I/O scheme, an efficient register and address space structure, and a number of ancillary features that are useful in many consumer, automotive, computer peripheral, and battery-operated hand-held applications.

There are three basic address spaces available to support a wide range of configurations:

1. Program Memory
2. Register File
3. Expanded Register File

The Register file is composed of 256 B of RAM. It includes three I/O port registers, 16 control and status registers, and 237 general-purpose registers. The Expanded Register file consists of two additional register groups (F and D).

To unburden the program from coping with such real-time problems like generating complex waveforms or receiving and demodulating complex waveform/pulses, the Crimzon ZLR16300 offers a new intelligent counter/timer architecture with 8-bit and 16-bit counter/timers (see [Figure 2](#) on page 4). Also included are a large number of user-selectable modes and two on-board comparators to process analog signals with separate reference voltages.

## Features

[Table 1](#) lists the features of Crimzon ZLR16300 family.

**Table 1. Crimzon ZLR16300 ROM MCU Features**

| Device           | ROM (KB)       | RAM* (Bytes) | I/O Lines | Voltage Range |
|------------------|----------------|--------------|-----------|---------------|
| Crimzon ZLR16300 | 1, 2, 4, 8, 16 | 237          | 24, 16    | 2.0–3.6 V     |
| *General-purpose |                |              |           |               |



The additional features include:

- Low power consumption—5 mW (typical)
- Three standby modes:
  - STOP—1.3  $\mu$ A (typical)
  - HALT—0.5 mA (typical)
  - Low-voltage reset
- Special architecture to automate both generation and reception of complex pulses or signals:
  - One programmable 8-bit counter/timer with two capture registers and two load registers
  - One programmable 16-bit counter/timer with one 16-bit capture register pair and one 16-bit load register pair
  - Programmable input glitch filter for pulse reception
- Six priority interrupts
  - Three external
  - Two assigned to counter/timers
  - One low-voltage detection interrupt
- Low-Voltage Detection and High-Voltage Detection Flags
- Programmable Watchdog Timer (WDT)
- Power-On Reset (POR)
- Two independent comparators with programmable interrupt polarity
- Selectable pull-up transistors on ports 0, 2, and 3
- Mask options
  - Port 0: 0–3 pull-ups
  - Port 0: 4–7 pull-ups
  - Port 2: 0–7 pull-ups
  - Port 3: 0–3 pull-ups
  - Watchdog Timer at Power-On Reset


Power connections use the conventional descriptions listed in [Table 2](#).

**Table 2. Power Connections**

| Connection | Circuit         | Device          |
|------------|-----------------|-----------------|
| Power      | V <sub>CC</sub> | V <sub>DD</sub> |
| Ground     | GND             | V <sub>SS</sub> |

## Functional Block Diagram

Figure 1 displays the Crimzon ZLR16300 MCU functional block diagram.

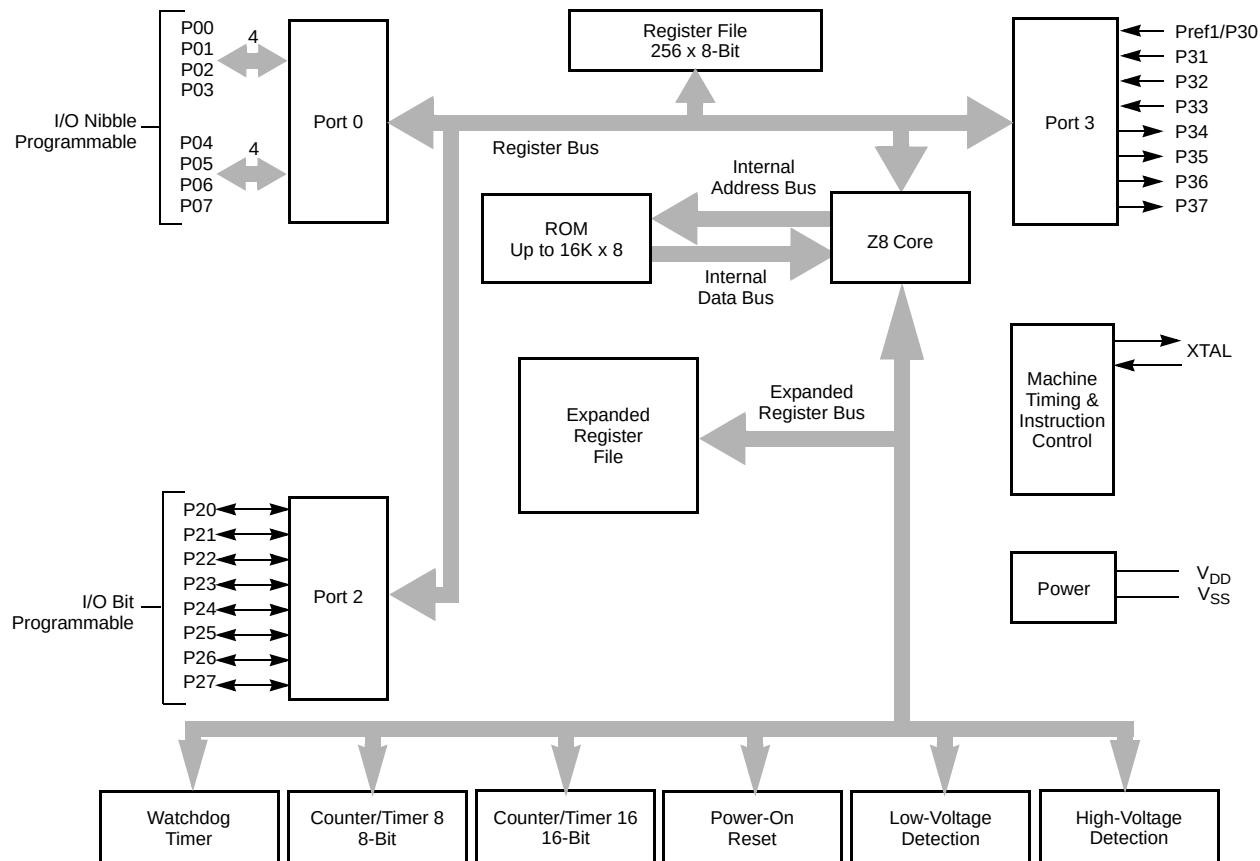

Note: Refer to the specific package for available pins.

**Figure 1. Crimzon ZLR16300 MCU Functional Block Diagram**

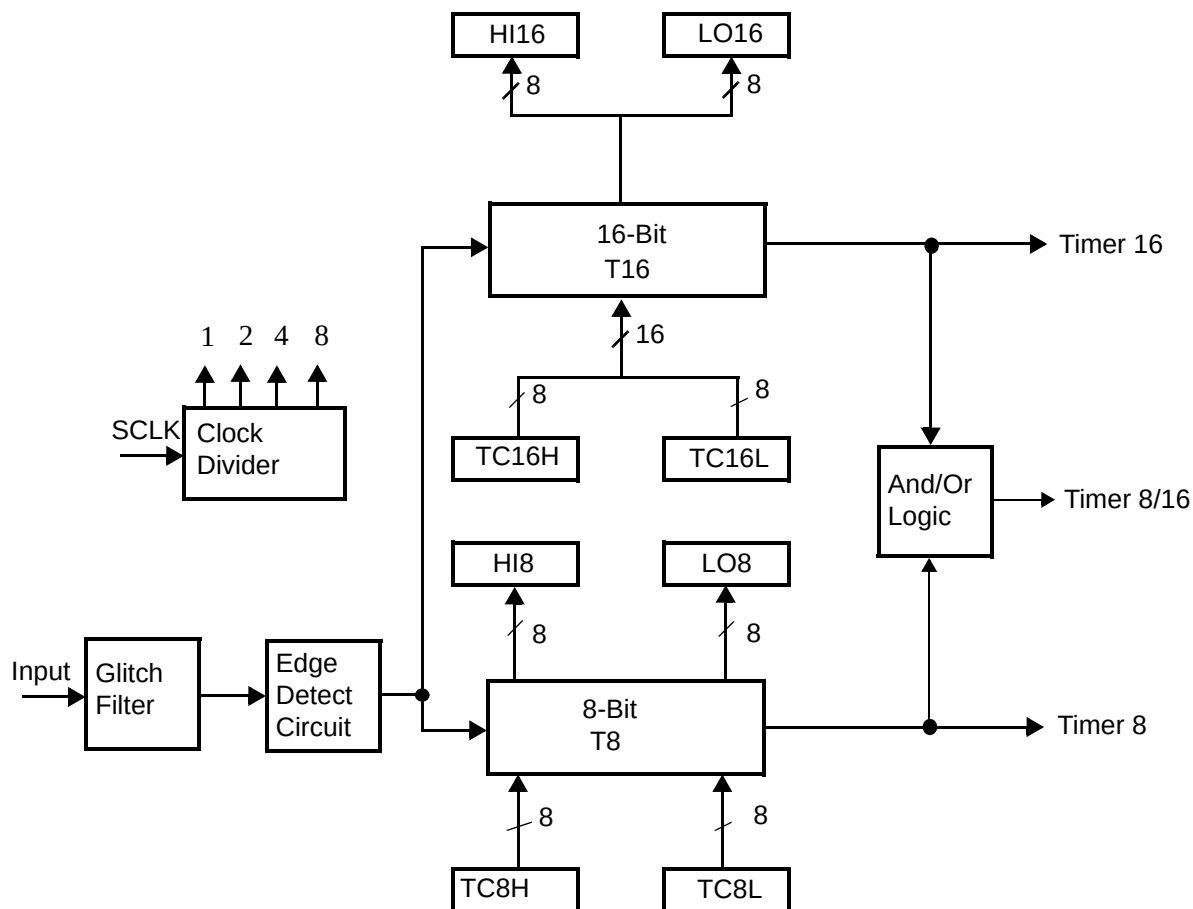


Figure 2. Counter/Timers Diagram



## Pin Description

The pin configuration for the 20-pin DIP/SOIC/SSOP is displayed in [Figure 3](#) and described in [Table 3](#). The pin configuration for the 28-pin DIP/SOIC/SSOP are displayed in [Figure 4](#) on page 6 and described in [Table 4](#) on page 6.

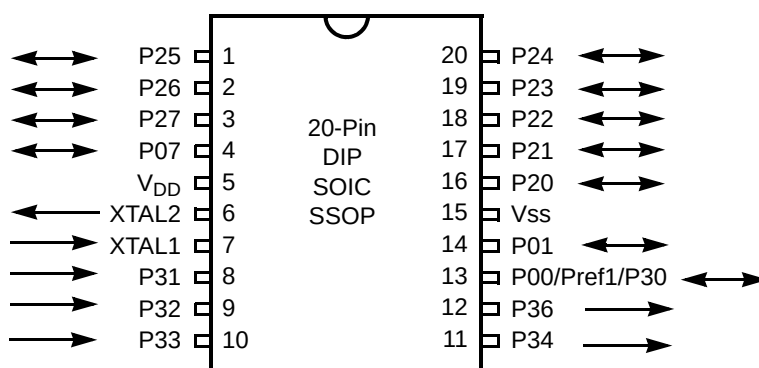


Figure 3. 20-Pin DIP/SOIC/SSOP Pin Configuration

Table 3. 20-Pin DIP/SOIC/SSOP Pin Identification

| Pin No | Symbol          | Function                                              | Direction                                   |
|--------|-----------------|-------------------------------------------------------|---------------------------------------------|
| 1–3    | P25–P27         | Port 2, Bits 5,6,7                                    | Input/Output                                |
| 4      | P07             | Port 0, Bit 7                                         | Input/Output                                |
| 5      | V <sub>DD</sub> | Power Supply                                          |                                             |
| 6      | XTAL2           | Crystal Oscillator Clock                              | Output                                      |
| 7      | XTAL1           | Crystal Oscillator Clock                              | Input                                       |
| 8–10   | P31–P33         | Port 3, Bits 1,2,3                                    | Input                                       |
| 11,12  | P34, P36        | Port 3, Bits 4,6                                      | Output                                      |
| 13     | P00/Pref1/P30   | Port 0, Bit 0/Analog reference input<br>Port 3, Bit 0 | Input/Output for P00<br>Input for Pref1/P30 |
| 14     | P01             | Port 0, Bit 1                                         | Input/Output                                |
| 15     | V <sub>SS</sub> | Ground                                                |                                             |
| 16–20  | P20–P24         | Port 2, Bits 0,1,2,3,4                                | Input/Output                                |

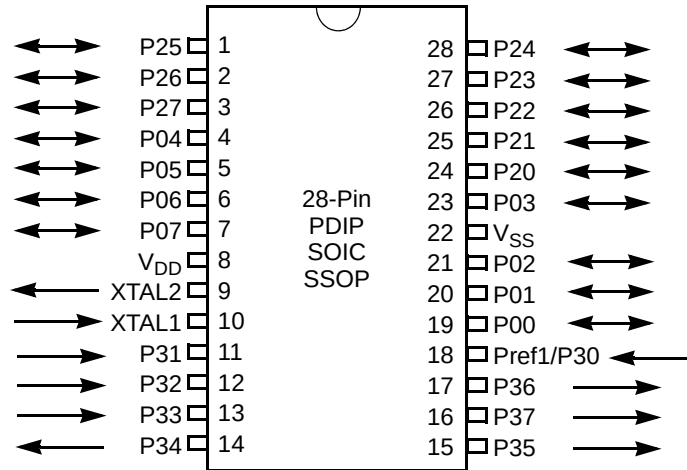


Figure 4. 28-Pin DIP/SOIC/SSOP Pin Configuration

Table 4. 28-Pin DIP/SOIC/SSOP Pin Identification

| Pin No | Symbol          | Function                                                              | Direction    |
|--------|-----------------|-----------------------------------------------------------------------|--------------|
| 1-3    | P25-P27         | Port 2, Bits 5,6,7                                                    | Input/Output |
| 4-7    | P04-P07         | Port 0, Bits 4,5,6,7                                                  | Input/Output |
| 8      | V <sub>DD</sub> | Power supply                                                          |              |
| 9      | XTAL2           | Crystal, oscillator clock                                             | Output       |
| 10     | XTAL1           | Crystal, oscillator clock                                             | Input        |
| 11-13  | P31-P33         | Port 3, Bits 1,2,3                                                    | Input        |
| 14     | P34             | Port 3, Bit 4                                                         | Output       |
| 15     | P35             | Port 3, Bit 5                                                         | Output       |
| 16     | P37             | Port 3, Bit 7                                                         | Output       |
| 17     | P36             | Port 3, Bit 6                                                         | Output       |
| 18     | Pref1           | Analog ref input; connect to V <sub>CC</sub> if not used Port 3 Bit 0 | Input        |
| 19-21  | P00-P02         | Port 0, Bits 0,1,2                                                    | Input/Output |
| 22     | V <sub>SS</sub> | Ground                                                                |              |
| 23     | P03             | Port 0, Bit 3                                                         | Input/Output |
| 24-28  | P20-P24         | Port 2, Bits 0-4                                                      | Input/Output |



## Pin Functions

### XTAL1 Crystal 1 (Time-Based Input)

This pin connects a parallel-resonant crystal or ceramic resonator to the on-chip oscillator input. Additionally, an external single-phase clock can be connected to the on-chip oscillator input.

### XTAL2 Crystal 2 (Time-Based Output)

This pin connects a parallel-resonant crystal or ceramic resonator to the on-chip oscillator output.

## Input/Output Ports



**Caution:** *The CMOS input buffer for each ports 0, 1, or 2 pin is always connected to the pin, even when the pin is configured as an output. If the pin is configured as an open-drain output and no external signal is applied, a High output state causes the CMOS input buffer to float. This leads to excessive leakage current of more than 100  $\mu$ A. To prevent this leakage, connect the pin to an external signal with a defined logic level or ensure its output state is Low, especially during STOP mode.*

*Internal pull-ups are disabled on any given pin or group of port pins when programmed into output mode.*

*Port 0, 1, and 2 have both input and output capability. The input logic is always present no matter whether the port is configured as input or output. While performing a READ instruction, the MCU reads the actual value at the input logic but not from the output buffer. In addition, the instructions of OR, AND, and XOR have the Read-Modify-Write sequence. The MCU first reads the port, modifies the value, and loads back to the port.*

*Precaution must be taken if the port is configured as open-drain output or if the port is driving any circuit that makes the voltage different from the desired output logic. For example, pins P00–P07 are not connected to anything else. If it is configured as open-drain output with output logic as ONE, it is a floating port and reads back as ZERO. The following instruction sets P00-P07 all Low.*

```
AND P0, #%F0
```


### Port 0 (P07–P00)

Port 0 is an 8-bit, bidirectional, and CMOS-compatible port. These eight I/O lines are configured under software control as a nibble I/O port. The output drivers are push-pull or open-drain controlled by bit D2 in the PCON register.

If one or both nibbles are required for I/O operation, they must be configured by writing to the Port 0 mode register. After a hardware reset, Port 0 is configured (see Figure 5) as an input port.

An optional pull-up transistor is available as a mask option on all Port 0 bits with nibble select.

► **Note:** The Port 0 direction is reset to be input following an Stop Mode Recovery.

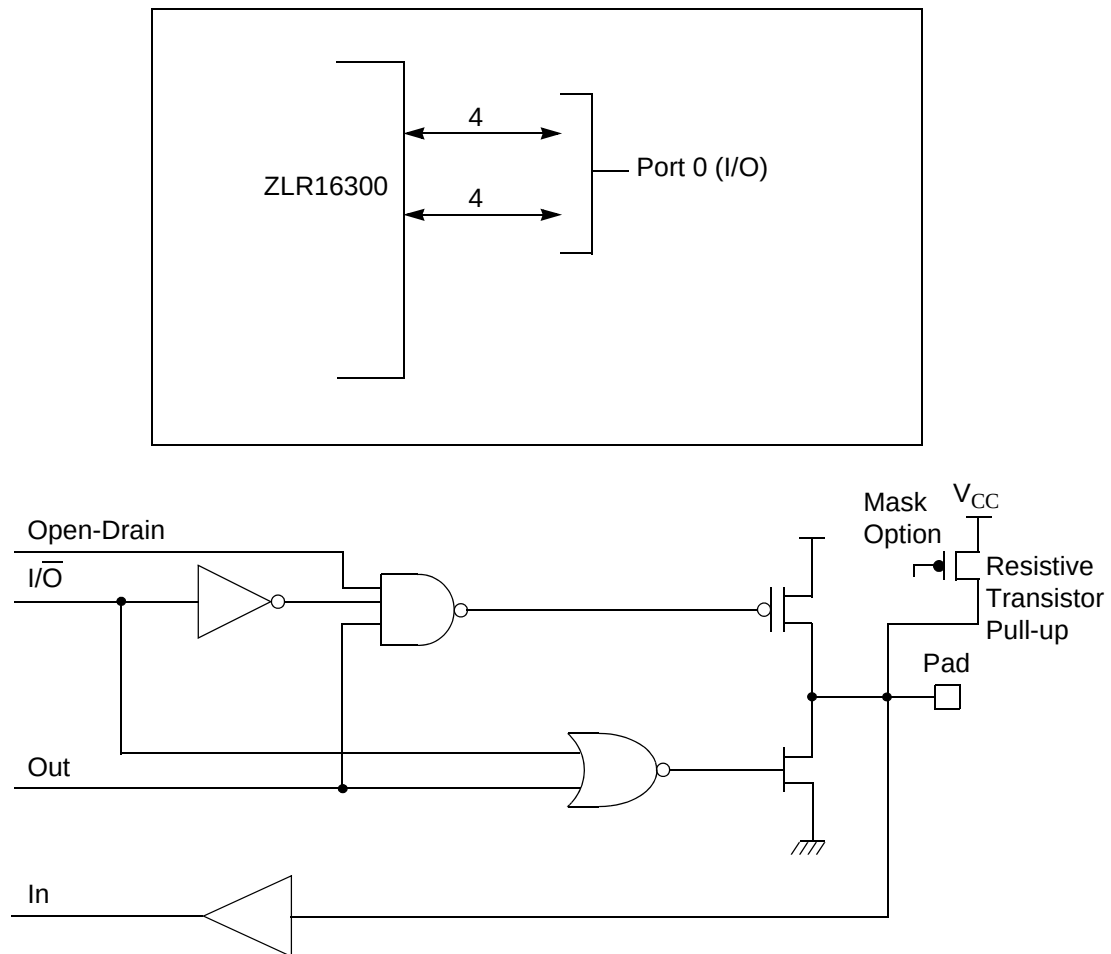


**Figure 5. Port 0 Configuration**



### Port 2 (P27–P20)

Port 2 is an 8-bit, bidirectional, and CMOS-compatible I/O port (see Figure 6). These eight I/O lines are independently configured under software control as inputs or outputs. Port 2 is always available for I/O operation. A mask option connects eight pull-up transistors on this port. Bits programmed as outputs are globally programmed as either push-pull or open-drain. The POR resets with the eight bits of Port 2 configured as inputs.


Port 2 also has an 8-bit input OR and AND gate which can be used to wake up the part. P20 is programmed to access the edge-detection circuitry in DEMODULATION mode.

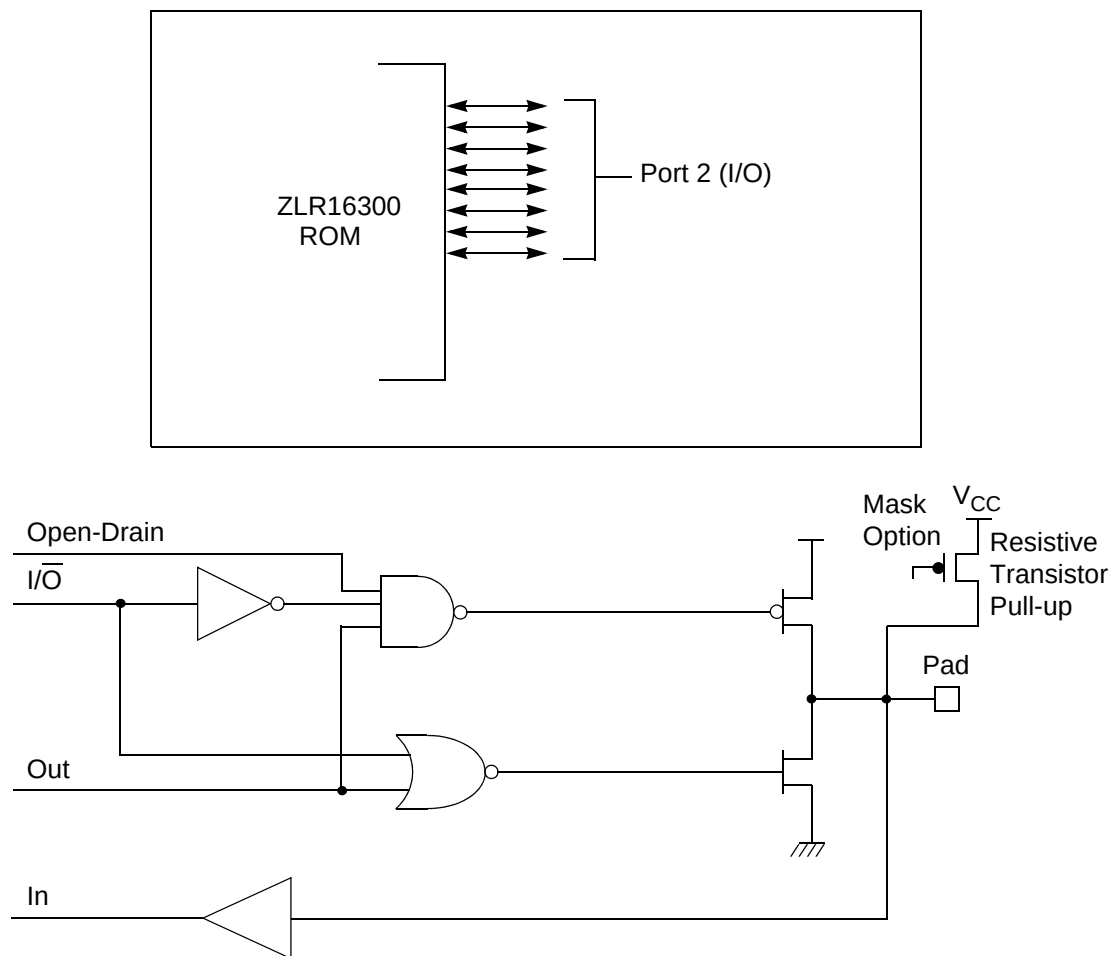

**Figure 6. Port 2 Configuration**

### Port 3 (P37–P30)

Port 3 is an 8-bit, CMOS-compatible fixed I/O port (see Figure 7). Port 3 consists of four fixed input (P33–P30) and four fixed output (P37–P34), which are configured under software control for interrupt and as output from the counter/timers. P30, P31, P32, and P33 are standard CMOS inputs; P34, P35, P36, and P37 are push-pull outputs.

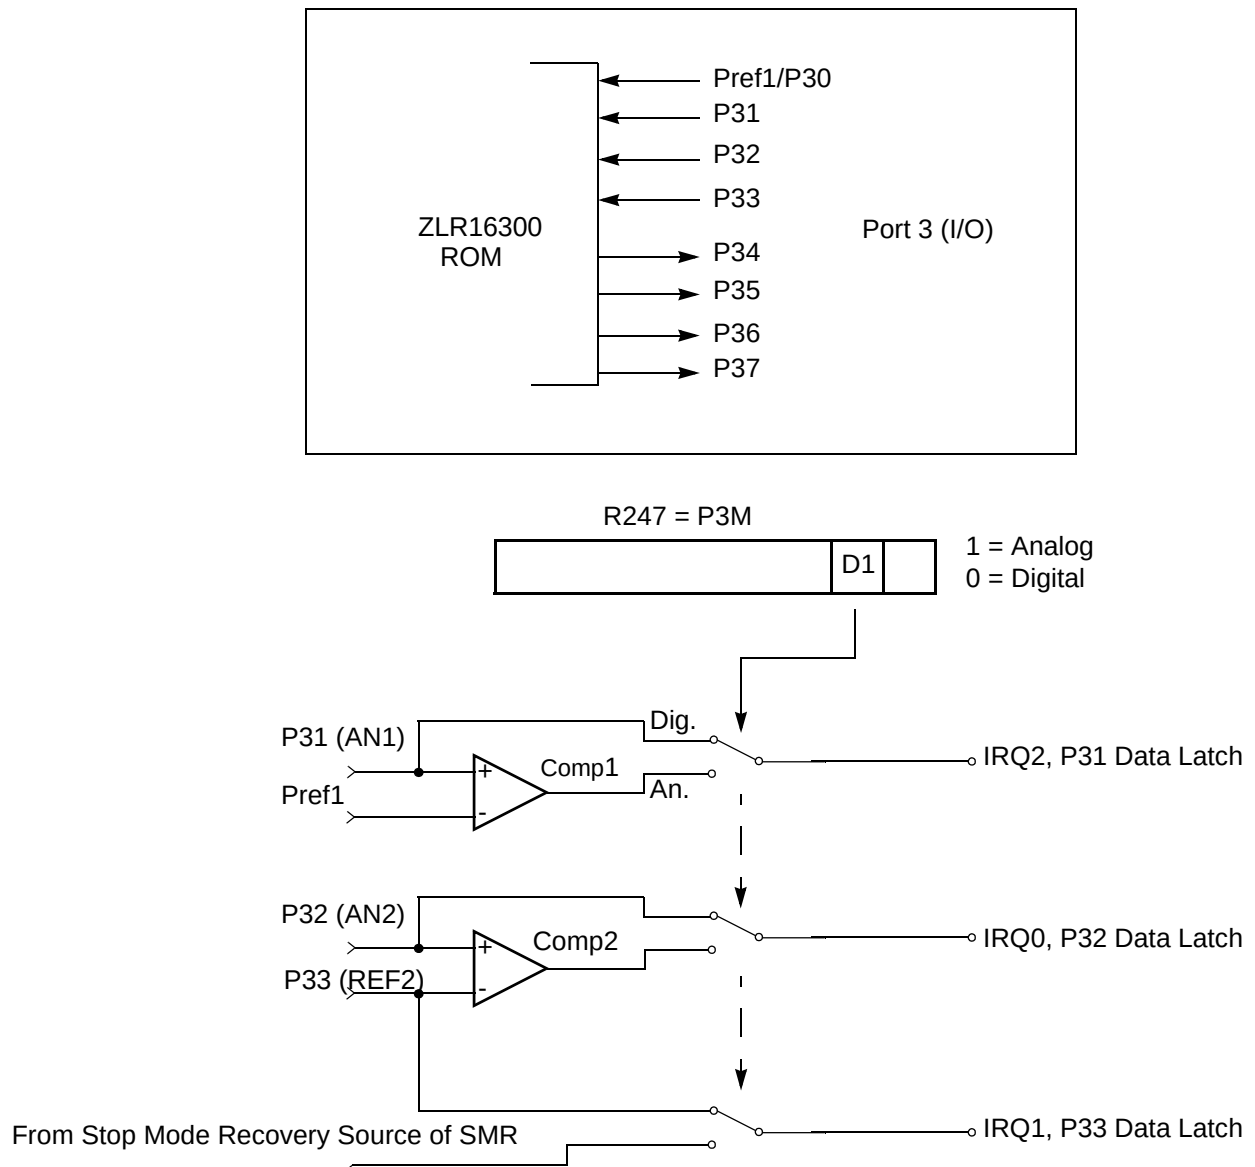

**Figure 7. Port 3 Configuration**




Two on-board comparators process analog signals on P31 and P32, with reference to the voltage on Pref1 and P33. The analog function is enabled by programming the Port 3 Mode Register (bit 1). P31 and P32 are programmable as rising, falling, or both edge triggered interrupts (IRQ register bits 6 and 7). Pref1 and P33 are the comparator reference voltage inputs. Access to the Counter Timer edge-detection circuit is through P31 or P20 (see [T8 and T16 Common Functions—CTR1\(0D\)01h](#) on page 23). Other edge detect and IRQ modes are described in [Table 5](#).

► **Note:** Comparators are powered down by entering STOP mode. For P31–P33 to be used in a SMR source, these inputs must be placed into DIGITAL mode.

**Table 5. Port 3 Pin Function Summary**

| Pin       | I/O | Counter/Timers | Comparator | Interrupt |
|-----------|-----|----------------|------------|-----------|
| Pref1/P30 | IN  |                | RF1        |           |
| P31       | IN  | IN             | AN1        | IRQ2      |
| P32       | IN  |                | AN2        | IRQ0      |
| P33       | IN  |                | RF2        | IRQ1      |
| P34       | OUT | T8             | AO1        |           |
| P35       | OUT | T16            |            |           |
| P36       | OUT | T8/16          |            |           |
| P37       | OUT |                | AO2        |           |
| P20       | I/O | IN             |            |           |

Port 3 also provides output for each of the counter/timers and the AND/OR Logic (see [Figure 8](#)). Control is performed by programming bits D5–D4 of CTR1, bit 0 of CTR0, and bit 0 of CTR2.

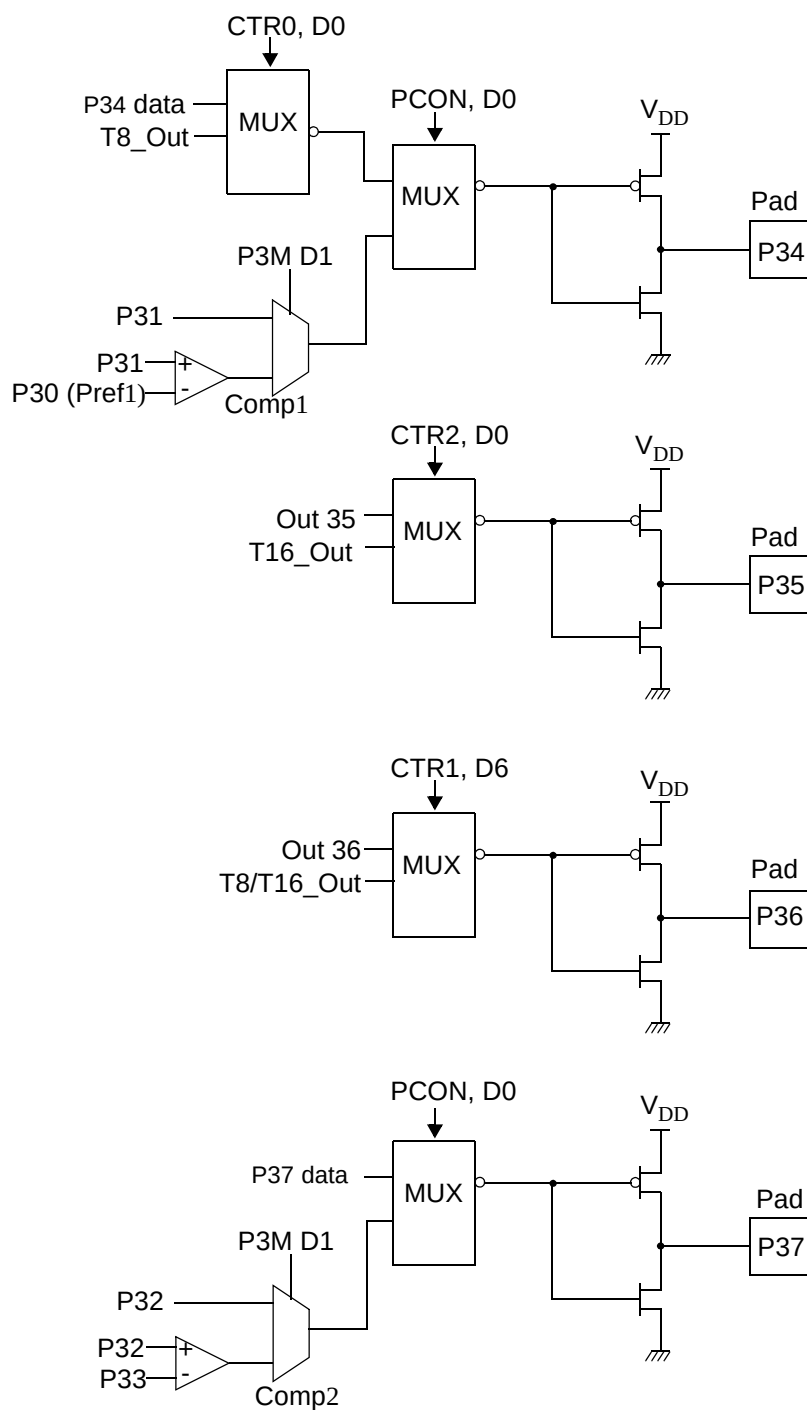

**Figure 8. Port 3 Counter/Timer Output Configuration**





### Comparator Inputs

In ANALOG mode, P31 and P32 have a comparator front end. The comparator reference is supplied to P33 and  $P_{REF1}$ . In this mode, the P33 internal data latch and its corresponding IRQ1 are diverted to the SMR sources (excluding P31, P32, and P33) as displayed in [Figure 7](#) on page 10. In DIGITAL mode, P33 is used as D3 of the Port 3 input register, which then generates IRQ1.

► **Note:** *Comparators are powered down by entering STOP mode. For P31–P33 to be used in a Stop Mode Recovery source, these inputs must be placed into DIGITAL mode.*

### Comparator Outputs

These channels are programmed to be output on P34 and P37 through the PCON register.



# Functional Description

The Crimzon ZLR16300 family of devices incorporate special functions to enhance the functionality of Z8® in consumer and battery-operated applications.

## Program Memory

These devices address from 1 KB to 16 KB of Program Memory. The first 12 bytes are reserved for interrupt vectors. These locations contain the six 16-bit vectors that correspond to the six available interrupts. See [Figure 9](#) on page 15.



RAM

The Crimzon ZLR16300 product family features 237 bytes of RAM.

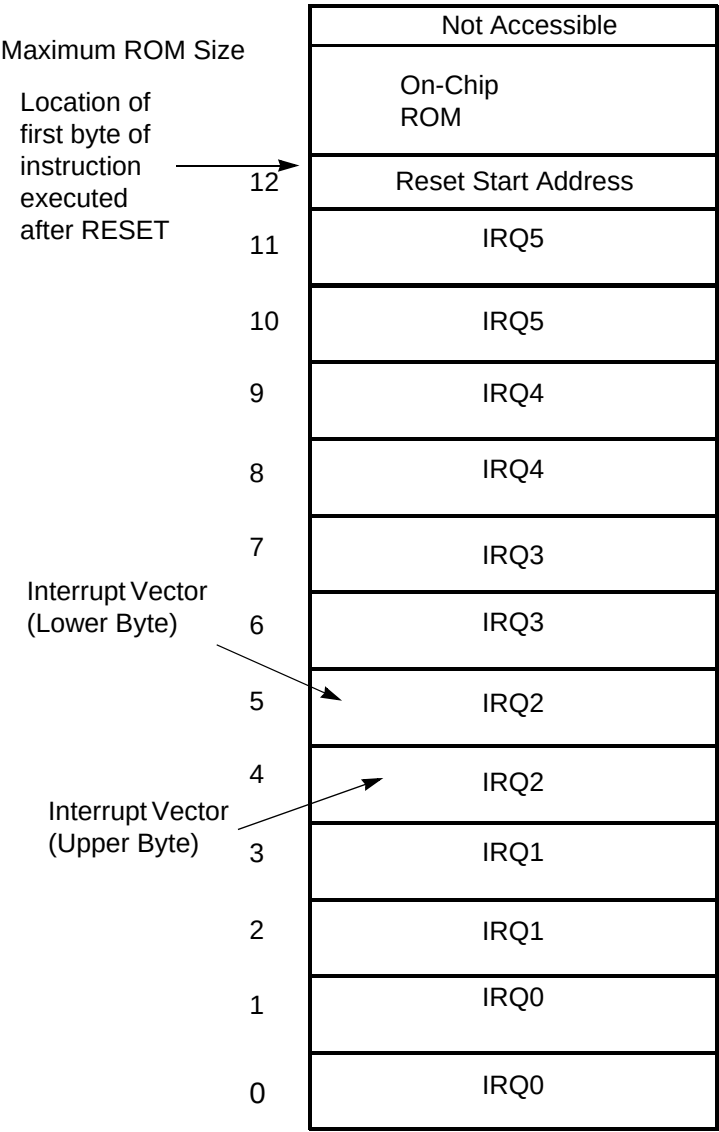


Figure 9. Program Memory Map



## Expanded Register File


The register file has been expanded to allow for additional system control registers and for mapping additional peripheral devices into the register address area. The Z8 register address space (0 through 15 (0Fh)) has been implemented as 16 banks, with 16 registers per bank. These register banks are known as the ERF (Expanded Register File). Bits 7–4 of register RP select the working register group. Bits 3–0 of register RP select the expanded register file bank.

► **Note:** *An expanded register bank is also referred to as an expanded register group (see [Figure 10](#) on page 17).*





The upper nibble of the register pointer (see [Figure 11](#)) selects which working register group, of 16 bytes in the register file, is accessed out of the possible 256. The lower nibble selects the expanded register file bank and in the case of the Crimzon ZLR16300 family, banks 0, F, and D are implemented. A 0h in the lower nibble allows the normal register file (bank 0) to be addressed. Any other value from 1h to Fh exchanges the lower 16 registers to the selected expanded register bank.

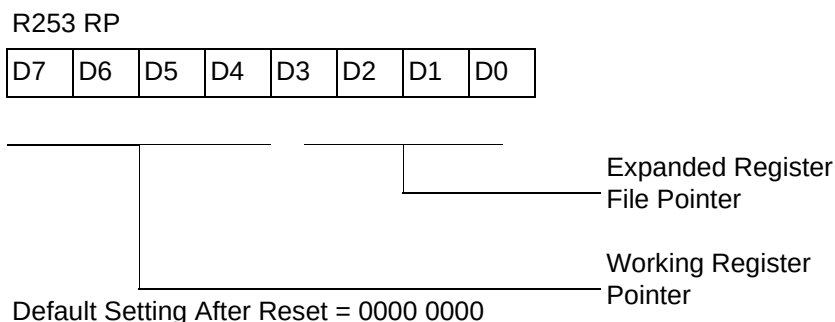

**Figure 11. Register Pointer**

**Example:** (See [Figure 10](#) on page 17)

R253 RP = 00h  
R0 = Port 0  
R2 = Port 2  
R3 = Port 3

But if:

R253 RP = 0Dh  
R0 = CTR0  
R1 = CTR1  
R2 = CTR2  
R3 = CTR3

The counter/timers are mapped into ERF group D. Access is easily performed using the following:

```
LD                                RP, #0Dh                ;Select ERF D
                                                                    for access to
                                                                    bank D
                                                                    ;(working
                                                                    register group
                                                                    0)
LD                                R0, #xx                ;load CTR0
```



```
LD          1, #xx          ;load CTR1
LD          R1, 2           ;CTR2→CTR1

LD          RP, #0Dh        ;Select ERF D
                           ; for access to
                           ; bank D
                           ; (working
                           ; register group
                           ; 0)

LD          RP, #7Dh        ;Select
                           ; expanded
                           ; register bank D
                           ; and working
                           ; register group
                           ; 7 of bank 0 for
                           ; access.


LD          71h, 2

;CTRL2→register
71h
LD          R1, 2           ;CTRL2→register 71h
```

## Register File

The Register file (bank 0) consists of three I/O port registers, 237 general-purpose registers, 16 control and status registers (R0, R2, R3, R4–R239, and R240–R255, respectively), and two expanded register Banks D (see [Table 6](#) on page 22) and F. Instructions can access registers directly or indirectly through an 8-bit address field, thereby allowing a short, 4-bit register address to use the Register Pointer (see [Figure 12](#) on page 20). In the 4-bit mode, the register file is divided into 16 working register groups, each occupying 16 continuous locations. The Register Pointer addresses the starting location of the active working register group.

► **Note:** *Register address E0h–EFh can be accessed only through working registers and indirect addressing modes.*

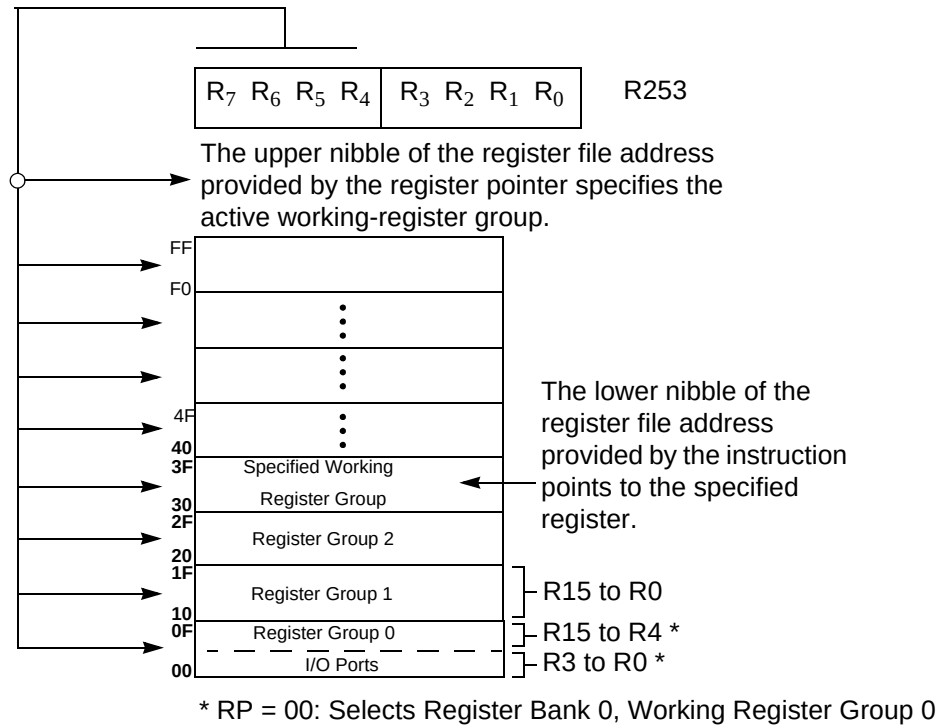

**Figure 12. Register Pointer—Detail**

## Stack

The internal register file is used for the stack. An 8-bit Stack Pointer SPL (R255) is used for the internal stack that resides in the general-purpose registers (R4–R239). SPH (R254) is used as a general-purpose register.

## Timers

### T8\_Capture\_HI—HI8(0D)0Bh

This register stores the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 1.

| Field         | Bit Position | Description                 |
|---------------|--------------|-----------------------------|
| T8_Capture_HI | [7:0]        | R/W Captured Data—No Effect |



**T8\_Capture\_LO—L08(0D)0Ah**

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 0.

| Field         | Bit Position | Description                 |
|---------------|--------------|-----------------------------|
| T8_Capture_LO | [7:0]        | R/W Captured Data—No Effect |

**T16\_Capture\_HI—HI16(0D)09h**

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the MS-Byte of the data.

| Field          | Bit Position | Description                 |
|----------------|--------------|-----------------------------|
| T16_Capture_HI | [7:0]        | R/W Captured Data—No Effect |

**T16\_Capture\_LO—L016(0D)08h**

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the LS-Byte of the data.

| Field          | Bit Position | Description                 |
|----------------|--------------|-----------------------------|
| T16_Capture_LO | [7:0]        | R/W Captured Data—No Effect |

**Counter/Timer2 MS-Byte Hold Register—TC16H(0D)07h**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_HI | [7:0]        | R/W Data    |

**Counter/Timer2 LS-Byte Hold Register—TC16L(0D)06h**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_LO | [7:0]        | R/W Data    |

**Counter/Timer8 High Hold Register—TC8H0(D)05h**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T8_Level_HI | [7:0]        | R/W Data    |

**Counter/Timer8 Low Hold Register—TC8L(0D)04h**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T8_Level_LO | [7:0]        | R/W Data    |

**CTR0 Counter/Timer8 Control Register—CTR0(0D)00h**

Table 6 lists and briefly describes the fields for this register.

**Table 6. CTR0(0D)00h Counter/Timer8 Control Register**

| Field            | Bit Position |     | Value | Description                    |
|------------------|--------------|-----|-------|--------------------------------|
| T8_Enable        | 7-----       | R/W | 0*    | Counter Disabled               |
|                  |              |     | 1     | Counter Enabled                |
|                  |              |     | 0     | Stop Counter                   |
|                  |              |     | 1     | Enable Counter                 |
| Single/Modulo-N  | -6-----      | R/W | 0*    | Modulo-N                       |
|                  |              |     | 1     | Single-Pass                    |
| Time_Out         | --5-----     | R/W | 0**   | No Counter Time-Out            |
|                  |              |     | 1     | Counter Time-Out Occurred      |
|                  |              |     | 0     | No Effect                      |
|                  |              |     | 1     | Reset Flag to 0                |
| T8_Clock         | ---43---     | R/W | 0 0** | SCLK                           |
|                  |              |     | 0 1   | SCLK/2                         |
|                  |              |     | 1 0   | SCLK/4                         |
|                  |              |     | 1 1   | SCLK/8                         |
| Capture_INT_Mask | ----2--      | R/W | 0**   | Disable Data Capture Interrupt |
|                  |              |     | 1     | Enable Data Capture Interrupt  |
| Counter_INT_Mask | -----1-      | R/W | 0**   | Disable Time-Out Interrupt     |
|                  |              |     | 1     | Enable Time-Out Interrupt      |
| P34_Out          | -----0       | R/W | 0*    | P34 as Port Output             |
|                  |              |     | 1     | T8 Output on P34               |

\*Indicates the value at Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with a Stop Mode Recovery.



### T8 Enable

This field enables T8 when set to 1.

### Single/Modulo-N

When set to 0 (MODULO-N), the counter reloads the initial value when the terminal count is reached. When set to 1 (Single-Pass), the counter stops when the terminal count is reached.

### Timeout

This bit is set when T8 times out (terminal count reached). To reset this bit, write a 1 to its location.



**Caution:** *Writing a 1 is the only way to reset the Terminal Count status condition. Reset this bit before using/enabling the counter/timers.*

*The first clock of T8 might not have complete clock width and can occur any time when enabled.*



**Note:** *Ensure to manipulate CTR0, bit 5 and CTR1, bits 0 and 1 (DEMODULATION mode) while using the OR or AND commands. These instructions use a Read-Modify-Write sequence in which the current status from the CTR0 and CTR1 registers is ORed or ANDed with the designated value and then written back into the registers.*

### T8 Clock

These bits define the frequency of the input signal to T8.

### Capture\_INT\_Mask

Set this bit to allow an interrupt when data is captured into either LO8 or HI8 upon a positive or negative edge detection in CAPTURE Mode.

### Counter\_INT\_Mask

Set this bit to allow an interrupt when T8 has a timeout.

### P34\_Out

This bit defines whether P34 is used as a normal output pin or the T8 output.

### T8 and T16 Common Functions—CTR1(0D)01h

This register controls the functions common with the T8 and T16.

[Table 7](#) lists and briefly describes the fields for this register.



Table 7. CTR1(0D)01h T8 and T16 Common Functions

| Field                              | Bit Position |     | Value | Description           |
|------------------------------------|--------------|-----|-------|-----------------------|
| Mode                               | 7-----       | R/W | 0*    | TRANSMIT Mode         |
|                                    |              |     | 1     | DEMODULATION Mode     |
| P36_Out/<br>Capture_Input          | -6-----      | R/W | 0*    | TRANSMIT Mode         |
|                                    |              |     | 1     | Port Output           |
|                                    |              |     | 0*    | T8/T16 Output         |
|                                    |              |     | 1     | DEMODULATION Mode     |
| T8/T16_Logic/<br>Edge_Detect       | --54----     | R/W | 00**  | P31                   |
|                                    |              |     | 01    | P20                   |
|                                    |              |     | 10    | TRANSMIT Mode         |
|                                    |              |     | 11    | AND                   |
|                                    |              |     | 00**  | OR                    |
|                                    |              |     | 01    | NOR                   |
|                                    |              |     | 10    | NAND                  |
|                                    |              |     | 11    | DEMODULATION Mode     |
|                                    |              |     | 00**  | Falling Edge          |
|                                    |              |     | 01    | Rising Edge           |
| Transmit_Submode/<br>Glitch_Filter | ----32--     | R/W | 10    | Both Edges            |
|                                    |              |     | 11    | Reserved              |
|                                    |              |     | 00    | TRANSMIT Mode         |
|                                    |              |     | 01    | Normal Operation      |
|                                    |              |     | 10    | PING-PONG Mode        |
|                                    |              |     | 11    | T16_Out = 0           |
|                                    |              |     | 00    | T16_Out = 1           |
|                                    |              |     | 01    | DEMODULATION Mode     |
|                                    |              |     | 10    | No Filter             |
|                                    |              |     | 11    | 4 SCLK Cycle          |
| Initial_T8_Out/<br>Rising Edge     | -----1-      | R/W | 0     | 8 SCLK Cycle          |
|                                    |              |     | 1     | Reserved              |
|                                    |              | R   | 0     | TRANSMIT Mode         |
|                                    |              |     | 1     | T8_OUT is 0 Initially |
|                                    |              | W   | 0     | T8_OUT is 1 Initially |
|                                    |              |     | 1     | DEMODULATION Mode     |

**Table 7. CTR1(0D)01h T8 and T16 Common Functions (Continued)**

| Field                            | Bit Position |     | Value | Description            |
|----------------------------------|--------------|-----|-------|------------------------|
| Initial_T16_Out/<br>Falling_Edge | -----0       | R/W | 0     | TRANSMIT Mode          |
|                                  |              |     | 1     | T16_OUT is 0 Initially |
|                                  |              | R   | 0     | T16_OUT is 1 Initially |
|                                  |              |     | 1     | DEMULATION Mode        |
|                                  |              | W   | 0     | No Falling Edge        |
|                                  |              |     | 1     | Falling Edge Detected  |
|                                  |              |     | 0     | No Effect              |
|                                  |              |     | 1     | Reset Flag to 0        |

\*Default at Power-On Reset.

\*Indicates the value upon Power-On Reset. Not reset with a Stop Mode Recovery.

### Mode

If the result is 0, the counter/timers are in TRANSMIT mode, else, they are in DEMODULATION mode.

### P36\_Out/Demodulator\_Input

In TRANSMIT mode, this bit defines whether P36 is used as a normal output pin or the combined output of T8 and T16.

In DEMODULATION mode, this bit defines whether the input signal to the Counter/Timers is from P20 or P31.

If the input signal is from Port 31, a capture event generates an IRQ2 interrupt. To prevent generating an IRQ2, either disable the IRQ2 interrupt by clearing its IMR bit D2 or use P20 as the input.

### T8/T16\_Logic/Edge\_Detect

In TRANSMIT mode, this field defines how the outputs of T8 and T16 are combined (AND, OR, NOR, NAND).

In DEMODULATION mode, this field defines which edge is detected by the edge detector.

### Transmit\_Submode/Glitch\_Filter

In TRANSMIT mode, this field defines whether T8 and T16 are in the PING-PONG mode or in independent Normal operation mode. Setting this field to 'Normal Operation mode' terminates the 'PING-PONG mode' operation. When set to 10, T16 is immediately forced to a 0; a setting of 11 forces T16 to output a 1.

In DEMODULATION mode, this field defines the width of the glitch that must be filtered out.



### Initial\_T8\_Out/Rising\_Edge

In TRANSMIT mode, if 0, the output of T8 is set to 0 when it starts to count. If 1, the output of T8 is set to 1 when it starts to count. When the counter is not enabled and this bit is set to 1 or 0, T8\_OUT is set to the opposite state of this bit. This ensures that when the clock is enabled, a transition occurs to the initial state set by CTR1, D1.

In DEMODULATION mode, this bit is set to 1 when a rising edge is detected in the input signal. In order to reset the mode, a 1 should be written to this location.

### Initial\_T16 Out/Falling\_Edge

In TRANSMIT mode, if it is 0, the output of T16 is set to 0 when it starts to count. If it is 1, the output of T16 is set to 1 when it starts to count. This bit is effective only in NORMAL or PING-PONG mode (CTR1, D3; D2). When the counter is not enabled and this bit is set, T16\_OUT is set to the opposite state of this bit. This ensures that when the clock is enabled, a transition occurs to the initial state set by CTR1, D0.

In DEMODULATION mode, this bit is set to 1 when a falling edge is detected in the input signal. In order to reset it, a 1 should be written to this location.

► **Note:** *Modifying CTR1 (D1 or D0) while the counters are enabled causes unpredictable output from T8/16\_OUT.*

### CTR2 Counter/Timer 16 Control Register—CTR2(0D)02h

Table 8 lists and briefly describes the fields for this register.

**Table 8. CTR2(0D)02h: Counter/Timer16 Control Register**

| Field           | Bit Position |     | Value | Description                 |
|-----------------|--------------|-----|-------|-----------------------------|
| T16_Enable      | 7-----       | R   | 0*    | Counter Disabled            |
|                 |              |     | 1     | Counter Enabled             |
|                 |              | W   | 0     | Stop Counter                |
|                 |              |     | 1     | Enable Counter              |
| Single/Modulo-N | -6-----      | R/W | 0     | TRANSMIT Mode               |
|                 |              |     | 1     | Modulo-N                    |
|                 |              |     | 0     | Single Pass                 |
|                 |              |     | 1     | DEMODULATION Mode           |
| Time_Out        | --5-----     | R   | 0**   | T16 Recognizes Edge         |
|                 |              |     | 1     | T16 Does Not Recognize Edge |
|                 |              | W   | 0     | No Counter Timeout          |
|                 |              |     | 1     | Counter Timeout Occurred    |
|                 |              |     | 0     | No Effect                   |
|                 |              |     | 1     | Reset Flag to 0             |

**Table 8. CTR2(0D)02h: Counter/Timer16 Control Register (Continued)**

| Field            | Bit Position |     | Value                  | Description                                           |
|------------------|--------------|-----|------------------------|-------------------------------------------------------|
| T16_Clock        | ---43---     | R/W | 00**<br>01<br>10<br>11 | SCLK<br>SCLK/2<br>SCLK/4<br>SCLK/8                    |
| Capture_INT_Mask | -----2--     | R/W | 0**<br>1               | Disable Data Capture Int.<br>Enable Data Capture Int. |
| Counter_INT_Mask | -----1-      | R/W | 0*                     | Disable Timeout Int.<br>Enable Timeout Int.           |
| P35_Out          | -----0       | R/W | 0*<br>1                | P35 as Port Output<br>T16 Output on P35               |

\*Indicates the value upon Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with a Stop Mode Recovery.

**T16\_Enable**

This field enables T16 when set to 1.

**Single/Modulo-N**

In TRANSMIT mode, when set to 0, the counter reloads the initial value when it reaches the terminal count. When set to 1, the counter stops when the terminal count is reached.

In DEMODULATION mode, when set to 0, T16 captures and reloads on detection of all the edges. When set to 1, T16 captures and detects on the first edge but ignores the subsequent edges. For details, see [T16 DEMODULATION Mode](#) on page 36.

**Time\_Out**

This bit is set when T16 times out (terminal count reached). To reset the bit, write a 1 to this location.

**T16\_Clock**

This bit defines the frequency of the input signal to Counter/Timer16.

**Capture\_INT\_Mask**

This bit is set to allow an interrupt when data is captured into LO16 and HI16.

**Counter\_INT\_Mask**

Set this bit to allow an interrupt when T16 times out.



### P35\_Out

This bit defines whether P35 is used as a normal output pin or T16 output.

### CTR3 T8/T16 Control Register—CTR3(0D)03h

[Table 9](#) lists and briefly describes the fields for this register. This register allow the T8 and T16 counters to be synchronized.

**Table 9. CTR3(0D)03h T8/T16 Control Register**

|            |          |     |     |                    |
|------------|----------|-----|-----|--------------------|
| T16_Enable | 7-----   | R   | 0*  | Counter Disabled   |
|            |          | R   | 1   | Counter Enabled    |
|            |          | W   | 0   | Stop Counter       |
|            |          | W   | 1   | Enable Counter     |
| T8 Enable  | -6-----  | R/W | 0** | Counter Disabled   |
|            |          |     | 1   | Counter Enabled    |
|            |          |     | 0   | Stop Counter       |
|            |          |     | 1   | Enable Counter     |
| Sync Mode  | --5----- | R/W | 0*  | Disable Sync Mode  |
|            |          |     | 1   | Enable Sync Mode   |
| Reserved   | ---43210 | R/W | 1   | Always reads 11111 |
|            |          |     | x   | No Effect          |

\*Indicates the value upon Power-On Reset.


\*\*\*Indicates the value upon Power-On Reset. Not reset with a Stop Mode Recovery.

## Counter/Timer Functional Blocks

### Input Circuit

The edge detector monitors the input signal on P31 or P20. Based on CTR1 D5–D4, a pulse is generated at the Pos Edge or Neg Edge line when an edge is detected. Glitches in the input signal that have a width less than specified (CTR1 D3, D2) are filtered out (see [Figure 13](#)).



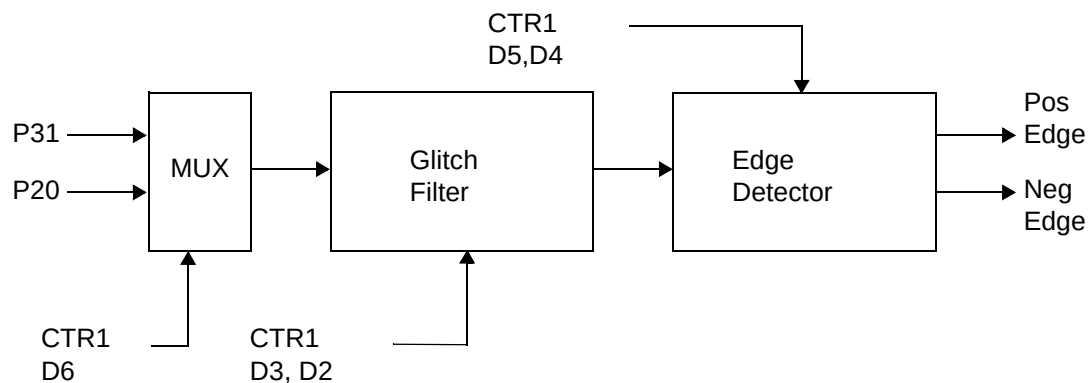

**Figure 13. Glitch Filter Circuitry**

#### **T8 TRANSMIT Mode**

Before T8 is enabled, the output of T8 depends on CTR1, D1. If it is 0, T8\_OUT is 1; if it is 1, T8\_OUT is 0. See [Figure 14](#) on page 30.


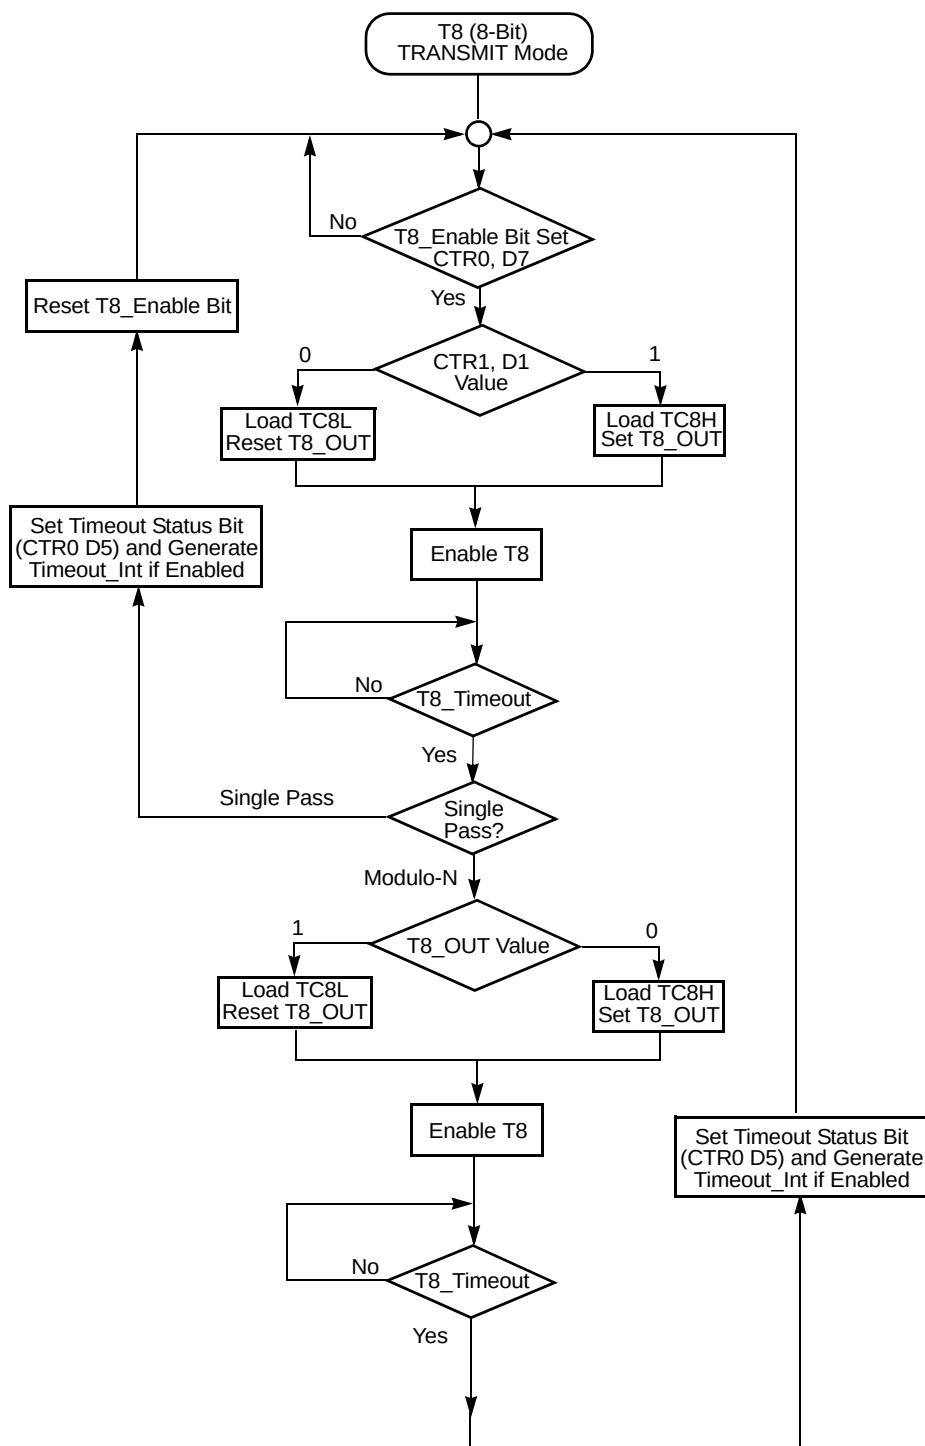


Figure 14. TRANSMIT Mode Flowchart

When T8 is enabled, the output T8\_OUT switches to the initial value (CTR1, D1). If the initial value (CTR1, D1) is 0, TC8L is loaded, else, TC8H is loaded into the counter. In SINGLE-PASS mode (CTR0, D6), T8 counts down to 0 and stops, T8\_OUT toggles, the timeout status bit (CTR0, D5) is set, and a timeout interrupt can be generated if it is enabled (CTR0, D1). In MODULO-N mode, upon reaching terminal count, T8\_OUT is toggled, but no interrupt is generated. From that point, T8 loads a new count (if the T8\_OUT level now is 0), TC8L is loaded; if it is 1, TC8H is loaded. T8 counts down to 0, toggles T8\_OUT, and sets the timeout status bit (CTR0, D5), thereby generating an interrupt if enabled (CTR0, D1). One cycle is complete. T8 then loads from TC8H or TC8L according to the T8\_OUT level and repeats the cycle. See Figure 15.

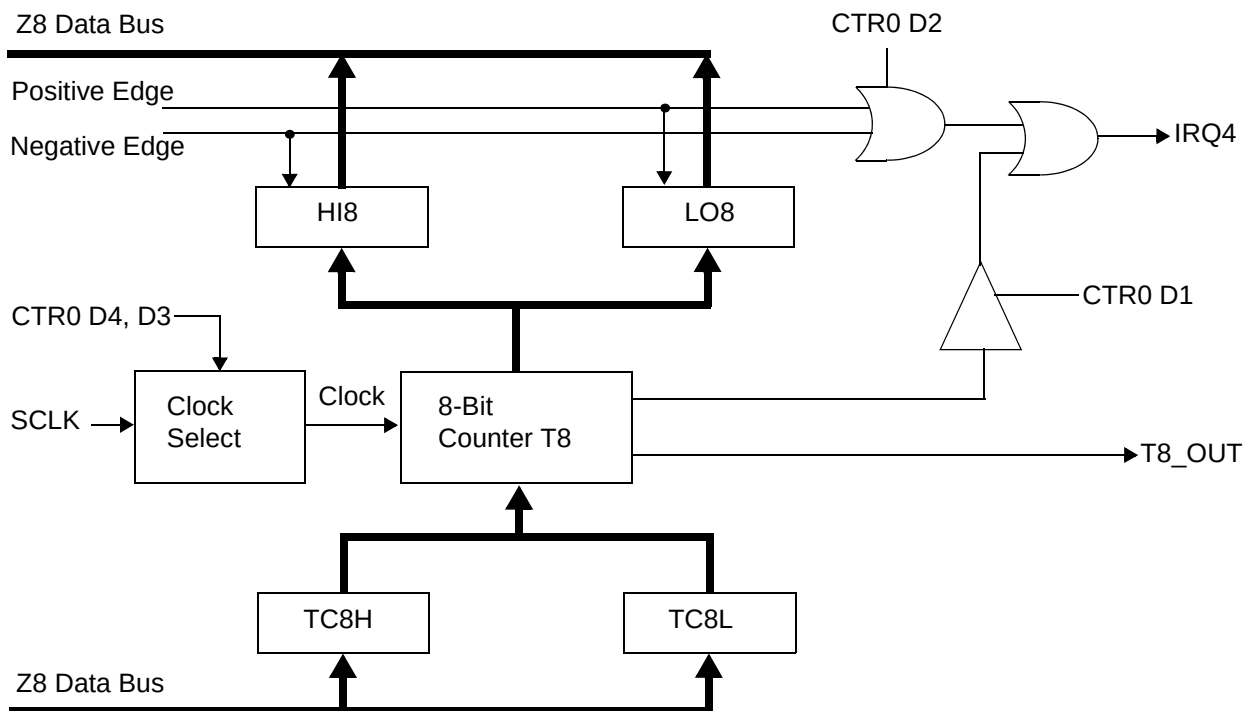

**Figure 15. 8-Bit Counter/Timer Circuits**

The values in TC8H or TC8L can be modified at any time. The new values take effect when they are loaded.



**Caution:** To ensure known operation do not write these registers at the time the values are to be loaded into the counter/timer. An initial count of 1 is not allowed (a non-function occurs). An initial count of 0 causes TC8 to count from 0 to FFh to FEh.




**Note:** The letter h denotes hexadecimal values.

Transition from 0 to FFh is not a timeout condition.




**Caution:** *Using the same instructions for stopping the counter/timers and setting the status bits is not recommended.*

Two successive commands are necessary. First, the counter/timers must be stopped. Second, the status bits must be reset. These commands are required because it takes one counter/timer clock interval for the initiated event to actually occur. See [Figure 16](#) and [Figure 17](#).

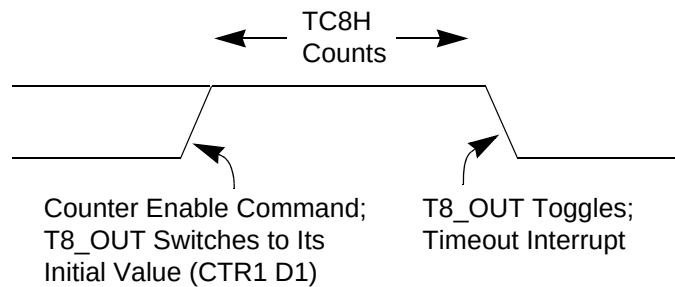

**Figure 16. T8\_OUT in SINGLE-PASS Mode**

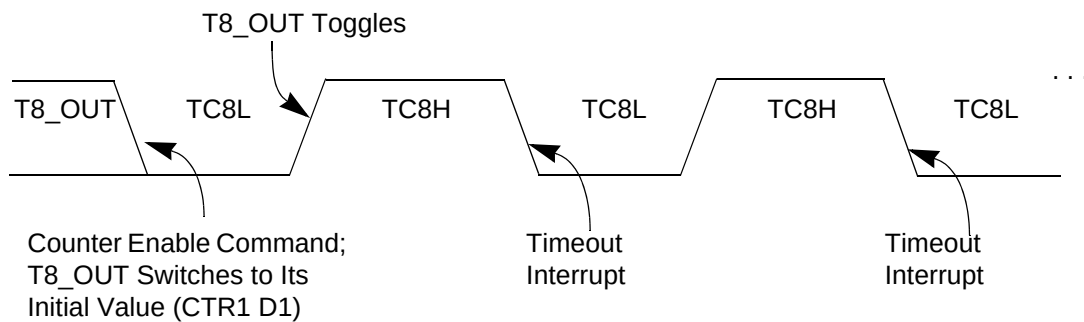


**Figure 17. T8\_OUT in MODULO-N Mode**

### T8 DEMODULATION Mode

You must program TC8L and TC8H to FFh. After T8 is enabled, when the first edge (rising, falling, or both depending on CTR1, D5; D4) is detected, it starts to count down. When a subsequent edge (rising, falling, or both depending on CTR1, D5; D4) is detected during counting, the current value of T8 is complemented and put into one of the capture registers. If it is a positive edge, data is put into LO8; if it is a negative edge, data is stored in HI8. From that point, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt is generated if enabled (CTR0, D2). Meanwhile, T8 is loaded with FFh and starts counting again. If T8 reaches 0, the timeout status bit (CTR0, D5) is set, and an interrupt

can be generated if enabled (CTR0, D1). T8 then continues counting from FFh (see [Figure 19](#) on page 34).

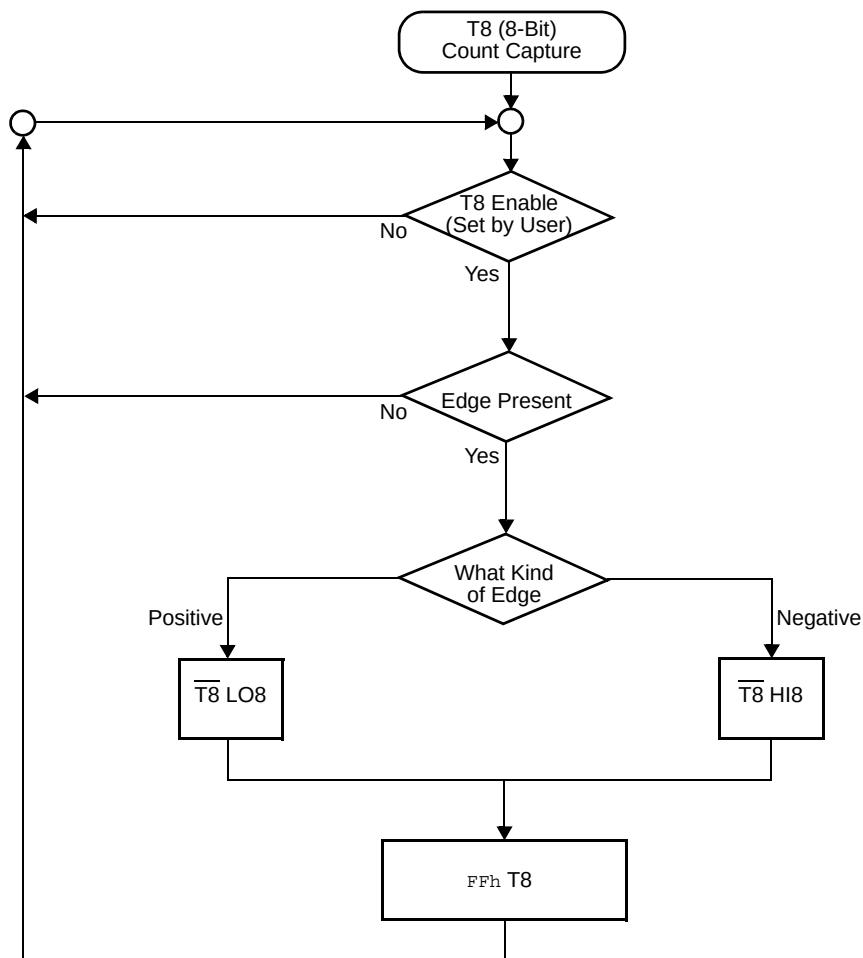

**Figure 18. DEMODULATION Mode Count Capture Flowchart**


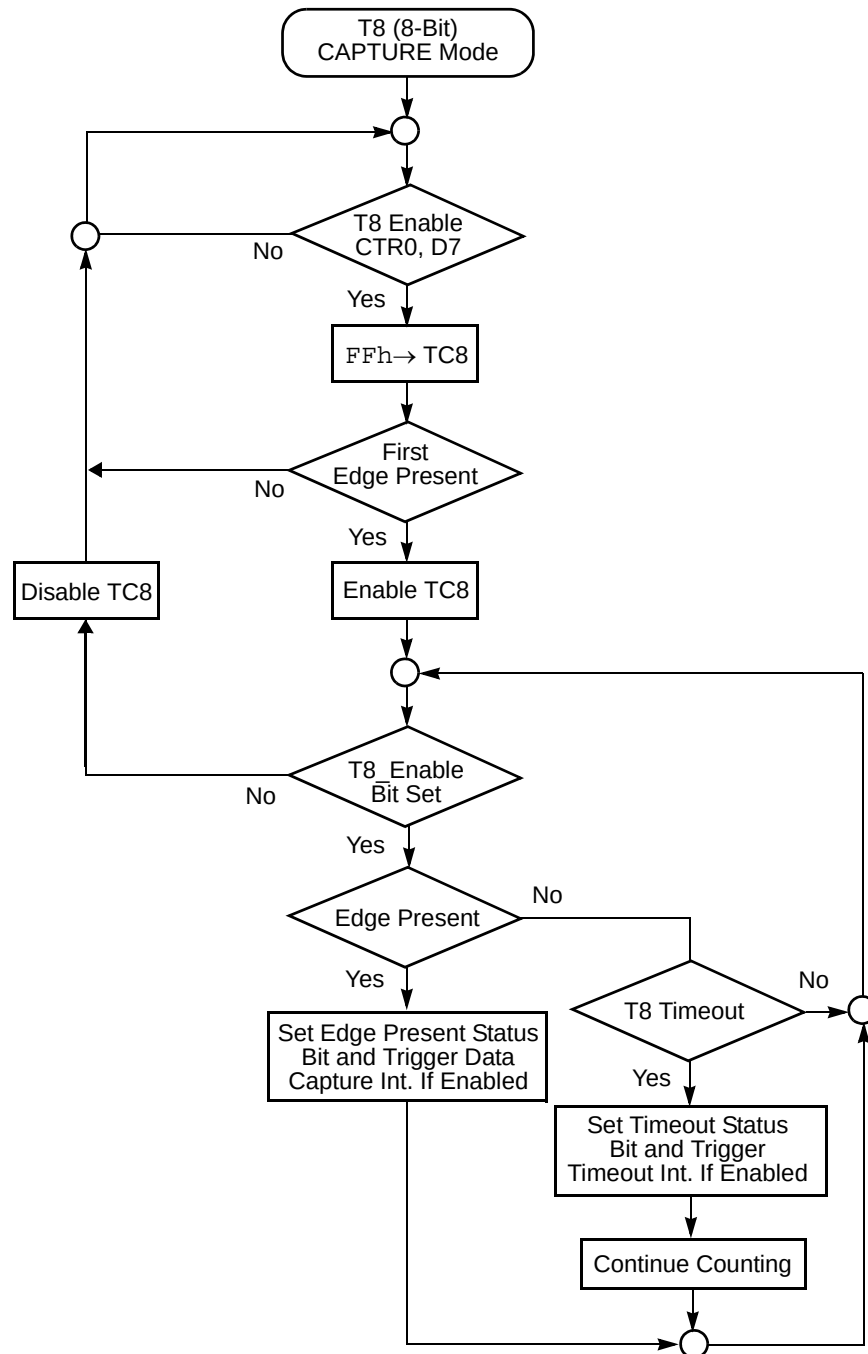


Figure 19. DEMODULATION Mode Flowchart

### T16 TRANSMIT Mode

In NORMAL or PING-PONG mode, the output of T16 when not enabled, is dependent on CTR1, D0. If it is a 0, T16\_OUT is a 1; if it is a 1, T16\_OUT is 0. You can force the output of T16 to either a 0 or 1 whether it is enabled or not by programming CTR1 D3; D2 to a 10 or 11.

When T16 is enabled, TC16H \* 256 + TC16L is loaded, and T16\_OUT is switched to its initial value (CTR1, D0). When T16 counts down to 0, T16\_OUT is toggled (in NORMAL or PING-PONG mode), an interrupt (CTR2, D1) is generated (if enabled), and a status bit (CTR2, D5) is set. See [Figure 20](#).

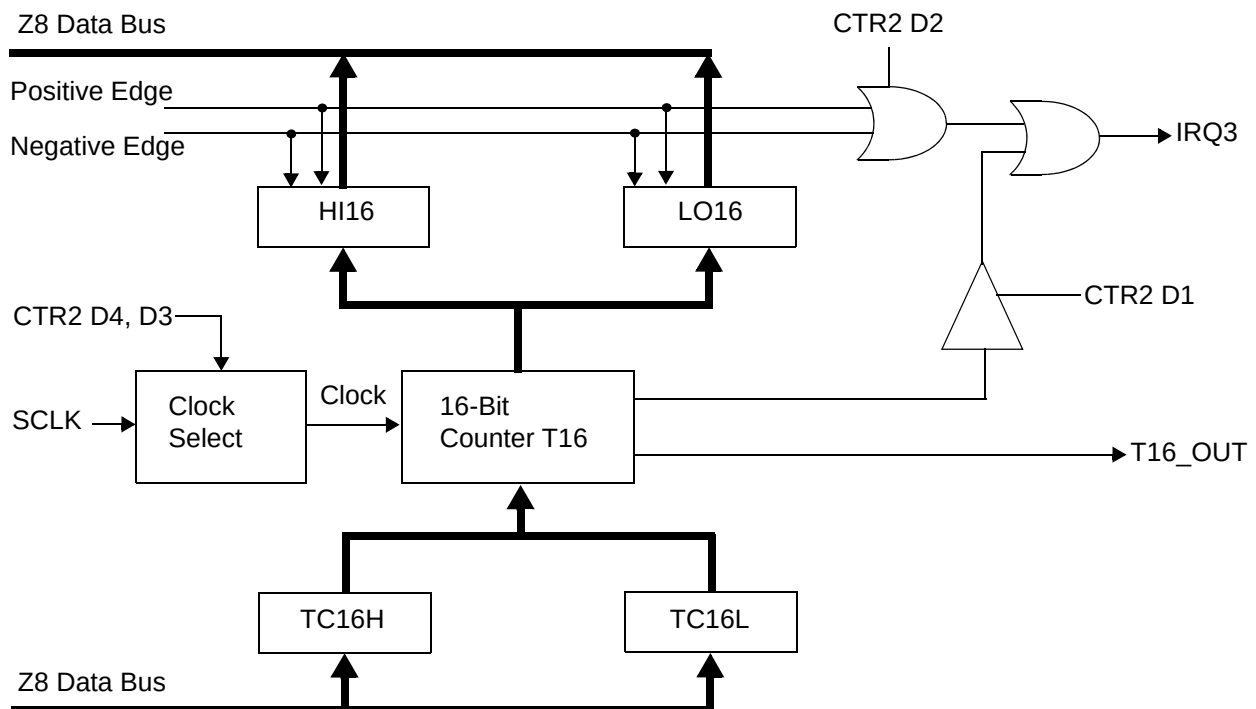

**Figure 20. 16-Bit Counter/Timer Circuits**

► **Note:** Global interrupts override this function as described in [Interrupts](#) on page 39.


If T16 is in SINGLE-PASS mode, it is stopped at this point (see [Figure 21](#) on page 36). If it is in MODULO-N mode, it is loaded with TC16H \* 256 + TC16L, and the counting continues (see [Figure 22](#) on page 36).

The values in TC16H and TC16L can be modified at any time. The new values take effect when they are loaded.




**Caution:**

*Do not load these registers at the time the values are to be loaded into the counter/timer to ensure known operation. An initial count of 1 is not allowed. An initial count of 0 causes T16 to count from 0 to FFFFh to FFFEh. Transition from 0 to FFFFh is not a time-out condition.*

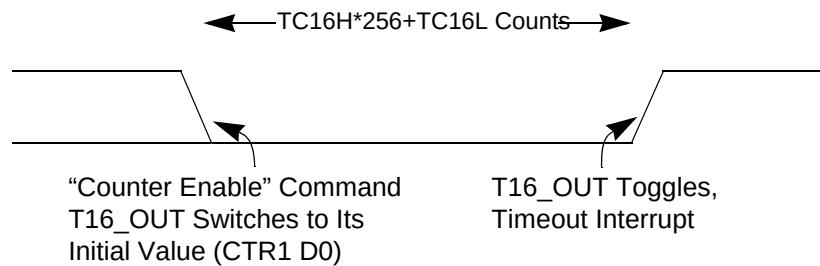

**Figure 21. T16\_OUT in SINGLE-PASS Mode**

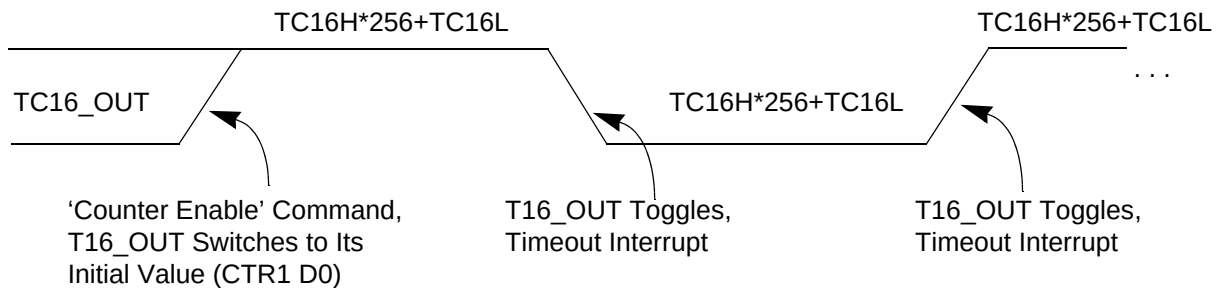

**Figure 22. T16\_OUT in MODULO-N Mode**

**T16 DEMODULATION Mode**

You must program TC16L and TC16H to FFh. Once T16 is enabled, and the first edge (rising, falling, or both depending on CTR1 D5; D4) is detected, T16 captures HI16 and LO16, reloads, and begins counting.

**If D6 of CTR2 Is 0**

When a subsequent edge (rising, falling, or both depending on CTR1, D5; D4) is detected during counting, the current count in T16 is complemented and put into HI16 and LO16. When data is captured, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt is generated if enabled (CTR2, D2). T16 is loaded with FFFFh and starts again.

This T16 mode is generally used to measure space time, the length of time between bursts of carrier signal (marks).



### If D6 of CTR2 Is 1

T16 ignores the subsequent edges in the input signal and continues counting down. A timeout of T8 causes T16 to capture its current value and generate an interrupt if enabled (CTR2, D2). In this case, T16 does not reload and continues counting. If the D6 bit of CTR2 is toggled (by writing a 0 then a 1 to it), T16 captures and reloads on the next edge (rising, falling, or both depending on CTR1, D5; D4), continuing to ignore subsequent edges.


This T16 mode generally measures mark time, the length of an active carrier signal burst.

If T16 reaches 0, T16 continues counting from FFFFh. Meanwhile, a status bit (CTR2 D5) is set, and an interrupt timeout is generated if enabled (CTR2 D1).

### PING-PONG Mode

This operation mode is valid only in TRANSMIT mode. T8 and T16 must be programmed in SINGLE-PASS mode (CTR0, D6; CTR2, D6), and Ping-Pong mode must be programmed in CTR1, D3; D2. You can begin the operation by enabling either T8 or T16 (CTR0, D7 or CTR2, D7). For example, if T8 is enabled, T8\_OUT is set to this initial value (CTR1, D1). According to T8\_OUT's level, TC8H or TC8L is loaded into T8. After the terminal count is reached, T8 is disabled, and T16 is enabled. T16\_OUT then switches to its initial value (CTR1, D0), data from TC16H and TC16L is loaded, and T16 starts to count. After T16 reaches the terminal count, it stops, T8 is enabled again, repeating the entire cycle. Interrupts are allowed when T8 or T16 reaches terminal control (CTR0, D1; CTR2, D1). To stop the Ping-Pong operation, write 00 to bits D3 and D2 of CTR1. See [Figure 23](#).


► **Note:** Enabling Ping-Pong operation while the counter/timers are running might cause intermittent counter/timer function. Disable the counter/timers and reset the status Flags before instituting this operation.

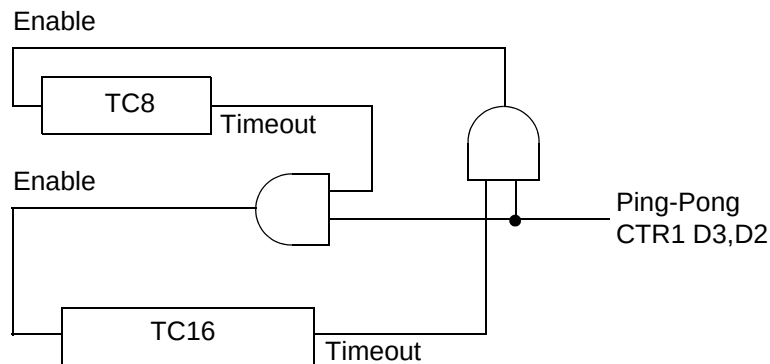

**Figure 23. PING-PONG Mode Diagram**

### Initiating PING-PONG Mode

Ensure that both counter/timers are not running. Set T8 into SINGLE-PASS mode (CTR0, D6), set T16 into SINGLE-PASS mode (CTR2, D6), and set the PING-PONG mode (CTR1, D2; D3). These instructions can be in random order. Finally, start PING-PONG mode by enabling either T8 (CTR0, D7) or T16 (CTR2, D7). See [Figure 23](#) on page 38.

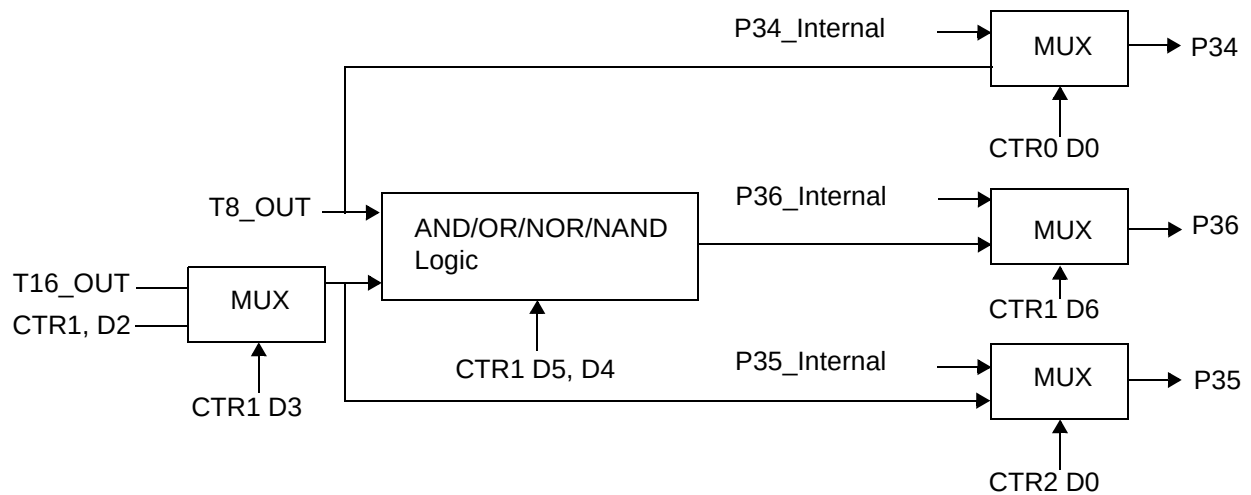

**Figure 24. Output Circuit**

The initial value of T8 or T16 must not be 1. If you stop the timer and restart the timer, reload the initial value to avoid an unknown previous value.

### During PING-PONG Mode

The enable bits of T8 and T16 (CTR0, D7; CTR2, D7) are set and cleared alternately by hardware. The timeout bits (CTR0, D5; CTR2, D5) are set every time the counter/timers reach the terminal count.

### Timer Output

The output logic for the timers is displayed in [Figure 24](#). P34 is used to output T8-OUT when D0 of CTR0 is set. P35 is used to output the value of T16-OUT when D0 of CTR2 is set. When D6 of CTR1 is set, P36 outputs the logic combination of T8-OUT and T16-OUT determined by D5 and D4 of CTR1.




## Interrupts

The Crimzon ZLR16300 features six different interrupts (see [Table 10](#) on page 41). The interrupts are maskable and prioritized (see [Figure 25](#) on page 40). The six sources are divided as follows:

- Three sources are claimed by Port 3 lines P33–P31
- Two by the counter/timers (see [Table 10](#) on page 41)
- One for low-voltage detection

The Interrupt Mask Register (globally or individually) enables or disables the six interrupt requests.

The source for IRQ is determined by bit 1 of the Port 3 mode register (P3M). When in DIGITAL mode, Pin P33 is the source. When in ANALOG mode the output of the Stop Mode Recovery source logic is used as the source for the interrupt. See [Figure 30](#) on page 47.

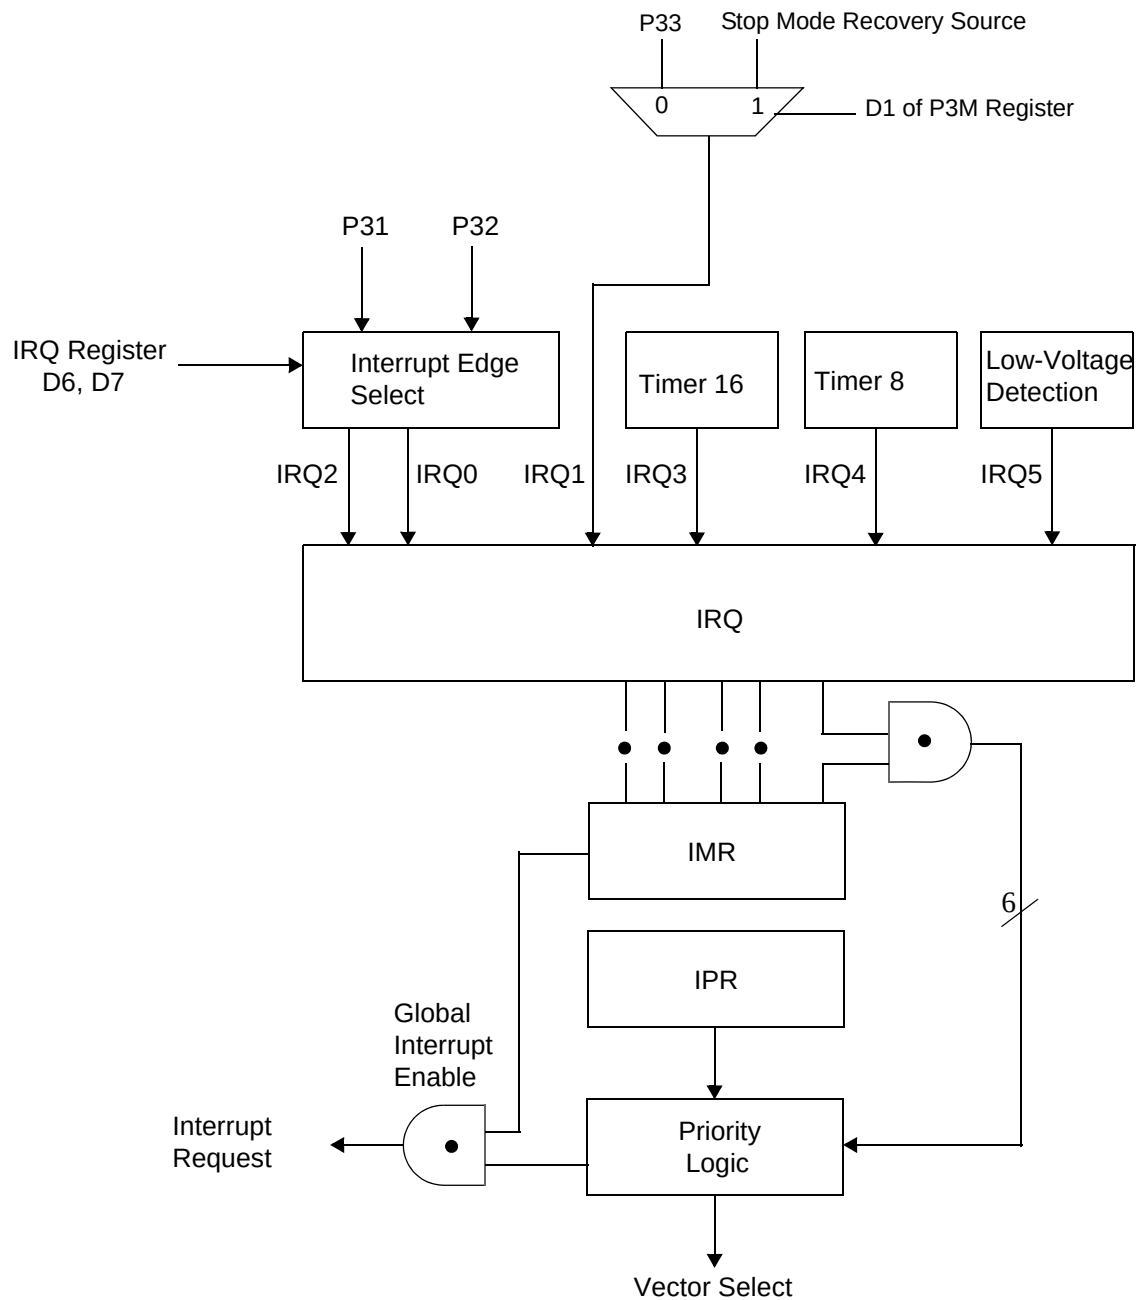

**Figure 25. Interrupt Block Diagram**

**Table 10. Interrupt Types, Sources, and Vectors**

| Name | Source               | Vector Location | Comments                                       |
|------|----------------------|-----------------|------------------------------------------------|
| IRQ0 | P32                  | 0,1             | External (P32), Rising, Falling Edge Triggered |
| IRQ1 | P33                  | 2,3             | External (P33), Falling Edge Triggered         |
| IRQ2 | P31, T <sub>IN</sub> | 4,5             | External (P31), Rising, Falling Edge Triggered |
| IRQ3 | T16                  | 6,7             | Internal                                       |
| IRQ4 | T8                   | 8,9             | Internal                                       |
| IRQ5 | LVD                  | 10,11           | Internal                                       |

When more than one interrupt is pending, priorities are resolved by a programmable priority encoder controlled by the Interrupt Priority Register. An interrupt machine cycle activates when an interrupt request is granted. As a result, all subsequent interrupts are disabled, and the Program Counter and Status Flags are saved. The cycle then branches to the Program Memory vector location reserved for that interrupt. All Crimzon ZLR16300 interrupts are vectored through locations in the Program Memory. This memory location and the next byte contain the 16-bit address of the interrupt service routine for that particular interrupt request. To accommodate polled interrupt systems, interrupt inputs are masked, and the Interrupt Request register is polled to determine which of the interrupt requests require service.

An interrupt resulting from AN1 is mapped into IRQ2, and an interrupt from AN2 is mapped into IRQ0. Interrupts IRQ2 and IRQ0 can be rising, falling, or both edge triggered. You can program these interrupts. The software can poll to identify the state of the pin.

Programming bits for the Interrupt Edge Select are located in the IRQ Register (R250), bits D7 and D6. [Table 11](#) indicates the IRQ configuration.

**Table 11. IRQ Register**

| IRQ |    | Interrupt Edge |            |
|-----|----|----------------|------------|
| D7  | D6 | IRQ2 (P31)     | IRQ0 (P32) |
| 0   | 0  | F              | F          |
| 0   | 1  | F              | R          |
| 1   | 0  | R              | F          |
| 1   | 1  | R/F            | R/F        |


**Note:** F = Falling Edge; R = Rising Edge.

## Clock

The device's on-chip oscillator has a high-gain, parallel-resonant amplifier for connection to a crystal, ceramic resonator, or any suitable external clock source (XTAL1 = Input, XTAL2 = Output). The crystal must be AT cut, 1 MHz to 8 MHz (maximum) with a series resistance (RS) less than or equal to 100  $\Omega$ . The on-chip oscillator is driven with a suitable external clock source.

The crystal must be connected across XTAL1 and XTAL2 using the recommended capacitors from each pin to ground. The typical capacitor value is 10 pF for 8 MHz.

► **Note:** Check with the crystal supplier for the optimum capacitance.

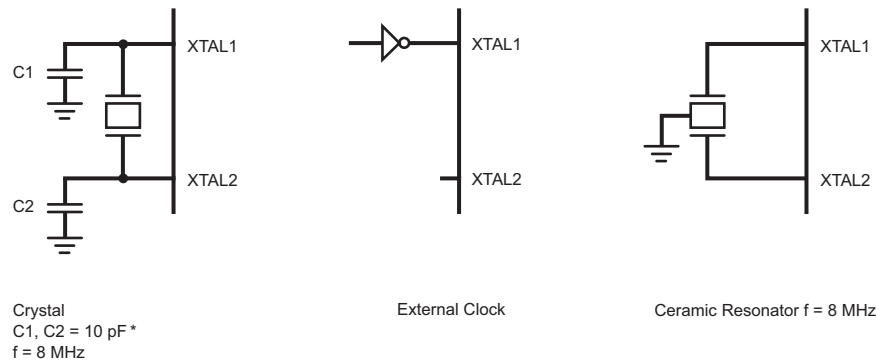

\*Note: preliminary value.

**Figure 26. Oscillator Configuration**

Maxim's IR MCU supports crystal, resonator, and oscillator. Most resonators have a frequency tolerance of less than  $\pm 0.5\%$ , which is enough for remote control application. Resonator has a very fast startup time, which is around few hundred microseconds. Most crystals have a frequency tolerance of less than 50 ppm ( $\pm 0.005\%$ ). However, crystal needs longer startup time than the resonator. The large loading capacitance slows down the oscillation startup time. Maxim suggests not to use more than 10 pF loading capacitor for the crystal. If the stray capacitance of the PCB or the crystal is high, the loading capacitance C1 and C2 must be reduced further to ensure stable oscillation before the  $T_{POR}$  (Power-On Reset time is typically 5–6 ms, see [Table 18](#) on page 75).

For SMR operation, bit 5 of SMR register allows you to select the SMR delay, which is the  $T_{POR}$ . If SMR delay is not selected, the MCU executes instruction immediately after it wakes up from the STOP mode. If resonator or crystal is used as a clock source then SMR delay needs to be selected (bit 5 of SMR = 1).



For both resonator and crystal oscillator, the oscillation ground must go directly to the ground pin of the microcontroller. The oscillation ground must use the shortest distance from the microcontroller ground pin and it must be isolated from other connections.

## Power Management

### Power-On Reset

A timer circuit clocked by a dedicated on-board RC-oscillator is used for the Power-On Reset timer function. The POR time allows  $V_{DD}$  and the oscillator circuit to stabilize before instruction execution begins.

The POR timer circuit is a one-shot timer triggered by one of three conditions:

1. Power Fail to Power OK status, including Waking up from  $V_{BO}$  Standby.
2. Stop Mode Recovery (if D5 of SMR = 1).
3. WDT Timeout.

The POR timer is 2.5 ms minimum. Bit 5 of the Stop-Mode Register determines whether the POR timer is bypassed after Stop Mode Recovery (typical for external clock).

### HALT Mode

This instruction turns Off the internal CPU clock, but not the XTAL oscillation. The counter/timers and external interrupts IRQ0, IRQ1, IRQ2, IRQ3, IRQ4, and IRQ5 remain active. The devices are recovered by interrupts, either externally or internally generated. An interrupt request must be executed (enabled) to exit HALT mode. After the interrupt service routine, the program continues from the instruction after the HALT.

### STOP Mode

This instruction turns OFF the internal clock and external crystal oscillation, reducing the standby current to 10  $\mu$ A or less. STOP mode is terminated only by a reset, such as WDT timeout, POR or SMR. This condition causes the processor to restart the application program at address 000Ch. In order to enter STOP (or HALT) mode, first flush the instruction pipeline to avoid suspending execution in mid-instruction. Execute an NOP instruction (Opcode = FFh) immediately before the appropriate sleep instruction, as follows:

|    |      |                      |
|----|------|----------------------|
| FF | NOP  | ; clear the pipeline |
| 6F | STOP | ; enter Stop Mode    |
| or |      |                      |
| FF | NOP  | ; clear the pipeline |
| 7F | HALT | ; enter Halt Mode    |




## Port Configuration

### Port Configuration Register

The Port Configuration (PCON) register (see [Figure 27](#)) configures the comparator output on Port 3. It is located in the expanded register file at Bank F, location 00.

PCON (0F) 00H

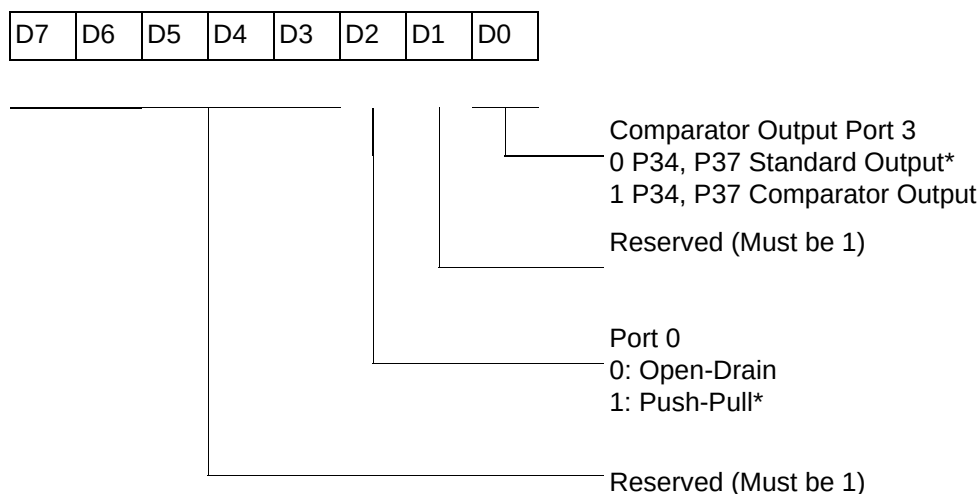

\*Default setting after reset.

**Figure 27. Port Configuration Register (PCON) (Write Only)**

### Comparator Output Port 3 (D0)

Bit 0 controls the comparator used in Port 3. A 1 in this location brings the comparator outputs to P34 and P37, and a 0 releases the Port to its standard I/O configuration.

### Port 0 Output Mode (D2)

Bit 2 controls the output mode of port 0. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.

## Stop Mode Recovery

### Stop Mode Recovery Register


This register selects the clock divide value and determines the mode of Stop Mode Recovery (see [Figure 28](#) on page 45). All bits are write only except bit 7, which is read only. Bit





7 is a Flag bit that is hardware set on the condition of Stop recovery and reset by a power-on cycle. Bit 6 controls whether a low level or a high level at the XOR-gate input (see [Figure 30](#) on page 47) is required from the recovery source. Bit 5 controls the reset delay after recovery. Bits D2, D3, and D4 of the SMR register specify the source of the Stop Mode Recovery signal. Bits D0 determines if SCLK/TCLK are divided by 16 or not. The SMR is located in Bank F of the Expanded Register File at address 0BH.

SMR (0F) 0BH

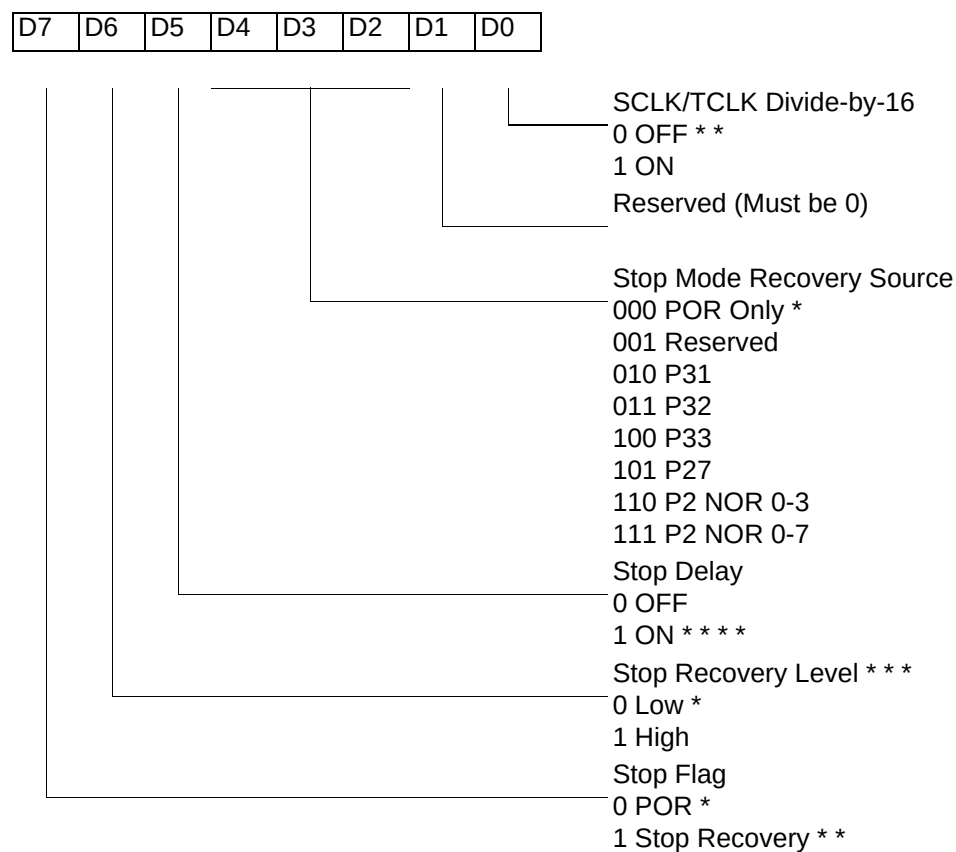

\*Default after Power-On Reset or Watchdog Reset.

\*\*Default setting after Reset and Stop Mode Recovery.

\* \* \*At the XOR gate input.


\* \* \* \*Default setting after reset. Must be 1 if using a crystal or resonator clock source.

**Figure 28. Stop Mode Recovery Register**

#### SCLK/TCLK Divide-by-16 Select (D0)

D0 of the SMR controls a divide-by-16 prescaler of SCLK/TCLK (see [Figure 29](#) on page 46). This control selectively reduces device power consumption during normal processor

execution (SCLK control) and/or HALT mode (where TCLK sources interrupt logic). After Stop Mode Recovery, this bit is set to 0.

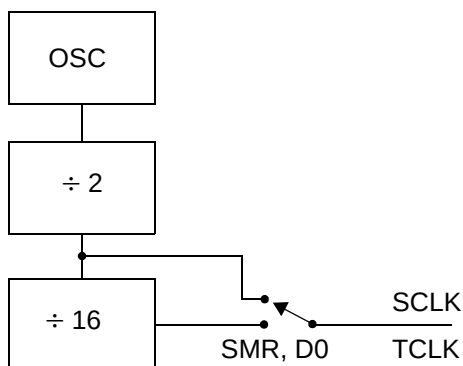

**Figure 29. SCLK Circuit**

### Stop Mode Recovery Register 2—SMR2(0F)0DH

Table 12 lists and describes the fields for this register.

**Table 12. SMR2(F)0DH:Stop Mode Recovery Register 2\***

| Field          | Bit Position | Value                                                               | Description                                                                                                                                                                                      |
|----------------|--------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reserved       | 7-----       | 0                                                                   | Reserved (Must be 0)                                                                                                                                                                             |
| Recovery Level | -6-----      | W 0 <sup>†</sup><br>1                                               | Low<br>High                                                                                                                                                                                      |
| Reserved       | --5-----     | 0                                                                   | Reserved (Must be 0)                                                                                                                                                                             |
| Source         | ---432--     | W 000 <sup>†</sup><br>001<br>010<br>011<br>100<br>101<br>110<br>111 | A. POR Only<br>B. NAND of P23–P20<br>C. NAND of P27–P20<br>D. NOR of P33–P31<br>E. NAND of P33–P31<br>F. NOR of P33–P31, P00, P07<br>G. NAND of P33–P31, P00, P07<br>H. NAND of P33–P31, P22–P20 |
| Reserved       | -----10      | 00                                                                  | Reserved (Must be 0)                                                                                                                                                                             |

\*Port pins configured as outputs are ignored as an SMR recovery source.

<sup>†</sup>Indicates the value at Power-On Reset.



### Stop Mode Recovery Source (D2, D3, and D4)

These three bits of the SMR specify the wake-up source of the Stop recovery (see Figure 30 on page 47 and Table 13 on page 48).

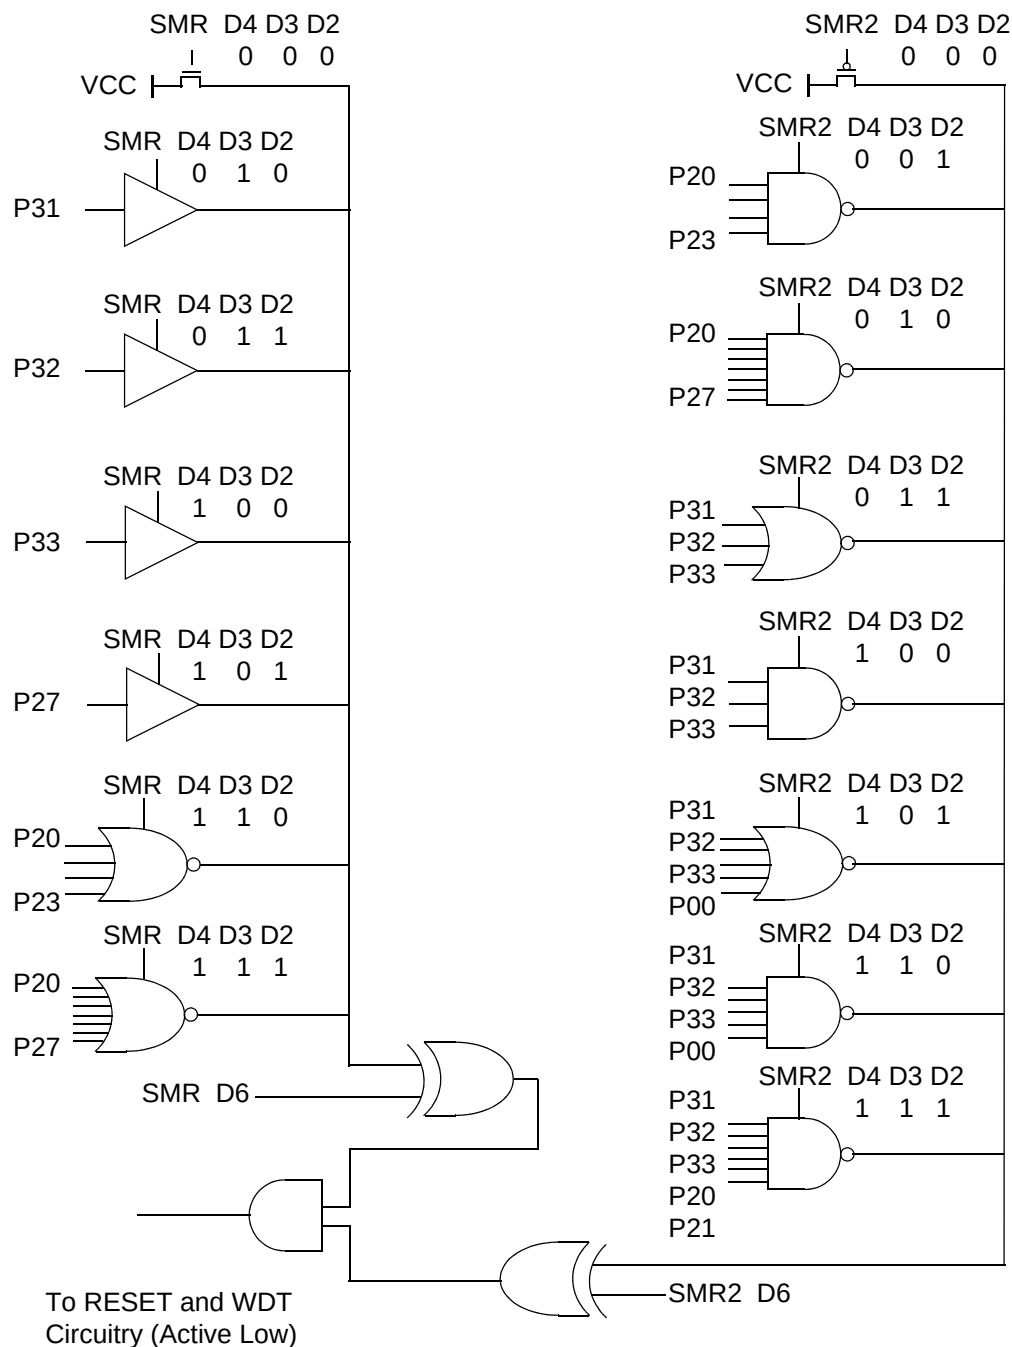


Figure 30. Stop Mode Recovery Source

**Table 13. Stop Mode Recovery Source**

| SMR: 432 |    |    | Operation                          |
|----------|----|----|------------------------------------|
| D4       | D3 | D2 | Description of Action              |
| 0        | 0  | 0  | POR and/or external reset recovery |
| 0        | 0  | 1  | Reserved                           |
| 0        | 1  | 0  | P31 transition                     |
| 0        | 1  | 1  | P32 transition                     |
| 1        | 0  | 0  | P33 transition                     |
| 1        | 0  | 1  | P27 transition                     |
| 1        | 1  | 0  | Logical NOR of P20 through P23     |
| 1        | 1  | 1  | Logical NOR of P20 through P27     |

- **Note:** Any Port 2 bit defined as an output drives the corresponding input to the default state. This condition allows the remaining inputs to control the AND/OR function. For other recovery sources, see [Stop Mode Recovery Register 2 \(SMR2\)](#).

#### Stop Mode Recovery Delay Select (D5)

This bit, if Low, disables the  $T_{POR}$  delay after Stop Mode Recovery. The default configuration of this bit is 1. If the 'fast' wake-up is selected, the Stop Mode Recovery source must be kept active for at least 10  $T_{pC}$ .

- **Note:** This bit must be set to 1 if using a crystal or resonator clock source. The  $T_{POR}$  delay allows the clock source to stabilize before executing instructions.

#### Stop Mode Recovery Edge Select (D6)

A 1 in this bit position indicates that a High level on any one of the recovery sources wakes the Crimzon ZLR16300 from STOP mode. A 0 indicates Low level recovery. The default is 0 on POR.

#### Cold or Warm Start (D7)


This bit is read only. It is set to 1 when the device is recovered from STOP mode. The bit is set to 0 when the device reset is other than SMR.

#### Stop Mode Recovery Register 2 (SMR2)

This register determines the mode of Stop Mode Recovery for SMR2 (see [Figure 31](#) on page 49).



SMR2 (0F) DH

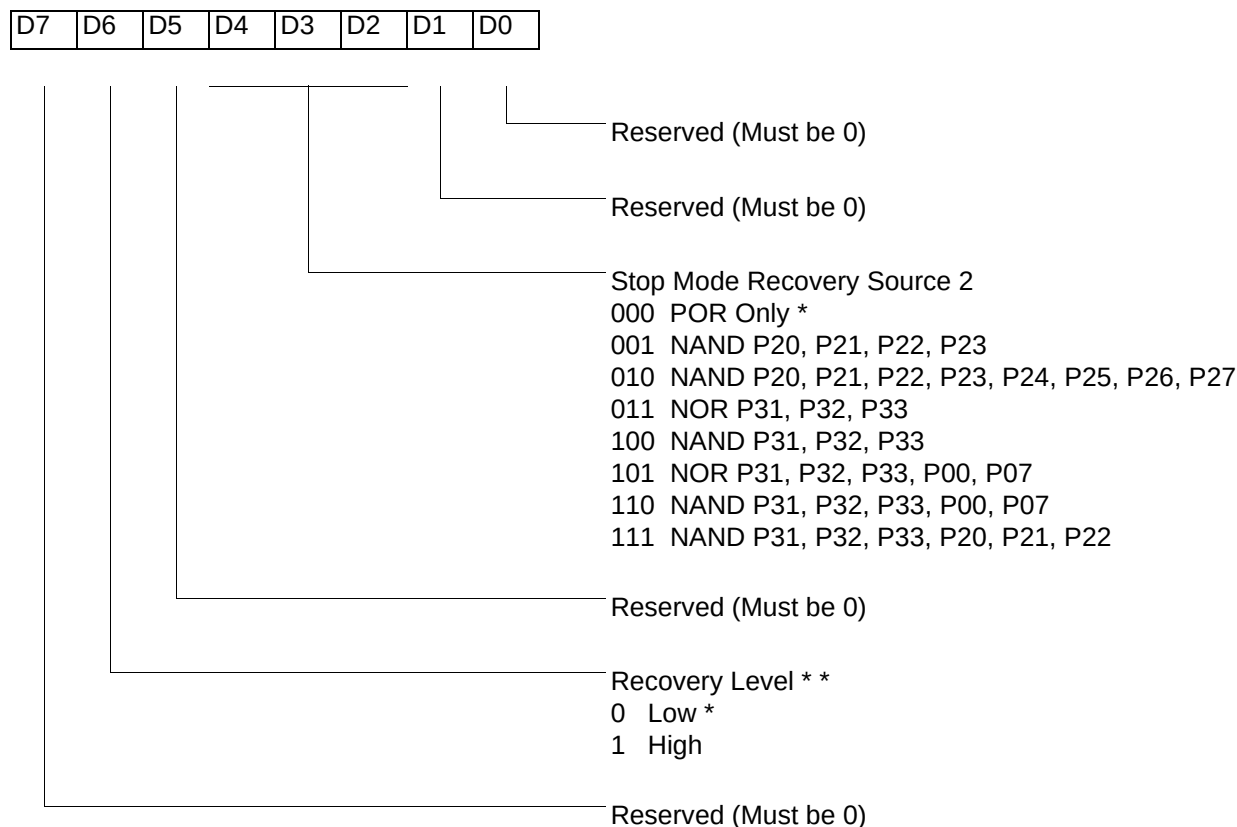

**Note:** If used in conjunction with SMR, either of the two specified events causes a Stop Mode Recovery.

\*Default setting after reset.

\*\*At the XOR gate input.

**Figure 31. Stop Mode Recovery Register 2 ((0F) DH:D2–D4, D6 Write Only)**

If SMR2 is used in conjunction with SMR, either of the specified events causes a Stop Mode Recovery.

► **Note:** Port pins configured as outputs are ignored as an SMR or SMR2 recovery source. For example, if the NAND or P23–P20 is selected as the recovery source and P20 is configured as an output, the remaining SMR pins (P23–P21) form the NAND equation.




## Watchdog Timer Mode

### Watchdog Timer Mode Register (WDTMR)

The Watchdog Timer is a retriggerable one-shot timer that resets the Z8 if it reaches its terminal count. The WDT must initially be enabled by executing the WDT instruction. On subsequent executions of the WDT instruction, the WDT is refreshed. The WDT circuit is driven by an on-board RC-oscillator. The WDT instruction affects the Zero (Z), Sign (S), and Overflow (V) Flags.

The POR clock source the internal RC-oscillator. Bits 0 and 1 of the WDT register control a tap circuit that determines the minimum timeout period. Bit 2 determines whether the WDT is active during HALT, and Bit 3 determines WDT activity during STOP. Bits 4 through 7 are reserved (see Figure 32). This register is accessible only during the first 60 processor cycles (120 XTAL clocks) from the execution of the first instruction after Power-On Reset, Watchdog Reset, or a Stop Mode Recovery (see Figure 31 on page 49). After this point, the register cannot be modified by any means (intentional or otherwise). The WDTMR cannot be read. The register is located in Bank F of the Expanded Register File at address location 0Fh. It is organized as displayed in Figure 32.

WDTMR (0F) 0FH

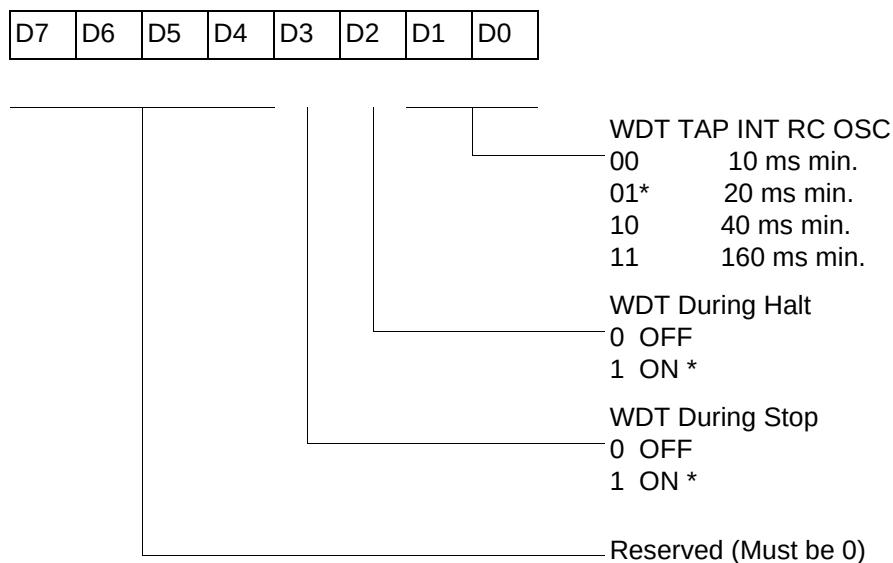

\*Default setting after reset.

**Figure 32. Watchdog Timer Mode Register (Write Only)**

**WDT Time Select (D0, D1)**


This bit selects the WDT time period. It is configured as indicated in [Table 14](#).

**Table 14. Watchdog Timer Time Select**

| D1 | D0 | Timeout of Internal RC-Oscillator |
|----|----|-----------------------------------|
| 0  | 0  | 10 ms min.                        |
| 0  | 1  | 20 ms min.                        |
| 1  | 0  | 40 ms min.                        |
| 1  | 1  | 160 ms min.                       |

**WDTMR During Halt (D2)**

This bit determines whether the WDT is active or not during HALT mode. A 1 indicates active during HALT. The default is 1. See [Figure 33](#) on page 52.

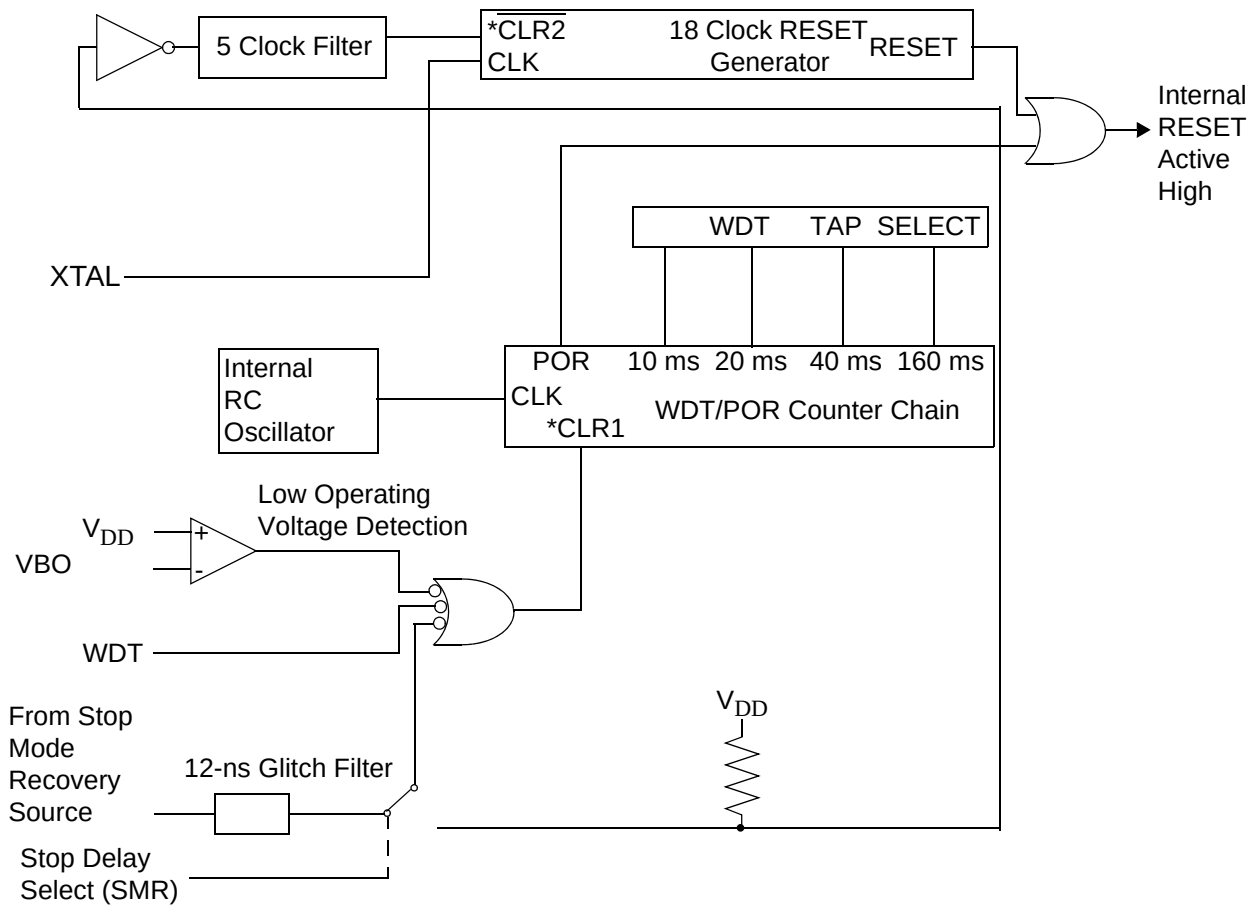

\*CLR1 and  $\overline{\text{CLR2}}$  enable the WDT/POR and 18 Clock Reset timers respectively upon a Low-to-High input translation.

**Figure 33. Resets and WDT**

### WDTMR During Stop (D3)

This bit determines whether or not the WDT is active during STOP mode. A 1 indicates active during STOP. The default is 1.

### ROM Selectable Options

There are five ROM Selectable Options to choose from based on ROM code requirements. These options are listed in [Table 15](#) on page 53.



**Table 15. ROM Selectable Options**

|                                    |        |
|------------------------------------|--------|
| Port 00–03 Pull-Ups                | ON/OFF |
| Port 04–07 Pull-Ups                | ON/OFF |
| Port 20–27 Pull-Up Port 3 Pull-Ups | ON/OFF |
| Port 3 Pull-Ups                    | ON/OFF |
| Watchdog Timer at Power-On Reset   | ON/OFF |

**Voltage Brownout/Standby**

An on-chip Voltage Comparator checks that the  $V_{DD}$  is at the required level for correct operation of the device. Reset is globally driven when  $V_{DD}$  falls below  $V_{BO}$ . A small drop in  $V_{DD}$  causes the XTAL1 and XTAL2 circuitry to stop the crystal or resonator clock. If the  $V_{DD}$  is allowed to stay above  $V_{RAM}$ , the RAM content is preserved. When the power level is returned to above  $V_{BO}$ , the device performs a POR and functions normally.

**Low-Voltage Detection****Low-Voltage Detection Register—LVD(0D)0CH**

► **Note:** *Voltage detection does not work at STOP mode.*

| Field | Bit Position |     |         | Description                    |
|-------|--------------|-----|---------|--------------------------------|
| LVD   | 765432---    |     |         | Reserved                       |
|       | -----2       | R   | 1<br>0* | HVD Flag set<br>HVD Flag reset |
|       | -----1-      | R   | 1<br>0* | LVD Flag set<br>LVD Flag reset |
|       | -----0       | R/W | 1<br>0* | Enable VD<br>Disable VD        |

\*Default after POR.

► **Note:** *Do not modify register P01M while checking a low-voltage condition. Switching noise of both ports 0 and 1 together might trigger the LVD Flag.*



## Voltage Detection and Flags

The Voltage Detection register (LVD, register *0Ch* at the expanded register bank *0Dh*) offers an option of monitoring the  $V_{CC}$  voltage. The Voltage Detection is enabled when bit 0 of LVD register is set. When Voltage Detection is enabled, the  $V_{CC}$  level is monitored in real time. The Flags in the LVD register valid 20 us after Voltage Detection is enabled. The HVD Flag (bit 2 of the LVD register) is set only if  $V_{CC}$  is lower than the  $V_{HVD}$ . When Voltage Detection is enabled, the LVD Flag also triggers IRQ5. The IRQ bit 5 latches the low-voltage condition until it is cleared by instructions or reset. The IRQ5 interrupt is served if it is enabled in the IMR register. Otherwise, bit 5 of IRQ register is latched as a Flag only.


► **Note:** *If it is necessary to receive an LVD interrupt upon power-up at an operating voltage lower than the low battery detect threshold, enable interrupts using the Enable Interrupt instruction (EI) prior to enabling the voltage detection.*

## Expanded Register File Control Registers (0D)

The expanded register file control registers (0D) are displayed in [Figure 34](#) through [Figure 38](#) on page 59.


CTR0 (0D) 00H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

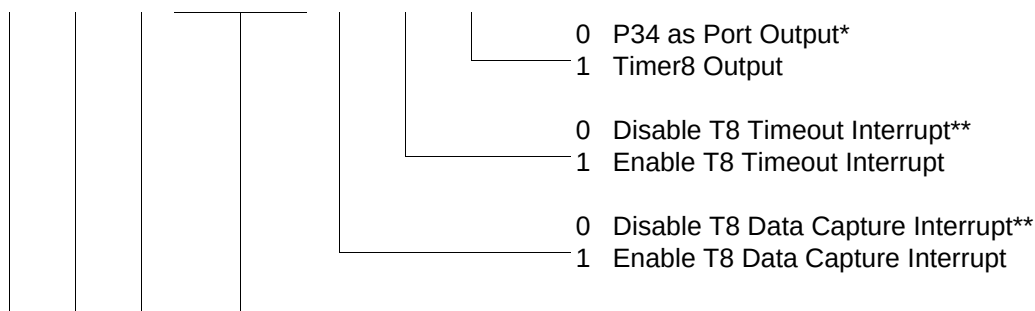



CTR0 (0D) 00H

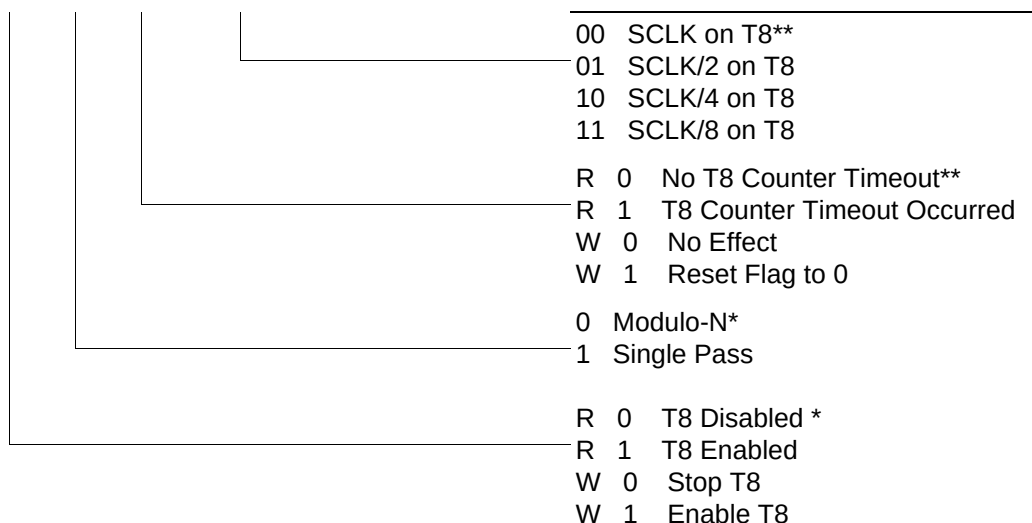

\*Default setting after reset.

\*\*Default setting after Reset. Not reset with a Stop Mode Recovery.

**Figure 34. TC8 Control Register ((0D) 00H: Read/Write Except Where Noted)**



CTR1 (0D) 01H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

|  |  |  |  |  |  |  |                               |
|--|--|--|--|--|--|--|-------------------------------|
|  |  |  |  |  |  |  | TRANSMIT Mode*                |
|  |  |  |  |  |  |  | R/W 0 T16_OUT is 0 initially* |
|  |  |  |  |  |  |  | 1 T16_OUT is 1 initially      |
|  |  |  |  |  |  |  | CAPTURE Mode                  |
|  |  |  |  |  |  |  | R 0 No Falling Edge Detection |
|  |  |  |  |  |  |  | R 1 Falling Edge Detection    |
|  |  |  |  |  |  |  | W 0 No Effect                 |
|  |  |  |  |  |  |  | W 1 Reset Flag to 0           |
|  |  |  |  |  |  |  | TRANSMIT Mode*                |
|  |  |  |  |  |  |  | R/W 0 T8_OUT is 0 initially*  |
|  |  |  |  |  |  |  | 1 T8_OUT is 1 initially       |
|  |  |  |  |  |  |  | CAPTURE Mode                  |
|  |  |  |  |  |  |  | R 0 No Rising Edge Detection  |
|  |  |  |  |  |  |  | R 1 Rising Edge Detection     |
|  |  |  |  |  |  |  | W 0 No Effect                 |
|  |  |  |  |  |  |  | W 1 Reset Flag to 0           |
|  |  |  |  |  |  |  | TRANSMIT Mode*                |
|  |  |  |  |  |  |  | 0 0 Normal Operation*         |
|  |  |  |  |  |  |  | 0 1 PING-PONG Mode            |
|  |  |  |  |  |  |  | 1 0 T16_OUT = 0               |
|  |  |  |  |  |  |  | 1 1 T16_OUT = 1               |
|  |  |  |  |  |  |  | CAPTURE Mode                  |
|  |  |  |  |  |  |  | 0 0 No Filter                 |
|  |  |  |  |  |  |  | 0 1 4 SCLK Cycle Filter       |
|  |  |  |  |  |  |  | 1 0 8 SCLK Cycle Filter       |
|  |  |  |  |  |  |  | 1 1 Reserved                  |
|  |  |  |  |  |  |  | TRANSMIT Mode/T8/T16 Logic    |
|  |  |  |  |  |  |  | 0 0 AND**                     |
|  |  |  |  |  |  |  | 0 1 OR                        |
|  |  |  |  |  |  |  | 1 0 NOR                       |
|  |  |  |  |  |  |  | 1 1 NAND                      |
|  |  |  |  |  |  |  | CAPTURE Mode                  |
|  |  |  |  |  |  |  | 0 0 Falling Edge Detection    |
|  |  |  |  |  |  |  | 0 1 Rising Edge Detection     |
|  |  |  |  |  |  |  | 1 0 Both Edge Detection       |
|  |  |  |  |  |  |  | 1 1 Reserved                  |
|  |  |  |  |  |  |  | TRANSMIT Mode                 |
|  |  |  |  |  |  |  | 0 P36 as Port Output*         |
|  |  |  |  |  |  |  | 1 P36 as T8/T16_OUT           |
|  |  |  |  |  |  |  | CAPTURE Mode                  |
|  |  |  |  |  |  |  | 0 P31 as Demodulator Input    |
|  |  |  |  |  |  |  | 1 P20 as Demodulator Input    |



CTR1 (0D) 01H

|                                                                     | TRANSMIT/CAPTURE Mode |
|---------------------------------------------------------------------|-----------------------|
| *Default setting after reset.                                       | 0 TRANSMIT Mode*      |
| **Default setting after Reset. Not reset with a Stop Mode recovery. | 1 CAPTURE Mode        |

**Figure 35. T8 and T16 Common Control Functions ((0D) 01H: Read/Write)**

- **Notes:** *Ensure to differentiate the TRANSMIT mode from CAPTURE mode. Depending on the operation of these two modes, the CTR1 bit has different functions.*

*Changing from one mode to another cannot be performed without disabling the counter/timers.*

CTR2 (0D) 02H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

|  |  |  |  |  |  |  |                                        |
|--|--|--|--|--|--|--|----------------------------------------|
|  |  |  |  |  |  |  | 0 P35 is Port Output *                 |
|  |  |  |  |  |  |  | 1 P35 is TC16 Output                   |
|  |  |  |  |  |  |  | 0 Disable T16 Timeout Interrupt*       |
|  |  |  |  |  |  |  | 1 Enable T16 Timeout Interrupt         |
|  |  |  |  |  |  |  | 0 Disable T16 Data Capture Interrupt** |
|  |  |  |  |  |  |  | 1 Enable T16 Data Capture Interrupt    |
|  |  |  |  |  |  |  | 0 0 SCLK on T16**                      |
|  |  |  |  |  |  |  | 0 1 SCLK/2 on T16                      |
|  |  |  |  |  |  |  | 1 0 SCLK/4 on T16                      |
|  |  |  |  |  |  |  | 1 1 SCLK/8 on T16                      |

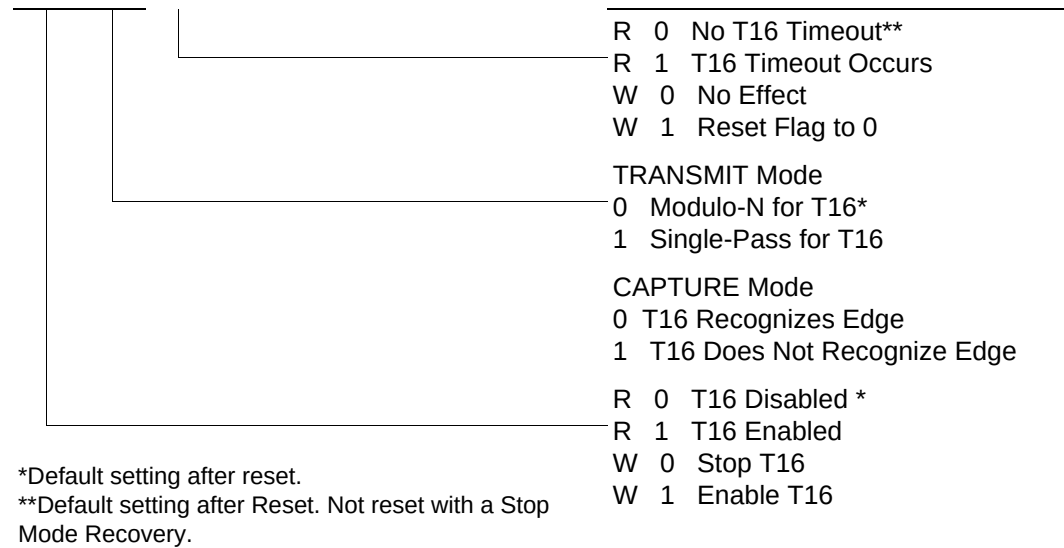


Figure 36. T16 Control Register ((0D) 02H: Read/Write Except Where Noted)

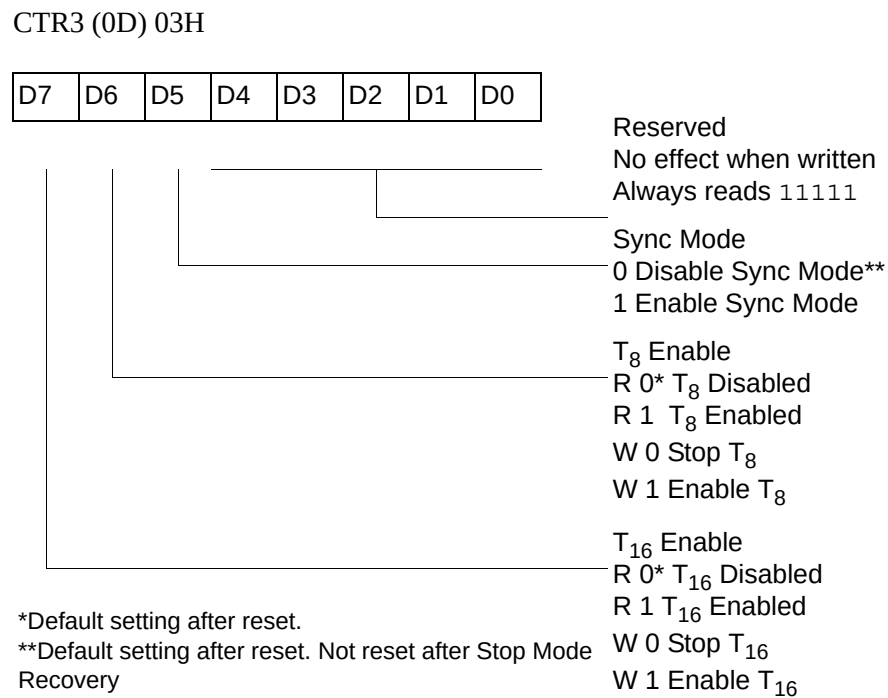



Figure 37. T8/T16 control Register (0D) 03H: Read/Write (Except Where Noted)



► **Note:** *If Sync Mode is enabled, the first pulse of T8 (carrier) is always synchronized with T16 (demodulated signal). It can always provide a full carrier pulse.*

LVD (0D) 0CH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

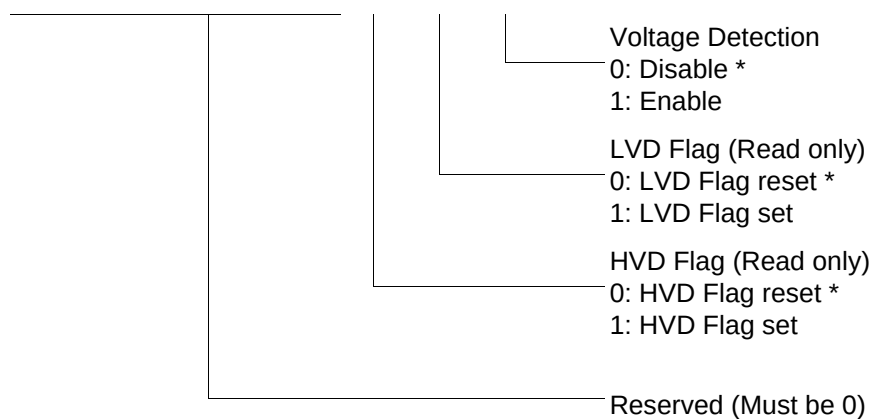

\*Default setting after reset.


**Figure 38. Voltage Detection Register**



## Expanded Register File Control Registers (0F)

The expanded register file control registers (0F) are displayed in [Figure 39](#) through [Figure 52](#) on page 68.

PCON (0F) 00H

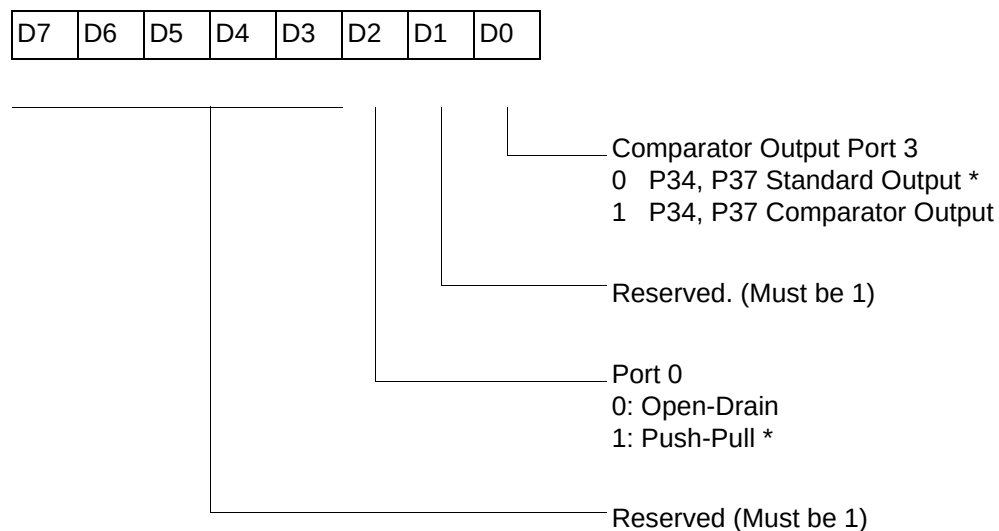

\*Default setting after reset.


**Figure 39. Port Configuration Register (PCON) ((0F)00H: Write Only))**





SMR (0F) 0BH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

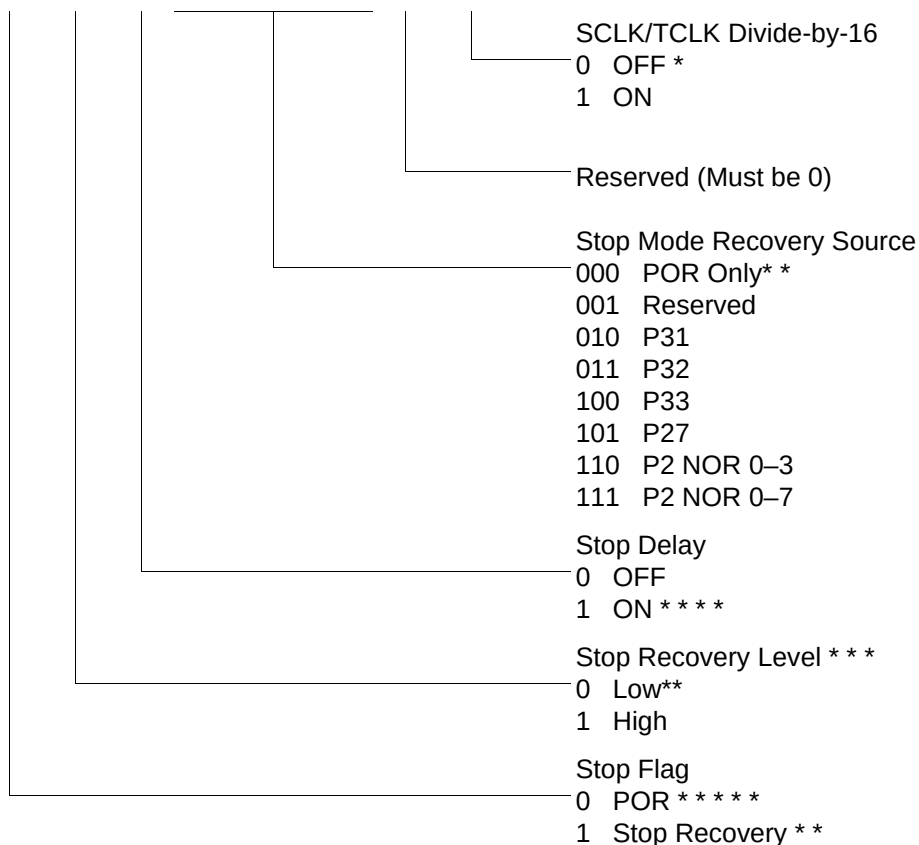

\*Default setting after Reset.

\* \*Set after Stop Mode Recovery.

\* \* \*At the XOR gate input.

\* \* \* \*Default setting after reset. Must be 1 if using a crystal or resonator clock source. Not reset with a Stop Mode Recovery.


\* \* \* \* \*Default setting after Power-On Reset.

**Figure 40. Stop Mode Recovery Register ((0F) 0BH: D6–D0=Write Only, D7=Read Only)**



SMR2 (0F) 0DH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

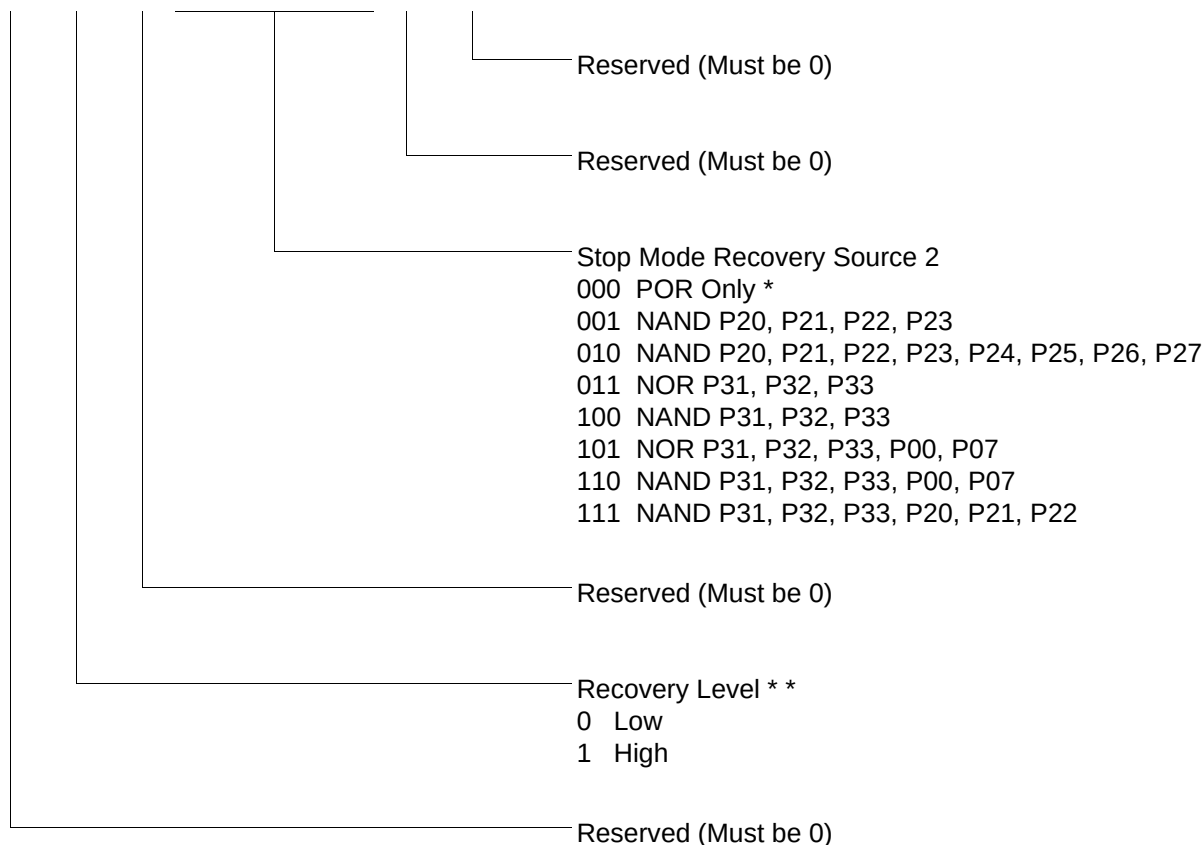

**Note:** If used in conjunction with SMR, either of the two specified events causes a Stop Mode Recovery.


\*Default setting after reset. Not reset with a Stop Mode Recovery.

\*\*At the XOR gate input

**Figure 41. Stop Mode Recovery Register 2 ((0F) 0DH: D2–D4, D6 Write Only)**



WDTMR (0F) 0FH

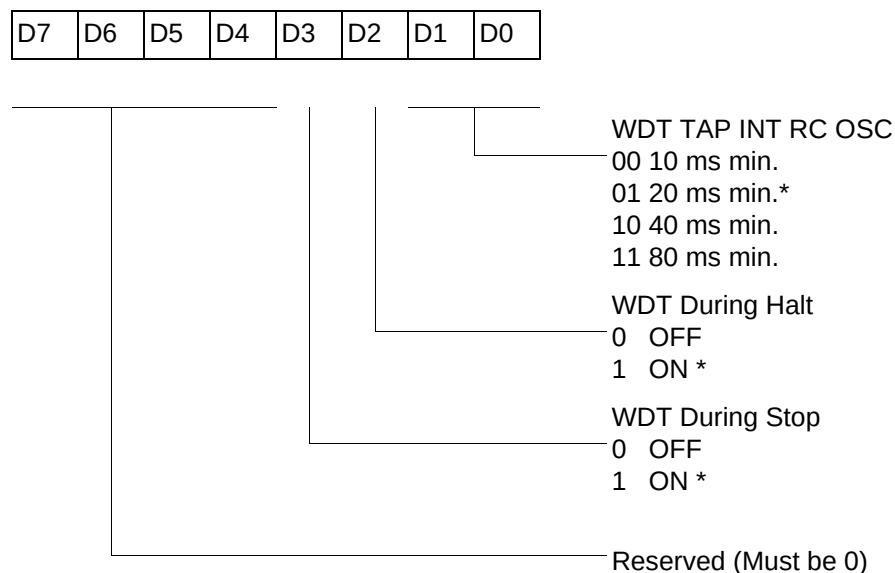


\*Default setting after reset. Not reset with a Stop Mode Recovery.

**Figure 42. Watchdog Timer Register ((0F) 0FH: Write Only)**

## Standard Control Registers

The standard control registers are displayed in [Figure 43](#) through [Figure 52](#) on page 68.

R246 P2M (F6H)

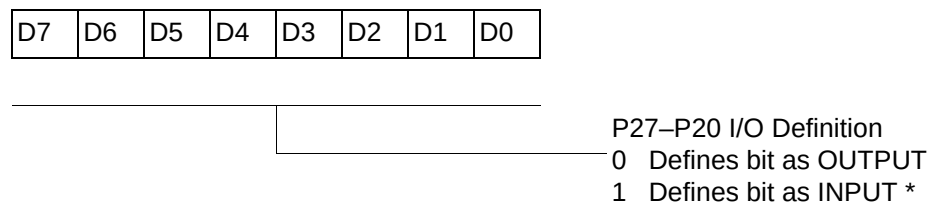


\*Default setting after reset. Not reset with a Stop Mode Recovery.

**Figure 43. Port 2 Mode Register (F6H: Write Only)**




R247 P3M (F7H)

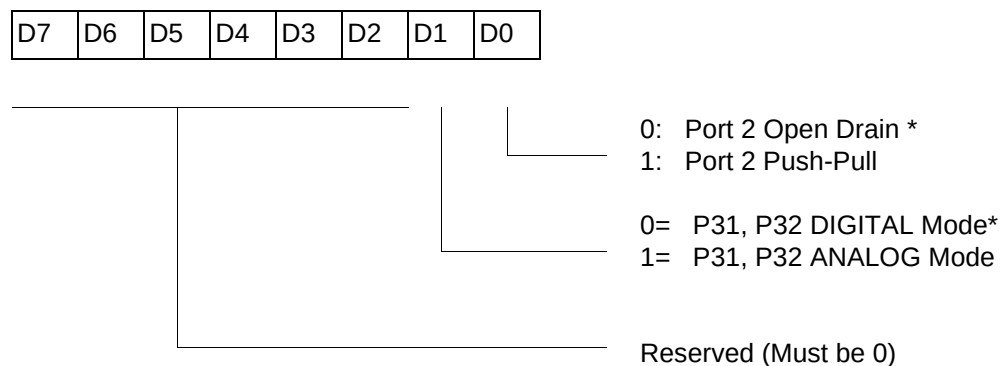

\*Default setting after reset. Not reset with a Stop Mode Recovery.

**Figure 44. Port 3 Mode Register (F7H: Write Only)**

R248 P01M (F8H)

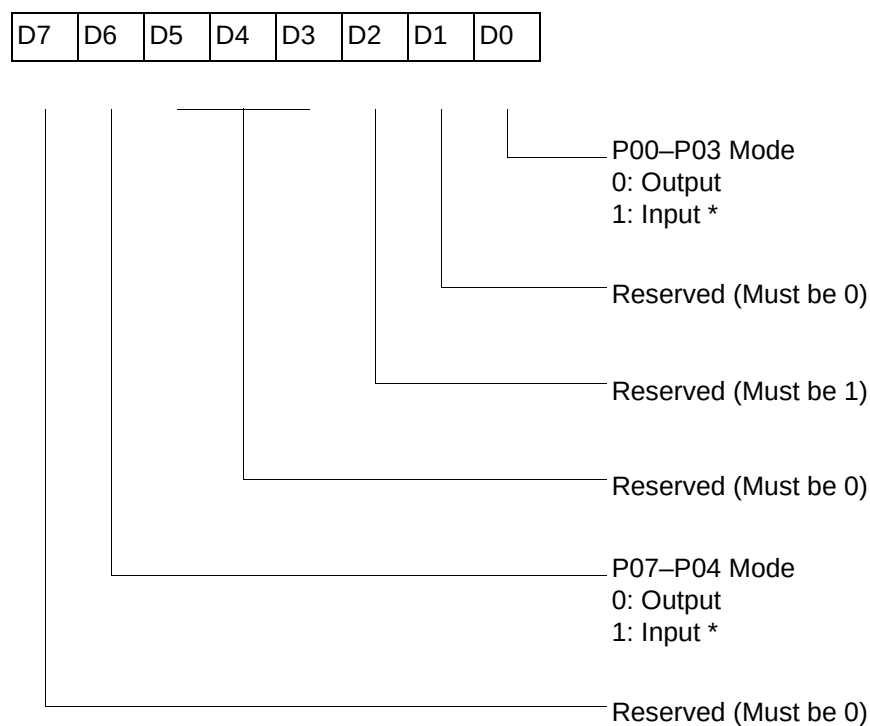


\*Default setting after reset; only P00, P01 and P07 are available on 20-pin configurations.

**Figure 45. Port 0 Register (F8H: Write Only)**



R249 IPR (F9H)


| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

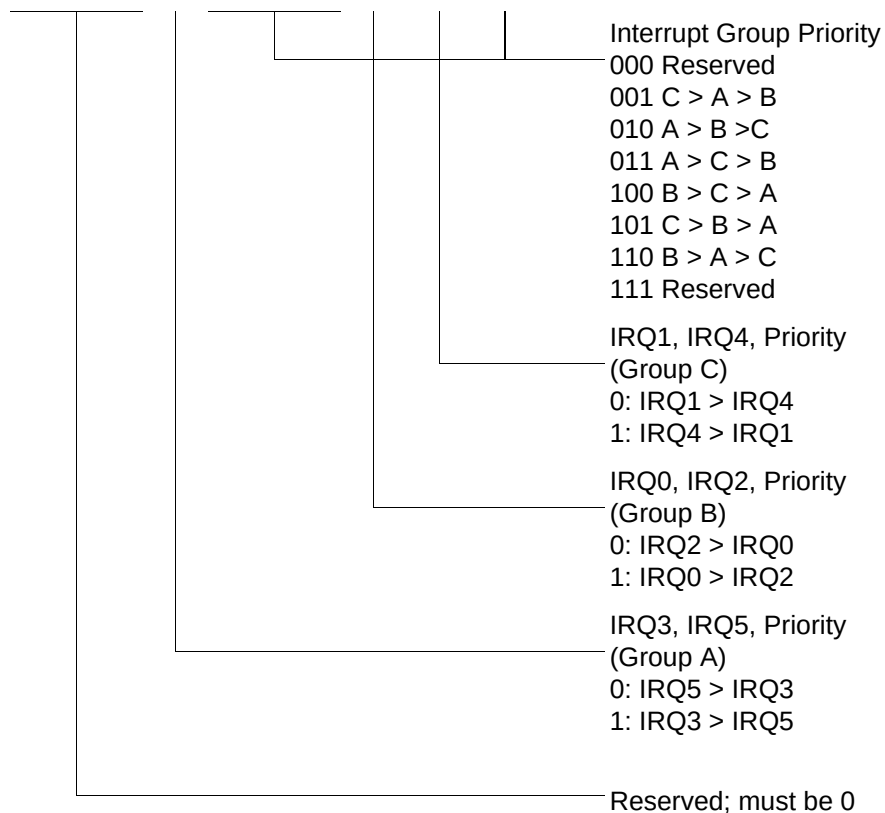

**Figure 46. Interrupt Priority Register (F9H: Write Only)**




### R250 IRQ (FAH)

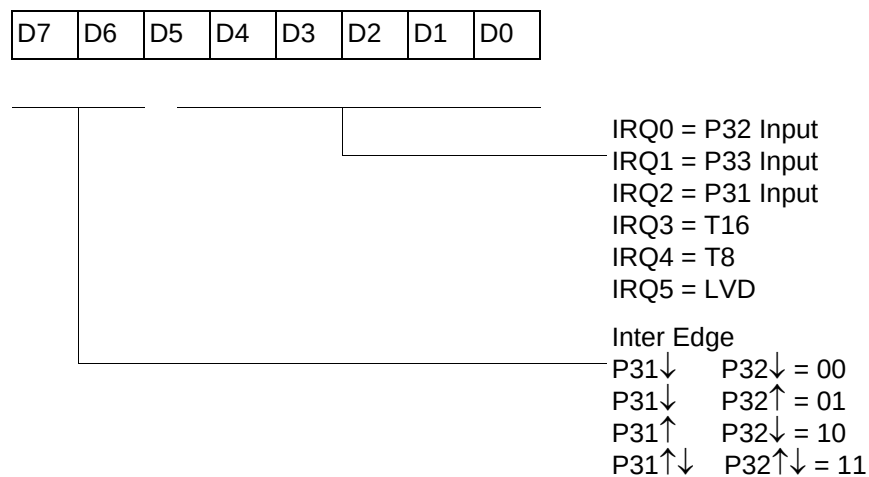

**Figure 47. Interrupt Request Register (FAH: Read/Write)**

### R251 IMR (FBH)

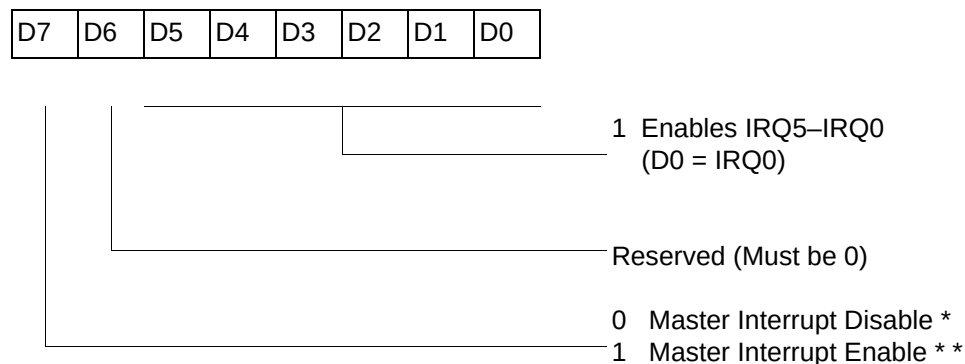


\*Default setting after reset.

\*\*Only by using EI, DI instruction; DI is required before changing the IMR register.

**Figure 48. Interrupt Mask Register (FBH: Read/Write)**




### R252 Flags (FCH)

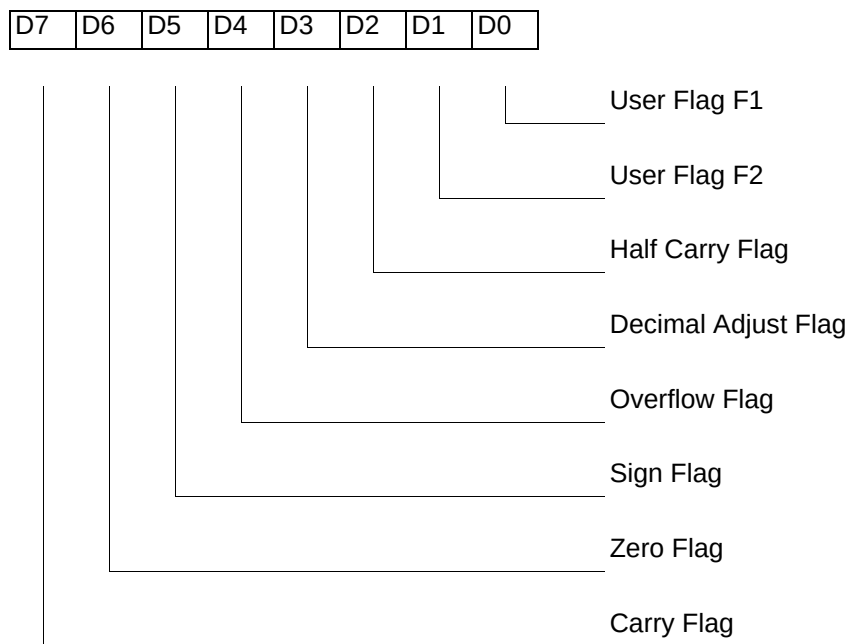

**Figure 49. Flag Register (FCH: Read/Write)**

### R253 RP (FDH)

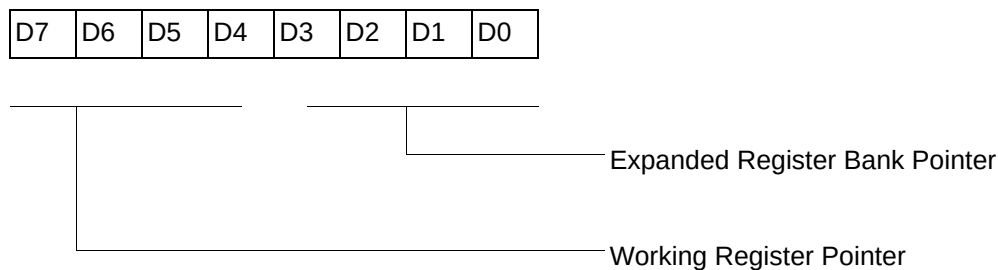

Default setting after reset = 0000 0000

**Figure 50. Register Pointer (FDH: Read/Write)**



R254 SPH (FEH)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

General-Purpose Register

Figure 51. Stack Pointer High (FEH: Read/Write)

R255 SPL (FFH)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Stack Pointer Low  
Byte (SP7–SP0)

Figure 52. Stack Pointer Low (FFH: Read/Write)





# Electrical Characteristics

## Absolute Maximum Ratings

A stress greater than listed in [Table 16](#) may or may not cause permanent damage to the device. Functional operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for an extended period affects device reliability.

**Table 16. Absolute Maximum Ratings**

| Parameter                                           | Minimum Stress | Maximum Stress | Units | Notes |
|-----------------------------------------------------|----------------|----------------|-------|-------|
| Ambient temperature under bias                      | 0              | +70            | C     |       |
| Storage temperature                                 | -65            | +150           | C     |       |
| Voltage on any pin with respect to $V_{SS}$         | -0.3           | +4.0           | V     | 1     |
| Voltage on $V_{DD}$ pin with respect to $V_{SS}$    | -0.3           | +3.6           | V     |       |
| Maximum current on input and/or inactive output pin | -5             | +5             | mA    |       |
| Maximum output current from active output pin       | -25            | +25            | mA    |       |
| Maximum current into $V_{DD}$ or out of $V_{SS}$    |                | 75             | mA    |       |

<sup>1</sup>This voltage applies to all pins except  $V_{DD}$ .

## Standard Test Conditions

The characteristics listed in this product specification apply for standard test conditions. All voltages are referenced to GND. Positive current flows into the referenced pin (see [Figure 53](#)).

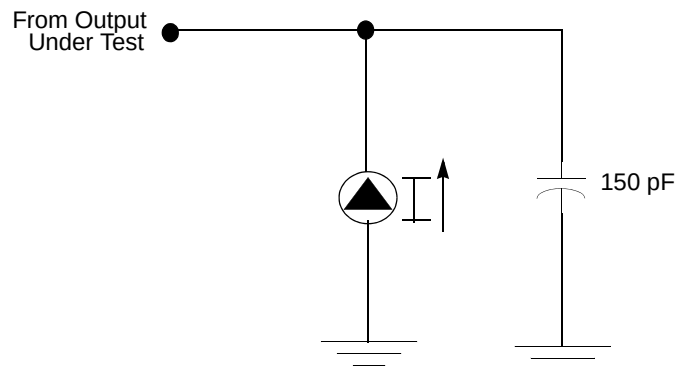


Figure 53. Test Load Diagram

## DC Characteristics

Table 17. DC Characteristics

| $T_A = 0\text{ }^{\circ}\text{C to } +70\text{ }^{\circ}\text{C}$ |                                          |           |              |        |              |       |                                    |       |
|-------------------------------------------------------------------|------------------------------------------|-----------|--------------|--------|--------------|-------|------------------------------------|-------|
| Symbol                                                            | Parameter                                | $V_{CC}$  | Minimum      | Typ(7) | Maximum      | Units | Conditions                         | Notes |
| $V_{CC}$                                                          | Supply Voltage                           |           | 2.0 V        |        | 3.6          | V     | See <a href="#">note 5</a>         |       |
| $V_{CH}$                                                          | Clock Input High Voltage                 | 2.0–3.6 V | $0.8 V_{CC}$ |        | $V_{CC}+0.3$ | V     | Driven by External Clock Generator |       |
| $V_{CL}$                                                          | Clock Input Low Voltage                  | 2.0–3.6 V | $V_{SS}-0.3$ |        | 0.5          | V     | Driven by External Clock Generator |       |
| $V_{IH}$                                                          | Input High Voltage                       | 2.0–3.6 V | $0.7 V_{CC}$ |        | $V_{CC}+0.3$ | V     |                                    |       |
| $V_{IL}$                                                          | Input Low Voltage                        | 2.0–3.6 V | $V_{SS}-0.3$ |        | $0.2 V_{CC}$ | V     |                                    |       |
| $V_{OH1}$                                                         | Output High Voltage                      | 2.0–3.6 V | $V_{CC}-0.4$ |        |              | V     | $I_{OH} = -0.5\text{ mA}$          |       |
| $V_{OH2}$                                                         | Output High Voltage (P36, P37, P00, P01) | 2.0–3.6 V | $V_{CC}-0.8$ |        |              | V     | $I_{OH} = -7\text{ mA}$            |       |
| $V_{OL1}$                                                         | Output Low Voltage                       | 2.0–3.6 V |              |        | 0.4          | V     | $I_{OL} = 4.0\text{ mA}$           |       |
| $V_{OL2}$                                                         | Output Low Voltage (P00, P01, P36, P37)  | 2.0–3.6 V |              |        | 0.8          | V     | $I_{OL} = 10\text{ mA}$            |       |



Table 17. DC Characteristics (Continued)


| $T_A = 0\text{ }^{\circ}\text{C to } +70\text{ }^{\circ}\text{C}$ |                                  |           |         |        |                   |               |                                                                                                                                                   |                    |
|-------------------------------------------------------------------|----------------------------------|-----------|---------|--------|-------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Symbol                                                            | Parameter                        | $V_{CC}$  | Minimum | Typ(7) | Maximum           | Units         | Conditions                                                                                                                                        | Notes              |
| $V_{OFFSE}$<br>$T$                                                | Comparator Input Offset Voltage  | 2.0–3.6 V |         |        | 25                | mV            |                                                                                                                                                   |                    |
| $V_{REF}$                                                         | Comparator Reference Voltage     | 2.0–3.6 V | 0       |        | $V_{DD}$<br>-1.75 | V             |                                                                                                                                                   |                    |
| $I_{IL}$                                                          | Input Leakage                    | 2.0–3.6 V | -1      |        | 1                 | $\mu\text{A}$ | $V_{IN} = 0\text{ V}$ , $V_{CC}$<br>Pull-ups disabled                                                                                             |                    |
| $R_{PU}$                                                          | Pull-up Resistance               | 2.0 V     | 225     |        | 675               | $k\Omega$     | $V_{IN} = 0\text{ V}$ ; Pullups<br>selected by mask<br>option                                                                                     |                    |
|                                                                   |                                  | 3.6 V     | 75      |        | 275               | $k\Omega$     |                                                                                                                                                   |                    |
| $I_{OL}$                                                          | Output Leakage                   | 2.0–3.6 V | -1      |        | 1                 | $\mu\text{A}$ | $V_{IN} = 0\text{ V}$ , $V_{CC}$                                                                                                                  |                    |
| $I_{CC}$                                                          | Supply Current                   | 2.0 V     |         | 1.2    | 3                 | mA            | at 8.0 MHz                                                                                                                                        | 1, 2               |
|                                                                   |                                  | 3.6 V     |         | 2.1    | 5                 | mA            | at 8.0 MHz                                                                                                                                        | 1, 2               |
| $I_{CC1}$                                                         | Standby Current<br>(HALT Mode)   | 2.0 V     |         | 0.5    | 1.6               | mA            | $V_{IN} = 0\text{ V}$ , Clock at<br>8.0 MHz<br>Same as above                                                                                      | 1, 2, 6<br>1, 2, 6 |
|                                                                   |                                  | 3.6 V     |         | 0.8    | 2.0               | mA            |                                                                                                                                                   |                    |
| $I_{CC2}$                                                         | Standby Current<br>(STOP Mode)   | 2.0 V     |         | 1.2    | 8                 | $\mu\text{A}$ | $V_{IN} = 0\text{ V}$ , $V_{CC}$<br>WDT is not<br>Running<br>Same as above<br>$V_{IN} = 0\text{ V}$ , $V_{CC}$<br>WDT is Running<br>Same as above | 3<br>3<br>3<br>3   |
|                                                                   |                                  | 3.6 V     |         | 1.4    | 10                | $\mu\text{A}$ |                                                                                                                                                   |                    |
|                                                                   |                                  | 2.0 V     |         | 3.5    | 20                | $\mu\text{A}$ |                                                                                                                                                   |                    |
|                                                                   |                                  | 3.6 V     |         | 6.5    | 30                | $\mu\text{A}$ |                                                                                                                                                   |                    |
| $I_{LV}$                                                          | Standby Current<br>(Low Voltage) |           |         | 0.8    | 6                 | $\mu\text{A}$ | Measured at 1.3 V                                                                                                                                 | 4                  |
| $V_{BO}$                                                          | $V_{CC}$ Low Voltage Protection  |           |         | 1.8    | 2.0               | V             | 8 MHz maximum<br>Ext. CLK Freq.                                                                                                                   |                    |
| $V_{LVD}$                                                         | $V_{CC}$ Low-Voltage Detection   |           |         | 2.4    |                   | V             |                                                                                                                                                   |                    |
| $V_{HVD}$                                                         | $V_{CC}$ High-Voltage Detection  |           |         | 2.7    |                   | V             |                                                                                                                                                   |                    |

**Notes**

1. All outputs unloaded, inputs at rail.
2.  $CL1 = CL2 = 100\text{ pF}$ .
3. Oscillator stopped.
4. Oscillator stops when  $V_{CC}$  falls below  $V_{BO}$  limit.
5. It is strongly recommended to add a filter capacitor (minimum  $0.1\text{ }\mu\text{F}$ ), physically close to VDD and  $V_{SS}$  pins if operating voltage fluctuations are anticipated, such as those resulting from driving an IR LED.
6. Comparators and Timers are On. Interrupt disabled.
7. Typical values shown are at  $25\text{ }^{\circ}\text{C}$ .

## AC Characteristics

Figure 54 and Table 18 on page 75 describe the alternating current (AC) characteristics.

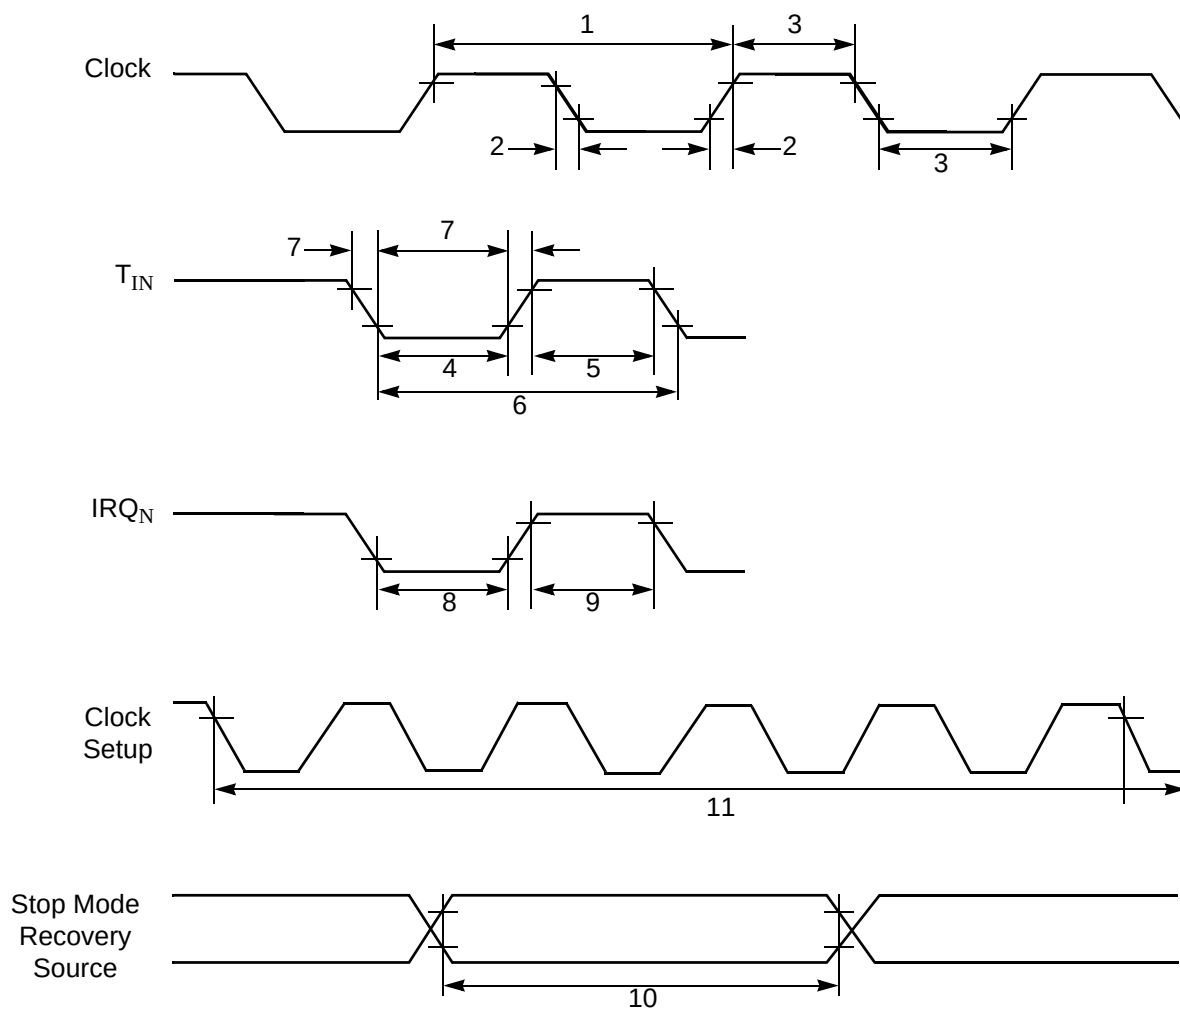

**Figure 54. AC Timing Diagram**



**Table 18. AC Characteristics**

| T <sub>A</sub> =0 °C to +70 °C<br>8.0 MHz                                                                                                                                                                   |                  |                                      |                                          |                       |         |                      |        |                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------------------------------|------------------------------------------|-----------------------|---------|----------------------|--------|------------------------------------------------|
| No                                                                                                                                                                                                          | Symbol           | Parameter                            | V <sub>CC</sub>                          | Minimum               | Maximum | Units                | Notes  | Watchdog<br>Timer Mode<br>Register<br>(D1, D0) |
| 1                                                                                                                                                                                                           | TpC              | Input Clock Period                   | 2.0–3.6                                  | 121                   | DC      | ns                   | 1      |                                                |
| 2                                                                                                                                                                                                           | TrC,TfC          | Clock Input Rise and<br>Fall Times   | 2.0–3.6                                  |                       | 25      | ns                   | 1      |                                                |
| 3                                                                                                                                                                                                           | TwC              | Input Clock Width                    | 2.0–3.6                                  | 37                    |         | ns                   | 1      |                                                |
| 4                                                                                                                                                                                                           | TwTinL           | Timer Input<br>Low Width             | 2.0<br>3.6                               | 100<br>70             |         | ns                   | 1      |                                                |
| 5                                                                                                                                                                                                           | TwTinH           | Timer Input High<br>Width            | 2.0–3.6                                  | 3TpC                  |         |                      | 1      |                                                |
| 6                                                                                                                                                                                                           | TpTin            | Timer Input Period                   | 2.0–3.6                                  | 8TpC                  |         |                      | 1      |                                                |
| 7                                                                                                                                                                                                           | TrTin,TfTin      | Timer Input Rise and<br>Fall Timers  | 2.0–3.6                                  |                       | 100     | ns                   | 1      |                                                |
| 8                                                                                                                                                                                                           | TwIL             | Interrupt Request<br>Low Time        | 2.0<br>3.6                               | 100<br>70             |         | ns                   | 1, 2   |                                                |
| 9                                                                                                                                                                                                           | TwIH             | Interrupt Request<br>Input High Time | 2.0–3.6                                  | 10TpC                 |         |                      | 1, 2   |                                                |
| 10                                                                                                                                                                                                          | Twsm             | Stop Mode Recovery<br>Width Spec     | 2.0–3.6                                  | 12<br>10TpC           |         | ns                   | 3<br>4 |                                                |
| 11                                                                                                                                                                                                          | Tost             | Oscillator<br>Start-Up Time          | 2.0–3.6                                  |                       | 5TpC    |                      | 4      |                                                |
| 12                                                                                                                                                                                                          | Twdt             | Watchdog Timer<br>Delay Time         | 2.0–3.6<br>2.0–3.6<br>2.0–3.6<br>2.0–3.6 | 10<br>20<br>40<br>160 |         | ms<br>ms<br>ms<br>ms |        | 0, 0<br>0, 1<br>1, 0<br>1, 1                   |
| 13                                                                                                                                                                                                          | T <sub>POR</sub> | Power-On Reset                       | 2.0–3.6                                  | 2.5                   | 10      | ms                   |        |                                                |
| <b>Notes</b><br>1. Timing Reference uses 0.9 V <sub>CC</sub> for a logic 1 and 0.1 V <sub>CC</sub> for a logic 0.<br>2. Interrupt request through Port 3 (P33–P31).<br>3. SMR – D5 = 1.<br>4. SMR – D5 = 0. |                  |                                      |                                          |                       |         |                      |        |                                                |



## Capacitance

Table 19 lists the capacitances.

**Table 19. Capacitance**

| Parameter          | Maximum |
|--------------------|---------|
| Input capacitance  | 12 pF   |
| Output capacitance | 12 pF   |
| I/O capacitance    | 12 pF   |

**Note:**  $T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{CC} = \text{GND} = 0\text{ V}$ ,  $f = 1.0\text{ MHz}$ , unmeasured pins returned to GND.



# Packaging

Figure 55 through Figure 60 on page 84 display package information available for all the Crimzon ZLR16300 device versions.


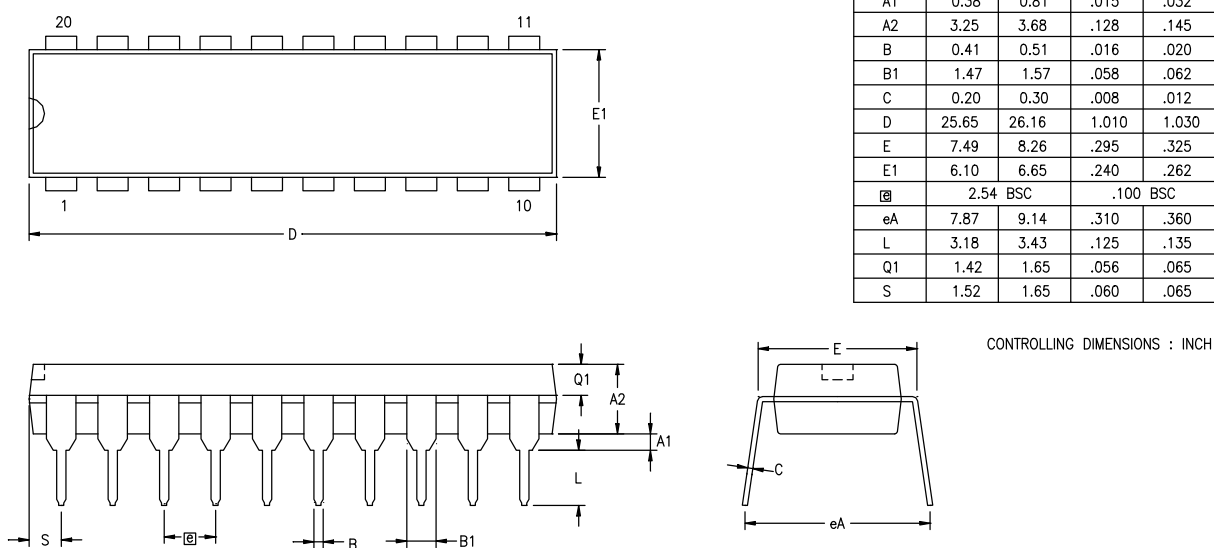


Figure 55. 20-Pin DIP Package Diagram

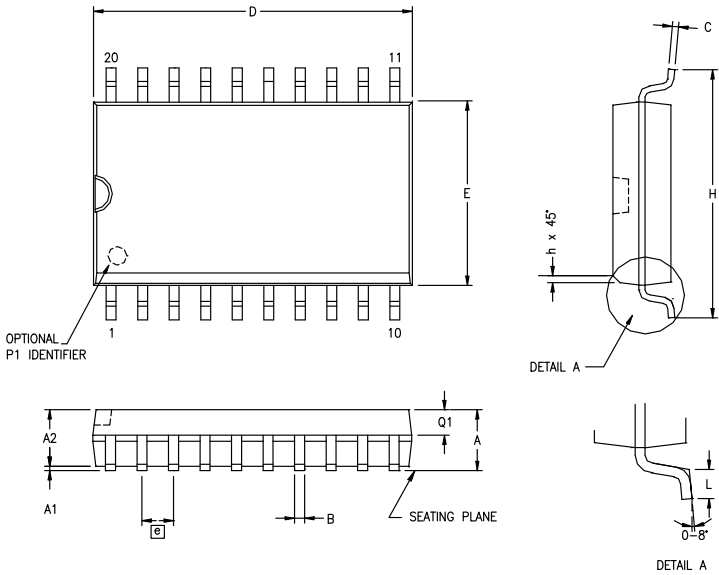

| SYMBOL | MILLIMETER |       | INCH     |      |
|--------|------------|-------|----------|------|
|        | MIN        | MAX   | MIN      | MAX  |
| A      | 2.40       | 2.65  | .094     | .104 |
| A1     | 0.10       | 0.30  | .004     | .012 |
| A2     | 2.24       | 2.44  | .088     | .096 |
| B      | 0.36       | 0.46  | .014     | .018 |
| C      | 0.23       | 0.30  | .009     | .012 |
| D      | 12.60      | 12.95 | .496     | .510 |
| E      | 7.40       | 7.60  | .291     | .299 |
| Ⓜ      | 1.27 BSC   |       | .050 BSC |      |
| H      | 10.00      | 10.65 | .394     | .419 |
| h      | 0.30       | 0.40  | .012     | .016 |
| L      | 0.60       | 1.00  | .024     | .039 |
| Q1     | 0.97       | 1.07  | .038     | .042 |

CONTROLLING DIMENSIONS : MM  
LEADS ARE COPLANAR WITHIN .004 INCH.

Figure 56. 20-Pin SOIC Package Diagram



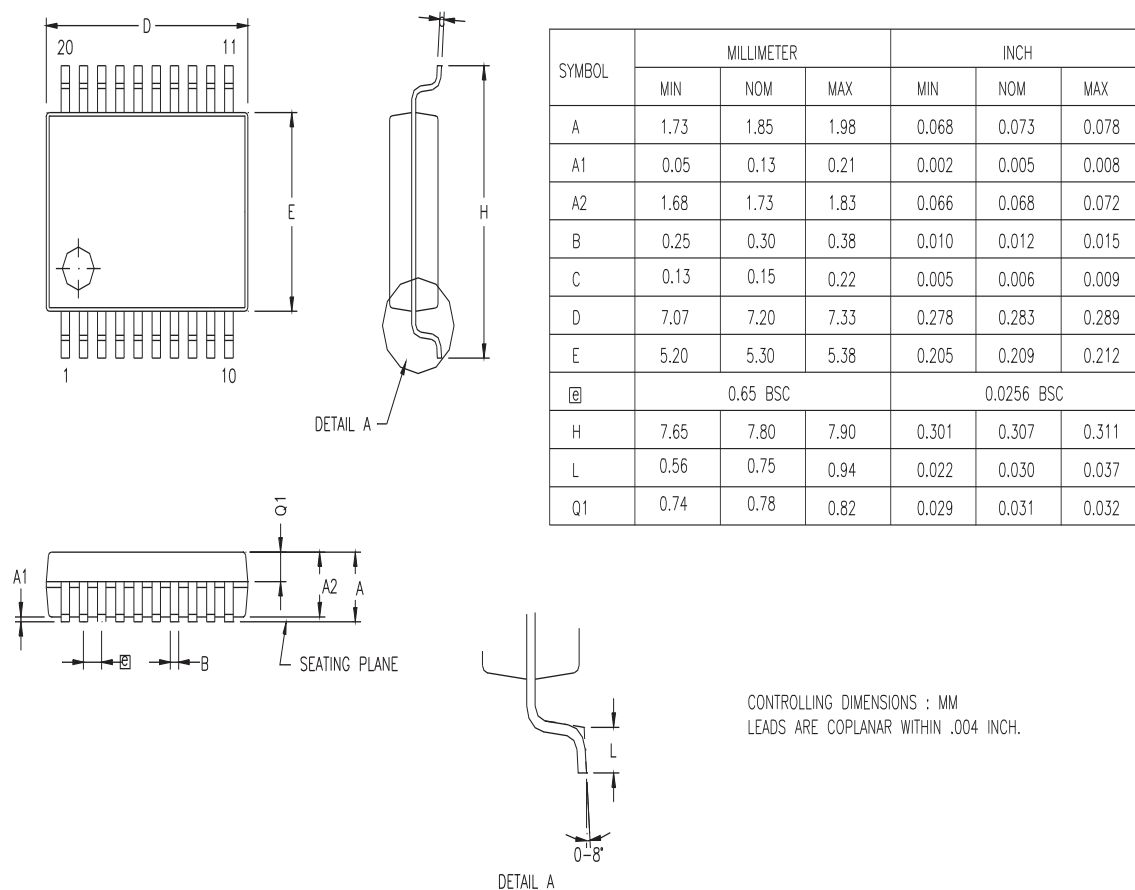


Figure 57. 20-Pin SSOP Package Diagram


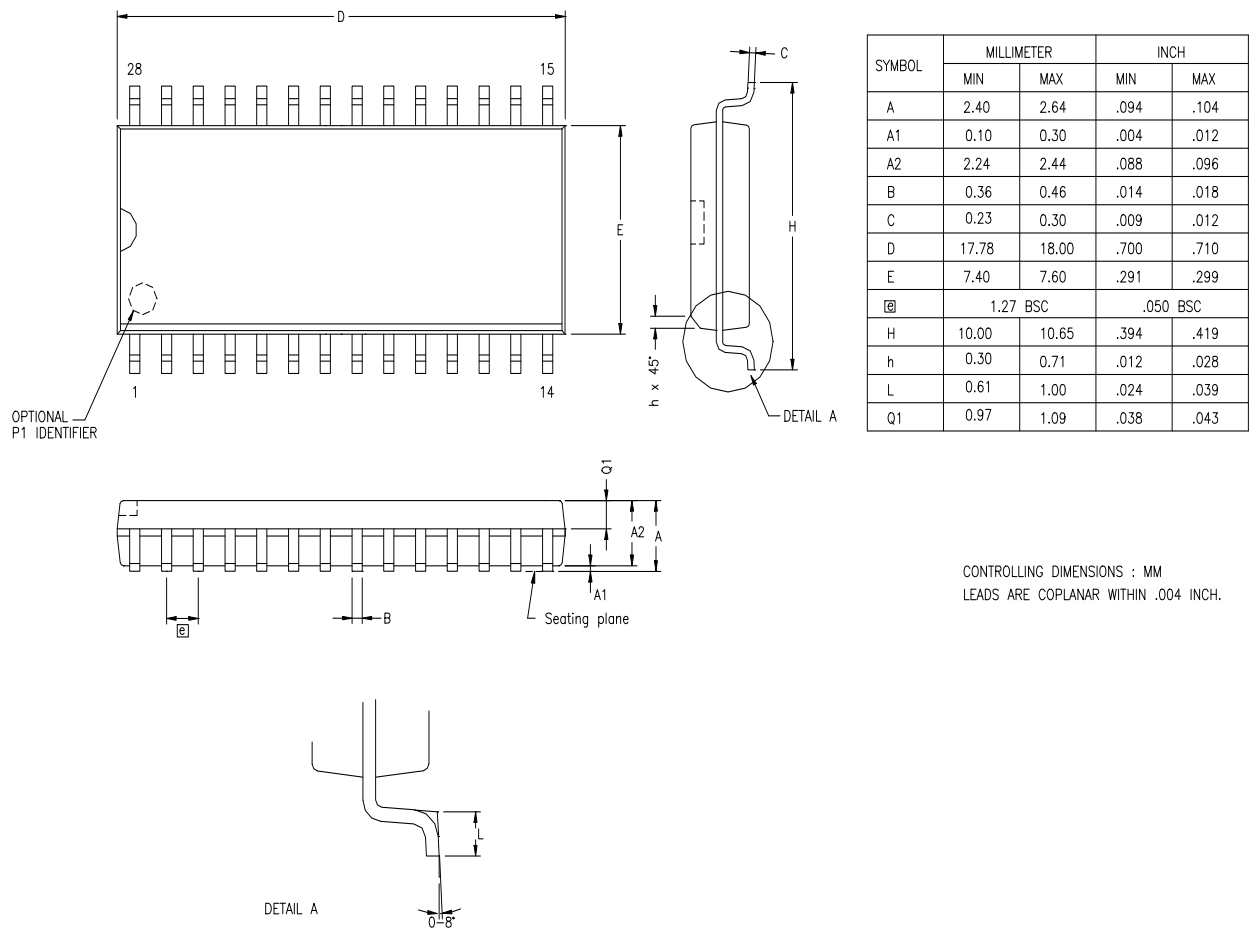


Figure 58. 28-Pin SOIC Package Diagram

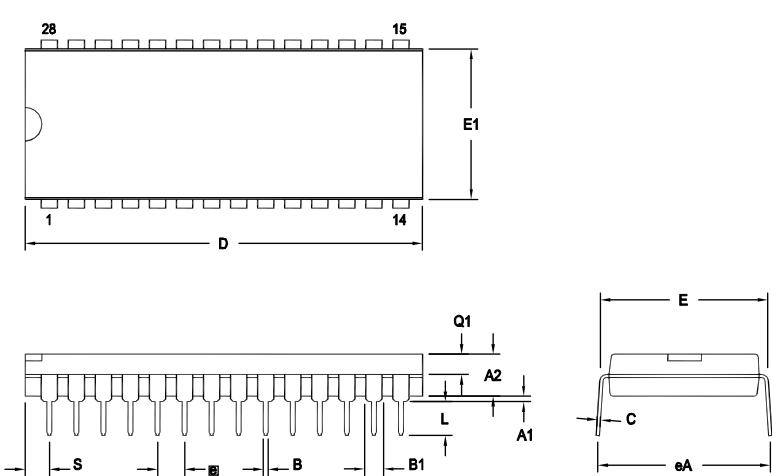

| OPTION TABLE |          |
|--------------|----------|
| OPTION #     | PACKAGE  |
| 01           | STANDARD |
| 02           | IDF      |

Note: ZILOG supplies both options for production. Component layout  
PCB design should cover bigger option 01.

| SYMBOL | OPT # | MILLIMETER |       | INCH     |       |
|--------|-------|------------|-------|----------|-------|
|        |       | MIN        | MAX   | MIN      | MAX   |
| A1     |       | 0.38       | 1.02  | .015     | .040  |
| A2     |       | 3.18       | 4.19  | .125     | .165  |
| B      |       | 0.38       | 0.53  | .015     | .021  |
| B1     | 01    | 1.40       | 1.65  | .055     | .065  |
|        | 02    | 1.14       | 1.40  | .045     | .055  |
| C      |       | 0.23       | 0.38  | .009     | .015  |
| D      | 01    | 36.58      | 37.34 | 1.440    | 1.470 |
|        | 02    | 35.31      | 35.94 | 1.390    | 1.415 |
| E      |       | 15.24      | 15.75 | .600     | .620  |
| E1     | 01    | 13.59      | 14.10 | .535     | .555  |
|        | 02    | 12.83      | 13.08 | .505     | .515  |
| e      |       | 2.54 TYP   |       | .100 BSC |       |
| eA     |       | 15.49      | 16.76 | .610     | .660  |
| L      |       | 3.05       | 3.81  | .120     | .150  |
| Q1     | 01    | 1.40       | 1.91  | .055     | .075  |
|        | 02    | 1.40       | 1.78  | .055     | .070  |
| S      | 01    | 1.52       | 2.29  | .060     | .090  |
|        | 02    | 1.02       | 1.52  | .040     | .060  |

CONTROLLING DIMENSIONS : INCH

Figure 59. 28-Pin DIP Package Diagram

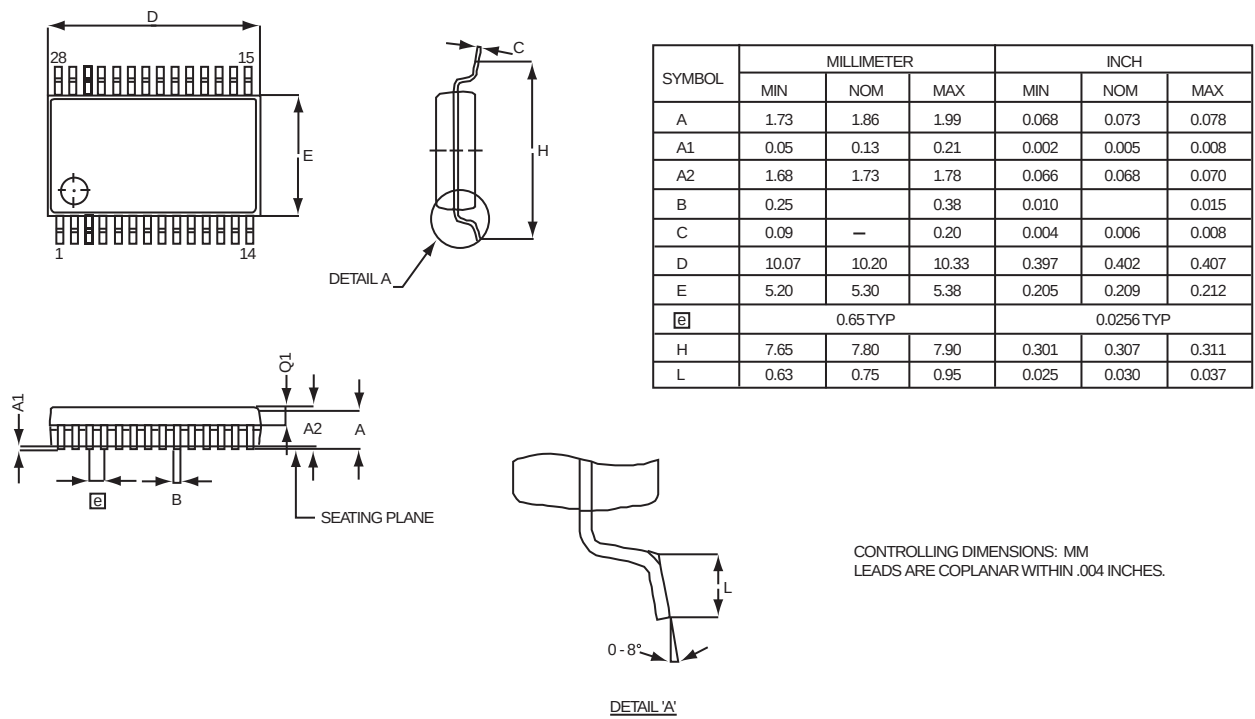


Figure 60. 28-Pin SSOP Package Diagram

► **Note:** Contact Maxim for the actual bonding diagram and chip-on-board assembly.



## Ordering Information

The Crimzon ZLR16300 is available for 16K, 8K, 4K, 2K, and 1K parts.

| Memory Size | Part Number    | Description          |
|-------------|----------------|----------------------|
| 16K         | ZLR16300H2816G | 28-pin SSOP 16 K ROM |
|             | ZLR16300P2816G | 28-pin PDIP 16 K ROM |
|             | ZLR16300S2816G | 28-pin SOIC 16 K ROM |
|             | ZLR16300H2016G | 20-pin SSOP 16 K ROM |
|             | ZLR16300P2016G | 20-pin PDIP 16 K ROM |
|             | ZLR16300S2016G | 20-pin SOIC 16 K ROM |
| 8K          | ZLR16300H2808G | 28-pin SSOP 8 K ROM  |
|             | ZLR16300P2808G | 28-pin PDIP 8 K ROM  |
|             | ZLR16300S2808G | 28-pin SOIC 8 K ROM  |
|             | ZLR16300H2008G | 20-pin SSOP 8 K ROM  |
|             | ZLR16300P2008G | 20-pin PDIP 8 K ROM  |
|             | ZLR16300S2008G | 20-pin SOIC 8 K ROM  |
| 4K          | ZLR16300H2804G | 28-pin SSOP 4 K ROM  |
|             | ZLR16300P2804G | 28-pin PDIP 4 K ROM  |
|             | ZLR16300S2804G | 28-pin SOIC 4 K ROM  |
|             | ZLR16300H2004G | 20-pin SSOP 4 K ROM  |
|             | ZLR16300P2004G | 20-pin PDIP 4 K ROM  |
|             | ZLR16300S2004G | 20-pin SOIC 4 K ROM  |
| 2K          | ZLR16300H2802G | 28-pin SSOP 2 K ROM  |
|             | ZLR16300P2802G | 28-pin PDIP 2 K ROM  |
|             | ZLR16300S2802G | 28-pin SOIC 2 K ROM  |
|             | ZLR16300H2002G | 20-pin SSOP 2 K ROM  |
|             | ZLR16300P2002G | 20-pin PDIP 2 K ROM  |
|             | ZLR16300S2002G | 20-pin SOIC 2 K ROM  |
| 1K          | ZLR16300H2801G | 28-pin SSOP 1 K ROM  |
|             | ZLR16300P2801G | 28-pin PDIP 1 K ROM  |
|             | ZLR16300S2801G | 28-pin SOIC 1 K ROM  |
|             | ZLR16300H2001G | 20-pin SSOP 1 K ROM  |
|             | ZLR16300P2001G | 20-pin PDIP 1 K ROM  |



| Memory Size                                                                       | Part Number      | Description                                 |
|-----------------------------------------------------------------------------------|------------------|---------------------------------------------|
|                                                                                   | ZLR16300S2001G   | 20-pin SOIC 1 K ROM                         |
| <b>Development Tools</b>                                                          |                  |                                             |
|                                                                                   | ZLP128ICE01ZEMG* | In-Circuit Emulator                         |
| Note: *ZLP128ICE01ZEMG has been replaced by an improved version, ZCRMZNICE01ZEMG. |                  |                                             |
|                                                                                   | ZCRMZNICE01ZEMG  | Crimzon In-Circuit Emulator                 |
|                                                                                   | ZCRMZN00100KITG  | Crimzon In-Circuit Emulator Development Kit |
|                                                                                   | ZCRMZNICE01ZACG  | 20-Pin Accessory Kit                        |
|                                                                                   | ZCRMZNICE02ZACG  | 40/48-Pin Accessory Kit                     |

**Note:** Contact [www.maxim-ic.com](http://www.maxim-ic.com) for the die form.


For faster results, contact your local Maxim sales office for assistance in ordering the part(s) required.



## Part Number Description

Maxim part numbers consist of a number of components as shown below. For example, part number ZLR16300H2816G is a Crimzon masked ROM product in a 28-pin SSOP package, with 16 KB of ROM and built with lead-free solder.

**Z LR 16300 H 28 16 G**

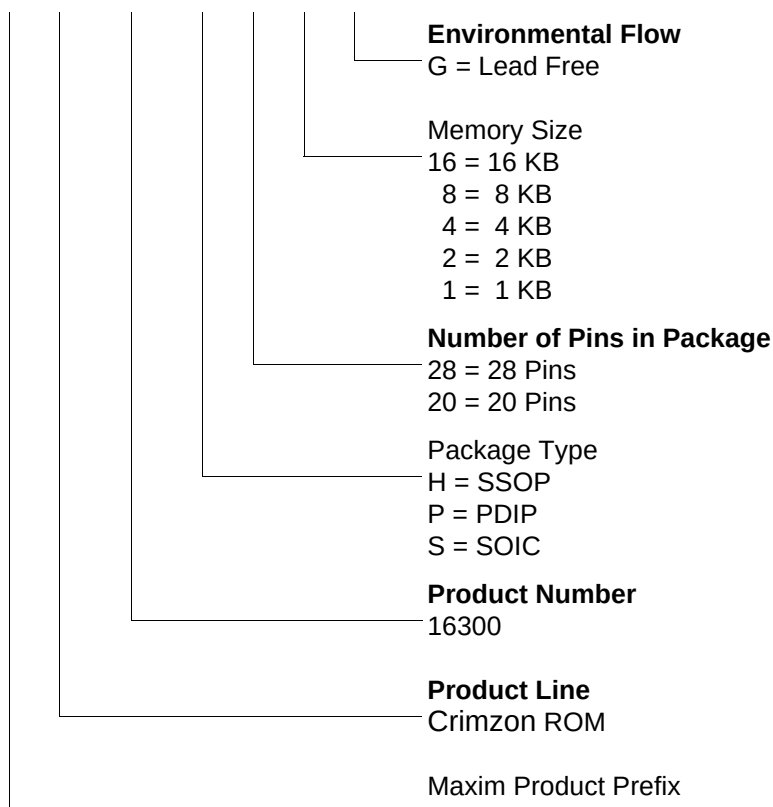



# Index

## Numerics

16-bit counter/timer circuits 36  
20-pin DIP package diagram 79  
20-pin SSOP package diagram 81  
28-pin DIP package diagram 83  
28-pin SOIC package diagram 82  
28-pin SSOP package diagram 84  
8-bit counter/timer circuits 32

## A

AC  
    timing diagram 75  
address spaces, basic 1  
architecture 1  
    expanded register file 18

## B

basic address spaces 1  
Block Diagram 1, 3  
block diagram, ZLR16300 functional 3

## C

capture\_INT\_mask 24, 28  
clock 43  
comparator inputs/outputs 13  
configuration  
    port 0 8  
    port 2 9  
    port 3 10  
    port 3 counter/timer 12  
counter/timer  
    16-bit circuits 36  
    8-bit circuits 32  
    brown-out voltage/standby 54  
    clock 43  
    demodulation mode count capture flowchart 34

demodulation mode flowchart 35  
EPROM selectable options 54  
glitch filter circuitry 30  
halt instruction 44  
input circuit 29  
interrupt block diagram 41  
interrupt types, sources and vectors 42  
oscillator configuration 43  
output circuit 39  
ping-pong mode 38  
port configuration register 45  
resets and WDT 53  
SCLK circuit 47  
stop instruction 44  
stop mode recovery register 46  
stop mode recovery register 2 49, 50  
stop mode recovery source 48  
T16 demodulation mode 37  
T16 transmit mode 36  
T16\_OUT in modulo-N mode 37  
T16\_OUT in single-pass mode 37  
T8 demodulation mode 33  
T8 transmit mode 30  
T8\_OUT in modulo-N mode 33  
T8\_OUT in single-pass mode 33  
transmit mode flowchart 31  
voltage detection and flags 55  
watchdog timer mode register 51  
watchdog timer time select 52  
counter/timer functional blocks  
    input circuit 29  
    T8 transmit mode 30  
counter\_INT\_mask 28  
crt3 T8/T16 control register  
    register 28  
CTR(D)01h T8 and T16 common functions 25  
CTR1 (0D)01 24  
CTR3 T8/T16 control CTR3(0D)03h 28

## D

demodulation mode  
    count capture flowchart 34  
    flowchart 35





T16 37  
T8 33  
description  
functional 15

## E

### EPROM

- selectable options 54
- expanded register file 17
- expanded register file architecture 18
- expanded register file control registers 60
  - flag 68
  - interrupt mask register 67
  - interrupt priority register 66
  - interrupt request register 67
  - port 0 and 1 mode register 65
  - port 2 configuration register 64
  - port 3 mode register 65
  - port configuration register 64
  - register pointer 68
  - stack pointer high register 69
  - stack pointer low register 69
  - stop mode recovery register 62
  - stop mode recovery register 2 63
  - T16 control register 59
  - T8 and T16 common control functions register 58
  - TC8 control register 55
  - watch-dog timer register 64

## F

### features

- standby modes 2
- ZLR16300 1

### functional description

- counter/timer functional blocks 29
- CTR0(0D)00h register 23
- CTR1(0D)01h register 24
- CTR2(0D)02h register 27
- expanded register file 17
- expanded register file architecture 18
- HI16(0D)09h register 22

- HI8(0D)0Bh register 21
- L08(0D)0Ah register 22
- L0I6(0D)08h register 22
- program memory map 16
- RAM 16
- register description 54
- register file 20
- register pointer 19
- register pointer detail 21
- stack 21
- TC16H(0D)07h register 22
- TC16L(0D)06h register 22
- TC8H(0D)05h register 23
- TC8L(0D)04h register 23
- TC8L(D)04h register 23

## G

- glitch filter circuitry 29, 30

## H

- halt instruction, counter/timer 44

## I

- input circuit 29
- interrupt block diagram, counter/timer 41
- interrupt types, sources and vectors 42

## L

- low-voltage detection register 54

## M

- memory, program 15
- modulo-N mode
  - T16\_OUT 37
  - T8\_OUT 33



## O

oscillator configuration 43  
output circuit, counter/timer 39

## P

P34\_out 24  
P35\_out 28  
P36\_out/demodulator input 26  
package information  
    20-pin DIP package diagram 79  
    20-pin SSOP package diagram 81  
    28-pin DIP package diagram 83  
    28-pin SOIC package diagram 82  
    28-pin SSOP package diagram 84  
part number format 87  
pin configuration  
    20-pin DIP/SOIC/SSOP 5  
    28-pin DIP/SOIC/SSOP 6  
Pin Descriptions 5  
pin functions  
    port 0 (P07 - P00) 8  
    port 0 configuration 8  
    port 2 (P27 - P20) 9  
    port 2 (P37 - P30) 10  
    port 2 configuration 9  
    port 3 configuration 10  
    port 3 counter/timer configuration 12  
    XTAL1 (time-based input) 7  
    XTAL2 (time-based output) 7  
ping-pong mode 38  
port 0  
    configuration 8  
    pin function 8  
port 2  
    configuration 9  
    pin function 9  
port 3  
    configuration 10  
    counter/timer configuration 12  
port 3 pin function 10  
port configuration register 45  
power connections 2  
power supply 5

Precharacterization Product 86  
program memory 15  
    map 16

## R

register 50  
    CTR0(0D)00h 23  
    CTR1 (0D) 01 24  
    CTR1(0D)01h 24  
    CTR2(0D)02h 27  
    flag 68  
    HI16(0D)09h 22  
    HI8(0D)0Bh 21  
    interrupt priority 66  
    interrupt request 67  
    interruptmask 67  
    L016(0D)08h 22  
    L08(0D)0Ah 22  
    LVD(D)0Ch 54  
    pointer 68  
    port 0 and 1 65  
    port 2 configuration 64  
    port 3 mode 65  
    port configuration 45, 64  
    stack pointer high 69  
    stack pointer low 69  
    stop mode recovery 46  
    stop mode recovery 2 49  
    stop mode recovery 62  
    stop mode recovery 2 63  
    T16 control 59  
    T8 and T16 common control functions 58  
    TC16H(0D)07h 22  
    TC16L(0D)06h 22  
    TC8 control 55  
    TC8H(0D)05h 23  
    TC8L(0D)04h 23  
    TC8L(D)04h 23  
    voltage detection 60  
    watch-dog timer 64  
register description  
    counter/timer2 LS-Byte hold 22  
    counter/timer2 MS-Byte hold 22



- counter/timer8 control 23
- counter/timer8 High hold 23
- counter/timer8 Low hold 23
- CTR2 counter/timer 16 control 27
- T16\_capture\_LO 22
- T8 and T16 common functions 24
- T8\_Capture\_HI 21
- T8\_capture\_LO 22
- register file 20
  - expanded 17
- register pointer 19
  - detail 21
- resets and WDT 53

## S

- SCLK circuit 47
- single/modulo-N 24, 28
- single-pass mode
  - T16\_OUT 37
  - T8\_OUT 33
- stack 21
- standby modes 2
- stop instruction, counter/timer 44
- stop mode recovery
  - 2 register 49
  - source 48
- stop mode recovery 2 50
- stop mode recovery register 46

## T

- T 16 clock 28
- T16 enable 28
- T16 initial out/falling edge 27
- T16 transmit mode 36
- T16\_capture\_HI 22
- T8 and T16 common functions 24
- t8 clock 24
- T8 enable 24
- T8 initial out/rising edge 27
- T8 transmit mode 30
- T8/T16\_logic/edge\_detect 26
- T8\_Capture\_HI 21

- test load diagram 72
- time\_out 28
- timeout 24
- timers
  - counter/timer2 LS-byte hold 22
  - counter/timer2 MS-byte hold 22
  - counter/timer8 high hold 23
  - counter/timer8 low hold 23
  - CTR0 counter/timer8 control 23
  - T16\_Capture\_HI 22
  - T16\_Capture\_LO 22
  - T8\_Capture\_HI 21
  - T8\_Capture\_LO 22
- timing diagram, AC 75
- transmit mode flowchart 31
- transmit\_submode/glitch filter 26

## V

- VCC 5
- voltage
  - brown-out/standby 54
  - detection and flags 55
- voltage detection register 60

## W

- watchdog timer
  - mode register watchdog timer mode register 51
  - time select 52

## X

- XTAL1 5
- XTAL1 pin function 7
- XTAL2 5
- XTAL2 pin function 7

## Z

- ZLR16300 family members 1



## Customer Support

For any comments, detail technical questions, or reporting problems, please visit Maxim's Technical Support at <https://support.maxim-ic.com/micro>.