

NCV8842PWGEVB

NCV8842 Buck Regulator 7.0 V-16 V to 5.0 V, 3.3 V and 2.5 V @ 1.0 A Evaluation Board User's Manual



ON Semiconductor®

<http://onsemi.com>

EVAL BOARD USER'S MANUAL

Description

The NCV8842 Evaluation Boards provide a convenient way to implement and evaluate a complete practical buck regulator design. No additional components are required other than the DC input source and load. Separate boards are available for the SOIC-16 and DFN-18 versions of the device. The SOIC-16 board has an input voltage range of 7 V – 16 V and includes jumpers to set the DC output voltage to 2.5 V, 3.3 V or 5.0 V. The DFN-18 board has an input voltage range of 6 V – 16 V and is preset for a nominal output voltage of 3.3 V.

Both boards include SHDNB and SYNC terminals for logic on-off control of the regulator and synchronization of the internal controller to a external frequency source instead of the internal 170 kHz oscillator.

Features

- V2 Control Method for Uncomplicated Loop Compensation, Fast Transient Response, and Reduced Board Area
- A Total of 12 Components, Including the IC, to Realize a Complete Buck Regulator
- Shutdown Terminal to Disable the Output and Provide a Low Current Drain Standby Mode
- Sync Terminal to Permit Controller Synchronization to an External Source
- 1.5 A Peak Inductor Current
- Cycle-by-Cycle Frequency-Foldback Current Limiter
- Soft Start Function to Reduce Inrush Current
- 87% Efficiency at 1 A Load Current (5 V Output)
- Line Regulation Better Than 0.02%
- Load Regulation Better Than 0.2%

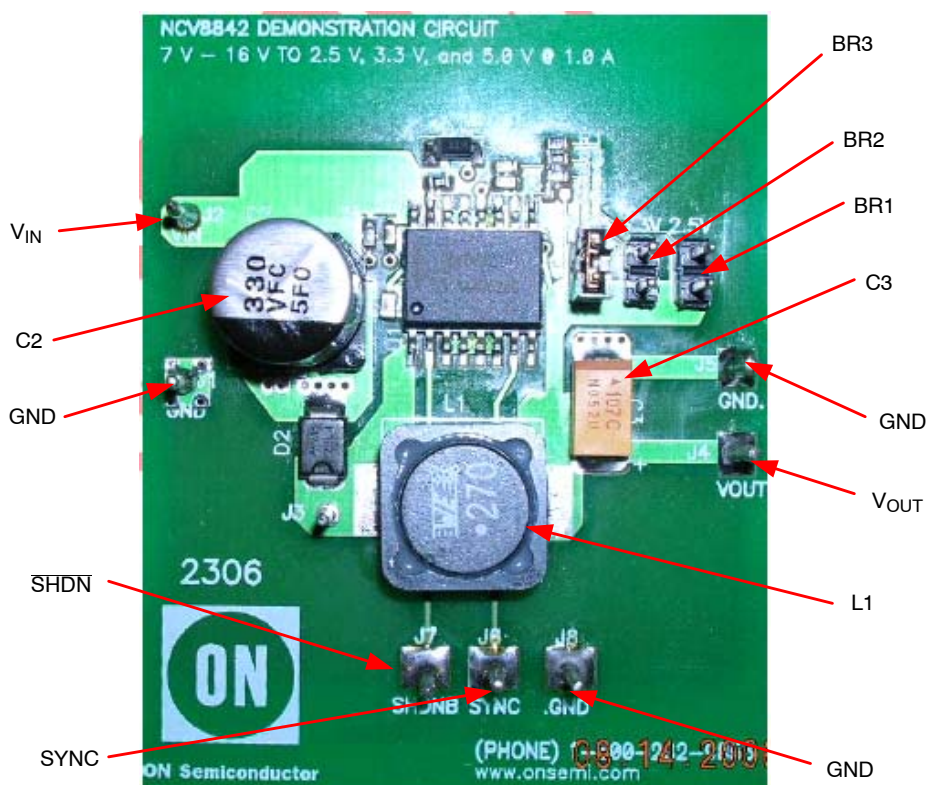


Figure 1. NCV8842 Evaluation Board (SOIC Package)

NCV8842PWGEVB

Table 1. ABSOLUTE MAXIMUM RATINGS

Pin Name	Maximum Voltage	Maximum Current
V _{IN}	16 V	2.0 A
V _{OUT}	10 V	2.0 A
SHDNB	7.0 V	1.0 mA
SYNC	7.0 V	1.0 mA

Stresses exceeding Maximum Ratings may damage the board. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied.

Table 2. NCV8842 SOIC EVALUATION BOARD USER TERMINALS

V _{IN}	Positive DC input voltage, 7 V to 16 V
GND	Common power negative / signal return
V _{OUT}	Regulated DC output voltage
SHDNB	Shutdown–bar signal. Leave open or drive high for normal operation, drive low to force the regulator into sleep/shutdown mode.
SYNC	Input signal to synchronize to converter oscillator to a higher external frequency source. Leave open if unused.
BR1, BR2, BR3	Bridges (jumpers) for programming the regulated output voltage to one of three levels. Always bridge one pair of terminals. Terminals bridged V_{OUT} BR1 2.5 V BR2 3.3 V BR3 5.0 V

Table 3. ELECTRICAL CHARACTERISTICS

(T_A = 25°C, 7.0 V ≤ V_{IN} ≤ 16 V, 0.1 A ≤ I_{OUT} ≤ 1.0 A, unless otherwise specified.)

Characteristic	Test Conditions	Typ	Unit
Output Voltage			
Voltage Accuracy	–	4.0	%
Line Regulation	No Load	0.02	%
Load Regulation	V _{IN} = 7.0 V	0.15	%
Transient Response	–	3.0	%
Transient Response Time	Load toggle between 0.1 A and 1.0 A	10	μs
Startup Time	–	5.0	ms
Input Voltage			
Start Threshold	–	3.3	V
Sync and Shutdown			
Sync Frequency	–	190 to 355	kHz
Minimum Sync Threshold Voltage	–	1.0	V
Minimum Shutdown Threshold Voltage	–	0.3	V
Maximum Shutdown Bias Current	–	12	μA
General			
Switching Frequency	–	170	kHz
Efficiency	I _{LOAD} = 100 mA I _{LOAD} = 1.0 A	77.5 83	% %
Shutdown Current*	–	1.0	μA

*If a pull-up resistor is employed, the shutdown current is increased drastically (V_{IN}/R).

NCV8842PWGEVB

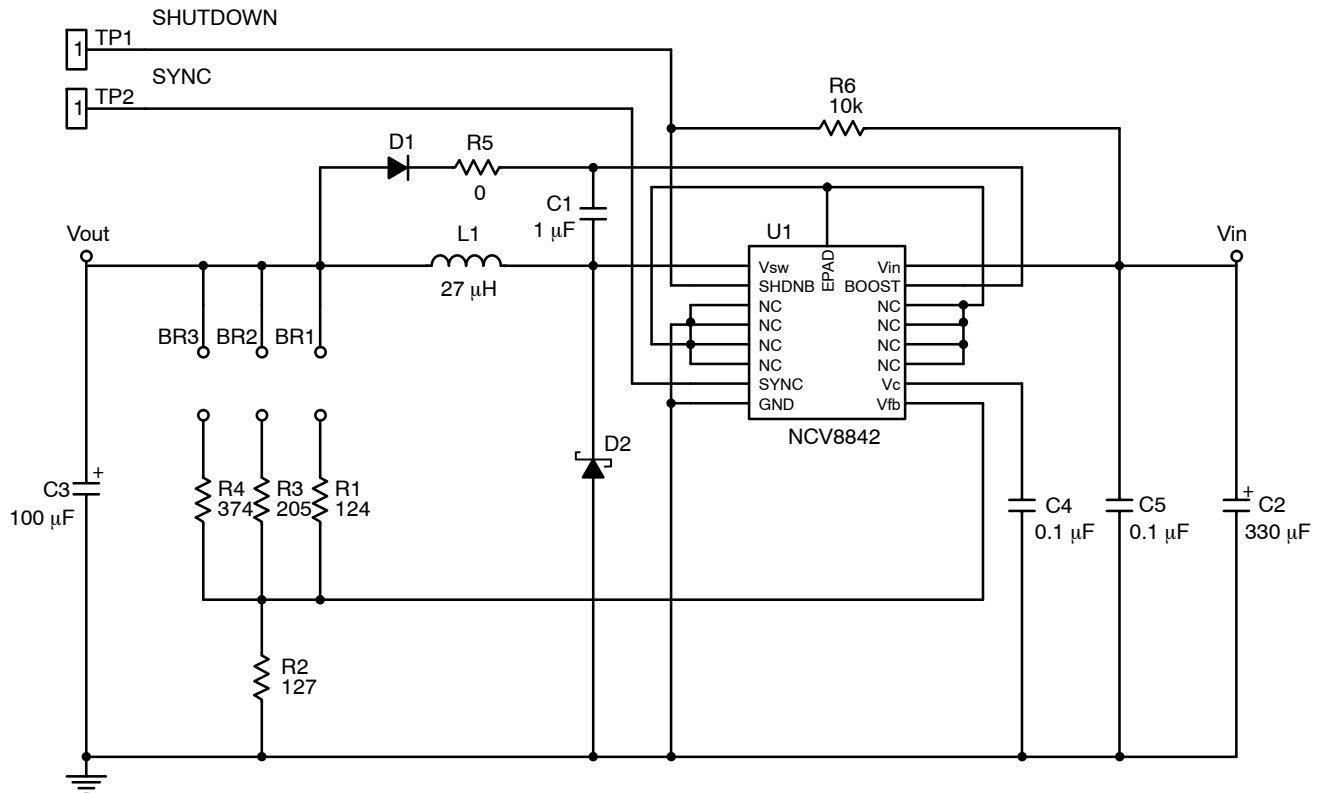


Figure 2. Application Diagram

Operation Guidelines

1. Connect a DC input voltage, within the range of 7.0 V to 16 V, between the board terminals “V_{IN}” (+) and “GND” (–).
2. Connect a load impedance between terminals “V_{OUT}” (+) and “GND” (–).
3. To force the regulator into Shutdown/sleep mode, connect the “SHDNB” terminal to a positive DC voltage of 0.3 V or less, or connect it directly to GND.
4. If synchronization to an external frequency source is desired, connect the SYNC terminal to a pulse source with positive amplitude 1 V to 7 V relative to GND. Sync pulse duty cycle may vary from 10% to 90%.

Theory Of Operation

1. **Boost Circuit:** The Boost circuit, comprised of D1 and C1, generates a voltage higher than the output voltage to drive the base of the internal NPN power switch. When the internal power switch is Off, pin V_{sw} of the NCV8842 goes negative to sustain the current in L1 through Schottky diode D2. Diode D1 is forward biased, and charges C1 to approximately the output voltage. When the internal power switch turns on, V_{sw} is driven high, forcing the voltage at BOOST to be the sum of the instantaneous voltage at V_{sw} plus the

charge across C1. D1 is now reverse-biased, and the energy stored in C1 is used to bias the output stage.

2. **Soft Start:** The soft-start is implemented on the V_C pin. During the startup, the limited source current (25 μA) of the error amplifier charges the V_C pin capacitor. The rising slope of the V_C pin voltage clamps the duty cycle through the PWM comparator. The V_C pin voltage eventually settles down to a voltage roughly equal to the reference voltage 1.27 V. Therefore, the startup time can be easily calculated.
3. **Feedback Network:** V² control relies on the output ripple to provide pulse width modulation. When the output ripple is inadequate, pulse skipping or instability may be observed. Adding a capacitor C6 in parallel with R1 provides a low impedance pass for the output ripple. Therefore, the output ripple is not attenuated by the resistor divider. The use of this capacitor is optional.

Please see data sheet for more description on regulator operation and component selection (document number NCV8842/D available through the Literature Distribution Center or via our website at <http://www.onsemi.com>).

TYPICAL PERFORMANCE CHARACTERISTICS

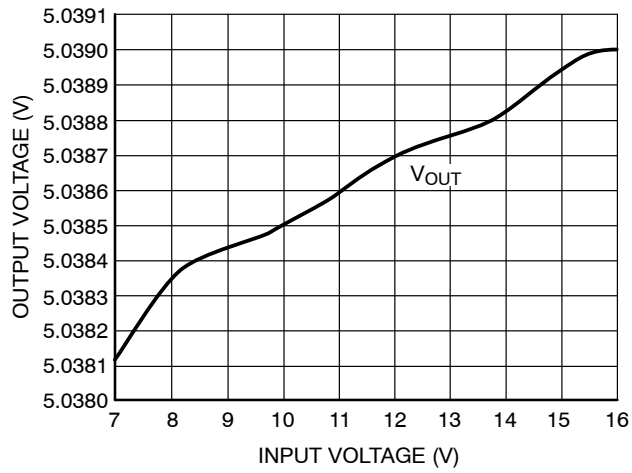


Figure 3. Line Regulation

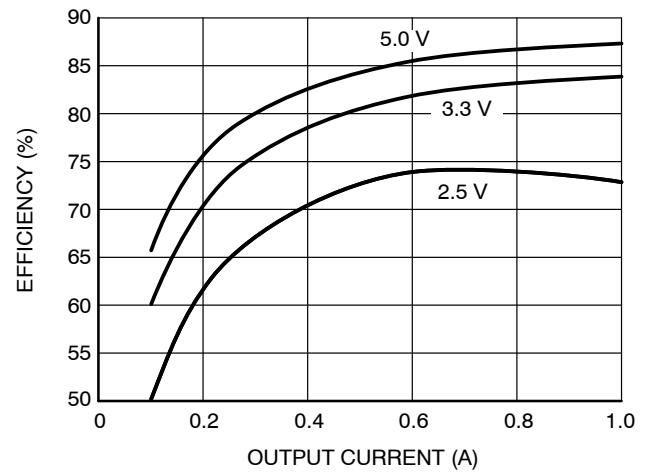


Figure 4. Efficiency vs. Output Current

NCV8842PWGEVB

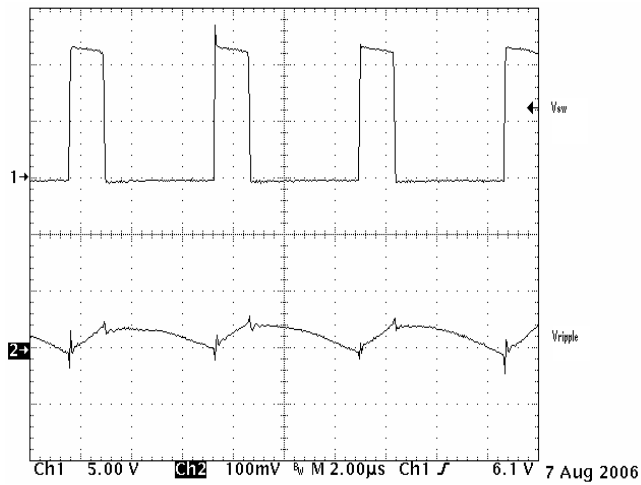


Figure 5. Continuous Mode Operation

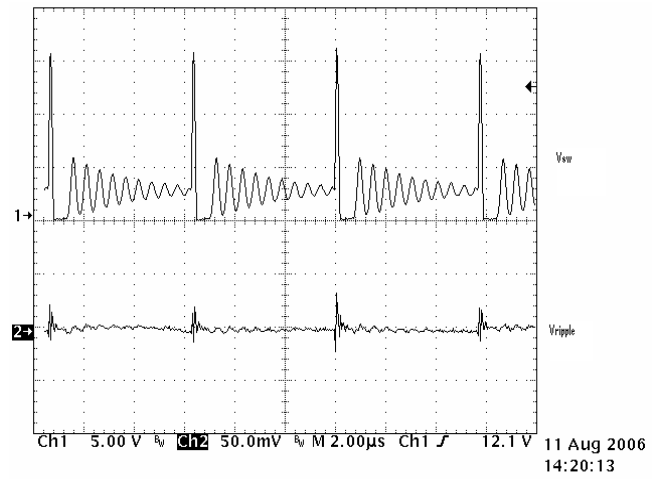


Figure 6. Discontinuous Mode Operation

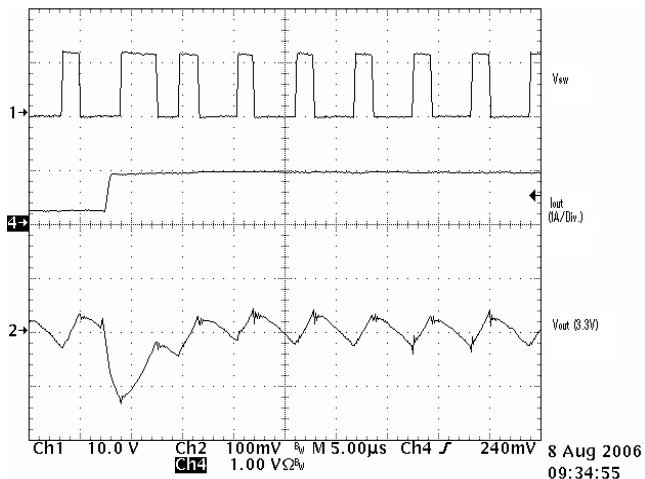


Figure 7. 300 mA to 1.0 A Load Step (3.3 V)

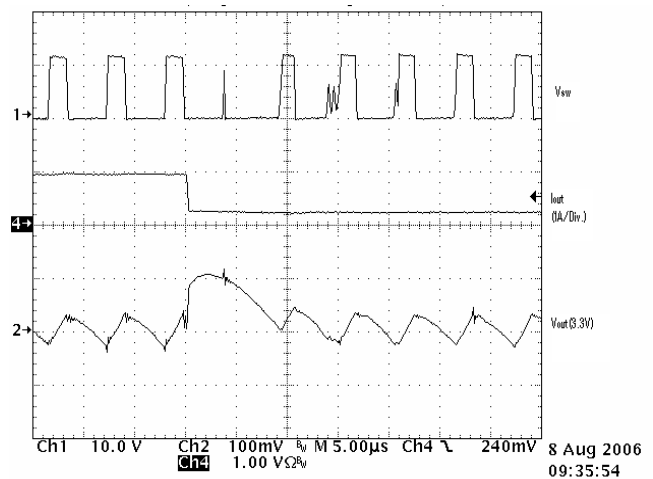


Figure 8. 1.0 A to 300 mA Load Release (3.3 V)

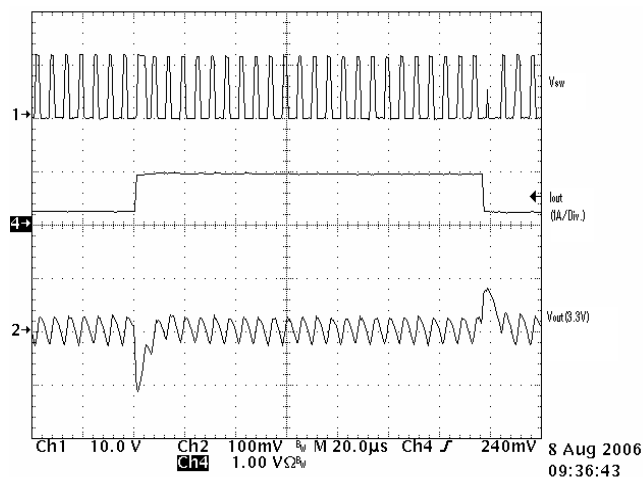


Figure 9. Overall 600 mA Load Response

NCV8842PWGEVB

Table 4. BILL OF MATERIALS

Ref. Designator	Vendor	Part Number	Type	PC/Board
C1	Panasonic	ECJ-1VB0J105K	1 μ F Ceramic	1
C2	Panasonic	EEVEC1V331P	330 μ F Electrolytic	1
C3	AVX	TAJE107K016R	100 μ F Tantalum	1
C4, C5	Panasonic	ECJ-1VBIC104K	0.1 μ F Ceramic	2
D1	ON Semiconductor	MBRM130LT3	Diode (Fast Switching)	1
D2	ON Semiconductor	MBRS240T3	2A Diode (Schottky)	1
R1	Panasonic	ERJ-3EKF2040V	124 Ω Resistor	1
R2	Panasonic	ERJ-3EKF1270V	127 Ω Resistor	1
R3	Panasonic	ERJ-3EKF205V	205 Ω Resistor	1
R4	Panasonic	ERJ-3EKF3740V	374 Ω Resistor	1
R5	Panasonic	ERJ-2GEY100V	10 Ω Resistor	1
R6	Panasonic	ERJ-2GEY103V	10 k Ω Resistor	1
L1	Würth	744771127	27 μ H Inductor	1
U1	ON Semiconductor	NCV8842	Controller	1
J1-J8	Vector	K24C/M	Test Points	8
BR1, 2, 3	Molex/Moldom	22-28-4020	Jumpers	3

NCV8842PWGEVB

DRAWINGS OF LAYERS

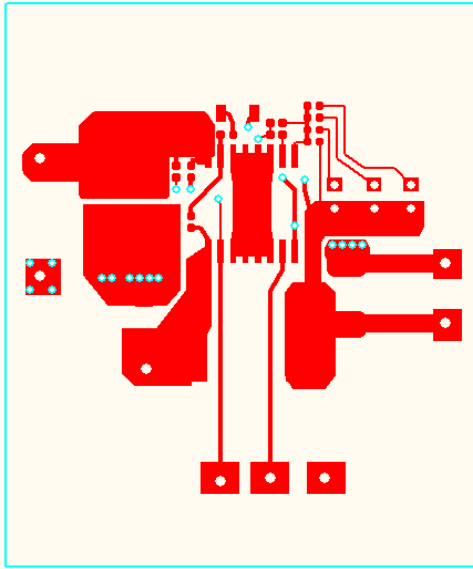


Figure 10. Top Copper

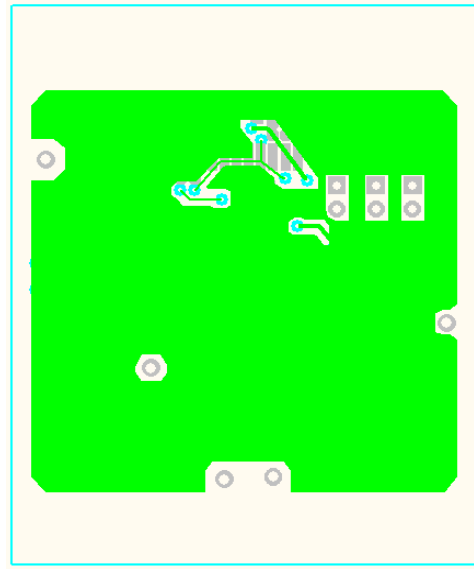


Figure 11. Bottom Copper

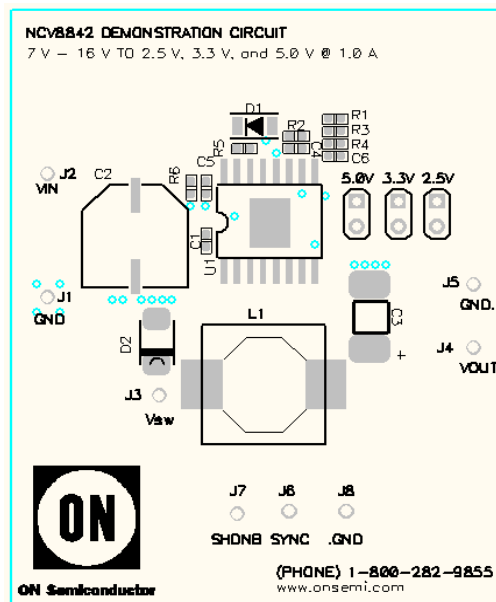


Figure 12. Top Silk

NCV8842PWGEVB

DFN EVALUATION CIRCUIT INFORMATION

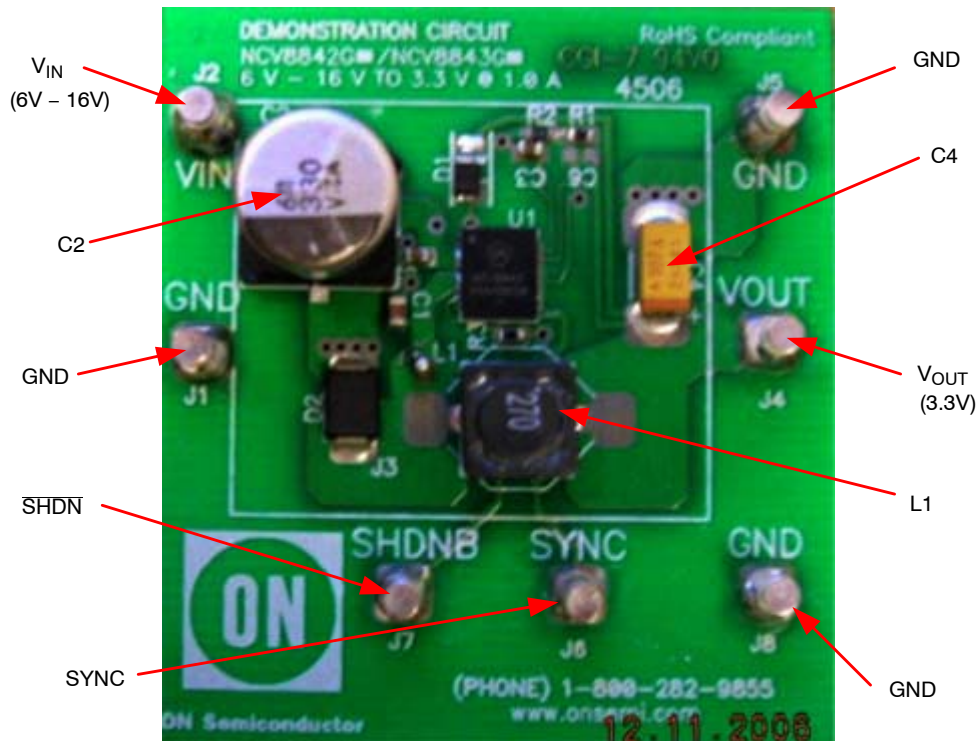


Figure 13. NCV8842 Evaluation Board (DFN Package)

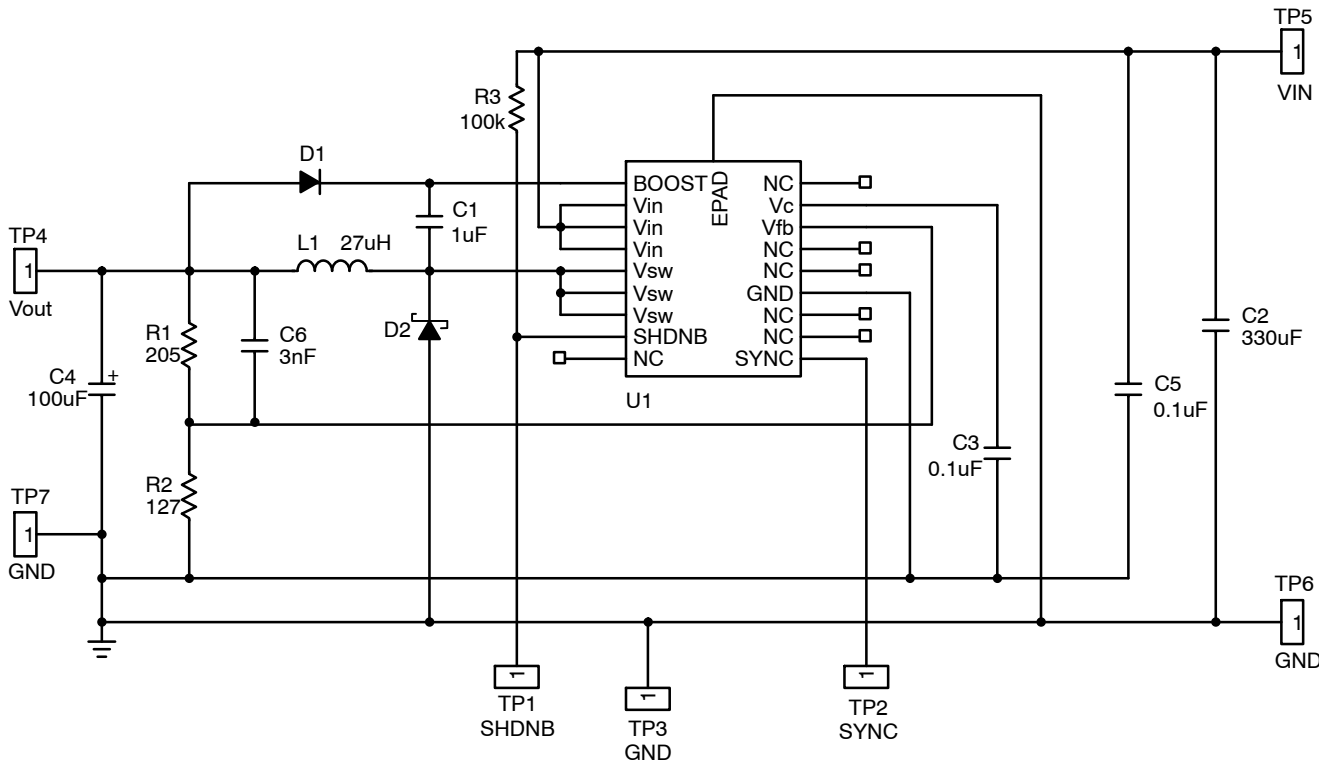


Figure 14. Application Diagram

NCV8842PWGEVB

Table 5. BILL OF MATERIALS

Ref Des	Type	Part Number	Vender	PC/Board
C3, C5	0.1 μ F Ceramic	PCC2398CT-ND	Panasonic	2
C1	1.0 μ F Ceramic	ECJ-1VBOJ105K	Panasonic	1
C2	330 μ F Electrolytic	MZA35VC331MJ10TP	United Chemi-Con	1
C4	100 μ F Tantalum	TPSC107K010R0075	AVX	1
C6	3.0 nF Ceramic	Not Used		1
D1	Diode	MBRM130LT1G	ON Semiconductor	1
D2	2 A Schottky Diode	MBRS240LT3G	ON Semiconductor	1
L1	27 μ H	7447779127	Würth	1
R1	205 Ω Resistor	P205HCT-ND	Panasonic	1
R2	127 Ω Resistor	P127HCT-ND	Panasonic	1
R3	100 k Ω Resistor	P100kHCT-ND	Panasonic	1
J1, J2, J4-J8	Test Points	2501-2-00-44-00-00-07-0	Mill-Max MFG	7
J3	Test Point (Vsw)	K24C/M	Vector	1
U1	Regulator	NCV8842G	ON Semiconductor	1

NCV8842PWGEVB

DRAWING OF LAYERS (DFN)

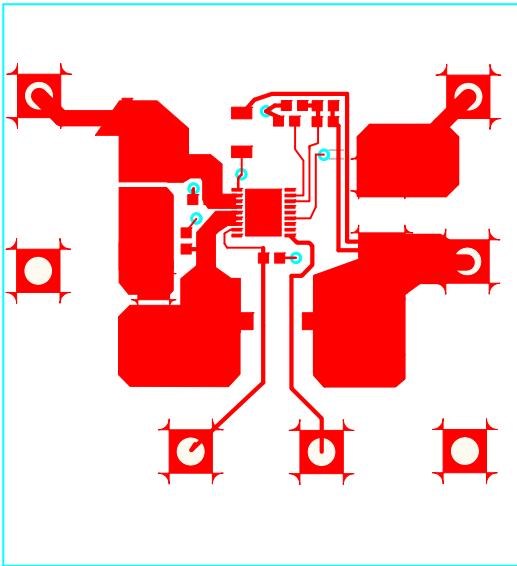


Figure 15. Top Copper

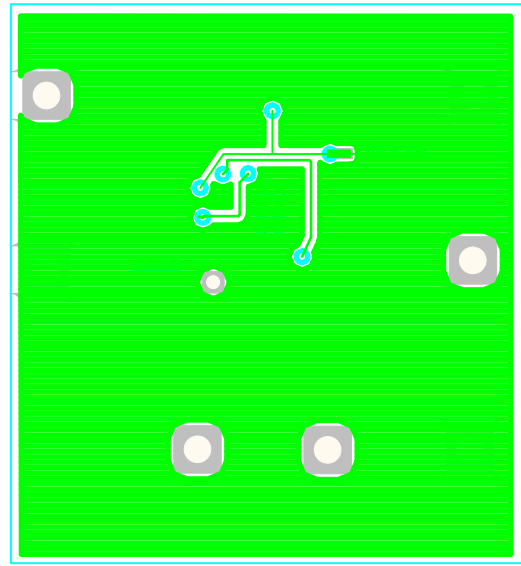


Figure 16. Bottom Copper

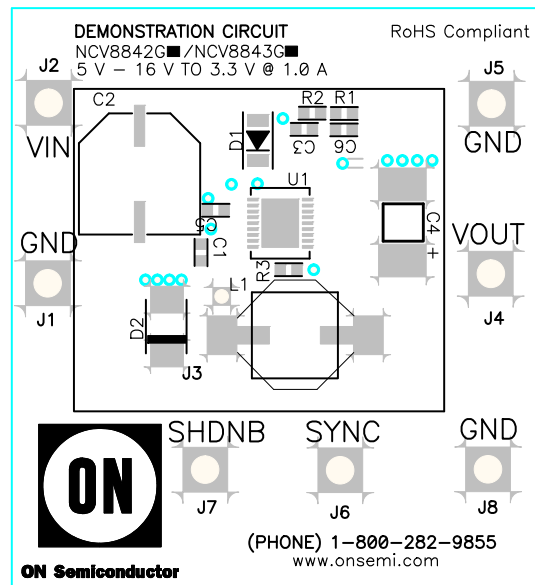


Figure 17. Top Silk

V² is a trademark of Switch Power, Inc.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative