

|                                                    |                             |
|----------------------------------------------------|-----------------------------|
| PKM 4000 PI series                                 | EN/LZT 146 310 R1B Nov 2006 |
| DC/DC converters, Input 36-75 V, Output 35 A/126 W | © Ericsson Power Modules AB |

Key Features

- Industry standard low profile Quarter-brick  
57.93 x 36.80 x 12.7 mm (2.278 x 1.449 x 0.50 in.)
- High efficiency, typ. 91 % at 2.5 Vout full load
- 1500 Vdc input to output isolation
- Meets isolation requirements equivalent to basic insulation according to IEC/EN/UL 60950
- More than 1.55 million hours MTBF according to Telcordia



General Characteristics

- Output over voltage protection
- Input under voltage protection
- Over temperature protection
- Soft start
- Output short-circuit protection
- Remote sense
- Remote control
- Output voltage adjust function
- Highly automated manufacturing ensures quality
- ISO 9001/14001 certified supplier

Safety Approvals



Design for Environment



Meets requirements in high-temperature lead-free soldering processes.

Contents

|                                      |                       |
|--------------------------------------|-----------------------|
| General Information                  | 2                     |
| Safety Specification                 | 3                     |
| Absolute Maximum Ratings             | 4                     |
| Product Program                      | Ordering No.          |
| 1.5 V/20 A Electrical Specification  | PKM 4318 P10A ..... 5 |
| 1.5 V/30 A Electrical Specification  | PKM 4418A P10A..... 8 |
| 1.8 V/20 A Electrical Specification  | PKM 4318 PI ..... 11  |
| 1.8 V/30 A Electrical Specification  | PKM 4518A PI..... 14  |
| 1.8 V/35 A Electrical Specification  | PKM 4618A PI..... 17  |
| 2.5 V/20 A Electrical Specification  | PKM 4519 PI..... 20   |
| 2.5 V/30 A Electrical Specification  | PKM 4719A PI..... 23  |
| 3.3 V/15 A Electrical Specification  | PKM 4510 PI ..... 26  |
| 3.3 V/20 A Electrical Specification  | PKM 4610 PI ..... 29  |
| 3.3 V/25 A Electrical Specification  | PKM 4810A PI..... 32  |
| 5 V/15 A Electrical Specification    | PKM 4711 PI ..... 35  |
| 5 V/20 A Electrical Specification    | PKM 4111 PI ..... 38  |
| 12 V/10.5 A Electrical Specification | PKM 4113 PI ..... 41  |
| EMC Specification                    | 44                    |
| Operating Information                | 45                    |
| Thermal Consideration                | 47                    |
| Connections                          | 47                    |
| Mechanical Information               | 48                    |
| Soldering Information                | 49                    |
| Delivery Information                 | 49                    |
| Product Qualification Specification  | 50                    |

**PKM 4000 PI series**
**DC/DC converters, Input 36-75 V, Output 35 A/126 W**

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## General Information

### Ordering Information

See Contents for individual product ordering numbers.

| Option                         | Suffix | Ordering No.  |
|--------------------------------|--------|---------------|
| Positive Remote Control Logic  | P      | PKM 4610 PIP  |
| Lead length 3.69 mm (0.145 in) | LA     | PKM 4610 PILA |

Note: As an example a positive logic, short pin product would be PKM 4610 PIPLA.

### Reliability

The Mean Time Between Failure (MTBF) is calculated at full output power and an operating ambient temperature ( $T_A$ ) of +40°C, which is a typical condition in Information and Communication Technology (ICT) equipment. Different methods could be used to calculate the predicted MTBF and failure rate which may give different results. Ericsson Power Modules currently uses two different methods, Ericsson failure rate data system DependTool and Telcordia SR332.

Predicted MTBF for the series is:

- 3.5 million hours according to DependTool.
- 1.55 million hours according to Telcordia SR332, issue 1, Black box technique.

The Ericsson failure rate data system is based on field tracking data. The data corresponds to actual failure rates of components used in ICT equipment in temperature controlled environments ( $T_A = -5...+65^\circ\text{C}$ ). Telcordia SR332 is a commonly used standard method intended for reliability calculations in ICT equipment. The parts count procedure used in this method was originally modelled on the methods from MIL-HDBK-217F, Reliability Predictions of Electronic Equipment. It assumes that no reliability data is available on the actual units and devices for which the predictions are to be made, i.e. all predictions are based on generic reliability parameters.

### Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2002/95/EC and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Ericsson Power Modules products include:

- Lead in high melting temperature type solder (used to solder the die in semiconductor packages)
- Lead in glass of electronics components and in electronic ceramic parts (e.g. fill material in chip resistors)
- Lead as an alloying element in copper alloy containing

up to 4% lead by weight (used in connection pins made of Brass)

The exemption for lead in solder for servers, storage and storage array systems, network infrastructure equipment for switching, signaling, transmission as well as network management for telecommunication are only utilized in products intended for end-users' leaded (SnPb Eutectic) soldering processes.

### Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, 6σ (sigma), and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of our products.

### Warranty

Warranty period and conditions are defined in Ericsson Power Modules General Terms and Conditions of Sale.

### Limitation of Liability

Ericsson Power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

PKM 4000 PI series

DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## Safety Specification

### General information

Ericsson Power Modules DC/DC converters and DC/DC regulators are designed in accordance with safety standards IEC/EN/UL60950, *Safety of Information Technology Equipment*.

IEC/EN/UL60950 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Energy hazards
- Fire
- Mechanical and heat hazards
- Radiation hazards
- Chemical hazards

On-board DC-DC converters are defined as component power supplies. As components they cannot fully comply with the provisions of any Safety requirements without "Conditions of Acceptability". It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable Safety standards and Directives for the final product.

Component power supplies for general use should comply with the requirements in IEC60950, EN60950 and UL60950 "Safety of information technology equipment".

There are other more product related standards, e.g. IEEE802.3af "Ethernet LAN/MAN Data terminal equipment power", and ETS300132-2 "Power supply interface at the input to telecommunications equipment; part 2: DC", but all of these standards are based on IEC/EN/UL60950 with regards to safety.

Ericsson Power Modules DC/DC converters and DC/DC regulators are UL60950 recognized and certified in accordance with EN60950.

The flammability rating for all construction parts of the products meets requirements for V-0 class material according to IEC 60695-11-10.

The products should be installed in the end-use equipment, in accordance with the requirements of the ultimate application. Normally the output of the DC/DC converter is considered as SELV (Safety Extra Low Voltage) and the input source must be isolated by minimum Double or Reinforced Insulation from the primary circuit (AC mains) in accordance with IEC/EN/UL60950.

### Isolated DC/DC converters

It is recommended that a slow blow fuse with a rating twice the maximum input current per selected product be used at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter.

In the rare event of a component problem in the input filter or in the DC/DC converter that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the faulty DC/DC converter from the input power source so as not to affect the operation of other parts of the system.
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating.

The galvanic isolation is verified in an electric strength test. The test voltage ( $V_{iso}$ ) between input and output is 1500 Vdc or 2250 Vdc for 60 seconds (refer to product specification).

Leakage current is less than 1  $\mu$ A at nominal input voltage.

### 24 V DC systems

The input voltage to the DC/DC converter is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

### 48 and 60 V DC systems

If the input voltage to Ericsson Power Modules DC/DC converter is 75 Vdc or less, then the output remains SELV (Safety Extra Low Voltage) under normal and abnormal operating conditions.

Single fault testing in the input power supply circuit should be performed with the DC/DC converter connected to demonstrate that the input voltage does not exceed 75 Vdc.

If the input power source circuit is a DC power system, the source may be treated as a TNV2 circuit and testing has demonstrated compliance with SELV limits and isolation requirements equivalent to Basic Insulation in accordance with IEC/EN/UL60950.

### Non-isolated DC/DC regulators

The input voltage to the DC/DC regulator is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.


|                                                                          |                             |
|--------------------------------------------------------------------------|-----------------------------|
| PKM 4000 PI series<br>DC/DC converters, Input 36-75 V, Output 35 A/126 W | EN/LZT 146 310 R1B Nov 2006 |
|                                                                          | © Ericsson Power Modules AB |

Absolute Maximum Ratings

| Characteristics  |                                                                   |                       | min  | typ | max               | Unit |
|------------------|-------------------------------------------------------------------|-----------------------|------|-----|-------------------|------|
| T <sub>ref</sub> | Operating Temperature (see Thermal Consideration section)         |                       | -40  |     | +100              | °C   |
| T <sub>S</sub>   | Storage temperature                                               |                       | -40  |     | +125              | °C   |
| V <sub>I</sub>   | Input voltage                                                     |                       | -0.5 |     | +80               | V    |
| V <sub>iso</sub> | Isolation voltage (input to output test voltage)                  |                       |      |     | 1500              | Vdc  |
| V <sub>tr</sub>  | Input voltage transient (Tp 100 ms)                               |                       |      |     | 100               | V    |
| V <sub>RC</sub>  | Remote Control pin voltage<br>(see Operating Information section) | Positive logic option | -0.5 |     | 12                | V    |
|                  |                                                                   | Negative logic option | -0.5 |     | 12                | V    |
| V <sub>adj</sub> | Adjust pin voltage (see Operating Information section)            |                       | -0.5 |     | 2xV <sub>oi</sub> | V    |

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Fundamental Circuit Diagram

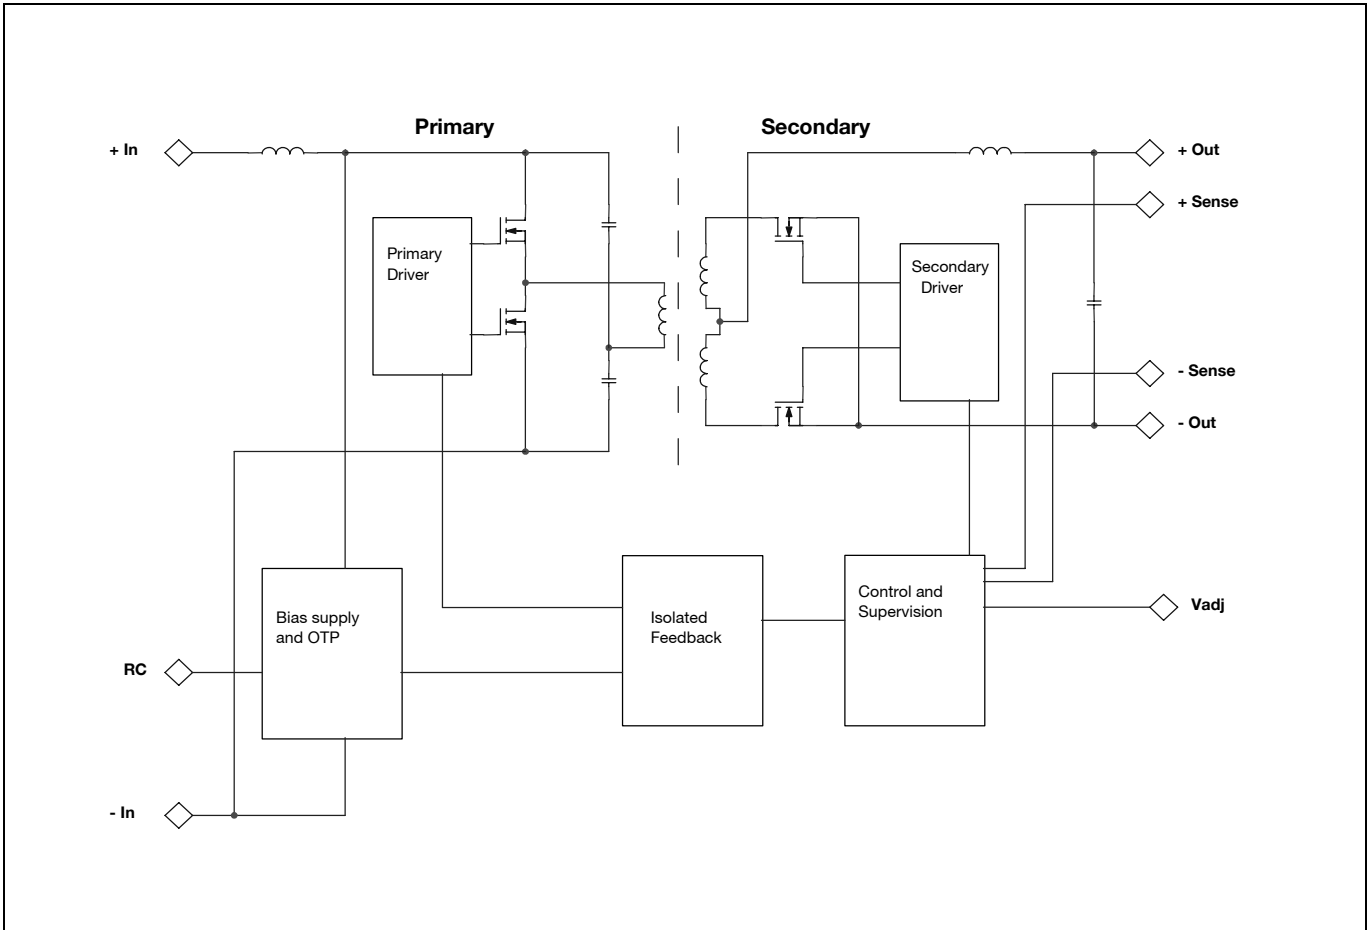

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 1.5V/20A Electrical Specification

### PKM 4318 PIOA

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 30  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 86.0 |     | %             |
|                 |                               | max $I_O$                         | 85.0 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 85.6 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 84.8 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 5.5  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 1.48 | 1.50      | 1.52 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 1.2  |           | 1.66 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 1.43 |           | 1.58 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 1.50      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 20   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 21   | 24        | 26   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 26        | 28   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 70        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 2.2  | 2.5       | 2.8  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.5V/20A Typical Characteristics


## PKM 4318 P10A

### Efficiency

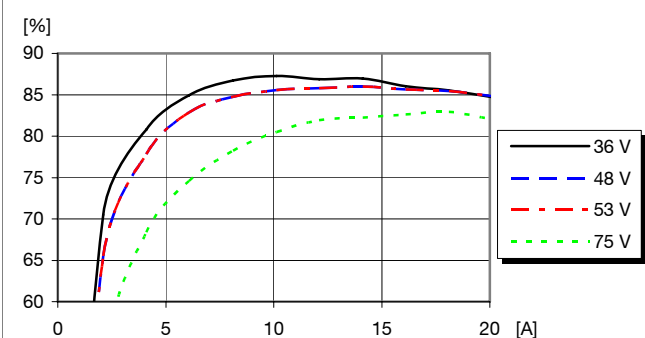


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

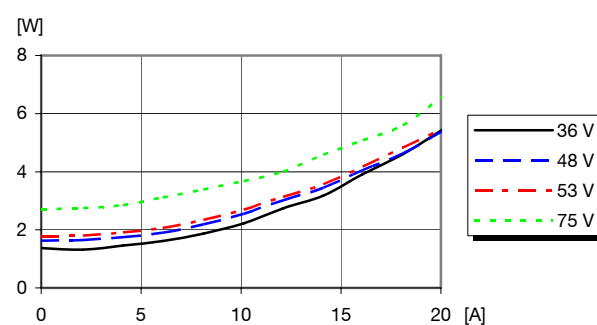


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

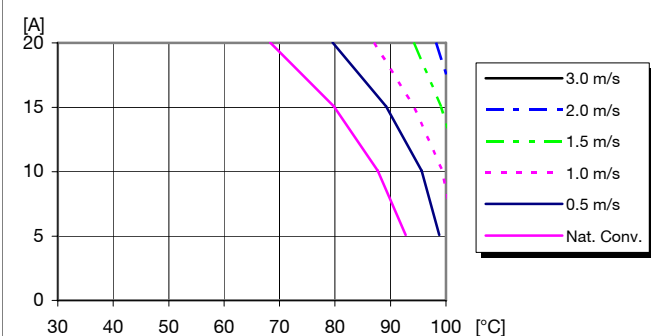


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

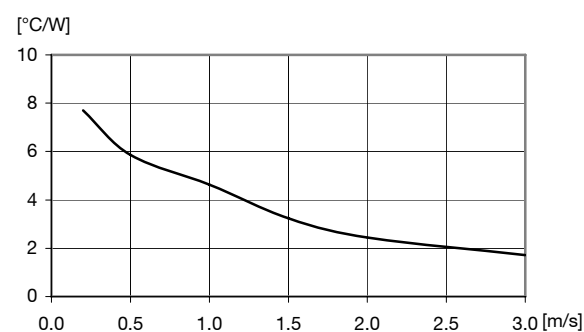


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

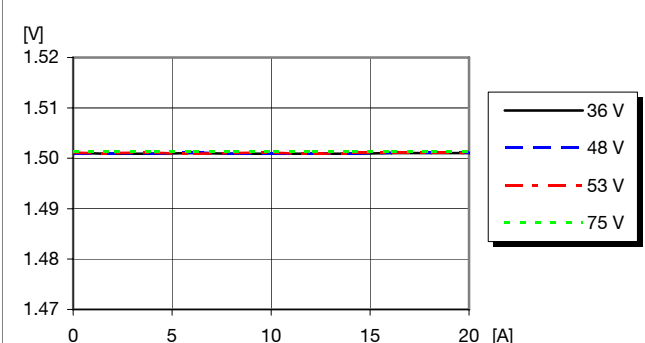

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

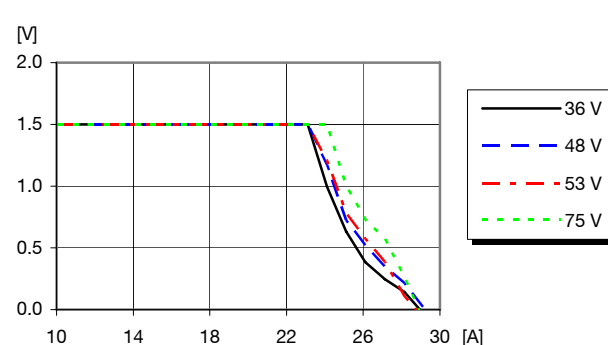

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.5 V/20 A Typical Characteristics

## PKM 4318 PIOA


### Start-up

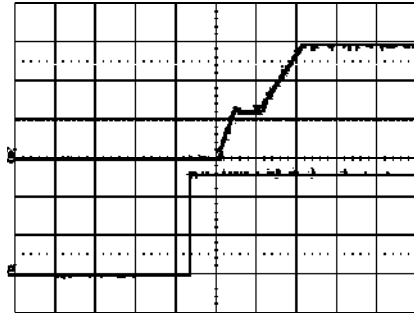

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div.).  
Bottom trace: input voltage (20 V/div.).  
Time scale: 10 ms/div..


### Shut-down

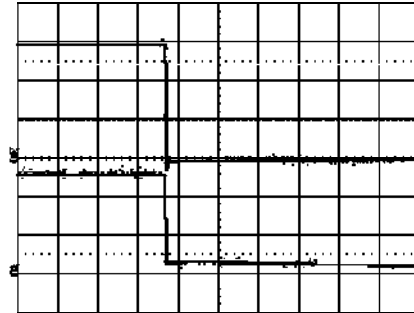

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div.).  
Bottom trace: input voltage (20 V/div.).  
Time scale: 5 ms/div..

### Output Ripple & Noise

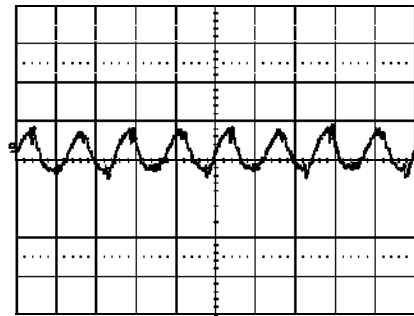

Output voltage ripple (50mV/div.) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div.

See the filter in the Output ripple and noise  
section (EMC Specification).

### Output Load Transient Response



Output voltage response to load current  
step-change 5-15 A at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (100mV/div.).  
Time scale: 0.1 ms/div..

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(1.5(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 1.560 \text{ Vdc}$$

$$5.11(1.5(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 24.7 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 1.470 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 1.5V/30A Electrical Specification

### PKM 4418A PIOA

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.

Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | 31                                | 33   |     | V             |
| $V_{lon}$       | Turn-on input voltage         |                                   | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  |                                   |      | 45  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     |      | 53  | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 88.7 |     | %             |
|                 |                               | max $I_O$                         | 88.0 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 89.6 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 88.2 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 6.1  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 1.48 | 1.50      | 1.52 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 1.2  |           | 1.66 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 1.43 |           | 1.58 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 1.50      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 30   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 31   | 36        | 39   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 38        | 40   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 70        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 2.2  | 2.5       | 2.8  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.



PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.5V/30A Typical Characteristics


## PKM 4418A PIOA

### Efficiency

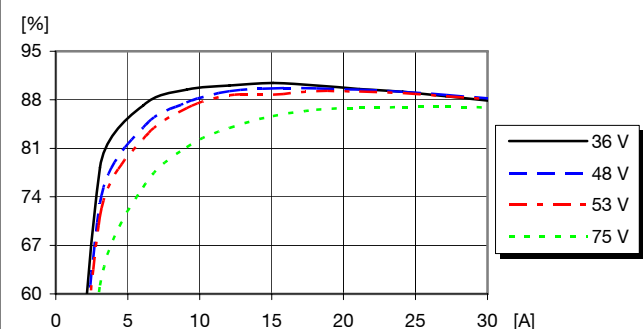


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

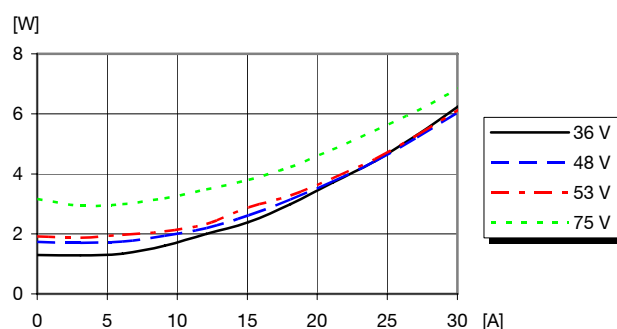


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

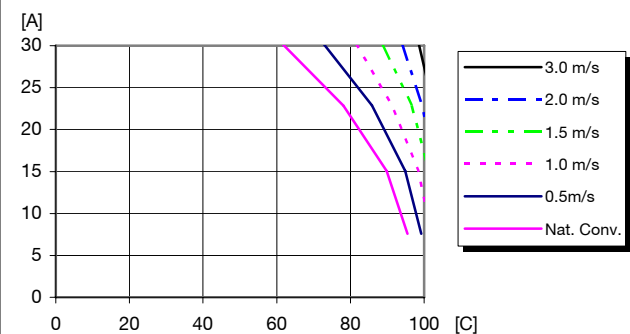


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

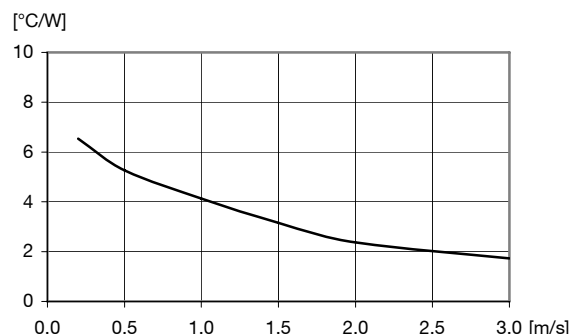


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

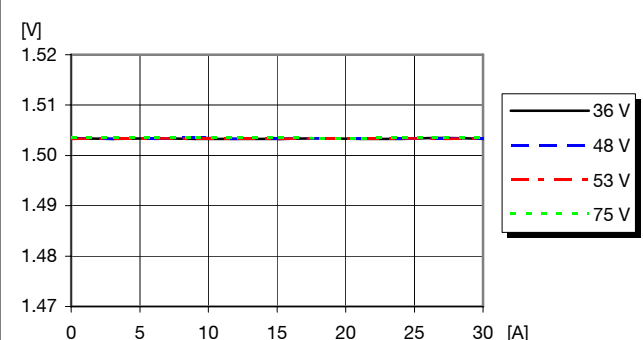

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

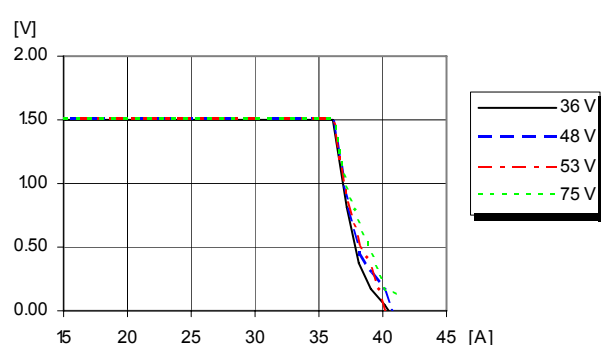

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.5V/30A Typical Characteristics

## PKM 4418A PIOA


### Start-up

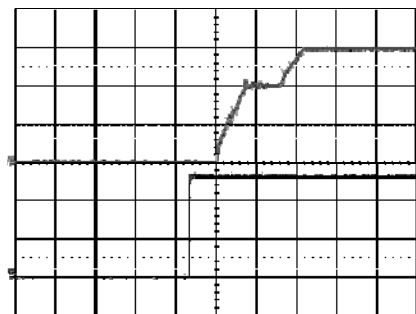

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_o = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: (10ms/div).


### Shut-down

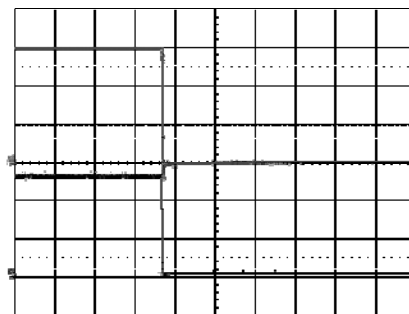

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_o = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: (5 ms/div).


### Output Ripple & Noise

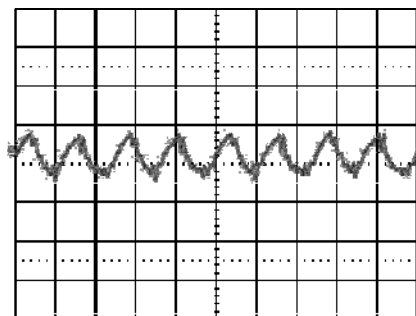

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_o = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div

See the filter in the Output ripple and noise  
section (EMC Specification).

### Output Load Transient Response

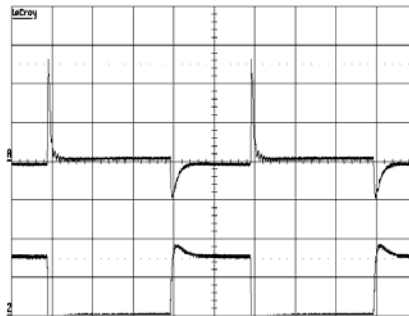

Output voltage response to load current  
step-change (7.5-22.5-7.5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (200mV/div).  
Time scale: 0.2 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(1.5(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 1.560 \text{ Vdc}$$

$$5.11(1.5(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 24.7 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 1.470 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 1.8V/20A Electrical Specification

### PKM 4318 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{Ioff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{Ion}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 36  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 87.0 |     | %             |
|                 |                               | max $I_O$                         | 86.6 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 87.3 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 87.0 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 5.6  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 1.77 | 1.80      | 1.83 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 1.44 |           | 2.0  | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 1.71 |           | 1.89 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 1.80      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 20   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 21   | 24        | 26   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 26        | 28   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 70        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 2.5  | 2.8       | 3.0  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.8V/20A Typical Characteristics


## PKM 4318 PI

### Efficiency

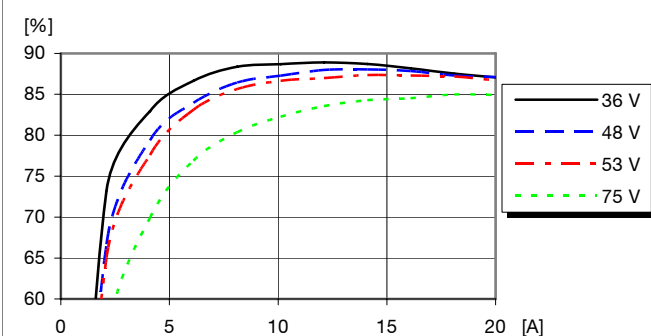


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

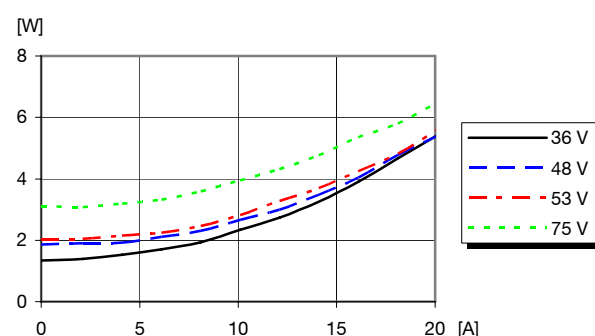


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

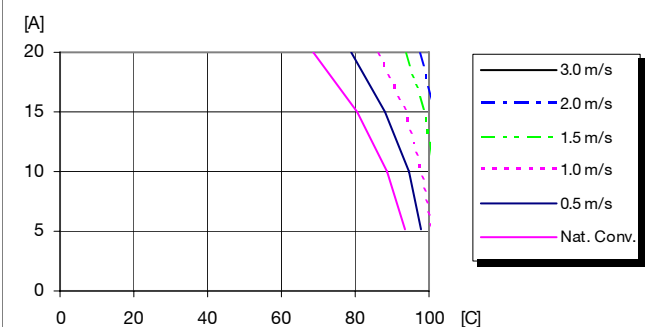


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

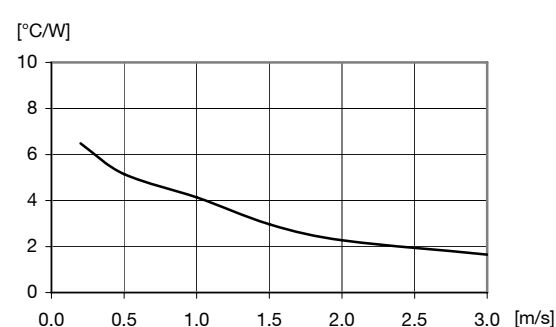


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

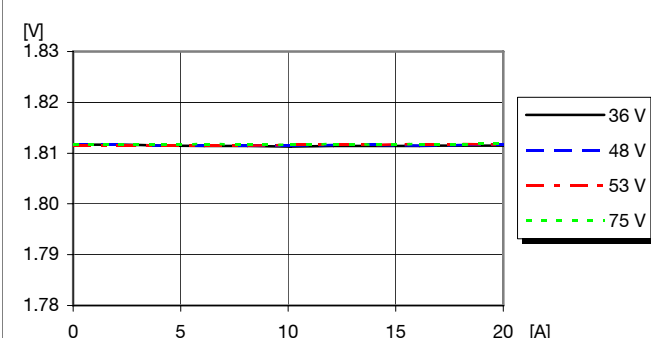

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

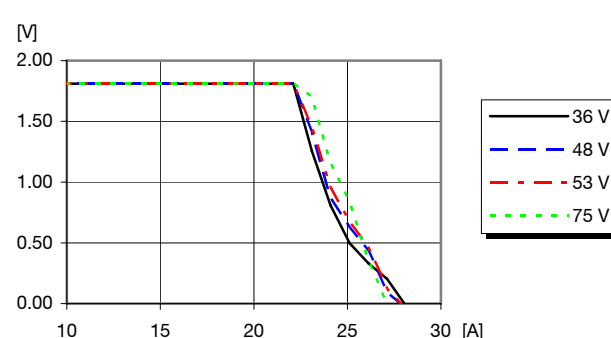

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.8V/20A Typical Characteristics

PKM 4318 PI


### Start-up

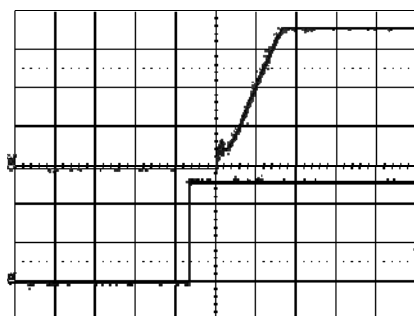

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

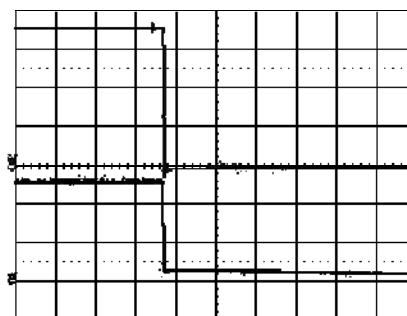

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


### Output Ripple & Noise

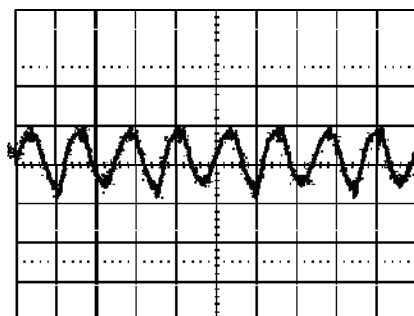

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div

See the filter in the Output ripple and noise  
section (EMC Specification).

### Output Load Transient Response

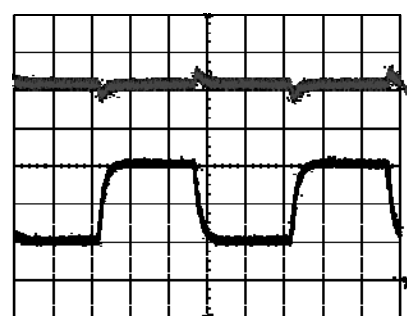

Output voltage response to load current  
step-change (5-15-5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (200mV/div).  
Time scale: 0.2 ms/div.

## Output Voltage Adjust (see operating information)

### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(1.8(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 1.872 \text{ Vdc}$$

$$5.11(1.8(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 57.25 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 1.764 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 1.8V/30A Electrical Specification

### PKM 4518A PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{Ioff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{Ion}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 54  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 88.0 |     | %             |
|                 |                               | max $I_O$                         | 88.6 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 88.9 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 88.8 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 7.0  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 1.77 | 1.80      | 1.83 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 1.44 |           | 2.0  | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 1.71 |           | 1.89 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 1.80      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 30   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \text{max } T_{ref}$                            | 31   | 36        | 39   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 38        | 40   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 70        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 2.5  | 2.8       | 3.0  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.8V/30A Typical Characteristics


## PKM 4518A PI

### Efficiency

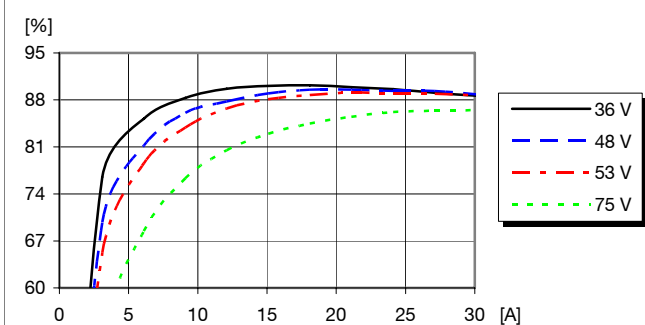


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

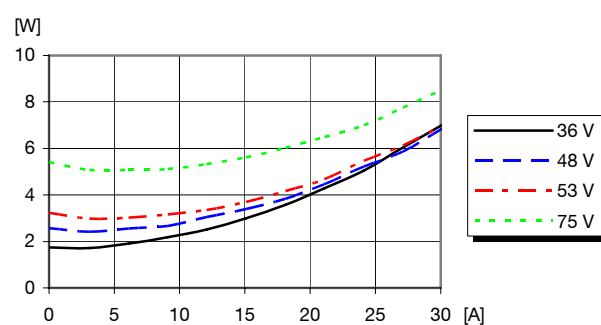


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

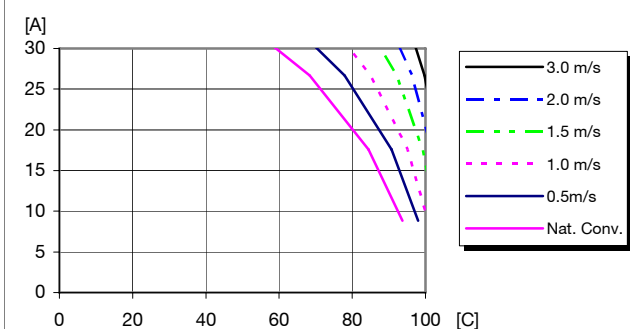


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

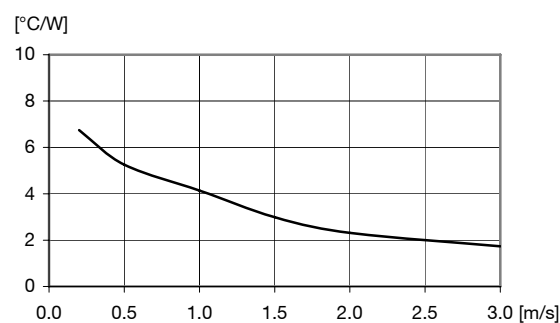


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

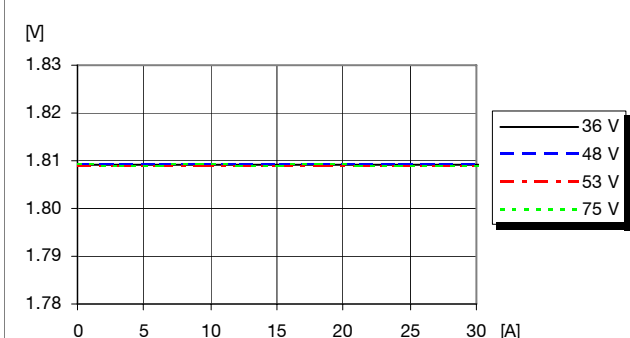

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

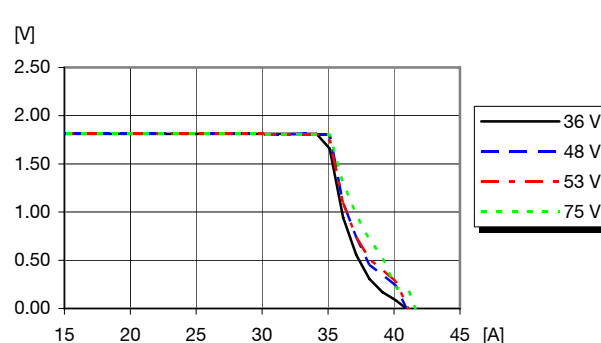

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.8V/30A Typical Characteristics

## PKM 4518A PI


### Start-up

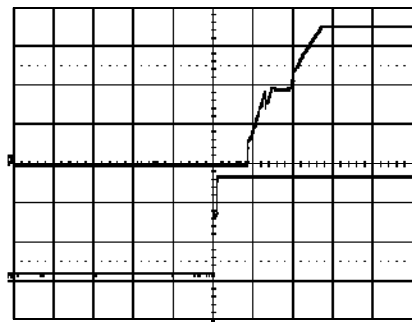

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

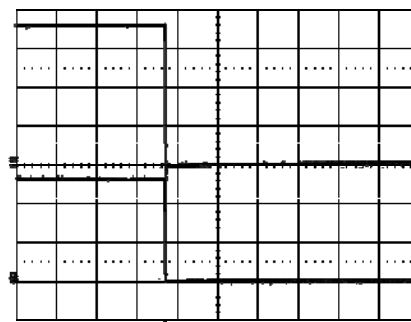

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


### Output Ripple & Noise

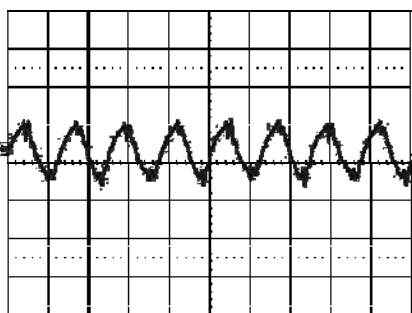

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div

See the filter in the Output ripple and noise section (EMC Specification).

### Output Load Transient Response

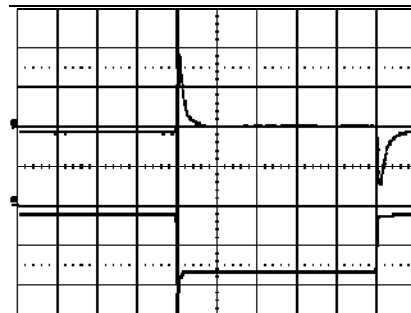

Output voltage response to load current step-change (7.5-22.5-7.5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (100mV/div).  
Time scale: {0.1 ms/div}.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(1.8(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

*Eg Increase 4%  $\Rightarrow V_{out} = 1.872\text{ Vdc}$*

$$5.11(1.8(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 57.25 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

*Eg Decrease 2%  $\Rightarrow V_{out} = 1.764\text{ Vdc}$*

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$



PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 1.8V/35A Electrical Specification

### PKM 4618A PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 2.8  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 63  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 89.8 |     | %             |
|                 |                               | max $I_O$                         | 88.6 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 90.1 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 88.4 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 8.2  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 1.77 | 1.80      | 1.83 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 1.44 |           | 2.0  | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 1.71 |           | 1.89 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 1.80      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 35   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 36   | 39        | 42   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 39        | 44   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 80        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 2.5  | 2.8       | 3.0  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.8V/35A Typical Characteristics


## PKM 4618A PI

### Efficiency

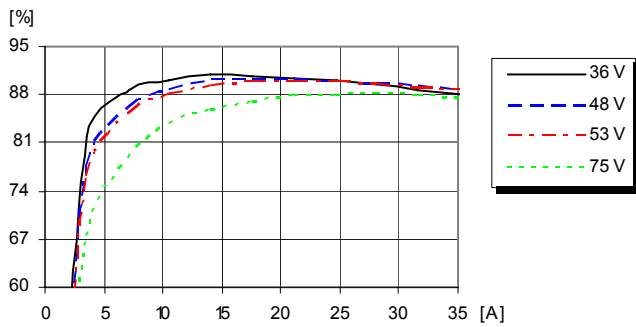


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

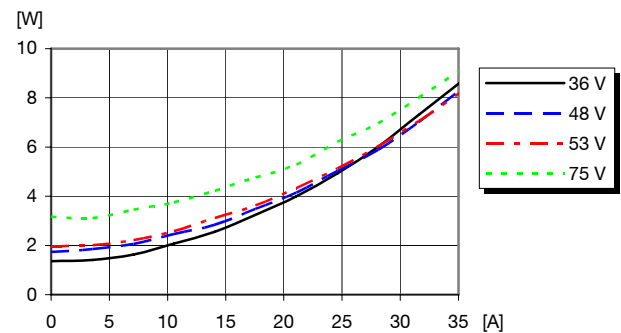


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

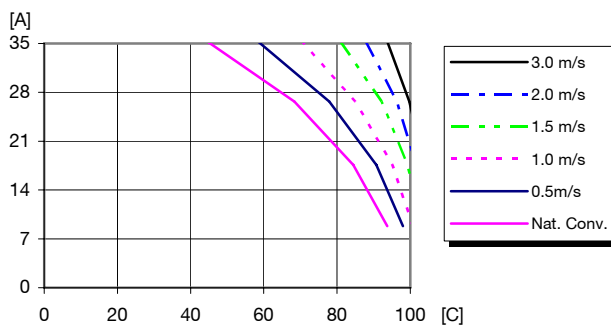


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

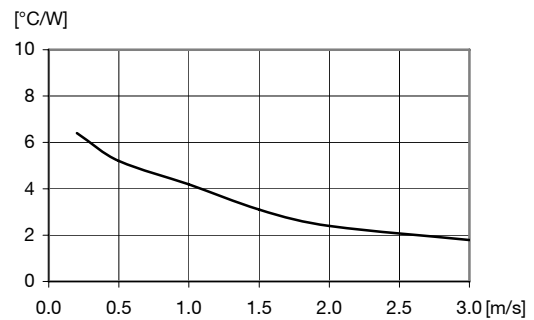


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

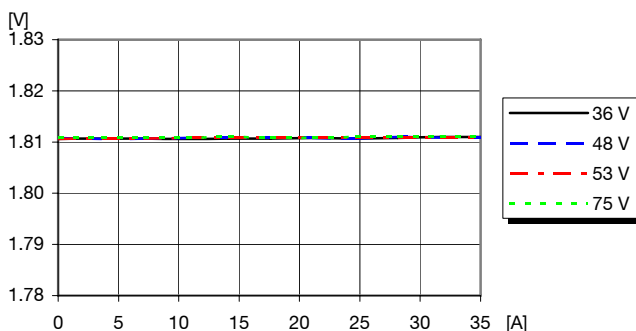

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

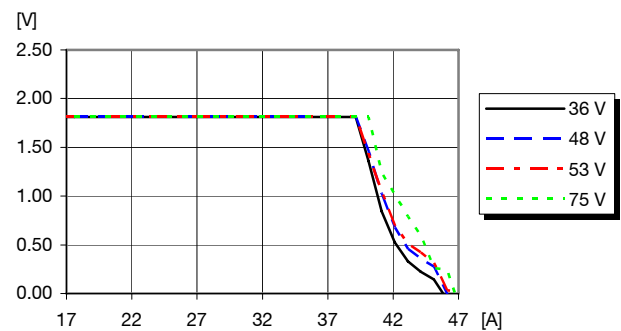

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 1.8V/35A Typical Characteristics

## PKM 4618A PI


### Start-up

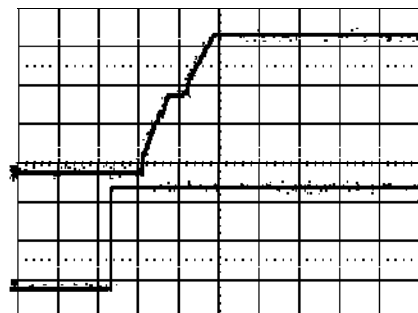

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 35\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

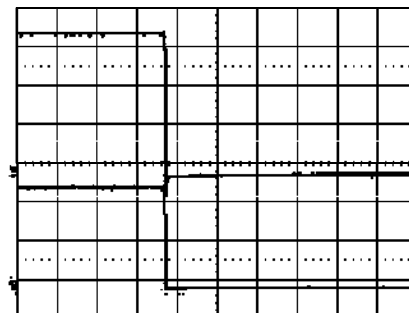

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 35\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


### Output Ripple & Noise

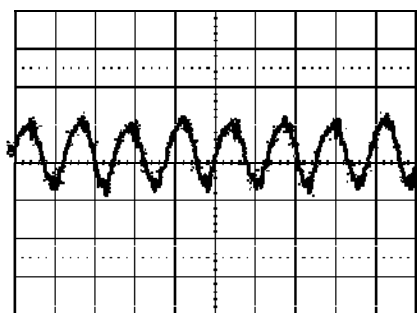

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 35\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div

See the filter in the Output ripple and noise section (EMC Specification).

### Output Load Transient Response

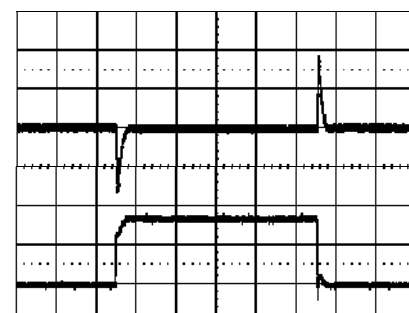

Output voltage response to load current step-Top trace: output voltage (100mV/div).  
change (8.75-26.25-8.75 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .  
Time scale: 0.1 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(1.8(100+\Delta\%)/((1.225 \Delta \%) - (100+2\Delta\%)/\Delta\%)) \text{ k}\Omega$$

*Eg Increase 4%  $\Rightarrow V_{out} = 1.872\text{ Vdc}$*

$$5.11(1.8(100+4)/(1.225 \times 4) - (100+2 \times 4)/4) = 57.25 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ k}\Omega$$

*Eg Decrease 2%  $\Rightarrow V_{out} = 1.764\text{ Vdc}$*

$$5.11(100/2 - 2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 2.5V/20A Electrical Specification

## PKM 4519 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.

Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 50  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 88.8 |     | %             |
|                 |                               | max $I_O$                         | 89.5 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 89.3 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 89.6 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 5.9  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 2.45 | 2.50      | 2.55 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 2.0  |           | 2.75 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 2.4  |           | 2.6  | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 2.50      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 20   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 21   | 24        | 26   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 26        | 30   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 60        | 100  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 3.2  | 3.7       | 4.2  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.


PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006  
© Ericsson Power Modules AB


2.5V/20A Typical Characteristics

PKM 4519 PI


Efficiency

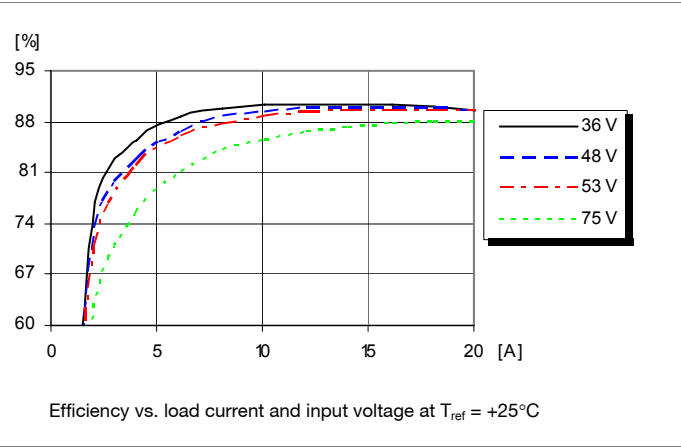


Power Dissipation

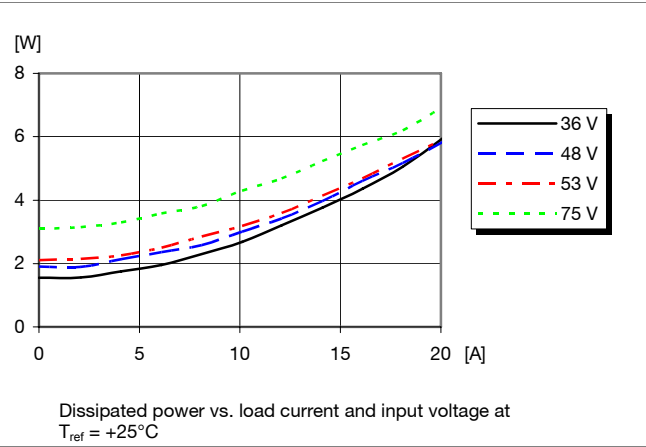


Output Current Derating

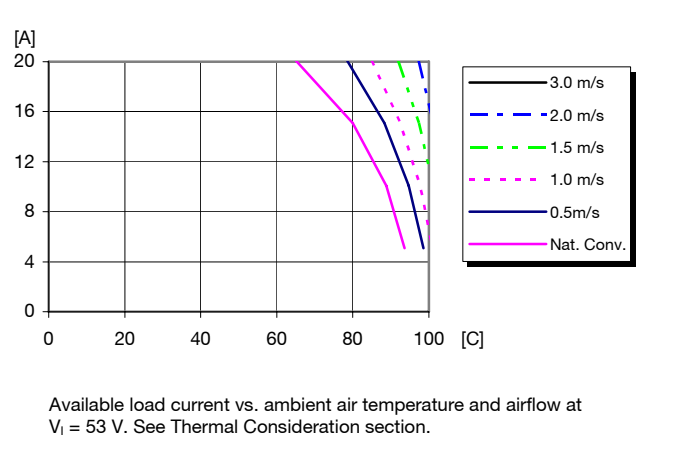


Thermal Resistance

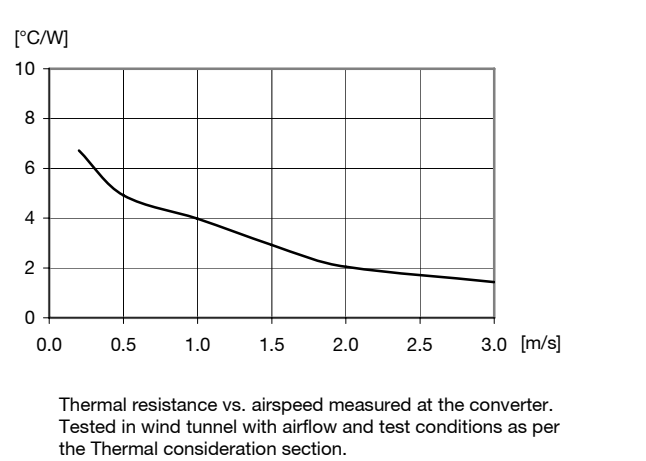

Output Characteristics

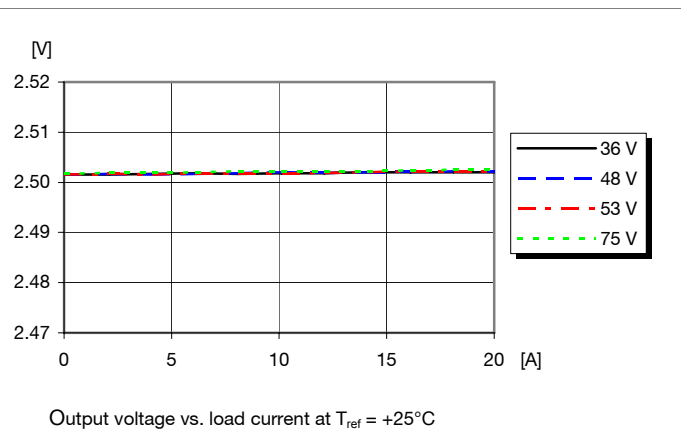

Current Limit Characteristics

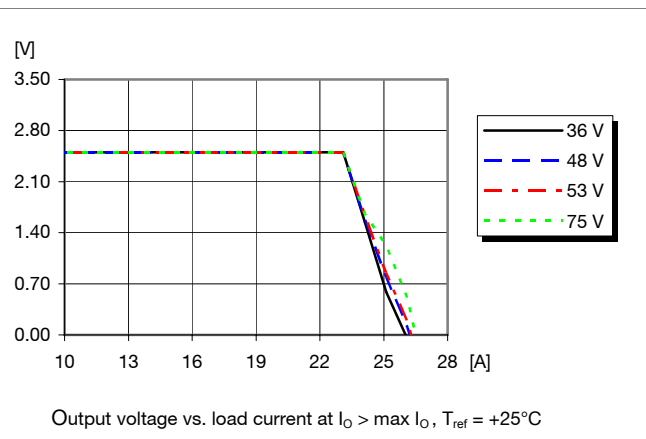

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 2.5V/20A Typical Characteristics

## PKM 4519 PI


### Start-up

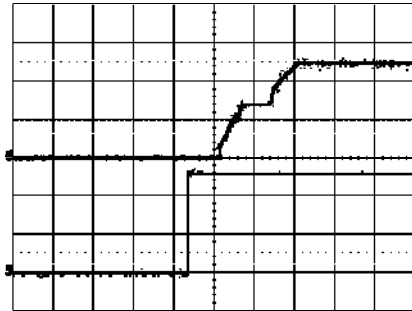

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

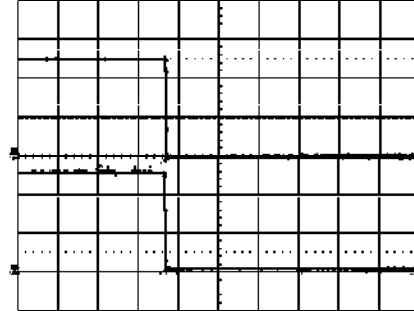

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


### Output Ripple & Noise

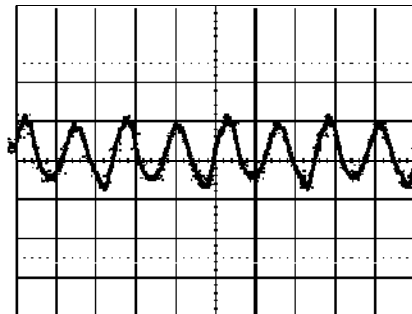

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}/\text{div}$

See the filter in the Output ripple and noise  
section (EMC Specification).

### Output Load Transient Response

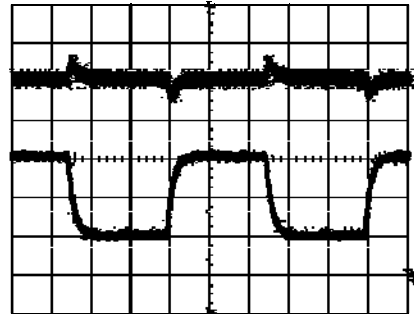

Output voltage response to load current  
step-change (5-15-5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (200mV/div).  
Time scale: 0.2 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(2.5(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 2.6 \text{ Vdc}$$

$$5.11(2.5(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 133.17 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 2.45 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 2.5V/30A Electrical Specification

## PKM 4719A PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 75  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 89.7 |     | %             |
|                 |                               | max $I_O$                         | 89.3 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 90.3 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 89.3 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 9.0  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 2.45 | 2.50      | 2.55 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 2.0  |           | 2.75 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 2.4  |           | 2.6  | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 2.50      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 30   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 31   | 36        | 39   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 38        | 40   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 60        | 100  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 3.2  | 3.7       | 4.2  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 2.5V/30A Typical Characteristics


## PKM 4719A PI

### Efficiency

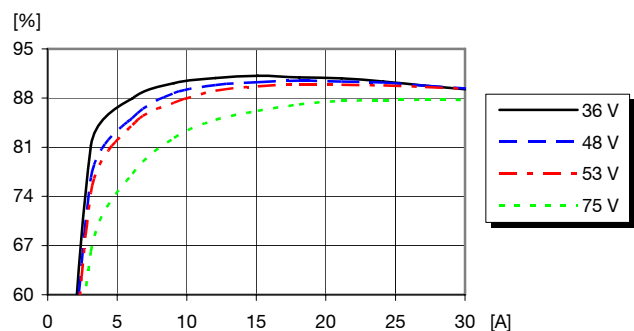


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

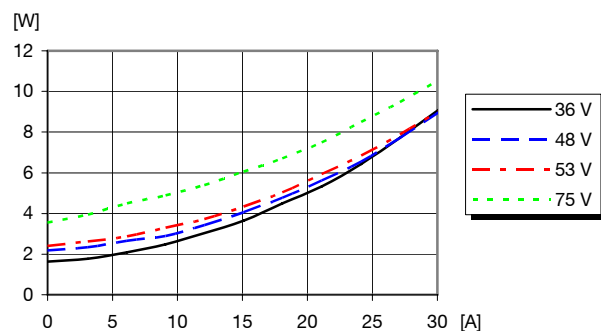


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

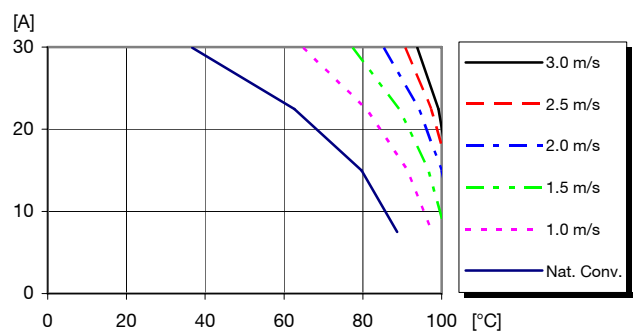


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

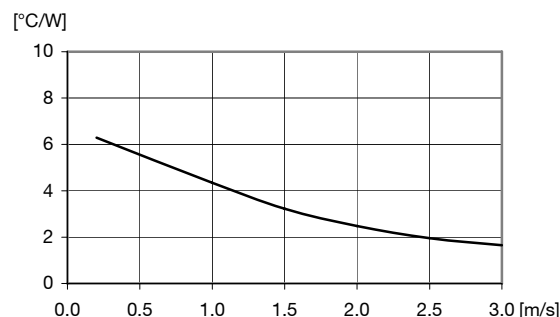


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

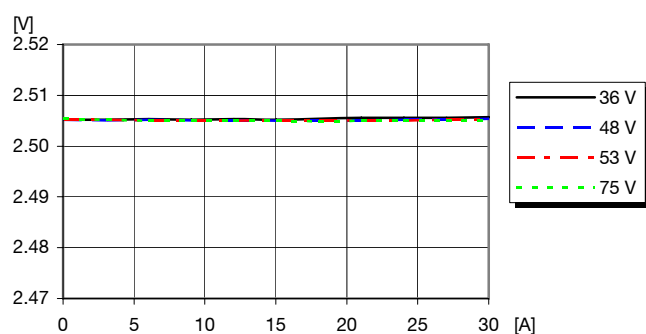

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

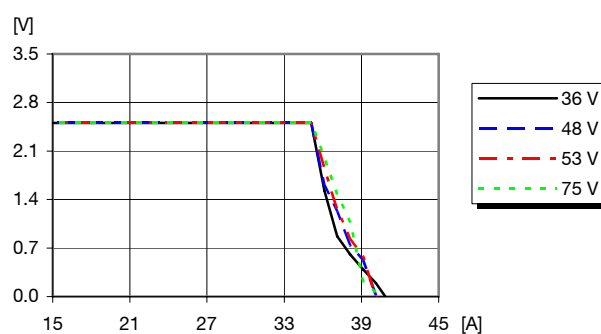

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$



PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 2.5V/30A Typical Characteristics

## PKM 4719A PI


### Start-up

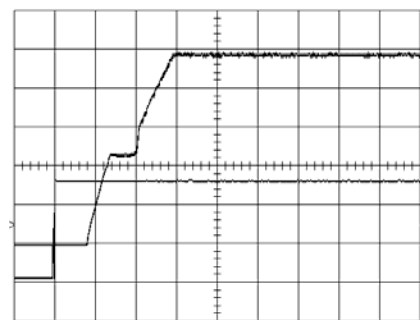

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (0.5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

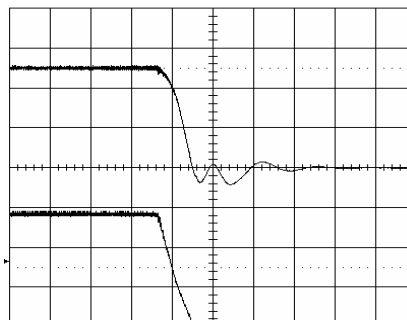

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 0.1 ms/div.


### Output Ripple & Noise

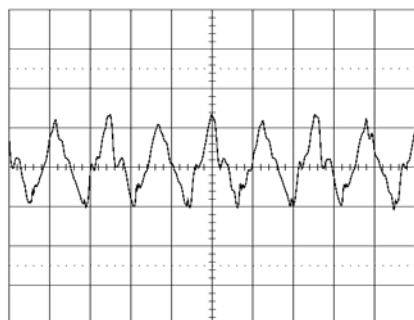

Output voltage ripple (20mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 30\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2 μs/div

See the filter in the Output ripple and noise  
section (EMC Specification).

### Output Load Transient Response

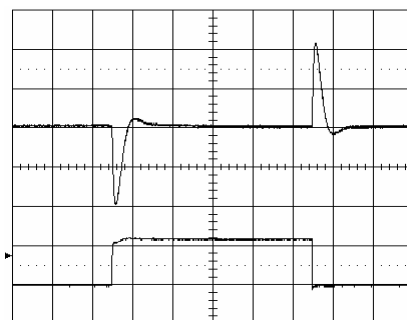

Output voltage response to load current  
step-change (7.5-22.5-7.5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (100mV/div).  
Time scale: 0.1 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(2.5(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

*Eg Increase 4% =>  $V_{out} = 2.6\text{ Vdc}$*

$$5.11(2.5(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 133.17 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

*Eg Decrease 2% =>  $V_{out} = 2.45\text{ Vdc}$*

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/15A Electrical Specification

### PKM 4510 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 50  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 90.4 |     | %             |
|                 |                               | max $I_O$                         | 90.3 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 90.8 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 90.4 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 5.3  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 150  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 3.25 | 3.30      | 3.35 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 2.64 |           | 3.63 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 3.2  |           | 3.4  | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 3.30      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 15   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 16   | 18        | 21   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 20        | 23   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 60        | 100  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 3.9  | 4.4       | 5.0  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.


PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006  
© Ericsson Power Modules AB


3.3V/15A Typical Characteristics

PKM 4510 PI


Efficiency

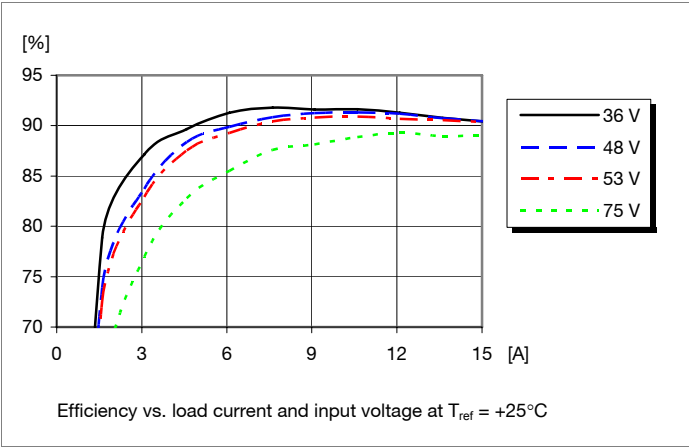


Power Dissipation

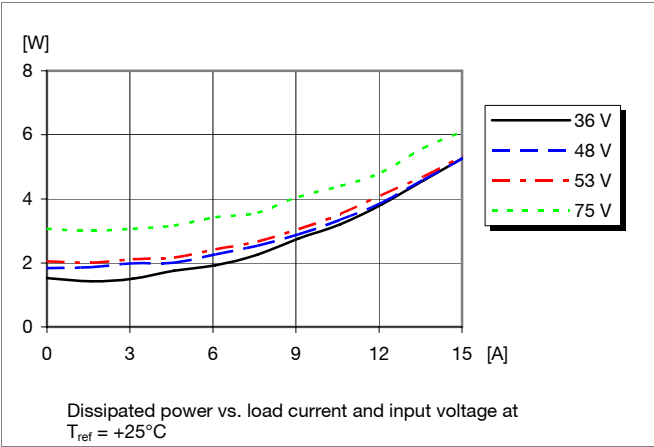


Output Current Derating

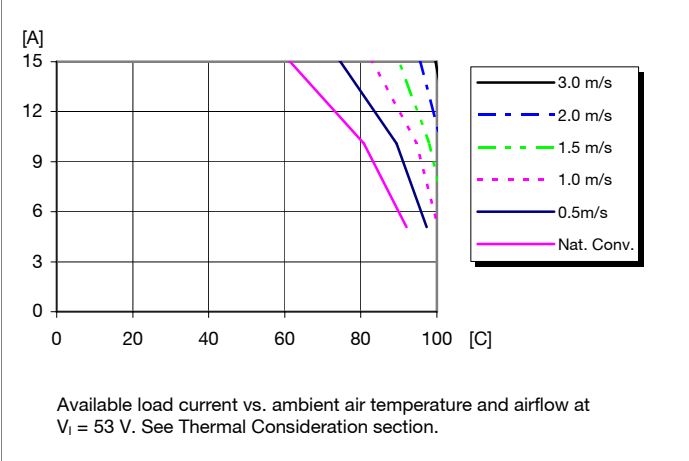


Thermal Resistance

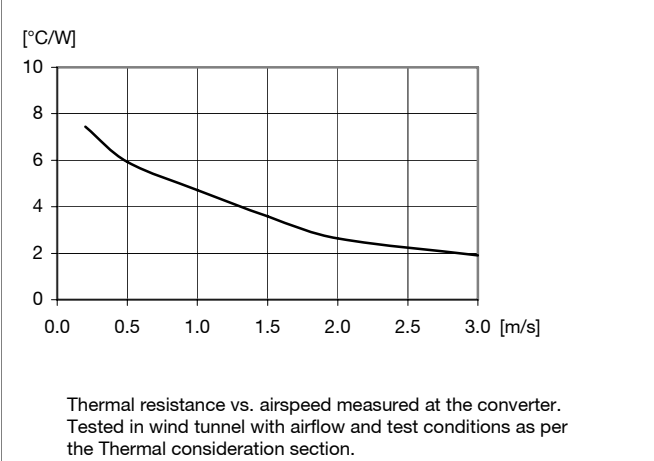

Output Characteristics

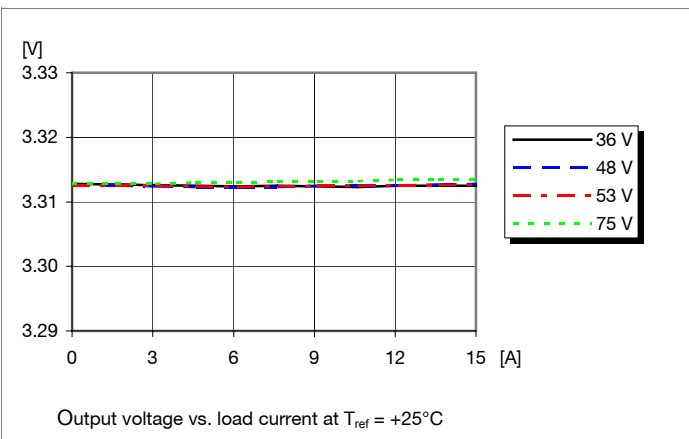

Current Limit Characteristics

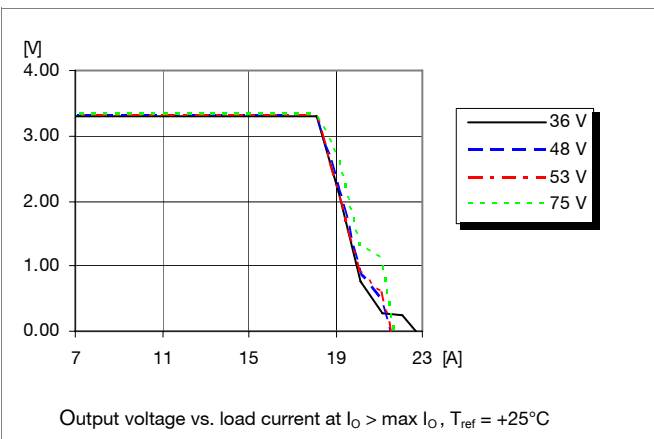

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/15A Typical Characteristics

### PKM 4510 PI


#### Start-up

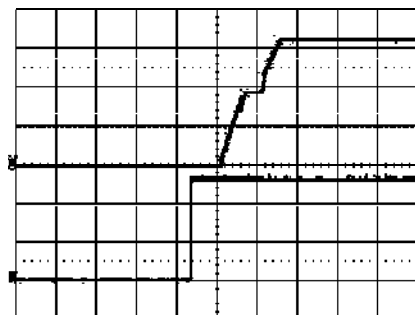

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 15\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


#### Shut-down

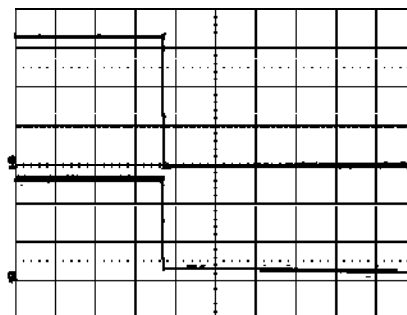

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 15\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


#### Output Ripple & Noise

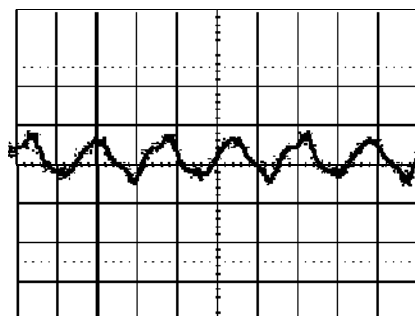

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 15\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2 μs/div

See the filter in the Output ripple and noise  
section (EMC Specification).

#### Output Load Transient Response

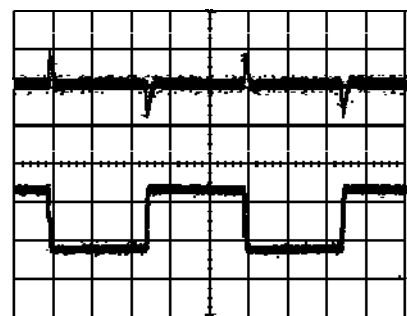

Output voltage response to load current  
step-change (3.75-11.25-3.75 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (200mV/div).  
Time scale: 0.2 ms/div.

#### Output Voltage Adjust (see operating information)

##### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(3.3(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 3.432 \text{ Vdc}$$

$$5.11(3.3(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 219.9 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 3.234 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/20A Electrical Specification

### PKM 4610 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 66  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 90.1 |     | %             |
|                 |                               | max $I_O$                         | 88.2 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 90.8 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 88.3 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 8.9  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 150  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 3.25 | 3.30      | 3.35 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 2.64 |           | 3.63 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 3.2  |           | 3.4  | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 3.30      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 20   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 21   | 24        | 26   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 26        | 28   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 60        | 100  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 3.9  | 4.4       | 5.0  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.


PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006  
© Ericsson Power Modules AB


3.3V/20A Typical Characteristics

PKM 4610 PI


Efficiency

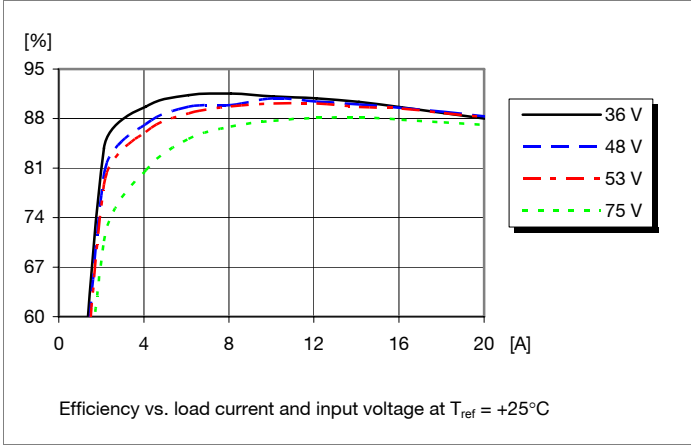


Power Dissipation

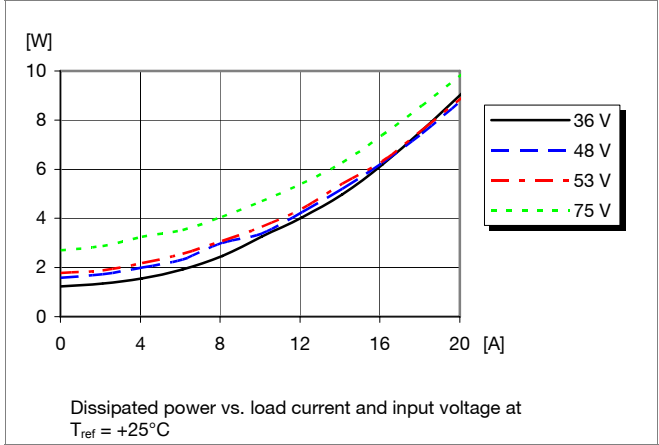


Output Current Derating

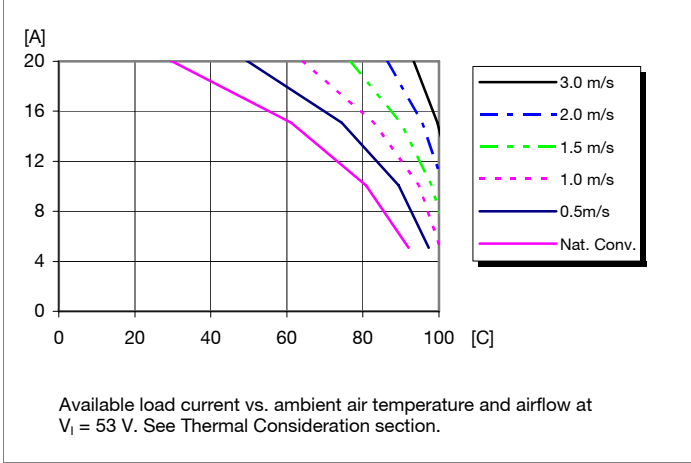


Thermal Resistance

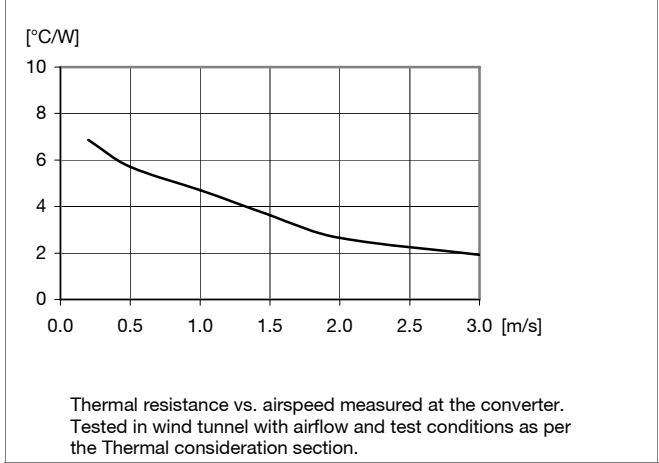

Output Characteristics

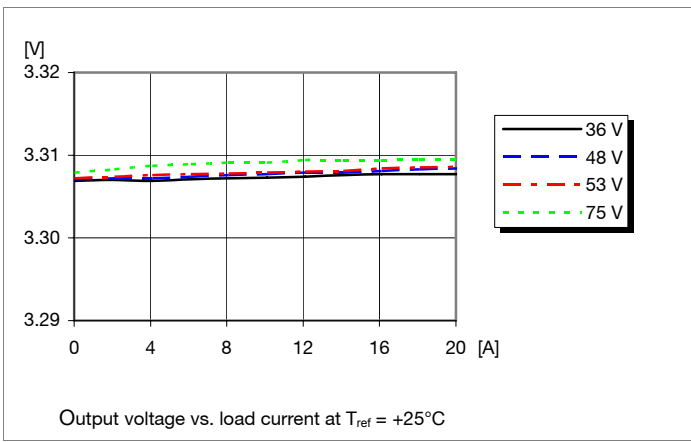

Current Limit Characteristics

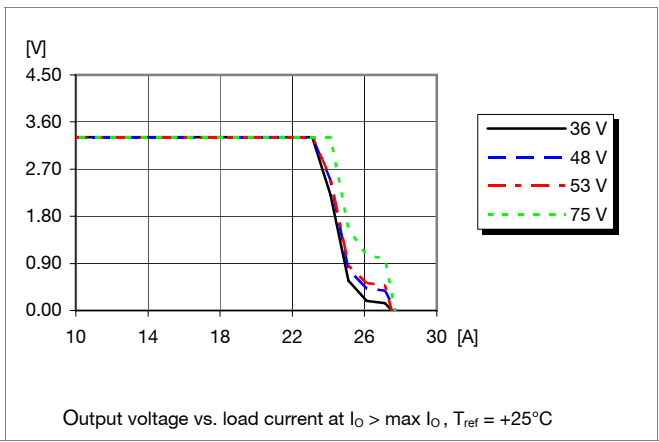

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/20A Typical Characteristics

### PKM 4610 PI


#### Start-up

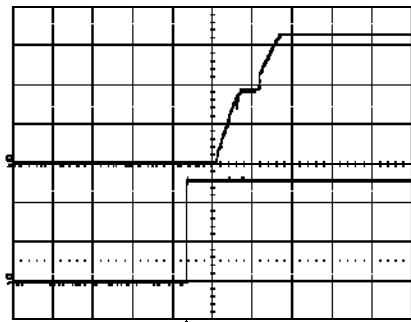

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


#### Shut-down

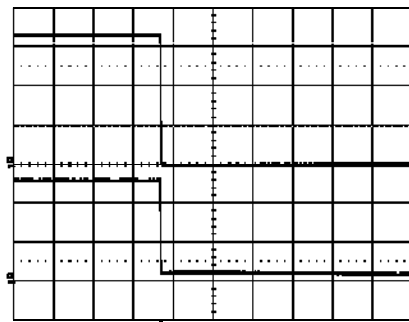

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


#### Output Ripple & Noise

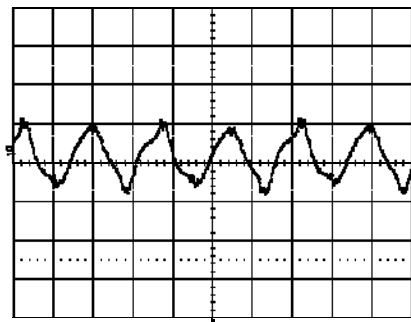

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}/\text{div}$

See the filter in the Output ripple and noise  
section (EMC Specification).

#### Output Load Transient Response

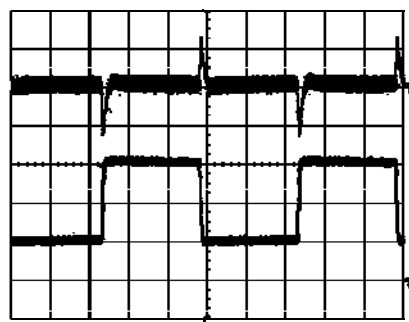

Output voltage response to load current  
step-change (5-15-5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (200mV/div).  
Time scale: 0.2 ms/div.

#### Output Voltage Adjust (see operating information)

##### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(3.3(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 3.432 \text{ Vdc}$$

$$5.11(3.3(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 219.9 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 3.234 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/25A Electrical Specification

### PKM 4810A PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max  | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|------|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75   | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33   | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36   | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |      | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 82.5 | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |      | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 91.8 |      | %             |
|                 |                               | max $I_O$                         | 89.6 |      |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 91.8 |      |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 89.7 |      |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 9.6  |      | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6  | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6  | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 150  |      | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 3.25 | 3.30      | 3.35 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 2.64 |           | 3.63 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 3.2  |           | 3.4  | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 3.30      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 25        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 25   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 26   | 30        | 33   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 30        | 34   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 60        | 100  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 3.9  | 4.4       | 5.0  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.



PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/25A Typical Characteristics


### PKM 4810A PI

#### Efficiency

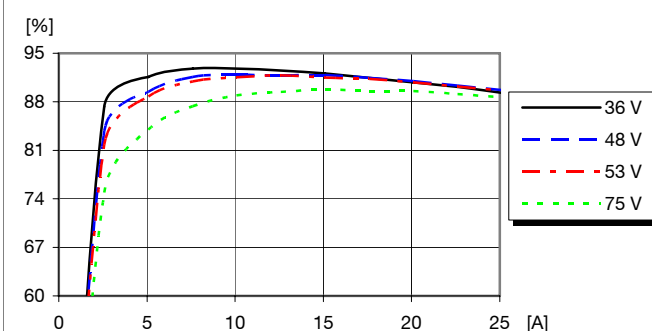


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

#### Power Dissipation

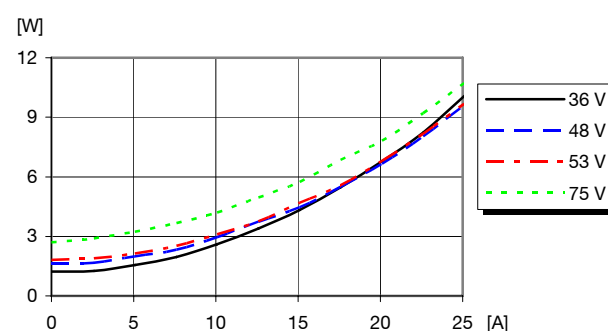


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

#### Output Current Derating

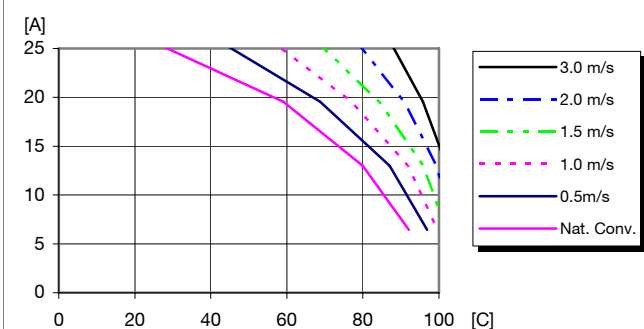


Available load current vs. ambient air temperature and airflow at  $V_I = 53\text{ V}$ . See Thermal Consideration section.

#### Thermal Resistance

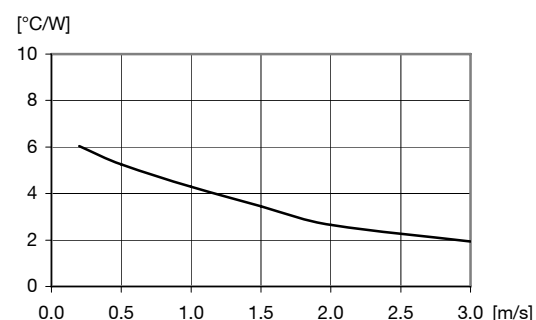


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

#### Output Characteristics

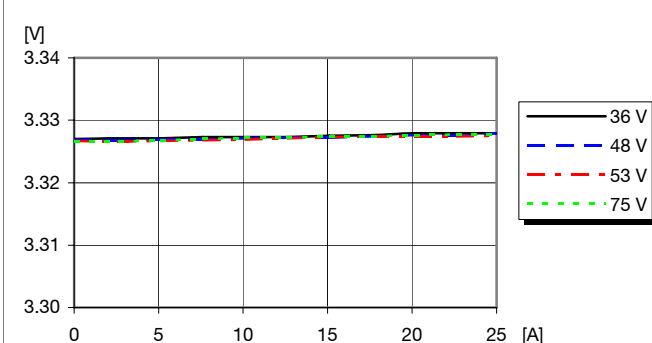

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

#### Current Limit Characteristics

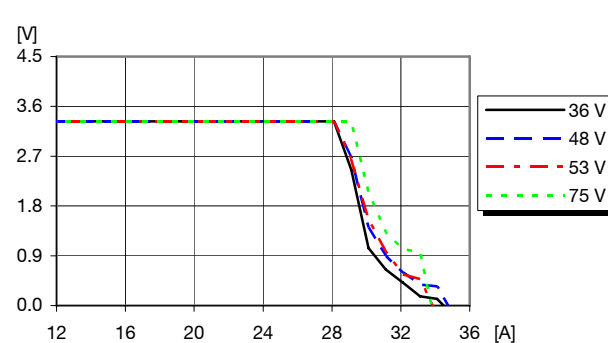

Output voltage vs. load current at  $I_O > \max I_O$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 3.3V/25A Typical Characteristics

### PKM 4810A PI


#### Start-up

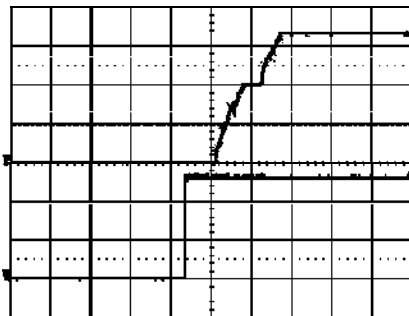

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 25\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


#### Shut-down

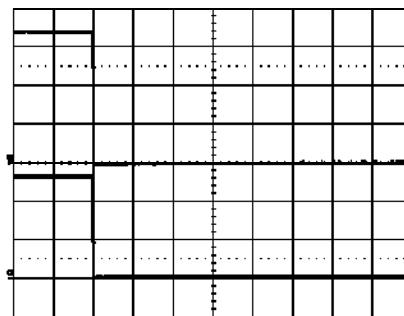

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 25\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (1 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


#### Output Ripple & Noise

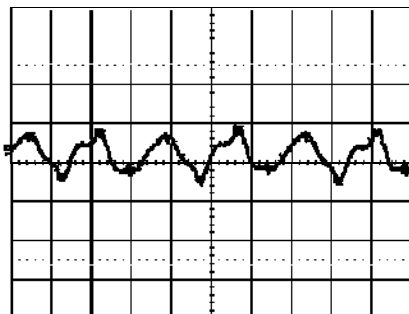

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 25\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div

See the filter in the Output ripple and noise section (EMC Specification).

#### Output Load Transient Response

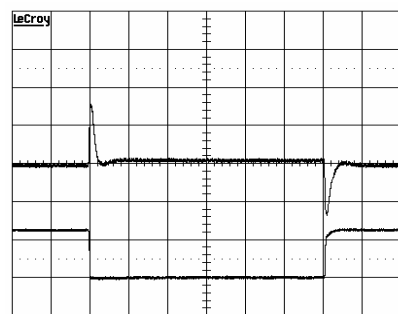

Output voltage response to load current step-change (6.25-18.75-6.25 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (200mV/div).  
Time scale: 0.1 ms/div.

#### Output Voltage Adjust (see operating information)

##### Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(3.3(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 3.432 \text{ Vdc}$$

$$5.11(3.3(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 219.9 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 3.234 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 5V/15A Electrical Specification

### PKM 4711 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 1.5  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 75  | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 90.7 |     | %             |
|                 |                               | max $I_O$                         | 91.5 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 91.8 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 91.4 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 7.0  |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 4.9  | 5.0       | 5.1  | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 4.0  |           | 5.5  | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 4.85 |           | 5.15 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 5.0       |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 200       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 40        | 90   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 15   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 16   | 18        | 21   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 20        | 23   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 85        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 5.8  | 6.2       | 6.5  | V             |

Note 1: Output filter according to Ripple & Noise section


Note 2: See Operating Information section.

|                                                                          |                             |
|--------------------------------------------------------------------------|-----------------------------|
| PKM 4000 PI series<br>DC/DC converters, Input 36-75 V, Output 35 A/126 W | EN/LZT 146 310 R1B Nov 2006 |
|                                                                          | © Ericsson Power Modules AB |


5V/15A Typical Characteristics

PKM 4711 PI


Efficiency

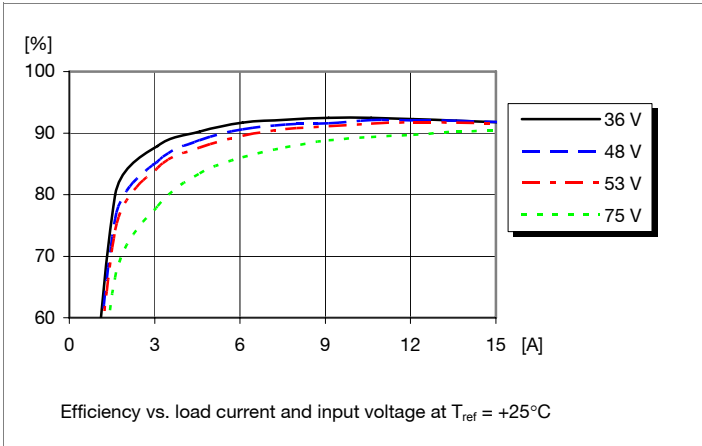


Power Dissipation

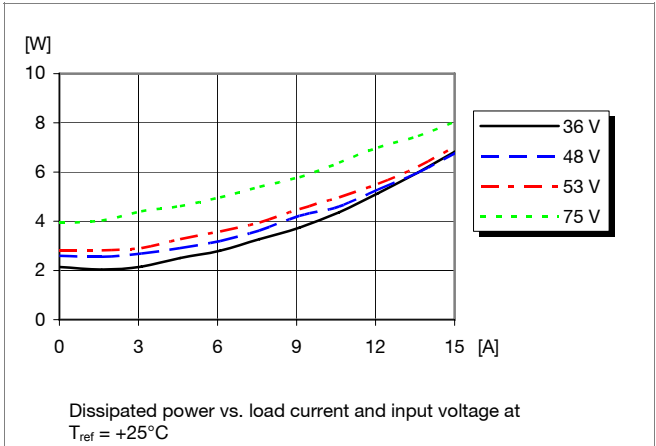


Output Current Derating

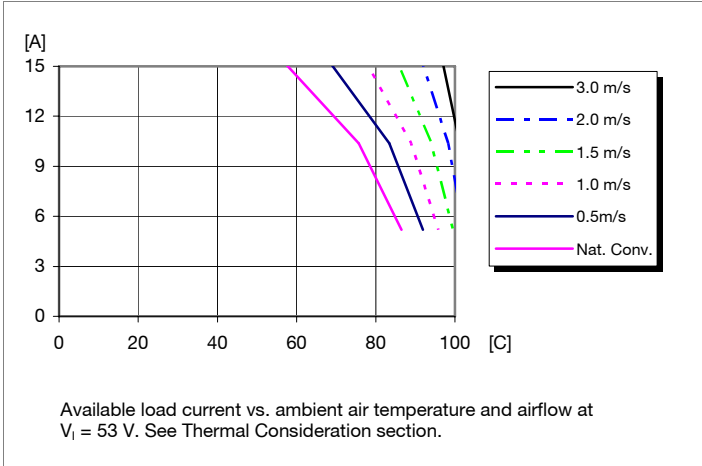


Thermal Resistance

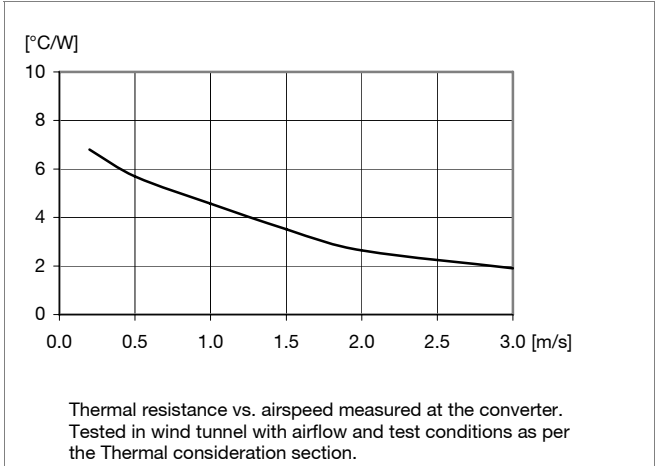

Output Characteristics

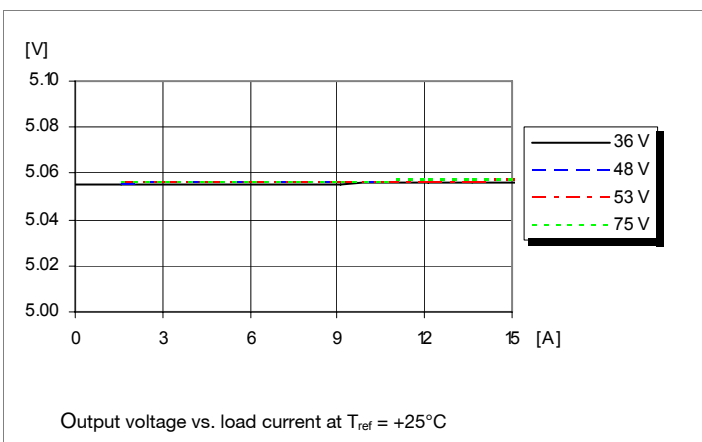

Current Limit Characteristics

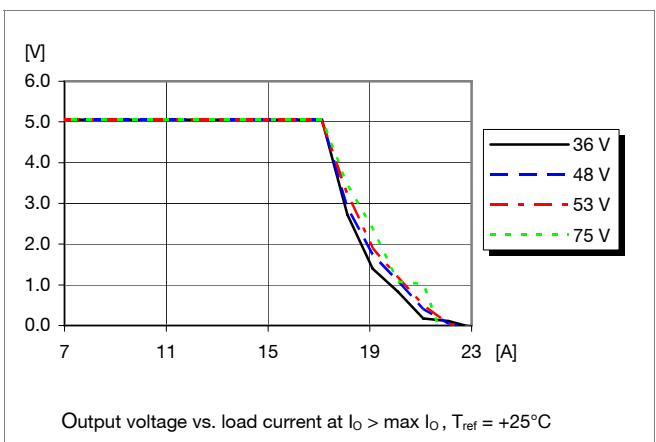

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 5V/15A Typical Characteristics

## PKM 4711 PI


### Start-up

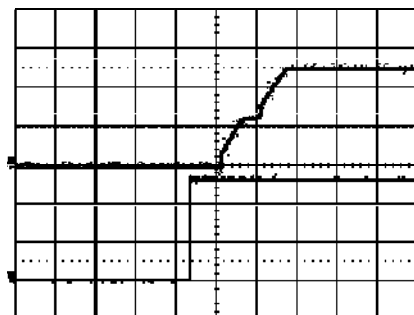

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 15\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (2 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

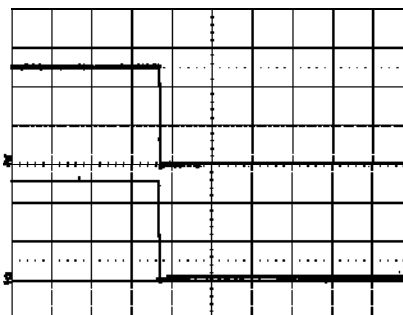

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 15\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (2 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


### Output Ripple & Noise

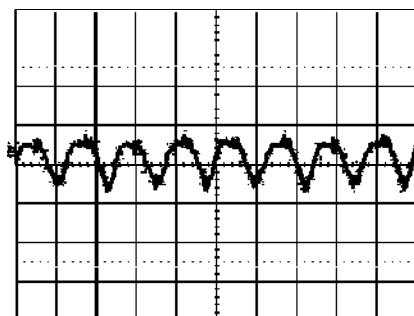

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 15\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2 μs/div

See the filter in the Output ripple and noise  
section (EMC Specification).

### Output Load Transient Response

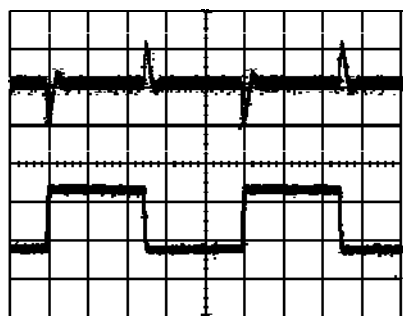

Output voltage response to load current  
step-change (3.75-11.25-3.75 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (100mV/div).  
Time scale: 0.2 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by  
using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(5(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

*Eg Increase 4%  $\Rightarrow V_{out} = 5.2\text{ Vdc}$*

$$5.11(5(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 404.3 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

*Eg Decrease 2%  $\Rightarrow V_{out} = 4.9\text{ Vdc}$*

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

### 5V/20A Electrical Specification

### PKM 4111 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.

Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_i$           | Internal input capacitance    |                                   | 2.8  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 100 | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 92.0 |     | %             |
|                 |                               | max $I_O$                         | 90.9 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 92.1 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 90.9 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 10.2 |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 200  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 4.9  | 5.0       | 5.1  | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 4.0  |           | 5.5  | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 4.85 |           | 5.15 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 5.0       |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 200       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 40        | 90   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 20   | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 21   | 24        | 26   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 26        | 28   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 85        | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              | 5.8  | 6.2       | 6.5  | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.


PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006  
© Ericsson Power Modules AB


5V/20A Typical Characteristics

PKM 4111 PI


Efficiency

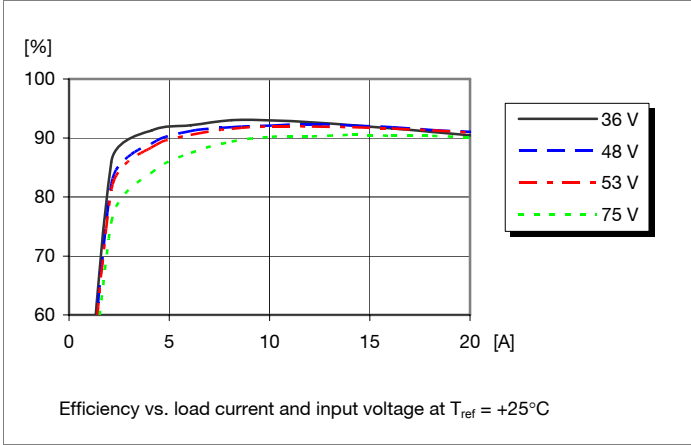


Power Dissipation

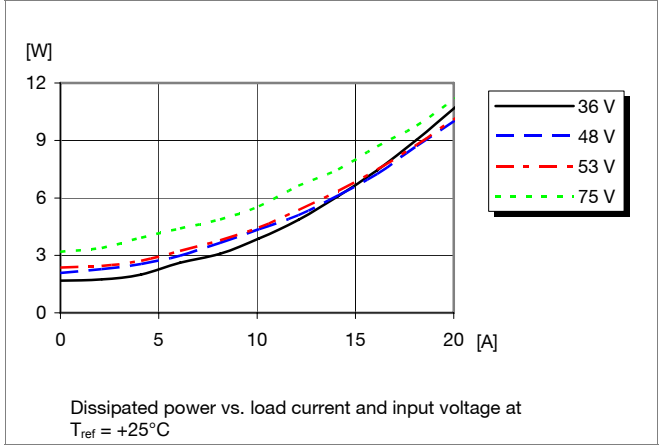


Output Current Derating

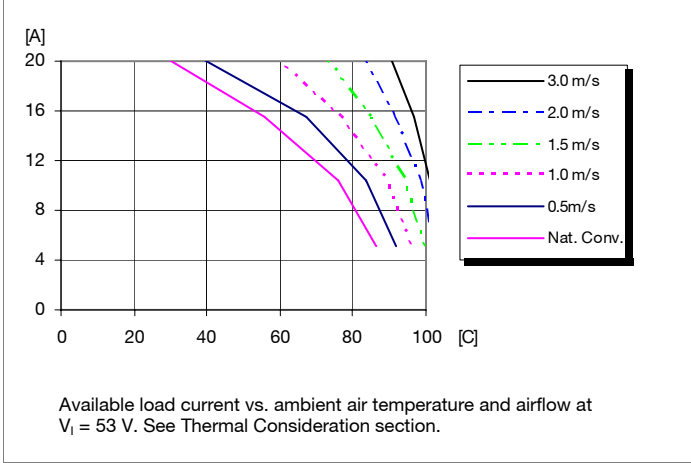


Thermal Resistance

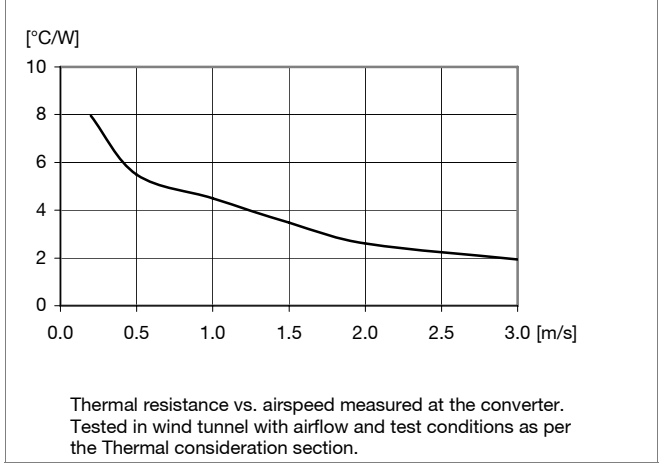

Output Characteristics

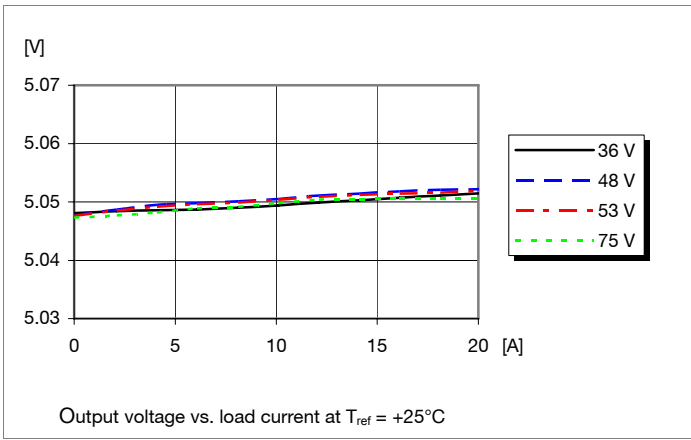

Current Limit Characteristics

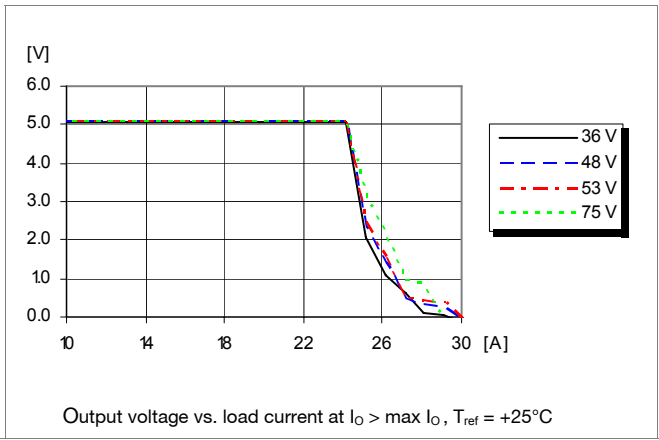

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 5V/20A Typical Characteristics

## PKM 4111 PI


### Start-up

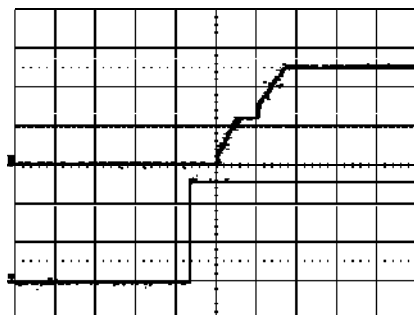

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (2 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10 ms/div.


### Shut-down

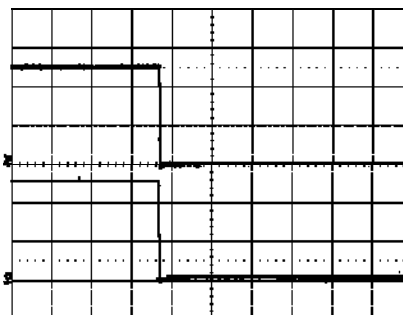

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (2 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.


### Output Ripple & Noise

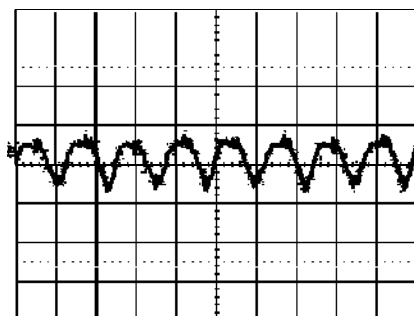

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 20\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}/\text{div}$

See the filter in the Output ripple and noise section (EMC Specification).

### Output Load Transient Response

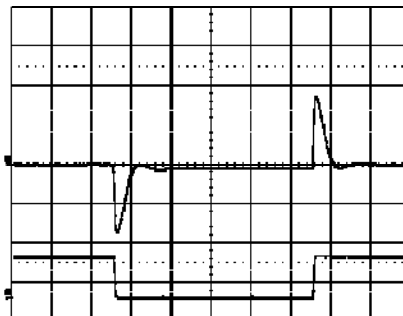

Output voltage response to load current step-change (5-15-5 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (100mV/div).  
Time scale: 0.1 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(5(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 5.2 \text{ Vdc}$$

$$5.11(5(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 404.3 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 4.9 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$



PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 12V/10.5A Electrical Specification

## PKM 4113 PI

$T_{ref} = -40$  to  $+100^{\circ}\text{C}$ ,  $V_I = 36$  to  $75$  V, sense pins connected to output pins unless otherwise specified under Conditions.  
Typical values given at:  $T_{ref} = +25^{\circ}\text{C}$ ,  $V_I = 53$  V, max  $I_O$ , unless otherwise specified under Conditions.

| Characteristics | Conditions                    | min                               | typ  | max | Unit          |
|-----------------|-------------------------------|-----------------------------------|------|-----|---------------|
| $V_I$           | Input voltage range           | 36                                |      | 75  | V             |
| $V_{loff}$      | Turn-off input voltage        | Decreasing input voltage          | 31   | 33  | V             |
| $V_{lon}$       | Turn-on input voltage         | Increasing input voltage          | 34   | 36  | V             |
| $C_I$           | Internal input capacitance    |                                   | 2.8  |     | $\mu\text{F}$ |
| $P_O$           | Output power                  | Output voltage initial setting    |      | 126 | W             |
| SVR             | Supply voltage rejection (ac) | $f = 100$ Hz sinewave, 1 Vp-p     | 53   |     | dB            |
| $\eta$          | Efficiency                    | 50 % of max $I_O$                 | 92.6 |     | %             |
|                 |                               | max $I_O$                         | 92.2 |     |               |
|                 |                               | 50 % of max $I_O$ , $V_I = 48$ V  | 93.2 |     |               |
|                 |                               | max $I_O$ , $V_I = 48$ V          | 92.3 |     |               |
| $P_d$           | Power Dissipation             | max $I_O$                         | 10.8 |     | W             |
| $P_{li}$        | Input idling power            | $I_O = 0$ , $V_I = 53$ V          | 2.6  | 4.6 | W             |
| $P_{RC}$        | Input standby power           | $V_I = 53$ V (turned off with RC) | 0.4  | 0.6 | W             |
| $f_s$           | Switching frequency           | 0-100% of max $I_O$               | 150  |     | kHz           |

|           |                                                           |                                                                                  |      |           |      |               |
|-----------|-----------------------------------------------------------|----------------------------------------------------------------------------------|------|-----------|------|---------------|
| $V_{Oi}$  | Output voltage initial setting and accuracy               | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, max $I_O$                        | 11.8 | 12.0      | 12.2 | V             |
| $V_O$     | Output adjust range                                       | See operating information                                                        | 9.6  |           | 13.3 | V             |
|           | Output voltage tolerance band                             | 0-100% of max $I_O$                                                              | 11.6 |           | 12.4 | V             |
|           | Idling voltage                                            | $I_O = 0$ A                                                                      |      | 12.0      |      | V             |
|           | Line regulation                                           | max $I_O$                                                                        |      | 3         | 10   | mV            |
|           | Load regulation                                           | $V_I = 53$ V, 0-100% of max $I_O$                                                |      | 3         | 10   | mV            |
| $V_{tr}$  | Load transient voltage deviation                          | $V_I = 53$ V, Load step 25-75-25 % of max $I_O$ , $di/dt = 1$ A/ $\mu\text{s}$ , |      | $\pm 150$ |      | mV            |
| $t_{tr}$  | Load transient recovery time                              |                                                                                  |      | 100       |      | $\mu\text{s}$ |
| $t_r$     | Ramp-up time (from 10–90 % of $V_{Oi}$ )                  | 10-100% of max $I_O$                                                             |      | TBD       |      | ms            |
| $t_s$     | Start-up time (from $V_I$ connection to 90% of $V_{Oi}$ ) |                                                                                  |      | 30        | 40   | ms            |
| $t_f$     | Vin shutdown fall time (from $V_I$ off to 10% of $V_O$ )  | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $t_{RC}$  | RC start-up time                                          | max $I_O$                                                                        |      | TBD       |      | ms            |
|           | RC shutdown fall time (from RC off to 10% of $V_O$ )      | max $I_O$                                                                        |      | N/A       |      | ms            |
|           |                                                           | $I_O = 0$ A                                                                      |      | N/A       |      | s             |
| $I_O$     | Output current                                            |                                                                                  | 0    |           | 10.5 | A             |
| $I_{lim}$ | Current limit threshold                                   | $V_O = 0.96V_{nom}$ , $T_{ref} < \max T_{ref}$                                   | 11.5 | 12.5      | 14   | A             |
| $I_{sc}$  | Short circuit current                                     | $T_{ref} = 25^{\circ}\text{C}$ , see Note 2                                      |      | 14.5      | 16   | A             |
| $V_{Oac}$ | Output ripple & noise                                     | max $I_O$ , $V_{Oi}$ , see Note 1                                                |      | 100       | 150  | mVp-p         |
| OVP       | Over voltage protection                                   | $T_{ref} = +25^{\circ}\text{C}$ , $V_I = 53$ V, 0-100% of max $I_O$              |      | 14.9      | 15.5 | V             |

Note 1: Output filter according to Ripple & Noise section

Note 2: See Operating Information section.

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 12V/10.5A Typical Characteristics


## PKM 4113 PI

### Efficiency

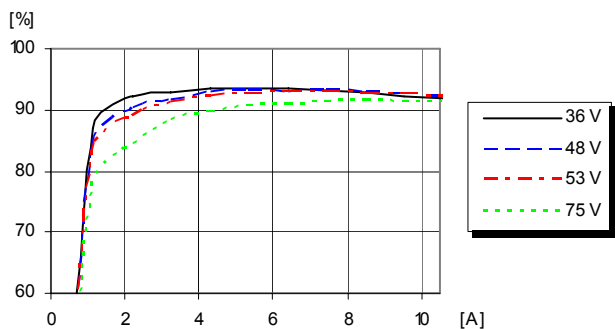


Efficiency vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Power Dissipation

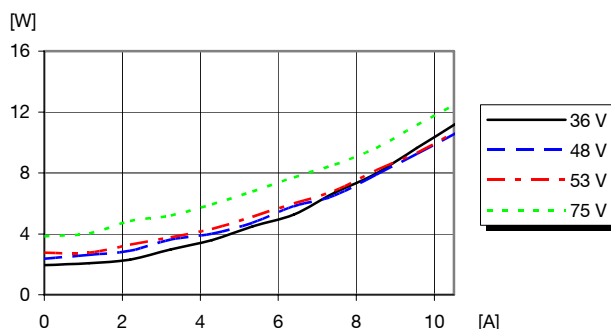


Dissipated power vs. load current and input voltage at  $T_{ref} = +25^{\circ}\text{C}$

### Output Current Derating

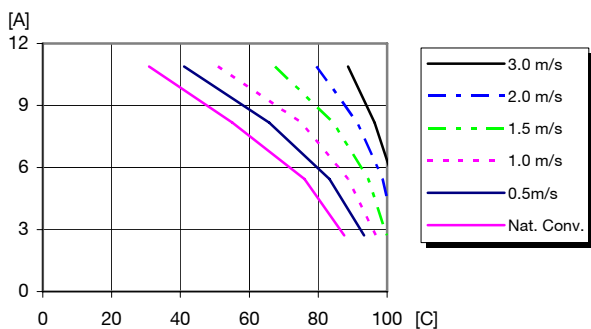


Available load current vs. ambient air temperature and airflow at  $V_i = 53\text{ V}$ . See Thermal Consideration section.

### Thermal Resistance

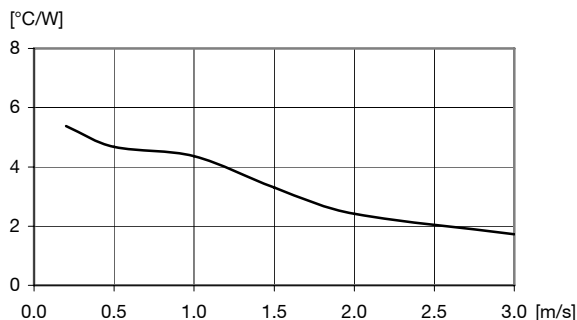


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

### Output Characteristics

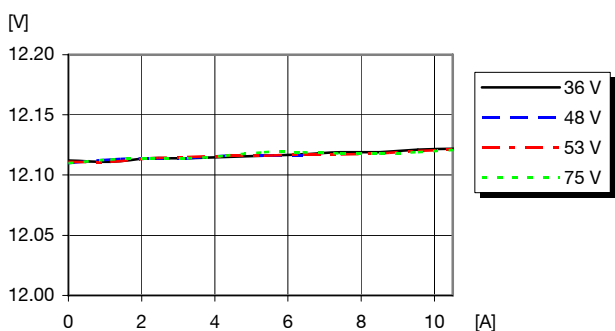

Output voltage vs. load current at  $T_{ref} = +25^{\circ}\text{C}$

### Current Limit Characteristics

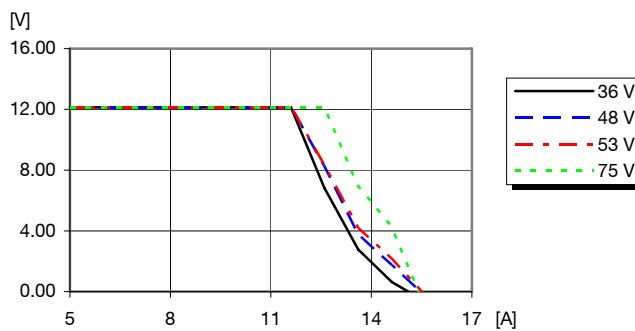

Output voltage vs. load current at  $I_o > \max I_o$ ,  $T_{ref} = +25^{\circ}\text{C}$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W


EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## 12V/10.5A Typical Characteristics

## PKM 4113 PI


### Start-up

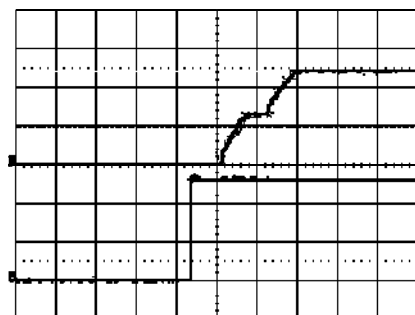

Start-up enabled by connecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 10.5\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 10ms/div.


### Shut-down

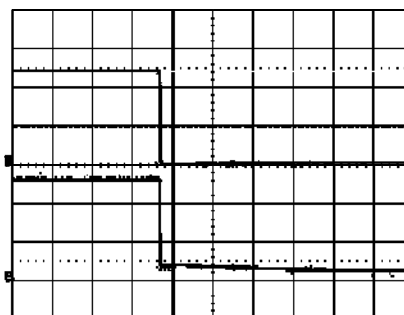

Shut-down enabled by disconnecting  $V_i$  at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 10.5\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ .

Top trace: output voltage (5 V/div).  
Bottom trace: input voltage (20 V/div).  
Time scale: 5 ms/div.

### Output Ripple & Noise

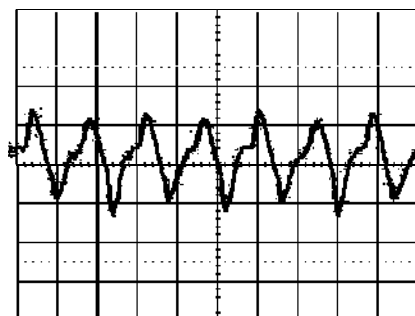

Output voltage ripple (50mV/div) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $I_O = 10.5\text{ A}$  resistive load,  
 $V_i = 53\text{ V}$ . Time scale: 2  $\mu\text{s}$ /div

See the filter in the Output ripple and noise section (EMC Specification).

### Output Load Transient Response



Output voltage response to load current step-change (2.625-7.875-2.625 A) at:  
 $T_{ref} = +25^\circ\text{C}$ ,  $V_i = 53\text{ V}$ .

Top trace: output voltage (100mV/div).  
Time scale: 0.1 ms/div.

### Output Voltage Adjust (see operating information)

#### Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11(12(100+\Delta\%)/(1.225\Delta\%)-(100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

$$\text{Eg Increase } 4\% \Rightarrow V_{out} = 12.48 \text{ Vdc}$$

$$5.11(12(100+4)/(1.225 \times 4)-(100+2 \times 4)/4) = 1163.5 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\%-2) \text{ k}\Omega$$

$$\text{Eg Decrease } 2\% \Rightarrow V_{out} = 11.76 \text{ Vdc}$$

$$5.11(100/2-2) = 245.3 \text{ k}\Omega$$

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006


© Ericsson Power Modules AB

## EMC Specification

Conducted EMI measured according to EN55022, CISPR 22 and FCC part 15J (see test set-up).

The fundamental switching frequency is 150 kHz for PKM4810API @  $V_I = 53$  V, max  $I_O$ .



### Conducted EMI Input terminal value (typ)

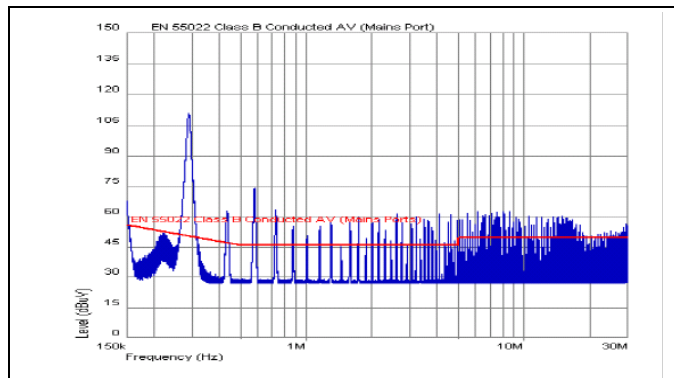


EMI without filter

### External filter (class B)

Required external input filter in order to meet class B in EN 55022, CISPR 22 and FCC part 15J.

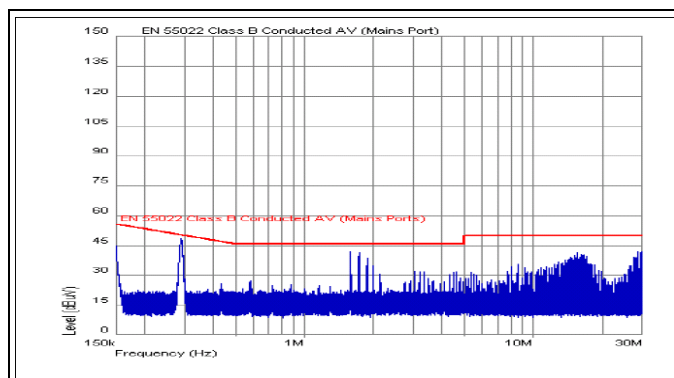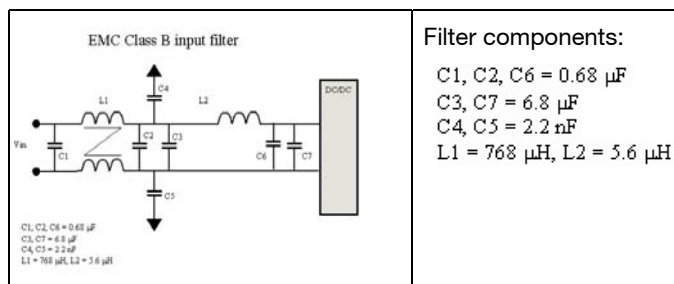

EMI with filter

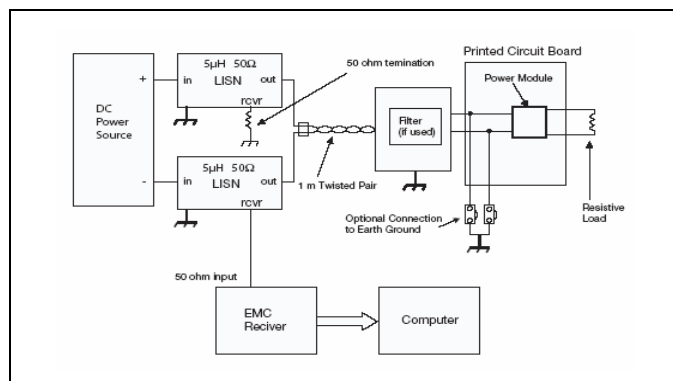

Test set-up

### Layout recommendation


The radiated EMI performance of the DC/DC converter will depend on the PCB layout and ground layer design. It is also important to consider the stand-off of the DC/DC converter.

If a ground layer is used, it should be connected to the output of the DC/DC converter and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PCB and improve the high frequency EMC performance.

### Output ripple and noise

Output ripple and noise measured according to figure below. See Design Note 022 for detailed information.

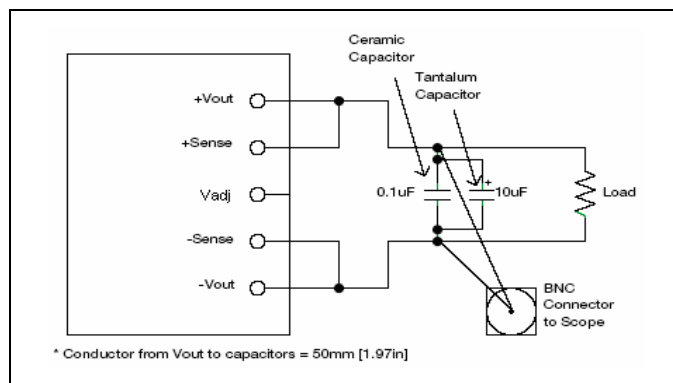

Output ripple and noise test setup

PKM 4000 PI series

DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006

© Ericsson Power Modules AB

## Operating information


### Input Voltage

The input voltage range 36 to 75Vdc meets the requirements of the European Telecom Standard ETS 300 132-2 for normal input voltage range in -48 and -60 Vdc systems, -40.5 to -57.0 V and -50.0 to -72 V respectively. At input voltages exceeding 75 V, the power loss will be higher than at normal input voltage and  $T_{ref}$  must be limited to absolute max +100°C. The absolute maximum continuous input voltage is 80Vdc.

### Turn-off Input Voltage

The DC/DC converters monitor the input voltage and will turn on and turn off at predetermined levels. The minimum hysteresis between turn on and turn off input voltage is 1V.

### Remote Control (RC)



The products are fitted with a remote control function referenced to the primary negative input connection (- In), with negative and positive logic options available. The RC function allows the converter to be turned on/off by an external device like a semiconductor or mechanical switch.

The maximum required sink current is 1 mA. When the RC pin is left open, the voltage generated on the RC pin is 3.0 – 6.5 V.

The second option is “positive logic” remote control, which can be ordered by adding the suffix “P” to the end of the part number. The converter will turn on when the input voltage is applied with the RC pin open. Turn off is achieved by connecting the RC pin to the - In. To ensure safe turn off the voltage difference between RC pin and the - In pin shall be less than 1V. The converter will restart automatically when this connection is opened.

### Input and Output Impedance

The impedance of both the input source and the load will interact with the impedance of the DC/DC converter. It is important that the input source has low characteristic impedance. The converters are designed for stable operation without external capacitors connected to the input or output. The performance in some applications can be enhanced by addition of external capacitance as described under External Decoupling Capacitors. If the input voltage source contains significant inductance, the addition of a 100  $\mu$ F capacitor across the input of the converter will ensure stable operation. The capacitor is not required when powering the DC/DC

converter from an input source with an inductance below 10  $\mu$ H.

### External Decoupling Capacitors

When powering loads with significant dynamic current requirements, the voltage regulation at the point of load can be improved by addition of decoupling capacitors at the load. The most effective technique is to locate low ESR ceramic and electrolytic capacitors as close to the load as possible, using several parallel capacitors to lower the effective ESR. The ceramic capacitors will handle high-frequency dynamic load changes while the electrolytic capacitors are used to handle low frequency dynamic load changes. Ceramic capacitors will also reduce any high frequency noise at the load.

It is equally important to use low resistance and low inductance PCB layouts and cabling.


External decoupling capacitors will become part of the control loop of the DC/DC converter and may affect the stability margins. As a “rule of thumb”, 100  $\mu$ F/A of output current can be added without any additional analysis. The ESR of the capacitors is a very important parameter. Power Modules guarantee stable operation with a verified ESR value of >10 m $\Omega$  across the output connections. For further information please contact your local Ericsson Power Modules representative.

### Output Voltage Adjust ( $V_{adj}$ )

The DC/DC converters have an Output Voltage Adjust pin ( $V_{adj}$ ). This pin can be used to adjust the output voltage above or below Output voltage initial setting.

When increasing the output voltage, the voltage at the output pins (including any remote sense compensation ) must be kept below the threshold of the over voltage protection, (OVP) to prevent the converter from shutting down. At increased output voltages the maximum power rating of the converter remains the same, and the max output current must be decreased correspondingly.

To increase the voltage the resistor should be connected between the  $V_{adj}$  pin and +Sense pin. The resistor value of the Output voltage adjust function is according to information given under the Output section for the respective product. To decrease the output voltage, the resistor should be connected between the  $V_{adj}$  pin and -Sense pin.

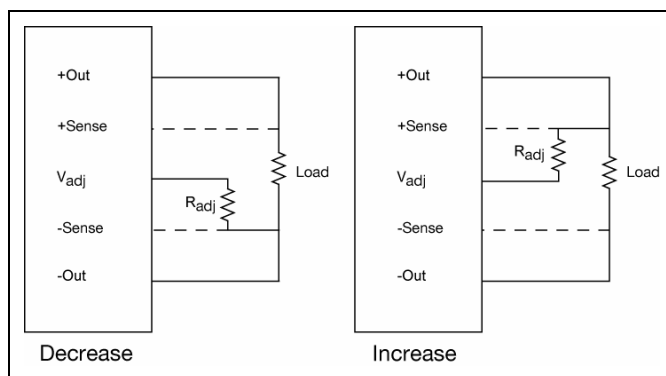

|                                                                          |                             |
|--------------------------------------------------------------------------|-----------------------------|
| PKM 4000 PI series<br>DC/DC converters, Input 36-75 V, Output 35 A/126 W | EN/LZT 146 310 R1B Nov 2006 |
|                                                                          | © Ericsson Power Modules AB |

Operating information continued

Parallel Operation

Two converters may be paralleled for redundancy if the total power is equal or less than  $P_O$  max. It is not recommended to parallel the converters without using external current sharing circuits.

Remote Sense

The DC/DC converters have remote sense that can be used to compensate for voltage drops between the output and the point of load. The sense traces should be located close to the PCB ground layer to reduce noise susceptibility. The remote sense circuitry will compensate for up to 10% voltage drop between output pins and the point of load.

If the remote sense is not needed +Sense should be connected to +Out and -Sense should be connected to -Out.

Over Temperature Protection (OTP)

The converters are protected from thermal overload by an internal over temperature shutdown circuit. When  $T_{ref}$  as defined in thermal consideration section exceeds 110°C the converter will shut down. The converter can be restarted by cycling the input voltage or using the remote control function.

Over Voltage Protection (OVP)

The converters have output over voltage protection that will shut down the converter in over voltage conditions. The converter can be restarted by cycling the input voltage or using the remote control function.

Over Current Protection (OCP)

The converters include current limiting circuitry for protection at continuous overload. The output voltage will decrease towards zero for output currents in excess of max output current (max  $I_O$ ). The converter will resume normal operation after removal of the overload. The load distribution should be designed for the maximum output short circuit current specified.

Thermal Consideration

General

The converters are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation. Cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependant on the airflow across the converter. Increased airflow enhances the cooling of the converter.


The Output Current Derating graph found in the Output section for each model provides the available output current

vs. ambient air temperature and air velocity at  $V_{in} = 53$  V.

The DC/DC converter is tested on a 254 x 254 mm, 16-layer test board mounted vertically in a wind tunnel with a cross-section of 305 x 305 mm.

Proper cooling of the DC/DC converter can be verified by measuring the temperature at positions P1. The temperature at these positions should not exceed the max values provided in the table below.

| Position       | Device    | Designation      | max value |
|----------------|-----------|------------------|-----------|
| P <sub>1</sub> | Baseplate | T <sub>ref</sub> | 100° C    |

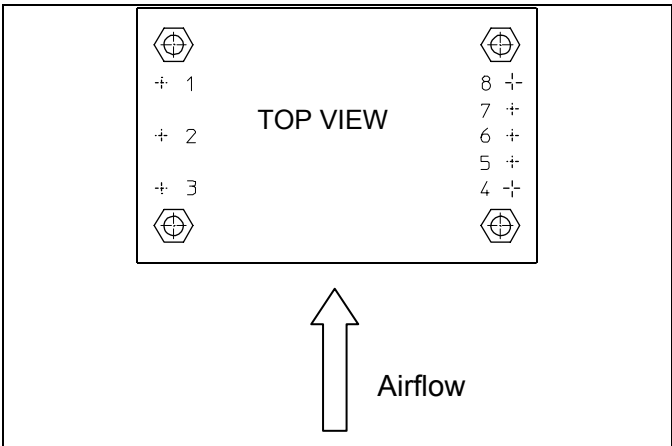

|                                                                          |                             |
|--------------------------------------------------------------------------|-----------------------------|
| PKM 4000 PI series<br>DC/DC converters, Input 36-75 V, Output 35 A/126 W | EN/LZT 146 310 R1B Nov 2006 |
|                                                                          | © Ericsson Power Modules AB |

Thermal Consideration continued

Definition of reference temperature (T<sub>ref</sub>)

The reference temperature is used to monitor the temperature limits of the product. Temperatures above maximum T<sub>ref</sub> are not allowed and may cause degradation or permanent damage to the product. T<sub>ref</sub> is also used to define the temperature range for normal operating conditions. T<sub>ref</sub> is defined by the design and used to guarantee safety margins, proper operation and high reliability of the module.

Ambient Temperature Calculation

By using the thermal resistance the maximum allowed ambient temperature can be calculated.


1. The power loss is calculated by using the formula  $((1/\eta) - 1) \times \text{output power} = \text{power losses (Pd)}$ .  
 $\eta$  = efficiency of converter. E.g 89.5 % = 0.895
2. Find the thermal resistance (R<sub>th</sub>) in the Thermal Resistance graph found in the Output section for each model.  
Calculate the temperature increase ( $\Delta T$ ).  
 $\Delta T = R_{th} \times P_d$
3. Max allowed ambient temperature is:  
Max T<sub>ref</sub> -  $\Delta T$ .

E.g PKM4719API at 2m/s:

1.  $((\frac{1}{0.883}) - 1) \times 75 \text{ W} = 9.94 \text{ W}$
2.  $9.94 \text{ W} \times 2.49^\circ\text{C/W} = 24.75^\circ\text{C}$
3.  $110^\circ\text{C} - 24.75^\circ\text{C} = \text{max ambient temperature is } 85.25^\circ\text{C}$

The actual temperature will be dependent on several factors such as the PCB size, number of layers and direction of airflow.

Connections

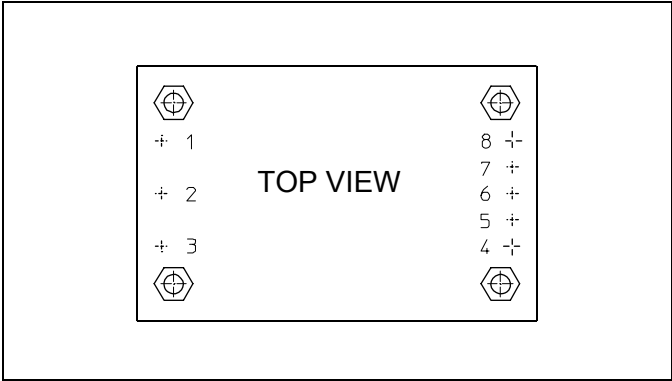

| Pin | Designation | Function              |
|-----|-------------|-----------------------|
| 1   | +In         | Positive Input        |
| 2   | RC          | Remote Control        |
| 3   | -In         | Negative Input        |
| 4   | -Out        | Negative Output       |
| 5   | -Sen        | Negative Remote Sense |
| 6   | Vadj        | Output voltage adjust |
| 7   | +Sen        | Positive Remote Sense |
| 8   | +Out        | Positive Output       |

PKM 4000 PI series  
DC/DC converters, Input 36-75 V, Output 35 A/126 W

EN/LZT 146 310 R1B Nov 2006  
© Ericsson Power Modules AB

Mechanical information






Table 1

| Pin Option | Lead Length  |
|------------|--------------|
| Standard   | 5.33 [0.21]  |
| LA         | 3.68 [0.145] |

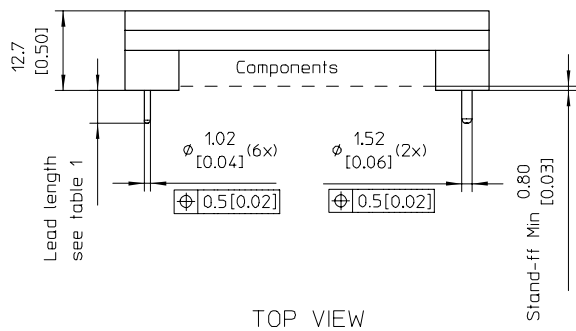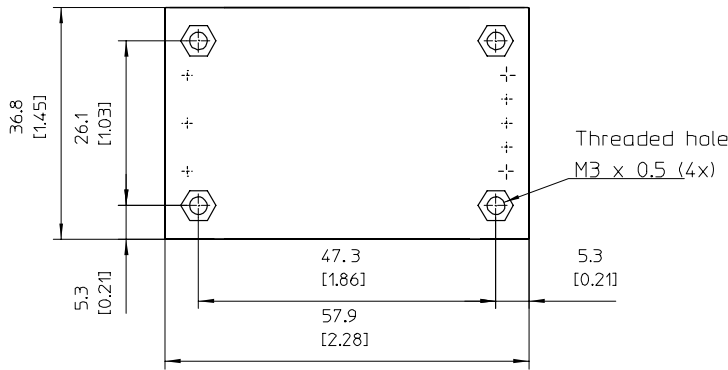


Weight: 55 g typical

Case: Aluminium base plate  
For screw attachment apply mounting torque of max 0.44 Nm [3.9 IN-LBS]

Pins:  
Material: Brass  
Plating: 0.1 µm Gold over 2 µm Nickel

All dimension are in mm [inches]  
Tolerance unless specified  
x.x ± 0.5 [±0.02]  
x.xx ± 0.25 [±0.01]  
Not applied on the recommended footprint

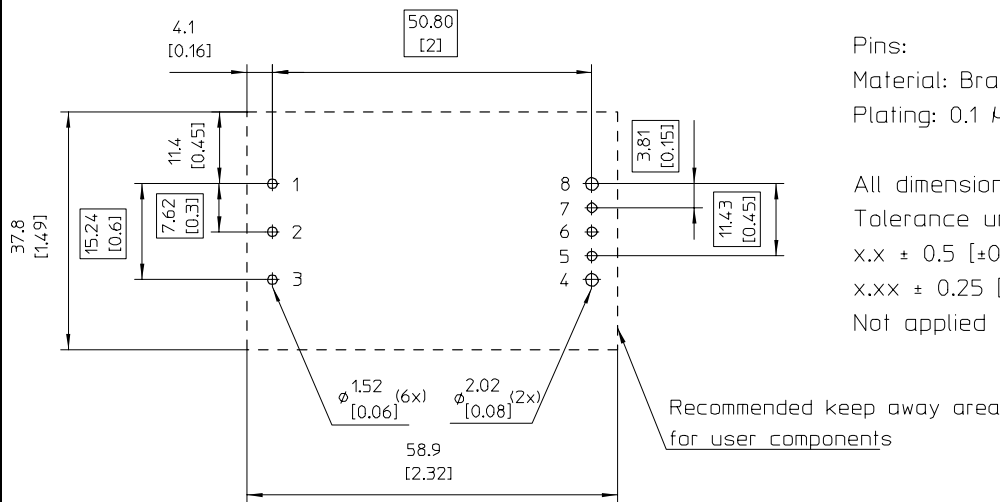



|                                                                          |                             |
|--------------------------------------------------------------------------|-----------------------------|
| PKM 4000 PI series<br>DC/DC converters, Input 36-75 V, Output 35 A/126 W | EN/LZT 146 310 R1B Nov 2006 |
|                                                                          | © Ericsson Power Modules AB |

Soldering Information – Through hole mounting


The PKM series DC/DC converters are intended for through hole mounting in a PCB. When wave soldering is used max temperature on the pins is specified to 260°C for 10 seconds. Maximum preheat rate of 4°C/s and temperature of max 150°C is suggested. When hand soldering, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

No-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC power module. The residues may affect long time reliability and isolation voltage.

Delivery package information

The products are delivered antistatic clamshells.

| Tray properties    |                                        |
|--------------------|----------------------------------------|
| Material           | PET                                    |
| Surface resistance | 10E5 to 10E12 ohms/square              |
| Bake ability       | The clamshells can not be baked        |
| clamshell capacity | 20 converters/clamshell                |
| Box capacity       | 100 converters (5 full clamshells/box) |

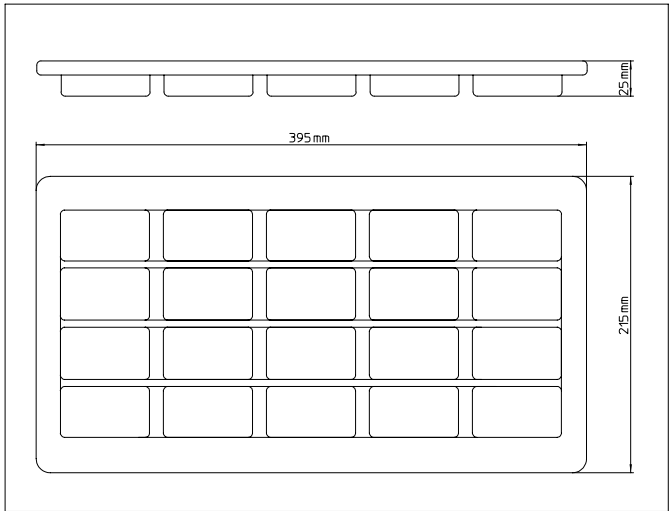

|                                                                          |                             |
|--------------------------------------------------------------------------|-----------------------------|
| PKM 4000 PI series<br>DC/DC converters, Input 36-75 V, Output 35 A/126 W | EN/LZT 146 310 R1B Nov 2006 |
|                                                                          | © Ericsson Power Modules AB |

**Product Qualification Specification**

| Characteristics                                                   |                               |                                                         |                                                   |
|-------------------------------------------------------------------|-------------------------------|---------------------------------------------------------|---------------------------------------------------|
| External visual inspection                                        | IPC-A-610D                    |                                                         |                                                   |
| Change of temperature                                             | IEC 60068-2-14Na              | Temperature range<br>Duration<br>Cycle                  | -40 °C-+100 °C<br>0.5 h<br>300                    |
| Cold                                                              | IEC 60068-2-1Ad               | Temperature range<br>Duration<br>Input Voltage<br>Load  | -40 °C-+125 °C<br>72 h<br>Minimum<br>No           |
| Damp heat                                                         | IEC 60068-2-3Ca               | Temperature<br>Humidity<br>Input Voltage<br>Duration    | +85 °C<br>85 % RH<br>Maximum<br>1000 hours        |
| Dry heat                                                          | IEC 60068-2-2Ba               | Time<br>Temperature                                     | 1000 hours<br>125° C                              |
| Immersion in cleaning solvents                                    | IEC 60068-2-45 XA<br>Method 2 | Water<br>Glycol ether<br>Isopropyl alcohol              | +55 ±5 °C<br>+35 ±5 °C<br>+35 ±5 °C               |
| Mechanical shock                                                  | IEC 60068-2-27Ea              | Peak acceleration<br>Duration                           | 100 g<br>3 ms                                     |
| Resistance to soldering heat<br>(not in operation, without board) | IEC 60068-2-20Tb<br>Method 1A | Solder Temperature<br>Duration                          | 260 °C<br>10-13 s                                 |
| Robustness of terminations                                        | IEC 60068-2-21Ua              |                                                         |                                                   |
| Solder ability<br>(Precondition 85°C/85%RH;<br>240h)              | IEC 60068-2-20Ta              | SnPb Eutectic<br>Pb Free                                | 235±5 °C<br>270±5 °C                              |
| Vibration, broad-band random                                      | IEC 60068-2-34Ed              | Frequency<br>Acceleration<br>Duration in each direction | 10...500 Hz<br>0.025 g <sup>2</sup> /Hz<br>10 min |
| Sinusoidal                                                        | IEC 60068-2-6Fc               | Frequency<br>Amplitude<br>Acceleration<br>No. of cycles | 10-500 Hz<br>0.75 mm<br>10 g<br>10 in each axis   |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Ericsson Power Modules:

[PKM4418APIOB](#) [PKM4318PIOA](#) [PKM4318PI](#) [PKM4518API](#) [PKM4618API](#) [PKM4519PI](#) [PKM4719API](#) [PKM4510PI](#)  
[PKM4610PI](#) [PKM4810API](#) [PKM4711PI](#) [PKM4111PI](#) [PKM4113PI](#) [PKM4418LDPINB](#)